

Experiment:14

Construct a C program to organize the file using single level directory

```
#include <stdio.h>
#include <stdlib.h>
#include <fcntl.h>
#include <unistd.h>
#define BUFFER_SIZE 4096

void create()
{
    FILE *fp;
    fp = fopen("C:/Users/itssk/OneDrive/Desktop/sasi.txt", "w");

    if (fp == NULL)
    {
        printf("File creation failed.\n");
        return;
    }
    printf("File created successfully.\n");
    fclose(fp);
}

void copy()
{
    const char *source_file = "C:/Users/itssk/OneDrive/Desktop/sasi.txt";
    const char *destination_file = "C:/Users/itssk/OneDrive/Desktop/sk.txt";

    int source_fd = open(source_file, O_RDONLY);
```

```
if (source_fd < 0)
{
    printf("Cannot open source file.\n");
    return;
}
int dest_fd = open(destination_file,
                    O_WRONLY | O_CREAT | O_TRUNC,
                    0666);
if (dest_fd < 0)
{
    printf("Cannot create destination file.\n");
    close(source_fd);
    return;
}
char buffer[BUFFER_SIZE];
ssize_t bytesRead;

while ((bytesRead = read(source_fd, buffer, BUFFER_SIZE)) > 0)
{
    write(dest_fd, buffer, bytesRead);
}
close(source_fd);
close(dest_fd);

printf("File copied successfully.\n");
}
```

```
void deleteFile()
{
    if (remove("C:/Users/itssk/OneDrive/Desktop/sasi.txt") == 0)
        printf("File deleted successfully.\n");
    else
        printf("Unable to delete file.\n");
}
```

```
int main()
{
    int n;

    printf("1. Create\n2. Copy\n3. Delete\n");
    printf("Enter your choice: ");
    scanf("%d", &n);
```


```
    switch (n)
    {
        case 1:
            create();
            break;

        case 2:
            copy();
            break;

        case 3:
```

```
        deleteFile();  
        break;  
  
    default:  
        printf("Invalid Choice\n");  
    }  
  
    return 0;  
}
```

Output:

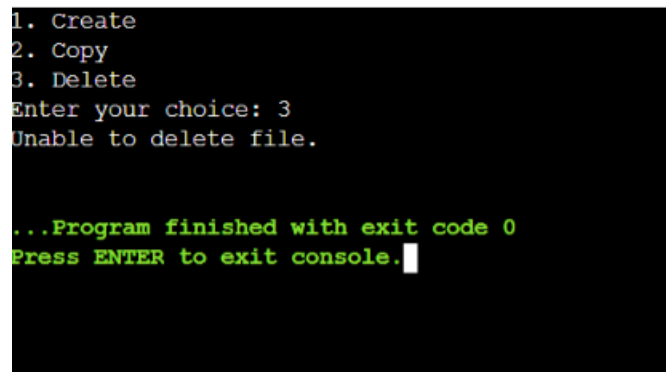

```
1. Create  
2. Copy  
3. Delete  
Enter your choice: 3  
Unable to delete file.  
  
...Program finished with exit code 0  
Press ENTER to exit console.
```