

# Table of Contents

<b>1</b>	<b>Introduction to Emacs Lisp Byte Code and LAP</b>	<b>1</b>
1.1	Why is Emacs Lisp Byte Code Important and How is Emacs as a Program Different?	1
1.2	Emacs Lisp Byte Code and LAP	2
	Example showing use of <code>byte-compile-lapcode</code>	2
1.3	Emacs Lisp Virtual Machine	3
<b>2</b>	<b>Emacs Lisp Bytecode Environment</b>	<b>4</b>
2.1	Emacs Lisp Bytecode Objects	5
2.1.1	Function Parameter (lambda) List	5
2.1.2	Bytecode Unibyte String	7
2.1.3	Constants Vector	8
2.1.4	Maximum Stack Usage	9
2.1.5	Docstring	9
2.1.6	“Interactive” Specification	9
	Examples showing the “interactive” specification	9
2.2	Emacs Lisp Bytecode Compiler	11
2.3	Emacs Lisp Bytecode Interpreter	12
2.4	Emacs Lisp Bytecode Bytes	13
2.5	Emacs Lisp Bytecode Files	14
2.6	Functions and Commands for working with LAP and Bytecode	16
2.6.1	<code>aref</code>	16
2.6.2	<code>batch-byte-compile</code>	16
2.6.3	<code>batch-byte-recompile-directory</code>	17
2.6.4	<code>byte-compile</code>	17
2.6.5	<code>byte-compile-file</code>	17
2.6.6	<code>byte-recompile-directory</code>	18
2.6.7	<code>byte-recompile-file</code>	18
2.6.8	<code>compile-defun</code>	19
2.6.9	<code>disassemble</code>	19
2.6.10	<code>display-call-tree</code>	19
2.6.11	<code>functionp</code>	19
2.6.12	<code>make-byte-code</code>	20
2.6.13	<code>symbol-function</code>	21
2.7	Bytecode Optimization	22
<b>3</b>	<b>Emacs Lisp Bytecode Instructions</b>	<b>23</b>
3.1	Instruction-Description Format	23
3.1.1	Instruction Jargon	23
3.1.2	Instruction Description Fields	24

3.2	Argument-Packing Instructions .....	26
	stack-ref (1–7) .....	26
	varref (8–15) .....	27
	varset (16–23) .....	28
	varbind (24–31) .....	29
	call (32–39) .....	30
	unbind (40–47) .....	31
3.3	Constants-Vector Retrieval Instructions .....	32
	constant (192–255) .....	32
	constant2 (129) .....	33
3.4	Exception-Handling Instructions .....	34
	pophandler (48) .....	34
	pushconditioncase (49) .....	35
	pushcatch (50) .....	36
3.5	Control-Flow Instructions .....	37
	goto (130) .....	37
	goto-if-nil (131) .....	38
	goto-if-not-nil (132) .....	39
	goto-if-nil-else-pop (133) .....	40
	goto-if-not-nil-else-pop (134) .....	41
	return (135) .....	42
	switch (183) .....	43
3.6	Function-Call Instructions .....	44
	3.6.1 Lisp Function Instructions .....	44
	symbolp (57) .....	44
	consp (58) .....	45
	stringp (59) .....	46
	listp (60) .....	47
	eq (61) .....	48
	memq (62) .....	49
	not (63) .....	50
	symbol-value (74) .....	51
	symbol-function (75) .....	52
	set (76) .....	53
	fset (77) .....	54
	get (78) .....	55
	equal (154) .....	56
	member (157) .....	57
	assq (158) .....	58
	numberp (167) .....	59
	integerp (168) .....	60
	3.6.2 List Function Instructions .....	61
	nth (56) .....	61
	car (64) .....	62
	cdr (65) .....	63
	cons (66) .....	64
	list1 (67) .....	65
	list2 (68) .....	66

list3 (69) .....	67
list4 (70) .....	68
listN (175) .....	69
length (71) .....	70
aref (72) .....	71
aset (73) .....	72
nthcdr (155) .....	73
elt (156) .....	74
nreverse (159) .....	75
setcar (160) .....	76
setcdr (161) .....	77
car-safe (162) .....	78
cdr-safe (163) .....	79
nconc (164) .....	80
3.6.3 Arithmetic Function Instructions .....	81
sub1 (83) .....	81
add1 (84) .....	82
eqsign (85) .....	83
gtr (86) .....	84
lss (87) .....	85
leq (88) .....	86
geq (89) .....	87
diff (90) .....	88
negate (91) .....	89
plus (92) .....	90
mult (95) .....	91
max (93) .....	92
min (94) .....	93
quo (165) .....	94
rem (166) .....	95
3.6.4 String Function Instructions .....	96
substring (79) .....	96
concat2 (80) .....	97
concat3 (81) .....	98
concat4 (82) .....	99
concatN (174) .....	100
upcase (150) .....	101
downcase (151) .....	102
stringeqsign (152) .....	103
stringlss (153) .....	104
3.6.5 Emacs Buffer Instructions .....	105
current-buffer (112) .....	105
set-buffer (113) .....	106
save-current-buffer-1 (114) .....	107
buffer-substring (123) .....	108
3.6.6 Emacs Position Instructions .....	109
point (96) .....	109
goto-char (98) .....	110

point-max (100) .....	111
point-min (101) .....	112
forward-char (117) .....	113
forward-word (118) .....	114
forward-line (121) .....	115
skip-chars-forward (119) .....	116
skip-chars-backward (120) .....	117
narrow-to-region (125) .....	118
widen (126) .....	119
3.6.7 Emacs Text Instructions .....	120
insert (99) .....	120
insertN (99) .....	121
char-after (102) .....	122
following-char (103) .....	123
preceding-char (104) .....	124
current-column (105) .....	125
eolp (108) .....	126
eobp (109) .....	127
bolp (110) .....	128
bobp (111) .....	129
delete-region (124) .....	130
end-of-line (127) .....	131
3.6.8 Emacs Misc Function Instructions .....	132
char-syntax (122) .....	132
save-excursion (138) .....	133
set-marker (147) .....	134
match-beginning (148) .....	135
match-end (149) .....	136
3.7 Stack-Manipulation Instructions .....	137
discard (136) .....	137
discardN (180) .....	138
dup (137) .....	139
stack-set (178) .....	140
stack-set2 (179) .....	141
3.8 Obsolete or Unused Instructions .....	142
save-current-buffer (97) .....	142
mark (97) .....	142
scan-buffer (107) .....	142
read-char (114) .....	142
set-mark (115) .....	142
interactive-p (116) .....	142
save-window-excursion (139) .....	142
condition-case (143) .....	143
temp-output-buffer-setup (144) .....	143
temp-output-buffer-show (145) .....	144
unbind-all (146) .....	144
3.8.12 Relative Goto Instructions .....	145
Rgoto (170) .....	145

Rgotoifnil (171) .....	145
Rgotoifnonnil (172) .....	145
Rgotoifnilelsep (173) .....	145
Rgotoifnonnilelsep (174) .....	145
<b>4 Instruction Changes Between Emacs Releases ..</b>	<b>146</b>
4.1 After 16 and Starting in 18.31 .....	146
Version 18 Release History .....	146
4.2 After 18.59 and Starting 19.34 .....	147
Version 19 Release History .....	148
4.3 After 19.34 and Starting in 20.1 .....	149
Version 20 Release History .....	149
4.4 After 20.1 and Starting in 21.1 .....	150
Version 21 Release History .....	150
4.5 After 21.4 and Starting in 22.1 .....	150
Version 22 Release History .....	150
4.6 After 22.3 and Starting in 23.1 .....	150
Version 23 Release History .....	151
4.7 After 23.4 and Starting in 24.1 .....	151
Version 24 Release History .....	151
4.8 After 24.5 and Starting in 25.1 .....	152
Version 25 Release History .....	152
4.9 After 25.3 and Starting in 26.1 .....	152
4.10 After 26.1 and Starting in 27.1 .....	152
<b>5 Opcode Table .....</b>	<b>153</b>
5.1 Opcodes (0000-0077) .....	153
5.2 Opcodes (0100-0177) .....	155
5.3 Opcodes (0200-0277) .....	157
5.4 Opcodes (0300-3277) Constants .....	160
<b>6 References .....</b>	<b>162</b>
<b>Instruction Index .....</b>	<b>163</b>
<b>Bytecode Function Index .....</b>	<b>165</b>
<b>Concept Index .....</b>	<b>166</b>

# 1 Introduction to Emacs Lisp Byte Code and LAP

## 1.1 Why is Emacs Lisp Byte Code Important and How is Emacs as a Program Different?

If we were to compare two similar complex programs in around 2018, Firefox 53.0.3 and Emacs 25.3, we would see that the Firefox tarball is 5 times bigger than the Emacs tarball. How are these made up, and what languages are they comprised of?

For Firefox whose core is written in C++ we have:

```
$ cloc --match-f='\.(js|c|cpp|html|py|css)$' firefox-53.0.3
  89156 text files.
   86240 unique files.
    1512 files ignored.
```

```
cloc v 1.60  T=244.20 s (353.2 files/s, 56012.8 lines/s)
```

Language	files	comment	code
C++	7267	418019	3057110
Javascript	25855	532629	2859451
HTML	45311	120520	2209067
C	3482	400594	1664666

And for Emacs whose core is written in C we have:

```
$ cloc emacs-25.3.tar.xz
  3346 text files.
   3251 unique files.
    1130 files ignored.
```

```
cloc 1.60  T=13.85 s (160.1 files/s, 154670.7 lines/s)
```

Language	files	comment	code
Lisp	1616	200820	1270511
C	255	66169	256314
C/C++ Header	176	11505	34891

If we look at the relative ratio of C++ to Javascript code in Firefox, and the ratio of C versus Lisp code in Emacs, we see that much more of Emacs written in Lisp than Firefox is written in Javascript. (And a lot of C code for Emacs looks like Lisp written using C syntax).

My take is that Emacs a lot more orthogonal in its basic concepts and construction. Just as Leibniz was amazed that such diversity could come out of such simple rules of mathematics and physics, so it is remarkable that something as complex as Emacs can come out of the relatively simple language, Lisp.

## 1.2 Emacs Lisp Byte Code and LAP

However pervasive Emacs Lisp is in the Emacs ecosystem, Emacs Lisp is not and never has been a speedy language compared to say, C, C++, Go, Rust or Java. And that's where LAP and bytecode come in.

As stated in a comment in `byte-opt.el` added circa 1996:

No matter how hard you try, you can't make a racehorse out of a pig.

You can, however, make a faster pig.

—Eric Naggum

Emacs Lisp bytecode is the custom lower-level language used by the Emacs bytecode interpreter. As with all bytecode, its instructions are compact. For display purposes, there is a `disassemble` command that unpacks the fields of the instruction. With this and the constants vector, bytecode can be printed in an assembly language-like format.

I'll often use an Emacs Lisp bytecode instruction to refer to an assembly representation of the instruction.

LAP stands for Lisp Assembly Program. It is an internal representation of the bytecode instructions in a more symbolic form. It is used behind the scenes to make bytecode more amenable to optimization, since the instructions are in a structure which is easier to operate on.

If we want to write the instruction sequence in this symbolic form rather than give a byte-encoded form, we can do that using the function `byte-compile-lapcode`.

### Example showing use of `byte-compile-lapcode`

```
(defalias 'get-foo
  (make-byte code
    #x000                ;; lexical parameter counts
    (byte-compile-lapcode
      '((byte-varref . 0)
        (byte-return)))  ;; instruction sequence
    [foo]                ;; constants vector
    1))                  ;; max stack usage
```

Silly Loop Example ([https://www.gnu.org/software/emacs/manual/html\\_node/elisp/Speed-of-Byte\\_002dCode.html](https://www.gnu.org/software/emacs/manual/html_node/elisp/Speed-of-Byte_002dCode.html)) in the Emacs Lisp Manual gives a program to time running in some code in the bytecode interpreter versus running the code in the Lisp interpreter. When I ran this program, bytecode ran 2.5 times faster<sup>1</sup>. The Emacs Lisp manual gets a speed improvement of about 3 times.

---

<sup>1</sup> Code was compiled to use dynamic binding for variable access, as was probably the case in the Emacs Lisp manual. We should note that byte-compiling with lexical binding for variable access gives code that runs a bit faster than when dynamic binding is used.

## 1.3 Emacs Lisp Virtual Machine

The Emacs Lisp bytecode interpreter, like many bytecode interpreters such as Smalltalk, CPython, Forth, or PostScript, has an evaluation stack and a code stack. Emacs Lisp bytecode instructions use reverse Polish notation: operands appear prior to the operator. This is how many other bytecode interpreters work. It is the opposite of the way Lisp works. To add the values of two variables we might write `(+ a b)`. However in bytecode it is the other way around: the operator or function comes last. So the corresponding bytecode is:

```
0      varref    a
1      varref    b
2      plus
```

As in most language-specific virtual machines, but in contrast to a typical general-purpose virtual machine, the things that are on the evaluation stack are the same objects that are found in the system that they model. Here, these objects can include Emacs buffers, or font faces, Lisp objects like hashes or vectors, or simply (30-bit) Lisp integers. Compare this with, say, LLVM IR, or JVM instructions where the underlying objects on the stack are registers which can act as pointers, and the internal memory layout of objects is exposed.

Control flow in Lisp bytecode is similar to a conventional assembly language: there are unconditional and conditional jumps. More complex control structures are simply built out of these.

Although it may be obvious, one last thing to point out is that the Emacs Lisp bytecode instruction set is custom to Emacs. In addition to primitives that we would expect for Lisp such “car” and “cdr”, there are primitive bytecodes for more-complex Emacs editor-specific concepts such as “save-excursion”<sup>1</sup>.

The interpreter is largely backward compatible, but not forward compatible (although eventually old Emacs Lisp bytecode instructions do die). So old versions of Emacs cannot necessarily run new bytecode. Each instruction is between 1 and 3 bytes. The first byte is the opcode and the second and third bytes are either a single operand or a single immediate value. Some operands are packed into the opcode byte.

---

<sup>1</sup> The semantic level difference between Emacs Lisp and its bytecode is not great, so writing a decompiler for it more feasible than if the bytecode language were of a general nature such as, say, LLVM IR.



## 2 Emacs Lisp Bytecode Environment

In this chapter we discuss the ways Emacs creates, modifies and uses bytecode in order to run code. We describe a little of the two kinds of interpreters Emacs has, what goes into a bytecode file, and the interoperability of bytecode between versions.

## 2.1 Emacs Lisp Bytecode Objects

*This section is expanded and edited from Chris Wellons’ blog on “Emacs byte code Internals” and from the Emacs Lisp Reference manual. See references at the end of this doc.*

Emacs Lisp bytecode is an encoded form of a low-level assembly format that is suited to running Emacs Lisp primitives and functions.

Emacs Lisp bytecode is not a low-level sequence of octets (bytes) that requires a lot of additional special-purpose machinery to run. There is a custom C code interpreter to handle each of the instruction primitives, and that is basically it. And even here, many of the instructions are simply a bytecode form of some existing Emacs primitive function like “car” or “point”.

Emacs Lisp bytecode is a built-in Emacs Lisp type (the same as a Lisp “cons” node, or a Lisp symbol).

Functions `aref` and `mapcar` can be used to extract the components of bytecode once it is built. The bytecode object is made up of other normal Emacs Lisp objects described next. Bytecode is created using the `make-bytecode` function.

One important component of the bytecode object is the “constants vector.” It contains important Lisp objects that are required to make sense of the bytecode-instruction operands, because functions that share the same bytecode-instruction byte string, but differ in their constants vectors, can do very different things.

An Emacs Lisp object of a bytecode type is analogous to an Emacs Lisp vector. As with a vector, elements are accessed in constant time.

The print syntax of this type is similar to vector syntax, except `#[...]` is displayed to display a bytecode literal instead of `[...]` as in a vector.

In contrast to a vector object, there are no functions to index or extract parts of a code object once it is built, and a bytecode object can be evaluated as a function. Valid bytecode objects have 4 to 6 elements and each element has a particular structure elaborated on below.

There are two ways to create a bytecode object: using a bytecode object literal or with `make-byte-code` (see Section 2.6.12 [make-byte-code], page 20). Like vector literals, bytecode functions don’t need to be quoted.

The elements of a bytecode function literal are:

1. Function Parameter (lambda) List
2. Bytecode Unibyte String
3. Constants Vector
4. Maximum Stack Usage
5. Docstring
6. “Interactive” Specification

### 2.1.1 Function Parameter (lambda) List

The first element of a bytecode-function literal is the parameter list for the `lambda`. The object takes on two different forms depending on whether the function is lexically or dynamically scoped. If the function is dynamically scoped, the argument list is a list and is

exactly what appears in Lisp code. In this case, the arguments will be dynamically bound before executing the bytecode.

**Example showing how a parameter list is transformed:**

```
ELISP> (setq lexical-binding nil) ; force lexical binding
ELISP> (byte-compile
  (lambda (a b &optional c) 5))
```


```
#[(a b &optional c) "\300\207" [5] 1]
```

Above we show raw bytecode data. Emacs after version 25 makes an effort to hide the data.

There is really no shorter way to represent the parameter list because preserving the argument names is critical. With dynamic scoping, while the function body is being evaluated these variables are globally bound (eww!) to the function's arguments.

On the other hand, when the function is lexically scoped, the parameter list is packed into an Emacs Lisp integer, indicating the counts of the different kinds of parameters: required, `&optional`, and `&rest`. No variable names are needed. In contrast to dynamically bound variables, here the arguments are on the stack of the byte-code interpreter before executing the code

The following shows how parameter counts and flags are encoded:

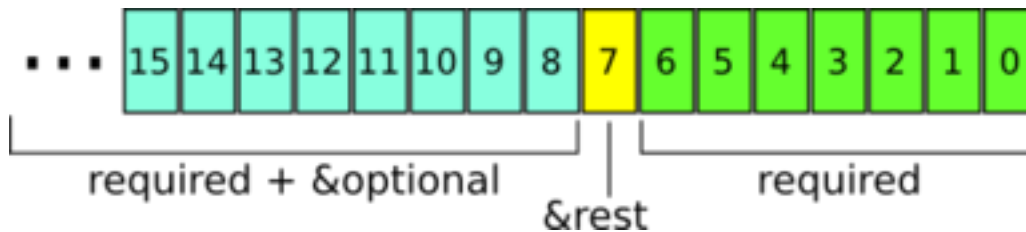

The least significant 7 bits indicate the number of required arguments. This limits compiled, lexically-scoped functions to 127 required arguments. The 8th bit is the number of `&rest` arguments (up to 1). The remaining bits indicate the total number of optional and required arguments (not counting `&rest`). It's really easy to parse these in your head when viewed as hexadecimal because each portion almost always fits inside its own "digit."

**Examples showing how lexical parameters are encoded:**

```
ELISP> (byte-compile-make-args-desc '())
```

```
#x000 ;; (0 args, 0 rest, 0 required)
```

```
ELISP> (byte-compile-make-args-desc '(a b))
```

```
#x202 ;; (2 args, 0 rest, 2 required)
```

```
ELISP> (byte-compile-make-args-desc '(a b &optional c))
```

```
#x302 ;; (3 args, 0 rest, 2 required)
```

```
ELISP> (byte-compile-make-args-desc '(a b &optional c &rest d))
```

```
#x382 ;; (3 args, 1 rest, 2 required)
```

The names of the arguments do not matter in lexical scope; they're purely positional. This tighter argument specification is one of the reasons lexical scope is sometimes faster: the byte-code interpreter doesn't need to parse the entire lambda list and assign all of the variables on each function invocation; furthermore, variable access is via a compact index located usually in the operand value rather than an index into the constants vector followed by a lookup of the variable.

## 2.1.2 Bytecode Unibyte String

The second element of a bytecode-function literal is either

- a unibyte string, or
- a pointer to a unibyte string,
- An autoload function

A unibyte string is a sequence of bytes or octets. Despite the type name, it is not interpreted with any sort of Unicode encoding. These sequences should be created with `unibyte-string()` because strings can get transformed into longer sequences of bytes when encoded. To disambiguate the string type to the Lisp reader when higher values are present (> 127), the strings are printed in an escaped octal notation, keeping the string literal inside the ASCII character set.

### Examples unibyte strings:

Bytecode for `(defun double-eg(n) (+ n n))` is:

PC	Byte	Instruction
0	8	varref[0] n
1	137	dup
2	92	plus
3	135	return

Constants Vector: [n]

To encode the byte sequence then for this we could use:

```
ELISP> (unibyte-string 8 127 92 135)
```

```
"^H^?\\207"
```

It is unusual to see a bytecode string that doesn't end with 135 (`#o207`, return).

We describe how to decode the bytecode string in Section 3.1 [Instruction-Description Format], page 23.

However when a function has been defined as a result of reading a bytecode file, the unibyte string is a pointer into that file. This pointer is represented by a `cons` node where the `car` is the filename and the `cdr` is the bytecode offset from the beginning of the file

```
ELISP> (aref
```

```

(symbol-function 'cl-gcd)
1)

("/tmp/emacs/lisp/emacs-lisp/cl-extra.elc" . 7352)
ELISP> (aref
        (symbol-function 'ediff-buffers)
        1)

(autoload "ediff" 975154 t nil)

```

### 2.1.3 Constants Vector

The third object in a bytecode-function literal is a constants vector. It is a normal Emacs Lisp vector and can be created with `(vector ...)` or a vector literal.

In addition to the normal kinds of things we think of as constants—numbers, strings, and compositions of these—the constants vector also contains symbol constants of the dynamic variables and function names that the instructions of the bytecode unibyte string refers to.

The amount of space used by an Emacs bytecode instruction, and the number of ways an operand in an instruction can refer to a Lisp object, is rather limited. Most operands are only a few bits long, some fill an entire byte, and occasionally an operand can be two bytes long. So, we cannot have an arbitrary string or structured Lisp object listed directly inside an operand. Instead, operands reference either the constants vector or they index into the evaluation stack itself.

#### Example Showing a Constants Vector:

```

ELISP> (aref
        (byte-compile
         (lambda (a b)
           (my-func '("hi" "there") a nil 5)))
        2)

```

```

[a my-func
 ("hi" "there")
 nil 5]

```

The above assumes that dynamic binding is in effect.

The constants vector in the above example contains 5 elements:

- `a` \ \ the symbol `a` which refers to a variable
- `myfunc` \ \ the symbol `myfunc` which likely refers to an external function
- `("hi" "there")` \ \ a list constant containing two strings
- `nil` \ \ the nil constant
- `5` \ \ the integer constant 5

The properties of symbol `a` and symbol `myfunc` are consulted at run time, so there is no knowledge in the bytecode representing the fact that `a` is a dynamically-bound parameter while `my-func` is probably an external function.

If the lambda were lexically scoped, the constants vector would not have the variable symbol `a` listed, but instead there would be a stack entry.

Note that although the symbol `b` is a parameter of the lambda, it does not appear in the constants vector, since it is not used in the body of the function.

#### 2.1.4 Maximum Stack Usage

The fourth object in a bytecode-function literal is an integer which gives the maximum stack space used by this bytecode. This value can be derived from the bytecode itself, but it is pre-computed so that the byte-code interpreter can quickly check for stack overflow. Under-reporting this value is probably another way to crash Emacs.

In our example above, the maximum-stack value is five since function `myfunc` is called with four parameters which are pushed onto the stack, and there is an additional stack entry pushed, the `myfunc` symbol itself. All of this needs to be in place on the stack just before a `call` instruction runs to perform the `myfunc` call.

#### 2.1.5 Docstring

The fifth object in a bytecode-function literal. It is optional. As with the bytecode unibyte string, this value is either a string literal or a pointer to a string in a bytecode file.

##### Examples showing DocStrings:

```
ELISP> (aref
        (byte-compile
         (defun double(a)
           "double parameter A"
           (+ a a)))
        4)
```

```
"double parameter A"
```

```
ELISP> (aref
        (symbol-function 'cl-gcd)
        4)
```

```
("/tmp/emacs/lisp/emacs-lisp/cl-extra.elc" . 7251)
```

#### 2.1.6 “Interactive” Specification

When there is a sixth field in the bytecode function, the function is a command, i.e., an “interactive” function. Otherwise the function is not a command. This parameter holds the exact contents of the argument to `interactive` in the uncompiled function definition. Note that `(interactive)` causes the sixth field to be nil, which is distinct from there not being a sixth field.

##### Examples showing the “interactive” specification

```
ELISP> (aref
```

```

      (byte-compile
        (lambda (n)
          (interactive "nNumber: ") n)
        )
      5)

"nNumber: "

ELISP> (aref
      (byte-compile
        (lambda (n)
          (interactive (list (read))) n)
        )
      5)

(list
  (read))

```

The interactive expression is usually interpreted, which is fine because, by definition, this code is going to be waiting on user input, but it slows down keyboard macro playback.

## 2.2 Emacs Lisp Bytecode Compiler

The bytecode compiler is an ahead-of-time compiler that accepts Emacs Lisp input and produces bytecode that can be run by Emacs. The compiler itself is written in Emacs Lisp<sup>1</sup>, and is a comparatively compact program contained in the files `bytecomp.el` and `byte-opt.el`.

Internally, the compiler first produces an intermediate Lisp structure in LAP code, then performs various optimizations on that, and finally translates the LAP code into bytecode. LAP code is used during compilation, but not kept in memory or used when running bytecode.

It is possible to go back to LAP code from bytecode. This is done in order to inline functions and when bytecode disassembly is requested.

---

<sup>1</sup> Usually the compiler itself is compiled into bytecode, which avoids overflow problems



## 2.3 Emacs Lisp Bytecode Interpreter

When a function is called and the function is represented as bytecode, control passes to the bytecode interpreter. The interpreter is written in C and is written more for speed than readability.

The bytecode interpreter operates on a single function at a time. For a function call, the bytecode interpreter calls other parts of Emacs, which might call the bytecode interpreter again, recursively. Thus, in contrast to languages like FORTH, there is no code stack per se, just the C stack.

The bytecode interpreter implements a stack machine utilizing a fixed-size evaluation stack, which is usually allocated as a block on the C stack. Instructions can access either this stack or a constants vector, which is produced at compile time and made part of the bytecode object.

The evaluation stack, as well as the constants vector, contains Lisp values, usually 64-bit words containing an integer (Emacs integers are limited to 62 bits on 64-bit machines), symbol index, or a tagged pointer to one of various Emacs structures such as markers, buffers, floating-point numbers, vectors, or cons cells.

Values on the evaluation stack are created at run time. Values in the constants vector are created when the byte-compiled file is read and converted into bytecode objects. The underlying bit representation of values in the constants vector can vary between Emacs instance; they are constants in the sense that they do not vary within a single Emacs instance.

Bytecode objects contain a number safely estimating the maximum stack size the evaluation stack can grow to.

## 2.4 Emacs Lisp Bytecode Bytes

The bytecode interpreter, once it has set up the evaluation stack and constants vector, executes the instructions that make up the bytecode byte sequence. Each instruction is between one and three bytes long, containing an opcode in the first byte and sometimes an eight- or 16-bit integer in the following bytes. Those integers are usually unsigned, and 16-bit integers are stored in little-endian byte order, regardless of whether that is the natural byte order for the machine Emacs runs on.

Some opcodes, allocated in blocks, encode an integer as part of the opcode byte.

Bytecode instructions operate on the evaluation stack. For example, **plus**, the addition function, removes two values from the top of the stack and pushes a single value, the sum of the first two values, back onto the stack.

Since the arguments for a function call need to be on the stack before the function can operate on them, bytecode instructions use reverse Polish notation: first the arguments are pushed onto the stack, then the function or operation is called. For example, the Lisp expression `(+ a b)` turns into this bytecode:

PC	Byte	Instruction
0	8	varref a
1	9	varref b
2	92	plus

First **a** and **b** are dereferenced and their values pushed onto the evaluation stack; then **plus** is executed, leaving only a single value, the sum of **a** and **b**, on the stack.

## 2.5 Emacs Lisp Bytecode Files

When Emacs is build from source code, there is C code for some primitive or built-in functions. These include Lisp functions like `car`, or primitive Emacs functions like `point`. Other equally important functions are implemented in Emacs Lisp. These are byte compiled and then loaded into Emacs. On many systems there is the ability to dump Emacs in some kind of image format after these basic functions have been loaded, but even if that does not happen, a file called `loaddefs.el` is created which contains many of the important basic primitive functions as bytecode.

When we invoke Emacs then, it has a number of functions already loaded and these are either coded in C or have been byte compiled and loaded. Before running a function, Emacs queries the type of code that is associated with the function symbol and calls either its lambda S-expression interpreter or its bytecode interpreter.

When we run `load`, which reads and evaluates Lisp code from a file, at the top-level it does not matter whether the file contains bytecode or Emacs Lisp source code. Either way the only thing done is to open the file and read its contents using the normal Lisp reader.

The difference between the two kinds of files is more about convention than about their contents, and specifically two things: First the bytecode file will have a comment header in it that starts `;ELC^W^@^@^@` while the source code probably does not (although nothing to stop us from adding in that line if we feel like it). And, in addition to this comment header, a bytecode file will have other meta-comments such as which version of Emacs was used to compile the file and whether optimization was used. In earlier versions, there was information about the program that was used to compile the program, such its version number, and the source code path used to be in there as well. (I think these things should still be in there but that's a different story.) See Chapter 4 [Instruction Changes Between Emacs Releases], page 146, where we give examples of the headers to show how they have changed.

The second thing that is typically different between source code files and bytecode files is that bytecode files contain the `bytecode` calls used in the file and lack of any `defun`, `defmacro`, or `lambda` calls. But again there is presumably nothing stopping anyone from using these in their source code.

In fact, we can take a file with the `.elc` extension, rename it with an `.el` extension and `load` that, and it will run exactly the same if it had been loaded as a bytecode file<sup>1</sup>.

Similarly, just as we can concatenate any number of independent Emacs Lisp source code files into one file, and this is sometimes done as a poor-man's way to create a package, we can also concatenate any numbers of Emacs Lisp bytecode files.

Of course, there are probably certain programs that are fooled when the extension is changed. In particular, the `byte-recompile-directory` function will think that the bytecode file does not exist because it has the wrong extension. So even though Emacs is permissive about such matters, it is best to stick with the normal Emacs conventions.

The final thing that should be mentioned when talking about bytecode files is interoperability between Emacs versions.

---

<sup>1</sup> If we go the other way and rename a Lisp file as a bytecode file, Emacs will notice the discrepancy because at the top of the file is a header that Emacs checks. But if we add a reasonable-looking header we can go that direction as well.

Even though a bytecode header has a meta comment indicating the version of Emacs that was used to compile it, that information is not used in determining whether the bytecode file can be run or not. This has the benefit of being able to run bytecode compiled in a different Emacs version than the version currently running. Since Emacs bytecode instructions do not change often, this largely works. The scary part, though, is that opcode meanings have changed over the 30 years, and the interpreter sometimes lacks checks. (In the past the interpreter aborted when running an invalid bytecode.) So Emacs does not even know when we are running bytecode from a different interpreter, and we might run off a cliff running older or newer bytecode without a check.

Emacs developers maintain that, in practice, problems have not been reported very much. Also, they try to keep backward compatibility between versions so that bytecode generated in an older version of Emacs will often still be interpreted in a newer version. While this is a worthwhile intention, my experience is that this does not always work, especially going back more than one version, and it is unrealistic to expect for a program that is 30 years old.

Because there is no up-front checking, bytecode generated from a newer version of emacs will run silently on an older version until there is opcode that the older version cannot handle. In some cases it will complete. See Chapter 4 [Instruction Changes Between Emacs Releases], page 146, for when this is likely to work and when it won't. Although running newer bytecode in an older version of Emacs is not explicitly considered, since bytecode does not change very often, this can sometimes work out.

Note the sharp contrast with other bytecode interpreters, such as Python, where the magic used in compiling has to be the same as the value of the running interpreter or it will refuse to run.

It would be nice to have an Emacs Lisp bytecode checker, perhaps a **safer-load** function that looks at the bytecode. Its meta-comments would glean when there is something that is known to cause problems. Any volunteers?

## 2.6 Functions and Commands for working with LAP and Bytecode

You can byte-compile an individual function or macro definition with the `byte-compile` function. To extract individual components of that array use `aref`. To recover human-readable LAP code from a byte-compiled file use `dissassemble`. Perhaps in the future there will be a decompiler which reconstructs higher-level Lisp from LAP.

You can see if a symbol's value holds one of the function types or an alias to a function with `functionp`. To retrieve the definition of the function use `symbol-function`.

You can compile a whole file with `byte-compile-file`, or several files with `byte-recompile-directory` or `batch-byte-compile`.

Sometimes, the byte compiler produces warning and/or error messages (see Section “Compiler Errors” in *GNU Emacs Lisp Reference Manual*, for details). These messages are normally recorded in a buffer called `*Compile-Log*`, which uses compilation mode. See Section “Compilation Mode” in *The GNU Emacs Manual*. However, if the variable `byte-compile-debug` is non-`nil`, error message will be signaled as Lisp errors instead (see Section “Errors” in *GNU Emacs Lisp Reference Manual*).

Be careful when writing macro calls in files that you intend to byte-compile. Since macro calls are expanded when they are compiled, the macros need to be loaded into Emacs or the byte compiler will not do the right thing. The usual way to handle this is with `require` forms which specify the files containing the needed macro definitions (see Section “Named Features” in *GNU Emacs Lisp Reference Manual*). Normally, the byte compiler does not evaluate the code that it is compiling, but it handles `require` forms specially, by loading the specified libraries. To avoid loading the macro definition files when someone runs the compiled program, write `eval-when-compile` around the `require` calls (see Section “Eval During Compile” in *GNU Emacs Lisp Reference Manual*). See Section “Compiling Macros” in *GNU Emacs Lisp Reference Manual* for more details.

Inline (`defsubst`) functions are less troublesome. If you compile a call to such a function before its definition is known, the call will still work right; it will just run slower.

### 2.6.1 `aref`

`aref` *array* *idx* [Function]

Return the element of *array* at index *idx*.

Use this to extract the individual components of a byte-code object. See Section 2.1 [Emacs Lisp Bytecode Objects], page 5, for numerous examples using `aref`.

### 2.6.2 `batch-byte-compile`

`batch-byte-compile` *&optional noforce* [Function]

This function runs `byte-compile-file` on files specified on the command line. This function must be used only in a batch execution of Emacs, as it kills Emacs on completion. An error in one file does not prevent processing of subsequent files, but no output file will be generated for it, and the Emacs process will terminate with a nonzero status code.

If *noforce* is non-`nil`, this function does not recompile files that have an up-to-date `.elc` file.

```
$ emacs -batch -f batch-byte-compile *.el
```

### 2.6.3 batch-byte-recompile-directory

**batch-byte-recompile-directory** *directory* &**optional** *arg* [Function]

Run **byte-recompile-directory** on the dirs remaining on the command line. Must be used only with **-batch**, and kills Emacs on completion. For example, invoke **emacs -batch -f batch-byte-recompile-directory ..**

Optional argument *arg* is passed as second argument *arg* to **byte-recompile-directory**; see there for its possible values and corresponding effects.

### 2.6.4 byte-compile

**byte-compile** *form* [Command]

If *form* is a symbol, byte-compile its function definition.

```
(defun factorial (integer)
  "Compute factorial of INTEGER."
  (if (= 1 integer) 1
      (* integer (factorial (1- integer)))))
⇒ factorial

(byte-compile 'factorial)
⇒
#[(integer)
  "^H\301U\203^H^\301\207\302^H\303^HS!\\"207"
  [integer 1 * factorial]
  4 "Compute factorial of INTEGER."]
```

If *form* is a lambda or a macro, byte-compile it as a function.

```
(byte-compile
  (lambda (a) (* a a)))
⇒
#[(a) "^H\211\207" [a] 2]
```

If *symbol*'s definition is a bytecode function object, **byte-compile** does nothing and returns **nil**. It does not compile the symbol's definition again, since the original (non-compiled) code has already been replaced in the symbol's function cell by the byte-compiled code.

### 2.6.5 byte-compile-file

**byte-compile-file** *filename* &**optional** *load* [Command]

This function compiles a file of Lisp code named *filename* into a file of bytecode. The output file's name is made by changing the **.el** suffix into **.elc**. If *filename* does not end in **.el**, it adds **.elc** to the end of *filename*.

Compilation works by reading the input file one form at a time. If it is a definition of a function or macro, the compiled function or macro definition is written out. Other forms are batched, then each batch is compiled, and written so that its compiled code

will be executed when the file is read. All comments are discarded when the input file is read.

This command returns `t` if there are no errors and `nil` otherwise. When called interactively, it prompts for the file name.

If *load* is non-`nil`, this command loads the compiled file after compiling it. Interactively, *load* is the prefix argument.

```
$ ls -l push*
-rw-r--r-- 1 lewis lewis 791 Oct  5 20:31 push.el

(byte-compile-file "~/emacs/push.el")
⇒ t

$ ls -l push*
-rw-r--r-- 1 lewis lewis 791 Oct  5 20:31 push.el
-rw-rw-rw- 1 lewis lewis 638 Oct  8 20:25 push.elc
```

## 2.6.6 byte-recompile-directory

**byte-recompile-directory** *directory* **&optional** *flag* *force* [Command]

This command recompiles every `.el` file in *directory* (or its subdirectories) that needs recompilation. A file needs recompilation if an `.elc` file exists but is older than the `.el` file.

When a `.el` file has no corresponding `.elc` file, *flag* says what to do. If it is `nil`, this command ignores these files. If *flag* is 0, it compiles them. If it is neither `nil` nor 0, it asks the user whether to compile each file, and asks about each subdirectory as well.

Interactively, **byte-recompile-directory** prompts for *directory* and *flag* is the prefix argument.

If *force* is non-`nil`, this command recompiles every `.el` file that has a `.elc` file.

The returned value is unpredictable.

## 2.6.7 byte-recompile-file

**byte-recompile-file** *filename* **&optional** *force* *arg* *load* [Command]

Recompile *filename* file if it needs recompilation. This happens when its `.elc` file is older than itself.

If the `.elc` file exists and is up-to-date, normally this function does not compile *filename*. If the prefix argument *force* is non-`nil`, however, it compiles *filename* even if the destination already exists and is up-to-date.

If the `.elc` file does not exist, normally this function *\*does not\** compile *filename*. If optional argument *ARG* is 0, it compiles the input file even if the `.elc` file does not exist. Any other non-`nil` value of *arg* means to ask the user.

If optional argument *load* is non-`nil`, loads the file after compiling.

If compilation is needed, this functions returns the result of **byte-compile-file**; otherwise it returns *no-byte-compile*.

## 2.6.8 compile-defun

**compile-defun** *&optional arg* [Command]

This command reads the defun containing point, compiles it, and evaluates the result. If you use this on a defun that is actually a function definition, the effect is to install a compiled version of that function.

**compile-defun** normally displays the result of evaluation in the echo area, but if *arg* is non-`nil`, it inserts the result in the current buffer after the form it compiled.

## 2.6.9 disassemble

**disassemble** *object &optional buffer-or-name* [Command]

This command displays the disassembled code for *object*. In interactive use, or if *buffer-or-name* is `nil` or omitted, the output goes in a buffer named `*Disassemble*`. If *buffer-or-name* is non-`nil`, it must be a buffer or the name of an existing buffer. Then the output goes there, at point, and point is left before the output.

The argument *object* can be a function name, a lambda expression, or a byte-code object (see Section 2.1 [Emacs Lisp Bytecode Objects], page 5). If it is a lambda expression, **disassemble** compiles it and disassembles the resulting compiled code.

There are a couple of variables that control how disassembly is displayed:

Variable Name	Default Value
<code>disassemble-column-1-indent</code>	8
<code>disassemble-column-2-indent</code>	10
<code>disassemble-recursive-indent</code>	3

## 2.6.10 display-call-tree

Even though this is a command, it only has an effect when *byte-compile-generate-call-tree* is set to non-`nil`; it is `nil` by default. In this case, it is called when a file is byte compiled, such as from `byte-compile-file`.

**display-call-tree** *&optional filename* [Command]

Display a call graph of a specified file. This lists which functions have been called, what functions called them, and what functions they call. The list includes all functions whose definitions have been compiled in this Emacs session, as well as all functions called by those functions.

The call graph does not include macros, inline functions, or primitives that the byte-code interpreter knows about directly, e.g. `eq`, `cons`.

The call tree also lists those functions which are not known to be called (that is, to which no calls have been compiled), and which cannot be invoked interactively.

## 2.6.11 functionp

**functionp** *object* [Function]

Non-`nil` if *object* is a function.



Use this to see if a symbol is a function. `symbol-function` can then be used to extract the function definition.

### 2.6.12 make-byte-code

**make-byte-code** *arglist byte-code constants depth &optional* [Function]  
*docstring interactive-spec &rest elements*

Create a byte-code object with specified arguments as elements. The arguments should be the *arglist*, bytecode-string *byte-code*, constant vector *constants*, maximum stack size *depth*, (optional) *docstring*, and (optional) *interactive-spec*.

We briefly describe parameters below. For a more detailed discussion of the parameters, see Section 2.1 [Emacs Lisp Bytecode Objects], page 5.

The first four arguments are required; at most six have any significance. The *arglist* can be either like the one of `lambda`, in which case the arguments will be dynamically bound before executing the bytecode, or it can be an integer of the form *NNNNNNNR-MMMMMMM* where the 7bit *MMMMMMM* specifies the minimum number of arguments, the 7-bit *NNNNNNN* specifies the maximum number of arguments (ignoring **&rest**) and the *R* bit specifies whether there is a **&rest** argument to catch the left-over arguments. If such an integer is used, the arguments will not be dynamically bound but will be instead pushed on the stack before executing the byte-code.

There very little checking of the validity of the elements either at creation time or at run time. If a parameter is are invalid or inconsistent, Emacs may crash when you call the function.

#### Examples of calling make-byte-code:

```
;; Null bytecode: no args, no bytecode, no stack needed
ELISP> (make-byte-code nil "" [] 0)
```

```
#[nil ""
  []
  0]
```

```
;; This byte-code for: '(lambda(a) (* a a))
ELISP> (make-byte-code '(a) "^H211_\207" [a] 2)
```

```
#[(a)
  "^H211_\207"
  [a]
  2]
```

```
ELISP> (make-byte-code 1 2 3 4)
```

```
#[1 2 3 4] ;; Doesn't even do type checking!
```

### 2.6.13 symbol-function

`symbol-function` *symbol* [Function]

Return *symbols* function definition, or nil if that is void.

The value returned from `symbol-function` for a function will either be its Lisp source, its bytecode, or an autoload function call.

For example if we take a function that is autoloaded when Emacs starts up:

```
ELISP> (symbol-function 'insert-file)
```

```
#[257 "\300^A301\""\207"  
  [insert-file-1 insert-file-contents]  
  4 2029839 "*fInsert file: "]
```

However if you load a file redefining the function, by loading in emacs source, you get the last definition:

```
ELISP> (load-file "/usr/share/emacs/25.2/lisp/files.el.gz")
```

```
t
```

```
ELISP> (symbol-function 'insert-file)
```

```
(closure  
  (backup-extract-version-start t)  
  (filename)  
  "Insert contents of file FILENAME into buffer after point.\nSet mark after the inser  
  (interactive "*fInsert file: ")  
  (insert-file-1 filename #'insert-file-contents))
```

Consider a function that hasn't been is set to be autoloaded:

```
ELISP> (symbol-function 'ediff-buffers)
```

```
(autoload "ediff" 975154 t nil)
```

## 2.7 Bytecode Optimization

*This is taken more or less from `bytecomp.el` comments.*

- optimization of compiled code:
  - removal of unreachable code;
  - removal of calls to side-effectless functions whose return-value is unused;
  - compile-time evaluation of safe constant forms, such as `(consp nil, and (ash 1 6))`
  - open-coding of literal lambdas;
  - peephole optimization of emitted code;
  - trivial functions are left uncompiled for speed.
- support for inline functions;
- compile-time evaluation of arbitrary expressions;
- compile-time warning messages for:
  - functions being redefined with incompatible arglists;
  - functions being redefined as macros, or vice-versa;
  - functions or macros defined multiple times in the same file;
  - functions being called with the incorrect number of arguments;
  - functions being called which are not defined globally, in the file, or as autoloads;
  - assignment and reference of undeclared free variables;
  - various syntax errors;
- correct compilation of nested `defuns`, `defmacros`, `defvars` and `defsubst`s;
- correct compilation of top-level uses of macros;
- the ability to generate a histogram of functions called.

## 3 Emacs Lisp Bytecode Instructions

### 3.1 Instruction-Description Format

In this chapter we'll document instructions over the course of the entire history of Emacs. Or at least we aim to.

For the opcode names, we will prefer canonicalized names from the Emacs C source `bytecode.c` (under directory `src/`) when those differ from the names in `bytecomp.el` (under directory `lisp/emacs-lisp`). Most of the time they are the same under the transformation described below.

We use names from `bytecode.c` because that is a larger set of instruction names. Specifically, obsolete instructions names (both those that can be interpreted even though they are no longer generated, and some that are no longer interpreted) are defined in that file, whereas that is not the case in `bytecomp.el`.

Names in `bytecode.c` must follow C conventions and must be adjusted to harmonize with other C names used. But this aspect isn't of use here, so we canonicalize those aspects away.

For example, in `bytecode.c` there is an opcode whose name is `Bbuffer_substring`. We will drop the initial `B` and replace all underscores (`_`) with dashes (`-`). Therefore we use `buffer-substring`.

The corresponding name for that opcode in `bytecomp.el` is `byte-buffer-substring`. For the most part, if you drop the initial `byte-` prefix in the `bytecomp.el` name you will often get the canonic name from `bytecode.c`.

However this isn't always true. The instruction that the Emacs Lisp `save-current-buffer` function generates nowadays has opcode value 114. In the C code, this value is listed as `B_save_current_buffer_1`; `bytecomp.el` uses the name `byte-save-current-buffer`. We report the instruction name for opcode 114 as `save-current-buffer-1`.

To shorten and regularize instruction descriptions, each instruction is described a standard format. We will also require a small amount of jargon. This jargon are explained below.

#### 3.1.1 Instruction Jargon

- **TOS** The value of top of the evaluation stack. Many instructions either read or push onto this.
- **S** This is an array of evaluation stack items. `S[0]` is the top of the stack, or **TOS**.
- **top** A pointer to the the top of the evaluation stack. In C this would be `&TOS`. When we want the stack to increase in size, we add to `top`. For example, to makes space to store a new single new value, we can use `top++` and then assign to **TOS**.

Note that in changing `top`, the value accessed by **TOS** or **S** values all change.

- $\phi$  This is used in describing stack effects for branching instructions where the stack effect is different on one branch versus the other. This is a function of two arguments. The first argument gives the stack effect on the non-nil branch and the second argument

gives the stack effect for the nil branch. So  $\phi(0, -1)$  which is seen in `goto-if-not-nil-else-pop` means that if the jump is taken, the stack effect is 0, otherwise the effect removes or pops an evaluation-stack entry.

- **instruction-name subscripting (`[]`)** In many instructions such as `constant`, `varref`, you will find an index after the instruction name. What's going on is that instruction name is one of a number of opcodes in a class encodes an index into the instruction. We generally call this an "Argument-encoding" instruction. In the display of the opcode in assembly listings and in the opcode table chapter where we list each opcode, we will include that particular instruction variant in subscripts.

For example consider `constant[0]` versus `constant[1]`. The former has opcode 192 while the latter has opcode 193. In terms of semantics, the former is the first or zeroth-index entry in a function's constant vector while the latter is the second or 1-index entry.

### 3.1.2 Instruction Description Fields

The description of fields use for describing each instruction is as follows

**Implements:**

A description of what the instruction does.

**Generated via:**

These give some Emacs Lisp constructs that may generate the instruction. Of course there may be many constructs and there may be limiting situations within that construct. We'll only give one or a few of the constructs, and we'll try to indicate a limiting condition where possible.

**Operand:** When an instruction has an operand, this describes the type of the operand. Note that the size of the operand (or in some cases the operand value) will determine the instruction size.

**Instruction size:**

The number of bytes in the instruction. This is 1 to 3 bytes.

**Stack effect:**

This describes how many stack entries are read and popped and how many entries stack entries are pushed. Although this is logically a tuple, we'll list this a tuple like  $(-3, 2)$  as a single scalar  $-3 + 2$ . In this example, we read/remove three stack entries and add two. The reason we give this as  $-3 + 2$  rather than the tuple format is so that the overall effect (removing a stack entry) can be seen by evaluating the expression.

**Added in:** This is optional. When it is given this gives which version of Emacs the opcode was added. It may also give when the opcode became obsolete or was no longer implemented.

**Example:** Some Emacs Lisp code to show how the instruction is used. For example the for the `goto` instruction we give:

```
(defun goto-eg(n)
  (while (n) 1300))
```

generates:

PC	Byte	Instruction
0	192	constant[0] n
1	32	call[0]
2	133	goto-if-nil-else-pop [8]
		8
		0
5	130	goto [0]
		0
		0
8	135	return

Constants Vector: [n]

From the above we see that the `goto` instruction at program counter (PC) 5, has decimal opcode 130. The instruction is three bytes long: a one-byte opcode followed by a two-byte operand.

The instruction name at PC 0 with opcode 192, `constant[0]`, looks like it is indexing, but it is a just name, where the brackets and number are part of the name. We use this kind of name because it is suggestive of how it works: it indexes the first element into the constants vector and pushes that value onto the evaluation stack. `constant[1]` with opcode 193 pushes the second element of the constants vector onto the stack. We could have also used instruction names like `constant0` and `constant1` for opcodes 192 and 193 instead.

Unless otherwise stated, all code examples were compiled in Emacs 25 with optimization turned off.

## 3.2 Argument-Packing Instructions

These instructions from opcode 1 to 47 encode an operand value from 0 to 7 encoded into the first byte. If the encoded value is 6, the actual operand value is the byte following the opcode. If the encoded value is 7, the actual operand value is the two-byte number following the opcode, in Little-Endian byte order.

### **stack-ref (1–7)**

Reference a value from the evaluation stack.

#### **Implements:**

top++; TOS <- S[i+1] where i is the value of the instruction operand.

#### **Generated via:**

let, let\* and lambda arguments.

**Operand:** A stack index

#### **Instruction size:**

1 byte for `stack-ref[0] .. stack-ref[4]`; 2 bytes for `stack-ref[5]`, 8-bit operand; 3 bytes for `stack-ref[6]`, 16-bit operand.

#### **Stack effect:**

-0 + 1.

**Added in:** Emacs 24.1. See Section 4.7 [Emacs 24], page 151.

**Example:** When lexical binding and optimization are in effect,

```
(defun stack-ref-eg()
  (let ((a 5) (_b 6) (c 7))
    (+ a c)))}
```

generates:

PC	Byte	Instruction
0	192	constant[0] 5 ;; top++; TOS <- 5
1	193	constant[1] 6 ;; top++; TOS <- 6
2	194	constant[2] 7 ;; top++; TOS <- 7
3	2	stack-ref[2] ;; top++; TOS <- S[3] (5)
4	1	stack-ref[1] ;; top++; TOS <- S[2] (7)
5	92	plus
6	135	return

Constants Vector: [5 6 7]

**Warning** Running an instruction with opcode 0 (logically this would be called `stack-ref[0]`), will cause an immediate abort of Emacs in versions after version 20 and before version 25! The abort of the opcode was in place before this instruction was added.

Zero is typically an invalid in bytecode and in machine code, since zero values are commonly found data, e.g. the end of C strings, or data that has been initialized to value but represents data that hasn't been written to yet. By having it be an invalid instruction, it is more likely to catch situations where random sections of memory are run such as by setting the PC incorrectly.

## varref (8–15)

### varref (8–15)

Pushes the value of the symbol in the constants vector onto the evaluation stack.

**Implements:**

```
top++; TOS <- (eval constants_vector[i]) where i is the value of instruction operand
```

**Generated via:**

dynamic variable access

**Operand:** A constants vector index. The constants vector item should be a variable symbol.

**Instruction size:**

1 byte for varref[0] .. varref[4]; 2 bytes for varref[5], 8-bit operand; 3 bytes for varref[6], 16-bit operand.

**Stack effect:**

$-0 + 1$ .

**Example:** When dynamic binding is in effect,

```
(defun varref-eg(n)
  n)
```

generates:

PC	Byte	Instruction
0	8	varref[0] n
1	135	return

Constants Vector: [n]



## varset (16–23)

### varset (16–23)

Sets a variable listed in the constants vector to the TOS value of the stack.

**Implements:**

```
constants_vector[i] <- TOS; top-- where i is the value of the instruction  
operand.
```

**Operand:** A constants vector index. The constants vector item should be a variable symbol.

**Instruction size:**

1 byte for `varset[0] .. varset[4]`; 2 bytes for `varset[5]`, 8-bit operand; 3 bytes for `varset[6]`, 16-bit operand.

**Stack effect:**

$-0 + 1$ .

**Example:** When dynamic binding is in effect,

```
defun varset-eg(n)  
  (setq n 5))
```

generates:

PC	Byte	Instruction
0	193	constant[1] 5
1	137	dup
2	16	varset[0] n ;; sets variable n
3	135	return

Constants Vector: [n 5]

## varbind (24–31)

### varbind (24–31)

Binds a variable to a symbol in the constants vector, and adds the symbol to a special-bindings stack.

#### Implements:

`(set_internal(constants_vector[i])` where `i` is the value of the instruction operand.

#### Instruction size:

1 byte for `varbind[0]` .. `varbind[4]`; 2 bytes for `varbind[5]`, 8-bit operand;  
3 bytes for `varbind[6]`, 16-bit operand.

#### Stack effect:

$-0 + 1$ .

**Example:** When dynamic binding is in effect,

```
defun varbind-eg()
  (let ((c 1))
    (1+ c)))
```

generates:

PC	Byte	Instruction
0	193	constant[1] 1
1	137	dup
2	24	varbind[0] c ;; creates variable c
3	84	add1
4	41	unbind[1] ;; removes variable c
5	135	return

Constants Vector: [c 1]

## call (32–39)

### call (32–39)

Calls a function. The instruction argument specifies the number of arguments to pass to the function from the stack, excluding the function itself.

**Implements:**

`(set_internal(constants_vector[i])` where `i` is the value of the instruction operand.

**Instruction size:**

1 byte for `call[0]` .. `call[4]`; 2 bytes for `call[5]`, 8-bit operand; 3 bytes for `call[6]`, 16-bit operand.

**Stack effect:**

$-0 + 1$ .

**Example:**

```
(defun call-eg()
  (exchange-point-and-mark)
  (next-line 2))
```

generates:

PC	Byte	Instruction
0	192	constant[0] exchange-point-and-mark
1	32	call[0]
2	136	discard
3	193	constant[1] next-line
4	194	constant[2] 2
5	33	call[1]
6	135	return

Constants Vector: [exchange-point-and-mark next-line 2]

## unbind (40–47)

### unbind (40–47)

Remove the binding of a variable to symbol and from the special stack. This is done when the variable is no longer needed.

**Implements:**

undo's a `let`, `unwind-protects`, and `save-excursions`

**Generated via:**

`let` in dynamic binding. Balancing the end of `save-excursion`.

**Instruction size:**

1 byte for `unbind[0]` .. `unbind[4]`; 2 bytes for `unbind[5]`, 8-bit operand; 3 bytes for `unbind[6]`, 16-bit operand.

**Stack effect:**

−0 + 0.

**Example:** When dynamic binding is in effect,

```
defun varbind-eg()
  (let ((c 1))
    (1+ c)))
```

generates:

PC	Byte	Instruction
0	193	constant[1] 1
1	137	dup
2	24	varbind[0] c ;; creates variable c
3	84	add1
4	41	unbind[1] ;; removes variable c
5	135	return

Constants Vector: [c 1]

### 3.3 Constants-Vector Retrieval Instructions

The instructions from opcode 192 to 255 push a value from the Constants Vector. See Section 2.1.3 [Constants Vector], page 8. Opcode 192 pushes the first entry, opcode 193, the second and so on. If there are more than 64 constants, opcode `constant2` (opcode 129) is used instead.

#### `constant (192–255)`

Pushes a value from the constants vector on the evaluation stack. There are special instructions to push any one of the first 64 entries in the constants stack.

**Implements:**

```
top++; TOS <- constants_vector[i] where i is the value of the instruction
operand.
```

**Instruction size:**

1 byte

**Stack effect:**

−0 + 1.

**Example:**

```
defun n3(n)
  (+ n 10 11 12))
generates:
PC  Byte  Instruction
0   193   constant[1] +
1    8    varref[0] n
2   194   constant[2] 10
3   195   constant[3] 11
4   196   constant[4] 12
5    36   call[4]
6   135   return
```

Constants Vector: [n + 10 11 12]

## constant2 (129)

### constant2 (129)

Pushes a value from the constants vector on the evaluation stack. Although there are special instructions to push any one of the first 64 entries in the constants stack, this instruction is needed to push a value beyond one the first 64 entries.

#### Implements:

```
top++; TOS <- constants_vector[i] where i is the value of the instruction
operand.
```

**Operand:** a 16-bit index into the constants vector.

#### Instruction size:

3 bytes

#### Stack effect:

-0 + 1.

#### Example:

```
(defun n64(n)
  (+ n 0 1 2 3 .. 64))
```

generates:

PC	Byte	Instruction
0	193	constant[1] +
1	8	varref[0] n
2	194	constant[2] 0
3	195	constant[3] 1
4	196	constant[4] 2
[...]		
63	255	constant[63] 61
64	129	constant2 [64] 62
		64
		0
67	129	constant2 [65] 63
		65
		0
70	129	constant2 [66] 64
		66
		0
73	38	call [66]
		66
75	135	return

Constants Vector: [n + 0 1 2 .. 61 62 63 64]

### 3.4 Exception-Handling Instructions

pophandler (48)

**Implements:**

Removes last condition pushed by pushconditioncase

**Generated via:**

condition-case

**Instruction size:**

1 byte

**Stack effect:**

-0 + 0.

**Added in:** Emacs 24.4. See Section 4.7 [Emacs 24], page 151.

**Example:**

```
(defun pushconditioncase-eg()
  (condition-case nil
    5
    (one-error 6)
    (another-error 7)))
```

generates:

PC	Byte	Instruction
0	192	constant[0] (another-error)
1	49	pushconditioncase [16]
		16
		0
4	193	constant[1] (one-error)
5	49	pushconditioncase [12]
		12
		0
8	194	constant[2] 5
9	48	pophandler
10	48	pophandler
11	135	return
12	48	pophandler
13	136	discard
14	195	constant[3] 6
15	135	return
16	136	discard
17	196	constant[4] 7
18	135	return

Constants Vector: [(another-error) (one-error) 5 6 7]

## pushconditioncase (49)

### pushconditioncase (49)

**Implements:**

Pops the TOS which is some sort of condition to test on and registers that. If any of the instructions errors with that condition, a jump to the operand occurs.

**Operand:** 16-bit PC address

**Instruction size:**

3 bytes

**Stack effect:**

-1 + 0.

**Added in:** Emacs 24.4. See Section 4.7 [Emacs 24], page 151.

**Example:**

```
(defun pushconditioncase-eg()
  (condition-case nil
    5
    (one-error 6)
    (another-error 7)))
```

generates:

PC	Byte	Instruction
0	192	constant[0] (another-error)
1	49	pushconditioncase [16]
		16
		0
4	193	constant[1] (one-error)
5	49	pushconditioncase [12]
		12
		0
8	194	constant[2] 5
9	48	pophandler
10	48	pophandler
11	135	return
12	48	pophandler
13	136	discard
14	195	constant[3] 6
15	135	return
16	136	discard
17	196	constant[4] 7
18	135	return

Constants Vector: [(another-error) (one-error) 5 6 7]



**pushcatch (50)**

pushcatch (50)

?

### 3.5 Control-Flow Instructions

**goto (130)**

**Implements:**

Jump to label given in the 16-bit operand

**Generated via:**

while and various control-flow constructs

**Operand:** 16-bit PC address

**Instruction size:**

3 bytes

**Stack effect:**

$-0 + 0$

**Example:** (defun goto-eg(n) (while (n) 1300)) generates:

PC	Byte	Instruction
0	192	constant[0] n
1	32	call[0]
2	133	goto-if-nil-else-pop [8]
		8
		0
5	130	goto [0]
		0
		0
8	135	return

Constants Vector: [n]

## goto-if-nil (131)

### goto-if-nil (131)

**Implements:**

Jump to label given in the 16-bit operand if TOS is nil. In contrast to `goto-if-nil-else-pop`, the test expression, TOS, is always popped.

**Generated via:**

if with “else” clause and various control-flow constructs

**Operand:** 16-bit PC address

**Instruction size:**

3 bytes

**Stack effect:**

$-1 + 0$

**Example:** (defun goto-if-nil-eg(n) (if (n) 1310 1311)) generates:

PC	Byte	Instruction
0	192	constant[0] n
1	32	call[0]
2	131	goto-if-nil [9]
		9
		0
5	193	constant[1] 1310
6	130	goto [10]
		10
		0
9	194	constant[2] 1311
10	135	return

Constants Vector: [n 1310 1311]

## goto-if-not-nil (132)

### goto-if-not-nil (132)

**Implements:**

Jump to label given in the 16-bit operand if TOS is not nil. In contrast to `goto-if-not-nil-else-pop`, the test expression, TOS, is always popped.

**Generated via:**

or inside an `if` with optimization and various control-flow constructs

**Operand:** 16-bit PC address

**Instruction size:**

3 bytes

**Stack effect:**

-1 + 0

**Example:** With bytecode optimization, `(defun goto-if-not-nil-eg(n) (if (or (n) (n)) 1320))` generates:

PC	Byte	Instruction
0	192	constant[0] n
1	32	call[0]
2	132	goto-if-not-nil [10] 10 0
5	192	constant[0] n
6	32	call[0]
7	133	goto-if-nil-else-pop [11] 11 0
10	193	constant[1] 1320
11	135	return

Constants Vector: [n 1320]

Note the change in opcode when bytecode optimization is not performed.

## goto-if-nil-else-pop (133)

goto-if-nil-else-pop (133)

**Implements:**

Jump to label given in the 16-bit operand if TOS is nil; otherwise pop the TOS, the tested condition. This allows the test expression, nil, to be used again on the branch as the TOS.

**Generated via:**

cond, if and various control-flow constructs

**Operand:** 16-bit PC address

**Instruction size:**

3 bytes

**Stack effect:**

$\phi(0, -1) + 0$

**Example:** (defun goto-if-nil-else-pop-eg(n) (cond ((n) 1330))) generates:

PC	Byte	Instruction
0	192	constant[0] n
1	32	call[0]
2	133	goto-if-nil-else-pop [6]
		6
		0
5	193	constant[1] 1330
6	135	return

Constants Vector: [n 1330]

## goto-if-not-nil-else-pop (134)

### goto-if-not-nil-else-pop (134)

**Implements:**

Jump to label given in the 16-bit operand if TOS is not nil; otherwise pop TOS, the tested condition. This allows the tested expression on TOS to be used again when the jump is taken.

**Generated via:**

cond, if and various control-flow constructs

**Operand:** 16-bit PC address

**Instruction size:**

3 bytes

**Stack effect:**

$\phi(0, -1) + 0$

**Example:**

```
(defun goto-if-not-nil-else-pop-eg(n)
  (if (or (n) (n))
      1340))
```

generates:

PC	Byte	Instruction
0	192	constant[0] n
1	32	call[0]
2	134	goto-if-not-nil-else-pop [7]
		7
		0
5	192	constant[0] n
6	32	call[0]
7	133	goto-if-nil-else-pop [11]
		11
		0
10	193	constant[1] 1340
11	135	return

Constants Vector: [n 1340]

Note the change in opcode when bytecode optimization is performed.

**return (135)**

**return (135)**

**Implements:**

Return from function. This is the last instruction in a function's bytecode sequence. The top value on the evaluation stack is the return value.

**Generated via:**

lambda

**Instruction size:**

1 byte

**Stack effect:**

-1 + 0

**Example:** (defun return-eg(n) 1350) generates:

PC	Byte	Instruction
0	192	constant[0] 1350
1	135	return

Constants Vector: [1350]

## switch (183)

### switch (183)

Jumps to entry in a jumtable.

#### Implements:

switch-like jumtable. Top of stack is a variable reference. Below that is a hash table mapping compared values to instructions offsets.

#### Generated via:

cond with several clauses that use the same test function and variable.

#### Instruction size:

1 byte

#### Stack effect:

$-2 + 0$

**Added in:** Emacs 26.1

#### Example:

```
(defun switch-eg(n)
  (cond ((equal n 1) 1)
        ((equal n 2) 2)
        ((equal n 3) 3)))
```

generates:

PC	Byte	Instruction
0	8	varref[0] n
1	193	constant[1] #s(hash-table size 3 test equal rehash-size 1.5 rehash-thres
2	183	switch
3	130	goto [12]
		12
		0
6	194	constant[2] 1
7	135	return
8	195	constant[3] 2
9	135	return
10	196	constant[4] 3
11	135	return
12	197	constant[5] nil
13	135	return

Constants Vector: [n #s(hash-table size 2 test equal rehash-size 1.5 rehash-thres



## 3.6 Function-Call Instructions

These instructions use up one byte, and are followed by the next instruction directly. They are equivalent to calling an Emacs Lisp function with a fixed number of arguments: the arguments are popped from the stack, and a single return value is pushed back onto the stack.

### 3.6.1 Lisp Function Instructions

These instructions correspond to general functions which are not specific to Emacs; common cases are usually inlined for speed by the bytecode interpreter.

#### **symbolp (57)**

Call `symbolp`.

**Implements:**

`TOS <- (symbolp TOS).`

**Generated via:**

`symbolp.`

**Instruction size:**

1 byte

**Stack effect:**

$-1 + 1$ .

**Example:** When lexical binding is in effect, `(defun symbolp-eg(n) (symbolp n))` generates:

PC	Byte	Instruction
0	137	<code>dup</code>
1	57	<code>symbolp</code>
2	135	<code>return</code>

## consp (58)

consp (58)

Call consp.

**Implements:**

TOS <- (consp TOS).

**Generated via:**

consp.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Example:** When lexical binding is in effect, (defun consp-eg(n) (consp n)) generates:

PC	Byte	Instruction
0	137	dup
1	58	consp
2	135	return

## stringp (59)

stringp (59)

Call stringp.

**Implements:**

TOS <- (stringp TOS).

**Generated via:**

unary stringp.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Example:** When lexical binding is in effect, (defun stringp-eg(n) (stringp n)) generates:

PC	Byte	Instruction
0	137	dup
1	59	stringp
2	135	return

## listp (60)

listp (60)

Call listp.

**Implements:**

TOS <- (listp TOS).

**Generated via:**

unary listp.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Example:** When lexical binding is in effect, (defun listp-eg(n) (listp n)) generates:

PC	Byte	Instruction
0	137	dup
1	60	listp
2	135	return

## eq (61)

eq (61)

Call eq.

**Implements:**

`S[1] <- (eq S[1] TOS); top--.`

**Generated via:**

binary eq.

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When lexical binding is in effect, `(defun eq-eg(a b) (eq a b))` generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	61	eq
3	135	return

## memq (62)

memq (62)

Call memq.

**Implements:**

```
S[1] <- (memq S[1] TOS); top--.
```

**Generated via:**

binary memq.

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When lexical binding is in effect, (defun memq-eg(a b) (memq a b)) generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	62	memq
3	135	return

## not (63)

not (63)

Call not.

**Implements:**

TOS <- (not TOS).

**Generated via:**

unary not.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Example:** When lexical binding is in effect, (defun not-eg(a) (not a)) generates:

PC	Byte	Instruction
0	137	dup
1	63	not
2	135	return

## symbol-value (74)

symbol-value (74)

Call symbol-value.

**Implements:**

```
TOS <- (symbol-value TOS).
```

**Generated via:**

```
symbol-value.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Example:** When lexical binding is in effect, (defun symbol-value-eg(a) (symbol-value a)) generates:

PC	Byte	Instruction
0	137	dup
1	74	symbol-value
2	135	return



## symbol-function (75)

symbol-function (75)

Call symbol-function.

**Implements:**

```
TOS <- (symbol-function TOS).
```

**Generated via:**

```
symbol-function.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Example:** When lexical binding is in effect, (defun symbol-function-eg(a) (symbol-function a)) generates:

PC	Byte	Instruction
0	137	dup
1	75	symbol-function
2	135	return

## set (76)

set (76)

Call set.

**Implements:**

```
S[1] <- (set S[1] TOS); top--.
```

**Generated via:**

```
set.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Example:** When lexical binding is in effect, (defun set-eg(a b) (set a b)) generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	76	set
3	135	return

## fset (77)

fset (77)

Call fset.

**Implements:**

`S[1] <- (fset S[1] TOS); top--.`

**Generated via:**

`binary fset.`

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When lexical binding is in effect, `(defun fset-eg(a b) (fset a b))` generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	77	fset
3	135	return

## get (78)

get (78)

Call get.

**Implements:**

`S[1] <- (get S[1] TOS); top--.`

**Generated via:**

binary get.

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When lexical binding is in effect, `(defun get-eg(a b) (get a b))` generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	78	get
3	135	return

## equal (154)

### equal (154)

Call equal.

**Implements:**

```
S[1] <- (equal S[1] TOS); top--.
```

**Generated via:**

binary equal.

**Instruction size:**

1 byte

**Stack effect:**

-2 + 1.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** When lexical binding is in effect, (defun equal-eg(a b) (equal a b)) generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	154	equal
3	135	return

## member (157)

member (157)

Call member.

**Implements:**

```
S[1] <- (member S[1] TOS); top--.
```

**Generated via:**

```
member.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Example:** When lexical binding is in effect, (defun member-eg(a b) (member a b)) generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	157	member
3	135	return

## assq (158)

assq (158)

Call assq.

**Implements:**

```
S[1] <- (assq S[1] TOS); top--.
```

**Generated via:**

```
binary assq.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Example:** When lexical binding is in effect, (defun assq-eg(a b) (assq a b)) generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	158	assq
3	135	return

## numberp (167)

numberp (167)

Call numberp.

**Implements:**

TOS <- (numberp TOS).

**Generated via:**

numberp.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** When lexical binding is in effect, (defun numberp-eg(a) (numberp a)) generates:

PC	Byte	Instruction
0	137	dup
1	167	numberp
2	135	return



## integerp (168)

integerp (168)

Call integerp.

**Implements:**

TOS <- (integerp TOS).

**Generated via:**

integerp.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** When lexical binding is in effect, (defun integerp-eg(a) (integerp a)) generates:

PC	Byte	Instruction
0	137	dup
1	168	integerp
2	135	return

### 3.6.2 List Function Instructions

These instructions correspond to general functions which are not specific to Emacs; common cases are usually inlined for speed by the bytecode interpreter.

#### **nth (56)**

Call **nth** with two stack arguments.

**Implements:**

```
S[1] <- (nth S[1] TOS); top--.
```

**Generated via:**

```
nth.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Example:** When lexical binding is in effect, `(defun nth-eg(1) (nth 560 1))` generates:

PC	Byte	Instruction
0	192	constant[0] 560
1	1	stack-ref[1]
2	56	nth
3	135	return

Constants Vector: [560]

## car (64)

### car (64)

Call `car` with one stack argument.

#### Implements:

```
TOS <- (car TOS).
```

#### Generated via:

```
car.
```

#### Instruction size:

1 byte

#### Stack effect:

-1 + 1.

**Example:** When lexical binding is in effect, `(defun car-eg(1) (car 1))` generates:

PC	Byte	Instruction
0	137	dup
1	64	car
2	135	return

## cdr (65)

### cdr (65)

Call `cdr` with one stack argument.

#### Implements:

```
TOS <- (cdr TOS).
```

#### Generated via:

```
cdr.
```

#### Instruction size:

1 byte

#### Stack effect:

-1 + 1.

**Example:** When lexical binding is in effect, `(defun cdr-eg(1) (cdr 1))` generates:

PC	Byte	Instruction
0	137	dup
1	65	cdr
2	135	return

## cons (66)

### cons (66)

Call cons with two stack arguments.

#### Implements:

```
S[1] <- (cons S[1] TOS); top--.
```

#### Generated via:

```
cons.
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-2 + 1.
```

**Example:** (defun cons-eg() (cons 'a 'b)) generates:

PC	Byte	Instruction
0	192	constant[0] a
1	193	constant[1] b
2	66	cons
3	135	return

Constants Vector: [a b]

## list1 (67)

list1 (67)

Call list with TOS.

**Implements:**

```
TOS <- (list TOS).
```

**Generated via:**

```
list.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Example:** (defun list1-eg() (list 'a)) generates:

PC	Byte	Instruction
0	192	constant[0] a
1	67	list1
2	135	return

```
Constants Vector: [a]
```

Call list with TOS.

## list2 (68)

### list2 (68)

Call `list` with two stack items.

#### Implements:

```
S[1] <- (list S[1] TOS); top--.
```

#### Generated via:

```
list.
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-2 + 1.
```

**Example:** `(defun list2-eg() (list 'a 'b))` generates:

PC	Byte	Instruction
0	192	constant[0] a
1	193	constant[1] b
2	68	list2
3	135	return

Constants Vector: [a b]

## list3 (69)

### list3 (69)

Call `list` with three stack items.

#### Implements:

```
S[2] <- (list S[2] S[1] TOS); top -= 2.
```

#### Generated via:

```
list
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-3 + 1.
```

**Example:** `(defun list3-eg() (list 'a 'b 'c))` generates:

PC	Byte	Instruction
0	192	constant[0] a
1	193	constant[1] b
2	194	constant[2] c
3	69	list3
4	135	return

Constants Vector: [a b c]



## list4 (70)

### list4 (70)

Call `list` with four stack items.

#### Implements:

```
S[3] <- (list S[3] S[2] S[1] TOS); top -= 2.
```

#### Generated via:

```
list.
```

#### Instruction size:

1 byte

#### Stack effect:

$-4 + 1$ .

**Example:** `(defun list4-eg() (list 'a 'b 'c 'd))` generates:

PC	Byte	Instruction
0	192	constant[0] a
1	193	constant[1] b
2	194	constant[2] c
3	195	constant[3] d
4	70	list4
5	135	return

Constants Vector: [a b c d]

## listN (175)

### listN (175)

Call `list` on up to 255 items. Note that there are special instructions for the case where there are 1 to 4 items in the list.

**Implements:**

`S[n-1] <- (list S[n-1] S[n-2] ... TOS); top -= (n-1)` where `n` is the value of the operand.

**Generated via:**

`list.`

**Operand:** 8-bit number of items in list

**Instruction size:**

2 bytes

**Stack effect:**

$-n + 1$  where  $n$  is the value of the instruction operand.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun listN-eg() (list 'a 'b 'c 'd 'e))` generates:

PC	Byte	Instruction
0	192	constant[0] a
1	193	constant[1] b
2	194	constant[2] c
3	195	constant[3] d
4	196	constant[4] e
5	175	listN [5]
		5
7	135	return

Constants Vector: [a b c d e]

## length (71)

### length (71)

Call `length` with one stack argument.

**Implements:**

```
TOS <- (length TOS).
```

**Generated via:**

```
length.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Example:** `(defun length-eg() (length '(a b)))` generates:

PC	Byte	Instruction
0	192	constant[0] (a b)
1	71	length
2	135	return

Constants Vector: [(a b)]

## aref (72)

### aref (72)

Call `aref` with two stack arguments.

#### Implements:

```
S[1] <- (aref S[1] TOS); top--.
```

#### Generated via:

```
aref.
```

#### Instruction size:

1 byte

#### Stack effect:

$-2 + 1$ .

**Example:** `(defun aref-eg() (aref '[720 721 722] 0))` generates:

PC	Byte	Instruction
0	192	constant[0] [720 721 722]
1	193	constant[1] 0
2	72	aref
3	135	return

Constants Vector: `[[720 721 722] 0]`

## aset (73)

### aset (73)

Call aset with three stack arguments.

#### Implements:

```
S[2] <- (aset S[2] S[1] TOS); top-=2.
```

#### Generated via:

```
aset.
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-2 + 1.
```

**Example:** (defun aset-eg() (aset array-var 0 730)) generates:

PC	Byte	Instruction
0	8	varref[0] array-var
1	193	constant[1] 0
2	194	constant[2] 730
3	73	aset
4	135	return

Constants Vector: [array-var 0 730]

## **nthcdr (155)**

### **nthcdr (155)**

Call `nthcdr` with two stack arguments.

**Implements:**

```
S[1] <- (nthcdr S[1] TOS); top --.
```

**Generated via:**

```
nthcdr.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun nthcdr-eg() (nthcdr '(1550 1551 1552) 2))` generates:

PC	Byte	Instruction
0	192	constant[0] (1550 1551 1552)
1	193	constant[1] 2
2	155	nthcdr
3	135	return

Constants Vector: [(1550 1551 1552) 2]

## elt (156)

### elt (156)

Call `elt` with two stack arguments.

**Implements:**

```
S[1] <- (elt S[1] TOS); top --.
```

**Generated via:**

```
elt.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun elt-eg() (elt '(1560 1561 1562) 2))` generates:

PC	Byte	Instruction
0	192	constant[0] (1560 1561 1562)
1	193	constant[1] 2
2	156	elt
3	135	return

Constants Vector: [(1560 1561 1562) 2]

## nreverse (159)

### nreverse (159)

Call `nreverse` with one stack argument.

**Implements:**

```
TOS <- (elt TOS).
```

**Generated via:**

```
nreverse.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun nreverse-eg() (nreverse '(1590 1591)))` generates:

PC	Byte	Instruction
0	192	constant[0] (1590 1591)
1	159	nreverse
2	135	return

Constants Vector: [(1590 1591)]



## setcar (160)

### setcar (160)

Call `setcar` with two stack arguments.

**Implements:**

```
S[1] <- (setcar S[1] TOS); top--.
```

**Generated via:**

```
setcar.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** With lexical binding in effect, `(defun setcar-eg(1) (setcar 1 1600)))` generates:

PC	Byte	Instruction
0	137	dup
1	192	constant[0] 1600
2	160	setcar
3	135	return

Constants Vector: [1600]

## setcdr (161)

### setcdr (161)

Call `setcdr` with two stack arguments.

**Implements:**

```
S[1] <- (setcdr S[1] TOS); top--.
```

**Generated via:**

```
setcdr.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** With lexical binding in effect, `(defun setcdr-eg(1) (setcdr 1 1610)))` generates:

PC	Byte	Instruction
0	137	dup
1	192	constant[0] 1610
2	161	setcdr
3	135	return

Constants Vector: [1610]

## car-safe (162)

### car-safe (162)

Call `car-safe` with one argument.

**Implements:**

```
TOS <- (car-safe TOS).
```

**Generated via:**

```
car-safe.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** With lexical binding in effect, `(defun car-safe-eg(1) (car-safe 1))` generates:

PC	Byte	Instruction
0	137	dup
1	162	car-safe
2	135	return

## cdr-safe (163)

### cdr-safe (163)

Call `cdr-safe` with one stack argument.

**Implements:**

```
TOS <- (cdr-safe TOS).
```

**Generated via:**

```
cdr-safe.
```

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** With lexical binding in effect, `(defun cdr-safe-eg(1) (cdr-safe 1))` generates:

PC	Byte	Instruction
0	137	dup
1	163	cdr-safe
2	135	return

## nconc (164)

### nconc (164)

Call `nconc` with two stack arguments.

**Implements:**

```
S[1] <- (nconc S[1] TOS); top--.
```

**Generated via:**

```
nconc.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** With lexical binding in effect, `(defun nconc-eg(a b) (nconc a b))` generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	164	nconc
3	135	return

### 3.6.3 Arithmetic Function Instructions

These instructions correspond to general functions which are not specific to Emacs; common cases are usually inlined for speed by the bytecode interpreter.

**sub1 (83)**

Call 1-.

**Implements:**

TOS <- (1- TOS).

**Generated via:**

1-.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Example:** When lexical binding is in effect, (defun sub1-eg(n) (1- n)) generates:

PC	Byte	Instruction
0	137	dup
1	83	sub1
2	135	return

## add1 (84)

add1 (84)

Call 1+.

**Implements:**

TOS <- (1+ TOS).

**Generated via:**

unary -.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Example:** When lexical binding is in effect, (defun add1-eg(n) (1+ n)) generates:

PC	Byte	Instruction
0	137	dup
1	84	add1
2	135	return

## eqlsign (85)

eqlsign (85)

Call =.

**Implements:**

`S[1] <- (= S[1] TOS); top--.`

**Generated via:**

binary =.

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When dynamic binding is in effect, `(defun eqlsign-eg(a b) (= a b))` generates:

PC	Byte	Instruction
0	8	varref[0] a
1	9	varref[1] b
2	85	eqlsign
3	135	return

Constants Vector: [a b]



## **gtr (86)**

**gtr (86)**

Call >.

**Implements:**

`S[1] <- (> S[1] TOS); top--.`

**Generated via:**

`>.`

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When lexical binding is in effect, `(defun gtr-eg(a b) (> a b))` generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	86	gtr
3	135	return

## lss (87)

lss (87)

Call <.

**Implements:**

`S[1] <- (< S[1] TOS); top--.`

**Generated via:**

`<.`

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When dynamic binding is in effect, `(defun lss-eg(a b) (< a b))` generates:

PC	Byte	Instruction
0	8	varref[0] a
1	9	varref[1] b
2	87	lss
3	135	return

Constants Vector: [a b]

## leq (88)

leq (88)

Call <=.

**Implements:**

`S[1] <- (<= S[1] TOS); top--.`

**Instruction size:**

1 byte

**Generated via:**

<=.

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When dynamic binding is in effect, `(defun leq-eg(a b) (<= a b))` generates:

PC	Byte	Instruction
0	8	varref[0] a
1	9	varref[1] b
2	88	leq
3	135	return

Constants Vector: [a b]

## geq (89)

geq (89)

Call >=.

**Implements:**

```
S[1] <- (>= S[1] TOS); top--.
```

**Instruction size:**

1 byte

**Generated via:**

>=.

**Instruction size:**

1 byte

**Stack effect:**

-2 + 1.

**Example:** When lexical binding is in effect, (defun geq-eg(a b) (>= a b)) generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	89	geq
3	135	return

## diff (90)

### diff (90)

Call binary `-`.

#### Implements:

```
S[1] <- (- S[1] TOS); top--.
```

#### Generated via:

binary `-`.

#### Instruction size:

1 byte

#### Instruction size:

1 byte

#### Stack effect:

$-2 + 1$ .

**Example:** When lexical binding is in effect, `(defun diff-eg(a b) (- a b))` generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	90	diff
3	135	return

## negate (91)

### negate (91)

Call unary `-`.

#### Implements:

```
TOS <- (- TOS).
```

#### Generated via:

```
unary -.
```

#### Instruction size:

```
1 byte
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-1 + 1.
```

**Example:** When lexical binding is in effect, `(defun negate-eg(a) (- a))` generates:

PC	Byte	Instruction
0	8	varref[0] a
1	91	negate
2	135	return

Constants Vector: [a]

## plus (92)

plus (92)

Call unary +.

**Implements:**

```
S[1] <- (+ S[1] TOS); top--.
```

**Generated via:**

```
+
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Example:** When dynamic binding is in effect, (defun plus-eg(n) (+ n n)) generates:

PC	Byte	Instruction
0	8	varref[0] n
1	137	dup
2	92	plus
3	135	return

Constants Vector: [n]

## mult (95)

mult (95)

Call \*.

**Implements:**

`S[1] <- (* S[1] TOS); top--.`

**Generated via:**

`*.`

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** When dynamic binding is in effect, `(defun mult-eg(n) (* n n))` generates:

PC	Byte	Instruction
0	8	varref[0] n
1	137	dup
2	95	mult
3	135	return

Constants Vector: [n]



## max (93)

max (93)

Call max.

**Implements:**

`S[1] <- (max S[1] TOS); top--.`

**Generated via:**

`max.`

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When dynamic binding is in effect, `(defun max-eg(a b) (max a b))` generates:

PC	Byte	Instruction
0	8	varref[0] a
1	9	varref[1] b
2	93	max
3	135	return

Constants Vector: [a b]

## min (94)

min (94)

Call min.

**Implements:**

TOS <- (min(S[1] TOS).

**Generated via:**

binary min.

**Instruction size:**

1 byte

**Stack effect:**

-2 + 1.

**Example:** When dynamic binding is in effect, (defun min-eg(a b) (min a b)) generates:

PC	Byte	Instruction
0	8	varref[0] a
1	9	varref[1] b
2	94	min
3	135	return

Constants Vector: [a b]

## quo (165)

quo (165)

Call /.

**Implements:**

`S[1] <- (/ S[1] TOS); top--.`

**Generated via:**

`/.`

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** When dynamic binding is in effect, `(defun min-quo(a b) (/ a b))` generates:

PC	Byte	Instruction
0	8	varref[0] a
1	9	varref[1] b
2	165	quo
3	135	return

Constants Vector: [a b]

## rem (166)

rem (166)

Call %.

**implements:**

```
S[1] <- (% S[1] TOS); top--.
```

**generated via:**

```
%
```

**Instruction size:**

1 byte

**Stack effect:**

-2 + 1

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** When lexical binding is in effect, (defun rem-eg(a b) (% a b)) generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	166	rem
3	135	return

### 3.6.4 String Function Instructions

These instructions correspond to general functions which are not specific to Emacs; the bytecode interpreter calls the corresponding C function for them.

#### **substring (79)**

Call `substring` with three stack arguments.

**Implements:**

```
S[2] <- (substring S[2] S[1] TOS); top-=2.
```

**Generated via:**

```
substring.
```

**Instruction size:**

1 byte

**Stack effect:**

$-2 + 1$ .

**Example:** `(defun substring-eg() (substring "abc" 0 2))` generates:

PC	Byte	Instruction
0	192	constant[0] "abc"
1	193	constant[1] 0
2	194	constant[2] 2
3	79	substring
4	135	return

Constants Vector: ["abc" 0 2]

## concat2 (80)

### concat2 (80)

Call `concat` with two stack arguments.

**Implements:**

```
S[1] <- (concat S[1] TOS); top--.
```

**Generated via:**

```
concat.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun concat2-eg() (concat "a" "b"))` generates:

PC	Byte	Instruction
0	192	constant[0] "a"
1	193	constant[1] "b"
2	80	concat2
3	135	return

Constants Vector: ["a" "b"]

## concat3 (81)

### concat3 (81)

Call concat with three stack arguments.

#### Implements:

```
S[2] <- (concat S[2] S[1] TOS); top-=2.
```

#### Generated via:

```
concat.
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-2 + 1.
```

**Example:** (defun concat3-eg() (concat "a" "b" "c")) generates:

PC	Byte	Instruction
0	192	constant[0] "a"
1	193	constant[1] "b"
2	194	constant[2] "c"
3	81	concat3
4	135	return

```
Constants Vector: ["a" "b" "c"]
```

## concat4 (82)

### concat4 (82)

Call `concat` with four stack arguments.

#### Implements:

```
S[3] <- (concat S[3] S[2] S[1] TOS); top -= 2.
```

#### Generated via:

```
concat.
```

#### Instruction size:

1 byte

#### Stack effect:

$-4 + 1$ .

**Example:** `(defun concat4-eg() (concat "a" "b" "c" "d"))` generates:

PC	Byte	Instruction
0	192	constant[0] "a"
1	193	constant[1] "b"
2	194	constant[2] "c"
3	195	constant[3] "d"
4	82	concat4
5	135	return

Constants Vector: ["a" "b" "c" "d"]



## concatN (174)

### concatN (174)

Call `concat` on up to 255 stack arguments. Note there are special instructions for the case where there are 2 to 4 items to concatenate.

**Implements:**

```
S[n-1] <- (concat S[n-1] S[n-2] ... TOS); top -= (n-1).
```

**Generated via:**

```
concat.
```

**Operand:** 8-bit number of items in `concat`

**Instruction size:**

2 bytes

**Stack effect:**

$-n + 1$  where  $n$  is the value of the instruction operand.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun concatN-eg() (concat "a" "b" "c" "d" "e"))` generates:

PC	Byte	Instruction
0	192	constant[0] "a"
1	193	constant[1] "b"
2	194	constant[2] "c"
3	195	constant[3] "d"
4	196	constant[4] "e"
5	176	concatN [5]
		5
7	135	return

Constants Vector: ["a" "b" "c" "d" "e"]

## upcase (150)

### upcase (150)

Call `upcase` with one stack argument.

**Implements:**

```
TOS <- (upcase TOS).
```

**Generated via:**

```
upcase.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun upcase-eg() (upcase "abc"))` generates:

PC	Byte	Instruction
0	192	constant[0] "abc"
1	150	upcase
2	135	return

Constants Vector: ["abc"]

## downcase (151)

### downcase (151)

Call `downcase` with one argument.

**Implements:**

```
TOS <- (downcase TOS).
```

**Generated via:**

```
downcase.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun downcase-eg(1) (downcase "ABC"))` generates:

PC	Byte	Instruction
0	192	constant[0] "ABC"
1	151	downcase
2	135	return

Constants Vector: ["ABC"]

## stringeqsign (152)

### stringeqsign (152)

Call `string=` with two stack arguments, comparing two strings for equality.

**Implements:**

```
S[1] <- (string= S[1] TOS); top--.
```

**Generated via:**

```
string=.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** With lexical binding in effect,  
(defun stringeqsign-eg(a)  
 (string= a "b"))

generates:

PC	Byte	Instruction
0	137	dup
1	192	constant[0] "b"
2	152	string=
3	135	return

Constants Vector: ["b"]

## stringlss (153)

### stringlss (153)

Call `string<` with two stack arguments, comparing two strings.

**Implements:**

```
S[1] <- (string< S[1] TOS); top--.
```

**Generated via:**

```
string<.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** With lexical binding in effect,

```
(defun stringlss-eg(a)
  (string< a "b"))
```

generates:

PC	Byte	Instruction
0	137	dup
1	192	constant[0] "b"
2	153	string<
3	135	return

Constants Vector: ["b"]

### 3.6.5 Emacs Buffer Instructions

#### current-buffer (112)

Call current-buffer.

**Implements:**

```
TOS <- (current-buffer)
```

**Generated via:**

```
current-buffer
```

**Instruction size:**

1 byte

**Stack effect:**

$-0 + 1$ .

**Example:** (defun current-buffer-eg() (current-buffer)) generates:

PC	Byte	Instruction
0	112	current-buffer
1	135	return

## set-buffer (113)

set-buffer (113)

Call set-buffer with TOS.

**Implements:**

```
TOS <- (set-buffer TOS)
```

**Generated via:**

```
set-buffer
```

**Instruction size:**

1 byte

**Stack effect:**

-1 + 1.

**Example:** (defun set-buffer-eg() (set-buffer "\*scratch")) generates:

PC	Byte	Instruction
0	192	constant[0] "*scratch"
1	113	set-buffer
2	135	return

Constants Vector: ["\*scratch"]

## save-current-buffer-1 (114)

### save-current-buffer-1 (114)

Call `save-current-buffer`.

Replaces older `save-current-buffer`. See [save-current-buffer], page 142.

#### Implements:

```
TOS <- (save-current-buffer)
```

#### Generated via:

```
save-current-buffer
```

#### Instruction size:

1 byte

#### Stack effect:

-1 + 1.

**Added in:** Emacs 22. See Section 4.5 [Emacs 22], page 150.

#### Example:

```
(defun save-current-buffer-1-eg()  
  (save-current-buffer (prog 5)))}
```

generates:

PC	Byte	Instruction
0	114	save-current-buffer
1	192	constant[0] prog
2	193	constant[1] 5
3	33	call[1]
4	41	unbind[1]
5	135	return

Constants Vector: [prog 5]



## buffer-substring (123)

### buffer-substring (123)

Call buffer-substring with two stack arguments.

**Implements:**

```
S[1] <- (buffer-substring S[1] TOS); top--.
```

**Generated via:**

```
buffer-substring.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1. Emacs 19.34. See Section 4.2 [Emacs 19], page 147.
```

**Example:** (defun buffer-substring-eg() (buffer-substring 1230 1231)) generates:

PC	Byte	Instruction
0	192	constant[0] 1230
1	193	constant[1] 1231
2	123	buffer-substring
3	135	return

```
Constants Vector: [1230 1231]
```

### 3.6.6 Emacs Position Instructions

These instructions correspond to Emacs-specific position functions that are found in the "Positions" chapter of the Emacs Lisp Reference Manual. They are not inlined by the bytecode interpreter, but simply call the corresponding C function.

#### **point (96)**

Call point.

#### **Implements:**

```
TOS <- (point)
```

#### **Generated via:**

```
point
```

#### **Instruction size:**

```
1 byte
```

#### **Stack effect:**

```
-0 + 1.
```

**Added in:** Emacs 18.31, renamed from `dot`. See Section 4.1 [Emacs 18], page 146.

**Example:** `(defun point-eg() (point))` generates:

PC	Byte	Instruction
0	96	point
1	135	return

## goto-char (98)

### goto-char (98)

Call goto-char with one stack argument.

#### Implements:

```
TOS <- (goto-char TOS)
```

#### Generated via:

```
goto-char
```

#### Instruction size:

1 byte

#### Stack effect:

-1 + 1.

**Example:** With lexical binding in effect, (defun goto-char-eg(n) (goto-char n)) generates:

PC	Byte	Instruction
0	137	dup
1	98	goto-char
2	135	return

## point-max (100)

point-max (100)

Call point-max.

**Implements:**

```
TOS <- (point-max)
```

**Generated via:**

```
point-max
```

**Instruction size:**

1 byte

**Stack effect:**

-0 + 1.

**Added in:** Emacs 18.31, renamed from `dot-max`. See Section 4.1 [Emacs 18], page 146.

**Example:** (defun point-max-eg() (point-max)) generates:

PC	Byte	Instruction
0	100	point-max
1	135	return

## point-min (101)

point-min (101)

Call point-min.

**Implements:**

```
TOS <- (point-min)
```

**Generated via:**

```
point-min
```

**Instruction size:**

1 byte

**Stack effect:**

$-0 + 1$ .

**Added in:** Emacs 18.31, renamed from `dot-min`. See Section 4.1 [Emacs 18], page 146.

**Example:** (defun point-min-eg() (point-min)) generates:

PC	Byte	Instruction
0	101	point-min
1	135	return

## forward-char (117)

### forward-char (117)

Call forward-char with one stack argument.

**Implements:**

```
TOS <- (forward-char TOS)
```

**Generated via:**

```
forward-char
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun forward-char-eg() (forward-char 1)) generates:

PC	Byte	Instruction
0	192	constant[0] 1
1	117	forward-char
2	135	return

Constants Vector: [1]

## forward-word (118)

### forward-word (118)

Call forward-word with one stack argument.

**Implements:**

```
TOS <- (forward-word TOS)
```

**Generated via:**

```
forward-word
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun forward-word-eg() (forward-word 1)) generates:

PC	Byte	Instruction
0	192	constant[0] 1
1	118	forward-word
2	135	return

Constants Vector: [1]

## forward-line (121)

### forward-line (121)

Call forward-line with one stack argument.

**Implements:**

```
TOS <- (forward-line TOS)
```

**Generated via:**

```
forward-line
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun forward-line-eg() (forward-line 1)) generates:

PC	Byte	Instruction
0	192	constant[0] 1
1	121	forward-line
2	135	return

Constants Vector: [1]



## skip-chars-forward (119)

### skip-chars-forward (119)

Call skip-chars-forward with two stack arguments.

#### Implements:

```
S[1] <- (skip-chars-forward S[1] TOS); top--.
```

#### Generated via:

```
skip-chars-forward.
```

#### Instruction size:

1 byte

#### Stack effect:

-2 + 1.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun skip-chars-forward-eg() (skip-chars-forward "aeiou" 3))  
generates:

PC	Byte	Instruction
0	192	constant[0] "aeiou"
1	193	constant[1] 3
2	119	skip-chars-forward
3	135	return

Constants Vector: ["aeiou" 3]

## skip-chars-backward (120)

### skip-chars-backward (120)

Call `skip-chars-backward` with two stack arguments.

**Implements:**

```
S[1] <- (skip-chars-backward S[1] TOS); top--.
```

**Generated via:**

```
skip-chars-backward.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun skip-chars-backward-eg() (skip-chars-backward "aeiou" 3))`  
generates:

PC	Byte	Instruction
0	192	constant[0] "aeiou"
1	193	constant[1] 3
2	120	skip-chars-backward
3	135	return

Constants Vector: ["aeiou" 3]

## narrow-to-region (125)

### narrow-to-region (125)

Call `narrow-to-region` with two stack arguments.

**Implements:**

```
S[1] <- (narrow-to-region S[1] TOS); top--.
```

**Generated via:**

```
narrow-to-region.
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-2 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun narrow-to-region-eg() (narrow-to-region 1250 1251))` generates:

PC	Byte	Instruction
0	192	constant[0] 1250
1	193	constant[1] 1251
2	125	narrow-to-region
3	135	return

Constants Vector: [1250 1251]

## widen (126)

### widen (126)

Call widen.

#### Implements:

TOS <- (widen)

#### Generated via:

widen

#### Instruction size:

1 byte

#### Stack effect:

-0 + 1.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun widen-eg() (widen)) generates:

PC	Byte	Instruction
0	126	widen
1	135	return

### 3.6.7 Emacs Text Instructions

These instructions correspond to Emacs-specific text manipulation functions found in the "Text" chapter of the Emacs Lisp Reference Manual. They are not inlined by the bytecode interpreter, but simply call the corresponding C function.

#### **insert (99)**

Call `insert` with one stack argument.

#### **Implements:**

```
TOS <- (insert TOS)
```

#### **Generated via:**

```
insert
```

#### **Instruction size:**

```
1 byte
```

#### **Stack effect:**

```
-1 + 1.
```

**Example:** With lexical binding in effect, `(defun insert-eg(n) (insert n))` generates:

PC	Byte	Instruction
0	137	dup
1	99	insert
2	135	return

## insertN (99)

### insertN (99)

Call `insert` on up to 255 stack arguments. Note there is a special instruction when there is only one stack argument.

**Implements:**

```
S[n-1] <- (insert S[n-1] S[n-2] ... TOS); top -= (n-1).
```

**Generated via:**

```
insert
```

**Operand:** 8-bit number of items in concat

**Instruction size:**

```
2 bytes
```

**Stack effect:**

$-n + 1$  where  $n$  is the value of the instruction operand.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** With lexical binding in effect, `(defun insertN-eg(a b c) (insert a b c))` generates:

PC	Byte	Instruction
0	2	stack-ref[2]
1	2	stack-ref[2]
2	2	stack-ref[2]
3	177	insertN [3]
		3
5	135	return

## char-after (102)

### char-after (102)

Call char-after with one stack argument.

#### Implements:

```
TOS <- (char-after TOS)
```

#### Generated via:

```
char-after
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-1 + 1.
```

**Example:** (defun char-after-eg() (char-after)) generates:

PC	Byte	Instruction
0	192	constant[0] nil
1	102	char-after
2	135	return

Constants Vector: [nil]

## following-char (103)

following-char (103)

Call following-char.

**Implements:**

```
TOS <- (following-char TOS)
```

**Generated via:**

```
following-char
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Example:** (defun following-char-eg() (following-char)) generates:

PC	Byte	Instruction
0	103	following-char
1	135	return



## preceding-char (104)

### preceding-char (104)

Call preceding-char.

#### Implements:

```
TOS <- (preceding-char TOS)
```

#### Generated via:

```
preceding-char
```

#### Instruction size:

1 byte

#### Stack effect:

-1 + 1.

**Example:** (defun preceding-char-eg() (preceding-char)) generates:

PC	Byte	Instruction
0	104	preceding-char
1	135	return

## current-column (105)

current-column (105)

Call current-column.

**Implements:**

```
TOS <- (current-column)
```

**Generated via:**

```
current-column
```

**Instruction size:**

1 byte

**Stack effect:**

$-0 + 1$ .

**Example:** (defun current-column-eg() (current-column)) generates:

PC	Byte	Instruction
0	105	current-column
1	135	return

## eolp (108)

### eolp (108)

Call eolp.

#### Implements:

```
TOS <- (eolp)
```

#### Generated via:

```
eolp
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-0 + 1.
```

**Example:** (defun eolp-eg() (eolp)) generates:

PC	Byte	Instruction
0	108	eolp
1	135	return

## eobp (109)

eobp (109)

Call eobp.

**Implements:**

TOS <- (eobp)

**Generated via:**

eobp

**Instruction size:**

1 byte

**Stack effect:**

-0 + 1.

**Example:** (defun eobp-eg() (eobp)) generates:

PC	Byte	Instruction
0	109	eobp
1	135	return

## **bolp (110)**

**bolp (110)**

Call bolp.

**Implements:**

TOS <- (bolp)

**Generated via:**

bolp

**Instruction size:**

1 byte

**Stack effect:**

-0 + 1.

**Example:** (defun bolp-eg() (bolp)) generates:

PC	Byte	Instruction
0	110	bolp
1	135	return

## bobp (111)

bobp (111)

Call bobp.

**Implements:**

TOS <- (bobp)

**Generated via:**

bobp

**Instruction size:**

1 byte

**Stack effect:**

-0 + 1.

**Example:** (defun bobp-eg() (bobp)) generates:

PC	Byte	Instruction
0	111	bobp
1	135	return

## delete-region (124)

### delete-region (124)

Call delete-region with two stack arguments.

Call delete-region with two stack arguments.

#### Implements:

```
S[1] <- (delete-region S[1] TOS); top--.
```

#### Generated via:

```
delete-region.
```

#### Instruction size:

1 byte

#### Stack effect:

$-2 + 1$ .

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun delete-region-eg() (delete-region 1240 1241)) generates:

PC	Byte	Instruction
0	192	constant[0] 1240
1	193	constant[1] 1241
2	124	delete-region
3	135	return

Constants Vector: [1240 1241]

## end-of-line (127)

### end-of-line (127)

Call end-of-line with one stack argument.

**Implements:**

(end-of-line TOS; top--

**Generated via:**

delete-region.

**Instruction size:**

1 byte

**Stack effect:**

-1 + 0-.

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun end-of-line-eg() (end-of-line)) generates:

PC	Byte	Instruction
0	192	constant[0] nil
1	127	end-of-line
2	135	return

Constants Vector: [nil]



### 3.6.8 Emacs Misc Function Instructions

These instructions correspond to miscellaneous Emacs-specific functions. They are not inlined by the bytecode interpreter, but simply call the corresponding C function.

#### **char-syntax (122)**

Call `char-syntax` with one stack argument.

**Implements:**

```
TOS <- (char-syntax TOS)
```

**Generated via:**

```
char-syntax
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** `(defun char-syntax-eg() (char-syntax ?a))` generates:

PC	Byte	Instruction
0	192	constant[0] 97
1	122	char-syntax
2	135	return

Constants Vector: [97]

## save-excursion (138)

### save-excursion (138)

Make a binding recording buffer, point, and mark.

This instruction manipulates the special-bindings stack by creating a new binding when executed. It needs to be balanced with `unbind` instructions.

**Implements:**

`(save-excursion).`

**Generated via:**

`save-excursion`

**Instruction size:**

1 byte

**Stack effect:**

$-0 + 0$ .

**Example:** When lexical binding is in effect, `(defun save-excursion-eg() (save-excursion 1380))` generates:

PC	Byte	Instruction
0	138	<code>save-excursion</code>
1	192	<code>constant[0] 1380</code>
2	41	<code>unbind[1]</code>
3	135	<code>return</code>

Constants Vector: [1380]

## set-marker (147)

### set-marker (147)

Call `set-marker` with three stack arguments.

#### Implements:

```
S[2] <- (set-marker S[2] S[1] TOS); top -= 2.
```

#### Generated via:

```
set-marker
```

#### Instruction size:

```
1 byte
```

#### Stack effect:

```
-3 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** When lexical binding is in effect, `(defun set-marker-eg(marker position)  
(set-marker marker position))` generates:

PC	Byte	Instruction
0	1	stack-ref[1]
1	1	stack-ref[1]
2	192	constant[0] nil
3	147	set-marker
4	135	return

Constants Vector: [nil]

## match-beginning (148)

### match-beginning (148)

Call match-beginning with one stack argument.

**Implements:**

```
TOS <- (match-beginning TOS)
```

**Generated via:**

```
match-beginning
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun match-beginning-eg() (match-beginning 1)) generates:

PC	Byte	Instruction
0	192	constant[0] 1
1	148	match-beginning
2	135	return

Constants Vector: [1]

## match-end (149)

### match-end (149)

Call match-end with one stack argument.

**Implements:**

```
TOS <- (match-end TOS)
```

**Generated via:**

```
match-end
```

**Instruction size:**

```
1 byte
```

**Stack effect:**

```
-1 + 1.
```

**Added in:** Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

**Example:** (defun match-end-eg() (match-end 1)) generates:

PC	Byte	Instruction
0	192	constant[0] 1
1	148	match-end
2	135	return

Constants Vector: [1]

### 3.7 Stack-Manipulation Instructions

#### **discard (136)**

Discard one value from the stack.

**Implements:**

top--

**Instruction size:**

1 byte

**Generated via:**

Function calls that do not use the returned value; the end of `let` forms in lexical binding to remove locally-bound variables.

**Stack effect:**

$-1 + 0$ .

**Example:** `(defun discard-eg() (exchange-point-and-mark) (point))` generates:

PC	Byte	Instruction
0	192	constant[0] exchange-point-and-mark
1	32	call[0]
2	136	discard
3	96	point
4	135	return

Constants Vector: [exchange-point-and-mark]

## discardN (180)

### discardN (180)

Discards up to 127 arguments from the stack. Note there is a special instruction when there is only one argument.

**Implements:**

if (n & 8) S[n] <- TOS; top -= n & 7; where n where n is the value of the operand.

**operand:** 7-bit number of items to discard. The top 8th bit when set indicates to keep the old TOS value after discarding.

**Instruction size:**

2 bytes

**Generated via:**

Function calls that do not use the returned value; the end of `let` forms in lexical binding with optimization to remove locally-bound variables.

**Stack effect:**

$-n + 0$

**Added in:** Emacs 24.1. See Section 4.7 [Emacs 24], page 151.

**Example:** When lexical binding is in effect and optimization are in effect,

```
(1+ (let ((a 1) (_b) (_c)) a)))
```

generates:

PC	Byte	Instruction
0	192	constant[0] 1
1	193	constant[1] nil
2	137	dup
3	2	stack-ref[2]
4	182	discardN [131]
		131
6	84	add1
7	135	return

Constants Vector: [1 nil]

## dup (137)

### dup (137)

Make a copy of the top-of-stack value and push that onto the top of the evaluation stack.

#### Implements:

```
top++; TOS <- S[1]
```

#### Generated via:

`setq` in dynamic bindings to set a value and then use it. In lexical binding, to use the first argument parameter.

#### Instruction size:

1 byte

#### Stack effect:

$-0 + 1$ .

**Example:** When lexical binding is in effect,

generates:

PC	Byte	Instruction
0	137	dup ;; duplicates top of stack, argument n
1	135	return



## stack-set (178)

### stack-set (178)

Sets a value on the evaluation stack to TOS.

**Implements:**

`S[i] <- TOS; top--` where `i` is the value of the instruction operand.

Note that `stack-set[0]` has the same effect as `discard`, but does a little more work to do this. `stack-set[1]` has the same effect as `discardN 1` with the top bit of `discardN` set to preserve TOS.

**Generated via:**

`let`, `let*` and `lambda` arguments.

**Operand:** A 8-bit integer stack index

**Instruction size:**

2 bytes

**Stack effect:**

$-1 + 0$ .

**Added in:** Emacs 24.1. See Section 4.7 [Emacs 24], page 151.

**Example:** When lexical binding is in effect and optimization

```
defun stack-set-eg()
  (let ((a 5) a))
```

generates:

PC	Byte	Instruction
0	192	constant[0] 5
1	193	constant[1] nil
2	193	constant[1] nil
3	178	stack-set [2]
		2
5	136	discard
6	135	return

Constants Vector: [5 nil]

## stack-set2 (179)

stack-set2 (179)

**Implements:**

`S[i] <- TOS; top--` where `i` is the value of the instruction operand.

Note that `stack-set2[0]` has the same effect as `discard`, but does a little more work to do this. `stack-set2[1]` has the same effect as `discardN 1` with the top bit of `discardN` set to preserve `TOS`.

**Generated via:**

`let`, `let*` and `lambda` arguments.

**Operand:** A 16-bit integer stack index

**Instruction size:**

3 bytes

**Stack effect:**

$-1 + 0$ .

**Added in:** Emacs 24.1. See Section 4.7 [Emacs 24], page 151.

**Example:** ??

## 3.8 Obsolete or Unused Instructions

These instructions are not generated by Emacs Lisp bytecode generation. In some cases, they were generated in a older version of Emacs. In some cases the instructions may have been planned to being used but never were. In some cases, the instructions are still handled if they appear (such as from older bytecode), but in other cases they are no longer accepted by the interpreter.

It is also possible that code outside of the Emacs Lisp distribution generates these instructions.

### **save-current-buffer (97)**

Replaced by `save-current-buffer-1`. See [save-current-buffer-1], page 107.

### **mark (97)**

Used in V 17; obsolete in Emacs 18.31. See Section 4.1 [Emacs 18], page 146.

### **scan-buffer (107)**

Obsolete in Emacs 18.31. See Section 4.1 [Emacs 18], page 146.

### **read-char (114)**

### **set-mark (115)**

Obsolete in Emacs 18.31. See Section 4.1 [Emacs 18], page 146.

### **interactive-p (116)**

### **save-window-excursion (139)**

Call `save-window-excursion`.

#### **Implements:**

`(save-window-excursion BLOCK)`

#### **Generated via:**

`save-window-excursion`

#### **Instruction size:**

1 byte

#### **Stack effect:**

$-1 + 0$ .

#### **Obsolete since:**

Emacs 24.1. See Section 4.7 [Emacs 24], page 151. Now generates a sequence of bytecode that includes calls to `current-window-configuration` and `set-window-configuration`

#### **Example:**

```
(defun save-window-excursion()
  (save-window-excursion 1390))
```

generates:

PC	Byte	Instruction
0	192	constant[0] (1390)
1	139	save-window-excursion
2	135	return

Constants Vector: [(1390)]

### condition-case (143)

Replaced by `pushconditioncase`. See [pushconditioncase], page 35,

**Implements:**

?

**Generated via:**

?

**Instruction size:**

1 byte

**Stack effect:**

-2 + 1.

**Obsolete since:**

Emacs 24.4. See Section 4.7 [Emacs 24], page 151.

**Example:** (defun condition-case-eg() (??)) generates:

### temp-output-buffer-setup (144)

**Implements:**

Setup for with-output-to-temp-buffer.

**Generated via:**

with-output-to-temp-buffer

**Instruction size:**

1 byte

**Stack effect:**

-1 + 0.

**Obsolete since:**

Emacs 24.1. See Section 4.7 [Emacs 24], page 151.

**Example:** (defun wottb-eg () (with-output-to-temp-buffer "wottb" 5)) generates:

PC	Byte	Instruction
0	192	constant[0] "wottb"
1	144	temp-output-buffer-setup
2	193	constant[1] 5
3	145	temp-output-buffer-show
4	135	return

Constants Vector: ["wottb" 5]

## temp-output-buffer-show (145)

### Implements:

Finishing code of with-output-to-temp-buffer.

### Generated via:

with-output-to-temp-buffer

### Instruction size:

1 byte

### Stack effect:

-0 + 0.

### Obsolete in:

Emacs 24.1. See Section 4.7 [Emacs 24], page 151.

**Example:** (defun wottb-eg () (with-output-to-temp-buffer "wottb" 5)) generates:

PC	Byte	Instruction
0	192	constant[0] "wottb"
1	144	temp-output-buffer-setup
2	193	constant[1] 5
3	145	temp-output-buffer-show
4	135	return

Constants Vector: ["wottb" 5]

## unbind-all (146)

Introduced in Emacs 19.34 for tail-recursion elimination by jwz, but never used. See Section 4.2 [Emacs 19], page 147.

### 3.8.12 Relative Goto Instructions

In Emacs 19.34, Hallvard Furuseth introduced relative goto instructions. However, they have never been generated in bytecode.

There have been reports however that others have used these instructions in alternate languages that generate bytecode.

#### **Rgoto (170)**

Relative jump version of see [goto], page 37.

Introduced but unused in Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

#### **Rgotoifnil (171)**

Relative jump version of see [goto-if-nil], page 38.

Introduced but unused in Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

#### **Rgotoifnonnil (172)**

Relative-jump version of see [goto-if-not-nil], page 39.

Introduced but unused in Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

#### **Rgotoifnilesepop (173)**

Relative-jump version of see [goto-if-nil-else-pop], page 40.

Introduced but unused in Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

#### **Rgotoifnonnilesepop (174)**

Relative-jump version of see [goto-if-not-nil-else-pop], page 41.

Introduced but unused in Emacs 19.34. See Section 4.2 [Emacs 19], page 147.

## 4 Instruction Changes Between Emacs Releases

The information in this chapter may not be as precise or granular as it could be. I invite those who want more detail to look at <https://github.com/larsbrinkhoff/emacs-history> Lars Brinkhoff's Emacs History project.

Feel free suggest changes, as github pull requests, to make this chapter more detailed.

### 4.1 After 16 and Starting in 18.31

The following instructions were renamed:

- `dot` becomes `mark` (97). See [mark], page 142.
- `dot-min` becomes `point-min` (100). See [point-min], page 112.
- `dot-max` becomes `point-max` (101). See [point-max], page 111.

The following instructions became obsolete:

- `mark` (97). See [mark], page 142.
- `scan-buffer` (107). See [scan-buffer], page 142.
- `set-mark` (115). See [set-mark], page 142.

### Version 18 Release History

- Emacs 18.31 was released Nov 23, 1986
- Emacs 18.32 was released Dec 6, 1986
- Emacs 18.33 was released Dec 12, 1986
- Emacs 18.35 was released Jan 5, 1987
- Emacs 18.36 was released Jan 21, 1987
- Emacs 18.37 was released Feb 11, 1987
- Emacs 18.38 was released Mar 3, 1987
- Emacs 18.39 was released May 14, 1987
- Emacs 18.40 was released Mar 18, 1987
- Emacs 18.41 was released Mar 22, 1987
- Emacs 18.44 was released Apr 15, 1987
- Emacs 18.46 was released Jun 8, 1987
- Emacs 18.47 was released Jun 15, 1987
- Emacs 18.48 was released Aug 30, 1987
- Emacs 18.49 was released Sep 17, 1987
- Emacs 18.50 was released Feb 13, 1988
- Emacs 18.51 was released May 6, 1988
- Emacs 18.52 was released Aug 31, 1988
- Emacs 18.59 was released Oct 30, 1988

## 4.2 After 18.59 and Starting 19.34

jwz and Hallvard made major changes and additions to the bytecode interpreter.

The following instructions were added:

- `mult` (97). See [mult], page 91.
- `forward-char` (117). See [forward-char], page 113.
- `forward-word` (118). See [forward-word], page 114.
- `skip-chars-forward` (119). See [skip-chars-forward], page 116.
- `skip-chars-backward` (120). See [skip-chars-backward], page 117.
- `forward-line` (121). See [forward-line], page 115.
- `char-syntax` (122). See [char-syntax], page 132.
- `buffer-substring` (123). See [buffer-substring], page 108.
- `delete-region` (124). See [delete-region], page 130.
- `narrow-to-region` (125). See [narrow-to-region], page 118.
- `widen` (126). See [widen], page 119.
- `end-of-line` (127). See [end-of-line], page 131.
- `unbind-all` (146). See [unbind-all], page 144.
- `set-marker` (147). See [set-marker], page 134.
- `match-beginning` (148). See [match-beginning], page 135.
- `match-end` (149). See [match-end], page 136.
- `upcase` (150). See [upcase], page 101.
- `downcase` (151). See [downcase], page 102.
- `stringeqsign` (152). See [stringeqsign], page 103.
- `stringlss` (153). See [stringlss], page 104.
- `equal` (154). See [equal], page 56.
- `nthcdr` (155). See [nthcdr], page 73.
- `elt` (156). See [elt], page 74.
- `member` (157). See [member], page 57.
- `assq` (158). See [assq], page 58.
- `nreverse` (159). See [nreverse], page 75.
- `setcar` (160). See [setcar], page 76.
- `setcdr` (161). See [setcdr], page 77.
- `car-safe` (162). See [car-safe], page 78.
- `cdr-safe` (163). See [cdr-safe], page 79.
- `nconc` (164). See [nconc], page 80.
- `quo` (165). See [quo], page 94.
- `rem` (166). See [rem], page 95.
- `numberp` (167). See [numberp], page 59.
- `integerp` (162). See [integerp], page 60.



- `Rgoto` (170). See [Rgoto], page 145.
- `Rgotoifnil` (171). See [Rgotoifnil], page 145.
- `Rgotoifnonnil` (172). See [Rgotoifnonnil], page 145.
- `Rgotoifnilesepop` (173). See [Rgotoifnilesepop], page 145.
- `Rgotoifnonnilesepop` (174). See [Rgotoifnonnilesepop], page 145.
- `listN` (175). See [listN], page 69.
- `concatN` (176). See [concatN], page 100.
- `insertN` (177). See [insertN], page 121.

Instruction `unbind-all` was added to support tail-recursion removal. However this was never subsequently implemented; so this instruction was never generated.

Starting in this version, unless C preprocessor variable `BYTE_CODE_SAFE` (off by default) is defined, the obsolete instructions listed in 18.59 are not implemented.

The following obsolete instructions throw an error when `BYTE_CODE_SAFE` is defined:

- `mark` (97)
- `scan-buffer` (107)
- `set-mark` (115)

Bytecode meta-comments look like this:

```
;;; compiled by rms@psilocin.gnu.ai.mit.edu on Mon Jun 10 17:37:37 1996
;;; from file /home/fsf/rms/e19/lisp/bytecomp.el
;;; emacs version 19.31.2.
;;; bytecomp version FSF 2.10
;;; optimization is on.
;;; this file uses opcodes which do not exist in Emacs 18.
```

## Version 19 Release History

- Emacs 19.7 was released May 22 1993
- Emacs 19.8 was released May 25 1993
- Emacs 19.9 was released May 27 1993
- Emacs 19.10 was released May 30 1993
- Emacs 19.11 was released Jun 1, 1993
- Emacs 19.12 was released Jun 1, 1993
- Emacs 19.13 was released Jun 8, 1993
- Emacs 19.14 was released Jun 17, 1993
- Emacs 19.15 was released Jun 19, 1993
- Emacs 19.16 was released Jul 6, 1993
- Emacs 19.17 was released Jul 7, 1993
- Emacs 19.18 was released Aug 8, 1993
- Emacs 19.19 was released Aug 14, 1993
- Emacs 19.20 was released Nov 11, 1993

- Emacs 19.21 was released Nov 16, 1993
- Emacs 19.22 was released Nov 27, 1993
- Emacs 19.23 was released May 17, 1994
- Emacs 19.24 was released May 23, 1994
- Emacs 19.25 was released May 30, 1994
- Emacs 19.26 was released Sep 7, 1994
- Emacs 19.27 was released Sep 11, 1994
- Emacs 19.29 was released Jun 19, 1995
- Emacs 19.30 was released Nov 24, 1995
- Emacs 19.31 was released May 25, 1996
- Emacs 19.31 was released May 25, 1996
- Emacs 19.32 was released Aug 7, 1996
- Emacs 19.33 was released Sept 11, 1996

The Emacs Lisp tarball for 19.2 is Aug, 1992. (The tarball date for 19.2 is much later; and even after the date on the 20.1 tarball.)

### 4.3 After 19.34 and Starting in 20.1

`save-current-buffer` (97). See `[save-current-buffer]`, page 142, and `save-current-buffer-1` (114) do the same thing, but the former is deprecated. The latter opcode replaces `read-char` which was not generated since v19.

I am not sure why the change; changing this opcode number however put it next to other buffer-related opcodes.

Bytecode meta-comments look like this:

```
;;; Compiled by rms@psilocin.gnu.ai.mit.edu on Sun Aug 31 13:07:37 1997
;;; from file /home/fsf/rms/e19/lisp/emacs-lisp/bytecomp.el
;;; in Emacs version 20.0.97.1
;;; with bytecomp version 2.33
;;; with all optimizations.
;;; This file uses opcodes which do not exist in Emacs 18.
```

### Version 20 Release History

- Emacs 20.1 was released Sep 15, 1997
- Emacs 20.2 was released Sep 19, 1997
- Emacs 20.3 was released Aug 19, 1998
- Emacs 20.4 was released Jul 14, 1999

## 4.4 After 20.1 and Starting in 21.1

There were no instruction changes. However there were major changes in the bytecode interpreter.

An instruction with opcode 0 causes an abort.

Bytecode meta-comments look like this:

```
;;; Compiled by pot@pot.cnuce.cnr.it on Tue Mar 18 15:36:26 2003
;;; from file /home/pot/gnu/emacs-pretest.new/lisp/emacs-lisp/bytecomp.el
;;; in Emacs version 21.3
;;; with bytecomp version 2.85.4.1
;;; with all optimizations.
```

### Version 21 Release History

- Emacs 21.1 was released Oct 20, 2001
- Emacs 21.2 was released Mar 16, 2002
- Emacs 21.3 was released Mar 18, 2003
- Emacs 21.4 was released Feb 6, 2005

## 4.5 After 21.4 and Starting in 22.1

There were no instruction changes.

The bytecode meta-comment no longer includes the bytecomp version used.

Bytecode meta-comments look like this:

```
;;; Compiled by cyd@localhost on Sat Jun 2 00:54:30 2007
;;; from file /home/cyd/emacs/lisp/emacs-lisp/bytecomp.el
;;; in Emacs version 22.1
;;; with all optimizations.
```

```
;;; This file uses dynamic docstrings, first added in Emacs 19.29.
```

### Version 22 Release History

- Emacs 22.1 was released Jun 02, 2007
- The Emacs 22.2 tarball is dated Mar 26 2008
- The Emacs 22.3 tarball is dated Sep 05 2008

## 4.6 After 22.3 and Starting in 23.1

There were no instruction changes.

Bytecode meta-comments look like this:

```
;;; Compiled by cyd@furry on Wed Jul 29 11:15:02 2009
;;; from file /home/cyd/emacs/lisp/emacs-lisp/bytecomp.el
;;; in Emacs version 23.1
;;; with all optimizations.
```

```
;;; This file uses dynamic docstrings, first added in Emacs 19.29.
```

## Version 23 Release History

- Emacs 23.1 was released Jul 29, 2009
- Emacs 23.2 was released May 7, 2010
- Emacs 23.3 was released Mar 7, 2011
- The Emacs 23.4 tarball is dated Jan 28, 2012

## 4.7 After 23.4 and Starting in 24.1

An error is thrown for unknown bytecodes rather than aborting.

The following instructions were added:

- `stack-set` (178). See [stack-set], page 140.
- `stack-set2`, (179). See [stack-set2], page 141.
- `discardN`, (180). See [discardN], page 138.

Unless C preprocessor variable `BYTE_CODE_SAFE` (off by default) is defined, obsolete instructions below and from earlier versions are not implemented.

- `temp-output-buffer-setup` (144). See [temp-output-buffer-setup], page 143.
- `temp-output-buffer-show` (145). See [temp-output-buffer-show], page 144.
- `save-window-excursion` (139). See [save-window-excursion], page 142.

Instruction `unbind-all`, which never was generated, was marked obsolete in this version.

The bytecode meta-comment no longer who user/hostname compiled and at what time. A message indicating whether utf-8 non-ASCII characters is used is included.

The following instructions were added in 24.4:

- `pophandler` (48). See [pophandler], page 34.
- `pushconditioncase` (49). See [pushconditioncase], page 35.
- `pushcatch` (50). See [pushcatch], page 36.

Bytecode meta-comments look like this:

```
;;; from file /misc/emacs/bzr/emacs24-merge/lisp/emacs-lisp/bytecomp.el
;;; in Emacs version 24.3
;;; with all optimizations.
```

```
;;; This file uses dynamic docstrings, first added in Emacs 19.29.
```

```
;;; This file does not contain utf-8 non-ASCII characters,
;;; and so can be loaded in Emacs versions earlier than 23.
```

## Version 24 Release History

- The Emacs 24.1 tarball is dated Jun 10, 2012
- The Emacs 24.2 tarball is dated Aug 27, 2012
- Emacs 24.3 was released Mar 11, 2013
- Emacs 24.4 was released Oct 20, 2014
- Emacs 24.5 was released Apr 10, 2015

## 4.8 After 24.5 and Starting in 25.1

Instruction 0 becomes an error rather than aborting emacs.

A number of changes were made to `bytecode.c`.

The bytecode meta-comment no longer includes the source-code path.

Bytecode meta-comments look like this:

```
;;; Compiled
;;; in Emacs version 25.2
;;; with all optimizations.

;;; This file uses dynamic docstrings, first added in Emacs 19.29.

;;; This file does not contain utf-8 non-ASCII characters,
;;; and so can be loaded in Emacs versions earlier than 23.
```

### Version 25 Release History

- Emacs 25.1 was released Sep 16, 2016
- The Emacs 25.2 tarball is dated Apr 21, 2017
- Emacs 25.3 was released Sep 11, 2017

## 4.9 After 25.3 and Starting in 26.1

The following instruction was added:

- `switch` (183) See commit 88549ec38e9bb30e338a9985d0de4e6263b40fb7.

## 4.10 After 26.1 and Starting in 27.1

No changes yet.

## 5 Opcode Table

In the table below, a \* before the instruction name indicates an obsolete instruction, or instruction that is no longer generated by the bytecode compiler. On the other hand, ! indicates not just an obsolete instruction, but one that no longer is interpreted. See Section 3.1 [Instruction-Description Format], page 23, for abbreviations used here, a description of how to interpret an opcode when it contains an index, and for a description of how to interpret the stack-effect field.

### 5.1 Opcodes (0000-0077)

Oct	Dec	Instruction	Size	Description	Stack
00	0			An error. Before 25.1 it is an immediate program abort! Logically <code>stack-ref[0]</code> but <code>dup</code> should be used instead.	
01	1	<code>stack-ref[1]</code>	1	See [stack-ref], page 26.	+1
02	2	<code>stack-ref[2]</code>	1	See [stack-ref], page 26.	+1
03	3	<code>stack-ref[3]</code>	1	See [stack-ref], page 26.	+1
04	4	<code>stack-ref[4]</code>	1	See [stack-ref], page 26.	+1
05	5	<code>stack-ref[5]</code>	1	See [stack-ref], page 26.	+1
06	6	<code>stack-ref[6]</code>	2	See [stack-ref], page 26.	+1
07	7	<code>stack-ref[7]</code>	3	See [stack-ref], page 26.	+1
010	8	<code>varref[0]</code>	1	See [varref], page 27.	+1
011	9	<code>varref[1]</code>	1	See [varref], page 27.	+1
012	10	<code>varref[2]</code>	1	See [varref], page 27.	+1
013	11	<code>varref[3]</code>	1	See [varref], page 27.	+1
014	12	<code>varref[4]</code>	1	See [varref], page 27.	+1
015	13	<code>varref[5]</code>	1	See [varref], page 27.	+1
016	14	<code>varref[6]</code>	2	See [varref], page 27.	+1
017	15	<code>varref[7]</code>	3	See [varref], page 27.	+1
020	16	<code>varset[0]</code>	1	See [varset], page 28.	-1
021	17	<code>varset[1]</code>	1	See [varset], page 28.	-1
022	18	<code>varset[2]</code>	1	See [varset], page 28.	-1
023	19	<code>varset[3]</code>	1	See [varset], page 28.	-1
024	20	<code>varset[4]</code>	1	See [varset], page 28.	-1
025	21	<code>varset[5]</code>	1	See [varset], page 28.	-1
026	22	<code>varset[6]</code>	2	See [varset], page 28.	-1
027	23	<code>varset[7]</code>	3	See [varset], page 28.	-1
030	24	<code>varbind[0]</code>	1	See [varbind], page 29.	-1

031	25	varbind[1]	1	See [varbind], page 29.	-1
032	26	varbind[2]	1	See [varbind], page 29.	-1
033	27	varbind[3]	1	See [varbind], page 29.	-1
034	28	varbind[4]	1	See [varbind], page 29.	-1
035	29	varbind[5]	1	See [varbind], page 29.	-1
036	30	varbind[6]	2	See [varbind], page 29.	-1
037	31	varbind[7]	3	See [varbind], page 29.	-1
040	32	call0	1	See [call], page 30.	-1 + 1
041	33	call1	1	See [call], page 30.	-2 + 1
042	34	call2	1	See [call], page 30.	-3 + 1
043	35	call3	1	See [call], page 30.	-4 + 1
044	36	call4	1	See [call], page 30.	-5 + 1
045	37	call5	1	See [call], page 30.	-6 + 1
046	38	call6	2	See [call], page 30.	-n - 1 + 1
047	39	call7	3	See [call], page 30.	-n - 1 + 1
050	40	unbind0	1	See [unbind], page 31.	-0
051	41	unbind1	1	See [unbind], page 31.	-0
052	42	unbind2	1	See [unbind], page 31.	-0
053	43	unbind3	1	See [unbind], page 31.	-0
054	44	unbind4	1	See [unbind], page 31.	-0
055	45	unbind5	1	See [unbind], page 31.	-0
056	46	unbind6	2	See [unbind], page 31.	-0
057	47	unbind7	3	See [unbind], page 31.	-0
060	48	pophandler	1		-0
061	49	conditioncase	3		-1 + $\phi(0, +1)$
062	50	pushconditioncase	1		-0
063	51			Unused	
064	52			Unused	
065	53			Unused	
066	54			Unused	
067	55			Unused	
070	56	nth	1	See [nth], page 61.	-2 + 1
071	57	symbolp	1	See [symbolp], page 44.	-1 + 1
072	58	consp	1	See [consp], page 45.	-1 + 1
073	59	stringp	1	See [stringp], page 46.	-1 + 1
074	60	listp	1	See [listp], page 47.	-1 + 1
075	61	eq	1	See [eq], page 48.	-2 + 1
076	62	memq	1	See [memq], page 49.	-2 + 1
077	63	not	1	See [not], page 50.	-1 + 1

## 5.2 Opcodes (0100-0177)

Oct	Dec	Instruction	Size	Description	Stack
0100	64	car	1	See [car], page 62.	-1 + 1
0101	65	cdr	1	See [cdr], page 63.	-1 + 1
0102	66	cons	1	See [cons], page 64.	-2 + 1
0103	67	list1	1	See [list1], page 65.	-1 + 1
0104	68	list2	1	See [list2], page 66.	-2 + 1
0105	69	list3	1	See [list3], page 67.	-3 + 1
0106	70	list4	1	See [list4], page 68.	-4 + 1
0107	71	length	1	See [length], page 70.	-1 + 1
0110	72	aref	1	See [aref], page 71.	-2 + 1
0111	73	aset	1	See [aset], page 72.	-3 + 1
0112	74	symbol-value	1	See [symbol-value], page 51.	-1 + 1
0113	75	symbol-function	1	See [symbol-function], page 52.	-1 + 1
0114	76	set	1	See [set], page 53.	-2 + 1
0115	77	fset	1	See [fset], page 54.	-2 + 1
0116	78	get	1	See [get], page 55.	-2 + 1
0117	79	substring	1	See [substring], page 96.	-3 + 1
0120	80	concat2	1	See [concat2], page 97.	-2 + 1
0121	81	concat3	1	See [concat3], page 98.	-3 + 1
0122	82	concat4	1	See [concat4], page 99.	-4 + 1
0123	83	sub1	1	See [sub1], page 81.	-1 + 1
0124	84	add1	1	See [add1], page 82.	-1 + 1
0125	85	eqlsign	1	See [eqlsign], page 83.	-2 + 1
0126	86	gtr	1	See [gtr], page 84.	-2 + 1
0127	87	lss	1	See [lss], page 85.	-2 + 1
0130	88	leq	1	See [leq], page 86.	-2 + 1
0131	89	geq	1	See [geq], page 87.	-2 + 1
0132	90	diff	1	See [diff], page 88.	-2 + 1
0133	91	negate	1	See [negate], page 89.	-1 + 1
0134	92	plus	1	See [plus], page 90.	-2 + 1
0135	93	max	1	See [max], page 92.	-2 + 1
0136	94	min	1	See [min], page 93.	-2 + 1
0135	95	mult	1	See [mult], page 91.	-2 + 1
0140	96	point	1	See [point], page 109.	
0141	*97	*mark	1	See [mark], page 142.	-0 + 1
0142	98	goto-char	1	See [goto-char], page 110.	-1 + 1
0143	99	insert	1	See [insert], page 120.	-1 + 1
0145	100	point-max	1	See [point-max], page 111.	-0 + 1
0146	101	point-min	1	See [point-min], page 112.	-0 + 1
0144	102	char-after	1	See [char-after], page 122.	-1 + 1



0147	103	following-char	1	See [following-char], page 123.	-0 + 1
0150	104	preceding-char	1	See [preceding-char], page 124.	-0 + 1
0151	105	current-column	1	See [current-column], page 125.	-0 + 1
0153	*107	*scan-buffer		See [scan-buffer], page 142.	
0154	108	eolp	1	See [eolp], page 126.	-0 + 1
0155	109	eobp	1	See [eobp], page 127.	-0 + 1
0156	110	bolp	1	See [bolp], page 128.	-0 + 1
0157	111	bobp	1	See [bobp], page 129.	-0 + 1
0160	112	current-buffer	1	See [current-buffer], page 105.	-0 + 1
0161	113	set-buffer	1	See [set-buffer], page 106.	-1 + 1
0162	114	save-current- buffer-1	1	See [save-current-buffer-1], page 107.	-0
0162	*114	*read-char	1	See [read-char], page 142.	+1
0163	*115	*set-mark	1	See [set-mark], page 142.	-0
0164	*116	*interactive-p	1	See [interactive-p], page 142.	+1
0165	117	forward-char	1	See [forward-char], page 113.	-1 + 1
0166	118	forward-word	1	See [forward-word], page 114.	-1 + 1
0167	119	skip-chars-forward	1	See [skip-chars-forward], page 116.	-2 + 1
0170	120	skip-chars-backward	1	See [skip-chars-backward], page 117.	-2 + 1
0171	121	forward-line	1	See [forward-line], page 115.	-1 + 1
0172	122	char-syntax	1	See [char-syntax], page 132.	-1 + 1
0173	123	buffer-substring	1	See [buffer-substring], page 108.	-2 + 1
0174	124	delete-region	1	See [delete-region], page 130.	-2 + 1
0175	125	narrow-to-region	1	See [narrow-to-region], page 118.	-2 + 1
0176	126	widen	1	See [widen], page 119.	-0 + 1
0177	127	end-of-line	1	See [end-of-line], page 131.	-1 + 1

### 5.3 Opcodes (0200-0277)

Oct	Dec	Instruction	Size	Description	Stack
0201	129	constant2	1	See [constant2], page 33.	+1
0202	130	goto	1	See [goto], page 37.	-1 + 0
0203	131	goto-if-nil	1	See [goto-if-nil], page 38.	-1 + 0
0204	132	goto-if-not-nil	1	See [goto-if-not-nil], page 39.	-1 + 0
0205	133	goto-if-nil-else-pop	1	See [goto-if-nil-else-pop], page 40.	$\phi(-1, 0) + 0$
0206	134	goto-if-not-nil-else-pop	1	See [goto-if-not-nil-else-pop], page 41.	$\phi(-1, 0) + 0$
0207	135	return	1	See [return], page 42.	-1 + 0
0210	136	discard	1	See [discard], page 137.	-1 + 0
0211	137	dup	1	See [dup], page 139.	-0 + 1
0212	138	save-excursion	1	See [save-excursion], page 133.	-0 + 0
0213	*139	*save-window-excursion	1	See [save-window-excursion], page 142.	-1 + 0
0214	140			Unused	
0215	141			Unused	
0216	142			Unused	
0217	*143	*condition-case	1	See [condition-case], page 143.	-1 + 1
0220	144	temp-output-buffer-setup		See [temp-output-buffer-setup], page 143.	-1 + 0
0221	145	temp-output-buffer-show		See [temp-output-buffer-show], page 144.	-0 + 0
0222	146			Unused	
0223	147			Unused	
0256	174			Unused	
0257	175	listN	2	See [listN], page 69.	-n + 1
0260	176	concatN	2	See [concatN], page 100.	-n + 1
0261	177	insertN	2	See [insertN], page 121.	-n + 1
0262	178	stack-set	1	See [stack-set], page 140.	-1
0263	179	stack-set2	1	See [stack-set2], page 141.	-1
0222	*146	*unbind-all	1	See [unbind-all], page 144.	-0
0223	147	set-marker	1	See [set-marker], page 134.	-3 + 1
0224	148	match-beginning	1	See [match-beginning], page 135.	-1 + 1
0225	149	match-end	1	See [match-end], page 136.	-1 + 1
0226	150	upcase	1	See [upcase], page 101.	-1 + 1

0227	151	downcase	1	See [downcase], page 102.	$-1 + 1$
0230	152	stringeqsign	1	See [stringeqsign], page 103.	$-2 + 1$
0231	153	stringlss	1	See [stringlss], page 104.	$-2 + 1$
0232	154	equal	1	See [equal], page 56.	$-2 + 1$
0233	155	nthcdr	1	See [nthcdr], page 73.	$-2 + 1$
0234	156	elt	1	See [elt], page 74.	$-2 + 1$
0235	157	member	1	See [member], page 57.	$-2 + 1$
0236	158	assq	1	See [assq], page 58.	$-2 + 1$
0237	159	nreverse	1	See [nreverse], page 75.	$-1 + 1$
0240	160	setcar	1	See [setcar], page 76.	$-2 + 1$
0241	161	setcdr	1	See [setcdr], page 77.	$-2 + 1$
0242	162	car-safe	1	See [car-safe], page 78.	$-1 + 1$
0243	163	cdr-safe	1	See [cdr-safe], page 79.	$-1 + 1$
0244	164	nconc	1	See [nconc], page 80.	$-2 + 1$
0245	165	quo	1	See [quo], page 94.	$-2 + 1$
0246	166	rem	1	See [rem], page 95.	$-2 + 1$
0247	167	numberp	1	See [numberp], page 59.	$-1 + 1$
0250	168	integerp	1	See [integerp], page 60.	$-1 + 1$
0251	169			Unused	
0252	*170	*Rgoto	1	See [Rgoto], page 145.	$-1 + 0$
0253	*171	*Rgotoifnil	1	See [Rgotoifnil], page 145.	
0254	*172	*Rgotoifnonnil	1	See [Rgotoifnonnil], page 145.	$-1 + 0$
0255	*173	*Rgotoifnilesepop	1	See [Rgotoifnilesepop], page 145.	$\phi(-1, 0) + 0$
0256	*174	*Rgotoifnonnilesepop	1	See [Rgotoifnonnilesepop], page 145,	$\phi(-1, 0) + 0$
0257	175	listN	2	See [listN], page 69.	$-n + 1$
0260	176	concatN	2	See [concatN], page 100.	
0261	177	insertN	1	See [insertN], page 121.	$-n + 1$
0262	178	stack-set	1	See [stack-set], page 140.	$-0 + 0$
0263	179	stack-set2	2	See [stack-set2], page 141.	$-0 + 0$
0264	180			Unused	
0265	181			Unused	
0266	182	discardN	1	See [discardN], page 138.	$-n + 0$
0267	183	switch	1	See [switch], page 43.	$-2 + 0$
0270	184			Unused	
0271	185			Unused	
0272	186			Unused	
0273	187			Unused	
0274	188			Unused	
0275	189			Unused	

0276	190	Unused
0277	191	Unused

## 5.4 Opcodes (0300-3277) Constants

Oct	Dec	Instruction	Size	Description	Stack
0300	192	constant[0]	1	See [constant], page 32.	+1
0301	193	constant[1]	1	See [constant], page 32.	+1
0302	194	constant[2]	1	See [constant], page 32.	+1
0303	195	constant[3]	1	See [constant], page 32.	+1
0304	196	constant[4]	1	See [constant], page 32.	+1
0305	197	constant[5]	1	See [constant], page 32.	+1
0306	198	constant[6]	1	See [constant], page 32.	+1
0307	199	constant[7]	1	See [constant], page 32.	+1
0310	200	constant[8]	1	See [constant], page 32.	+1
0311	201	constant[9]	1	See [constant], page 32.	+1
0312	202	constant[10]	1	See [constant], page 32.	+1
0313	203	constant[11]	1	See [constant], page 32.	+1
0314	204	constant[12]	1	See [constant], page 32.	+1
0315	205	constant[13]	1	See [constant], page 32.	+1
0316	206	constant[14]	1	See [constant], page 32.	+1
0317	207	constant[15]	1	See [constant], page 32.	+1
0320	208	constant[16]	1	See [constant], page 32.	+1
0321	209	constant[17]	1	See [constant], page 32.	+1
0322	210	constant[18]	1	See [constant], page 32.	+1
0323	211	constant[19]	1	See [constant], page 32.	+1
0324	212	constant[20]	1	See [constant], page 32.	+1
0325	213	constant[21]	1	See [constant], page 32.	+1
0326	214	constant[22]	1	See [constant], page 32.	+1
0327	215	constant[23]	1	See [constant], page 32.	+1
0330	216	constant[24]	1	See [constant], page 32.	+1
0331	217	constant[25]	1	See [constant], page 32.	+1
0332	218	constant[26]	1	See [constant], page 32.	+1
0333	219	constant[27]	1	See [constant], page 32.	+1
0334	220	constant[28]	1	See [constant], page 32.	+1
0335	221	constant[29]	1	See [constant], page 32.	+1
0336	222	constant[30]	1	See [constant], page 32.	+1
0337	223	constant[31]	1	See [constant], page 32.	+1
0340	224	constant[32]	1	See [constant], page 32.	+1
0341	225	constant[33]	1	See [constant], page 32.	+1
0342	226	constant[34]	1	See [constant], page 32.	+1
0343	227	constant[35]	1	See [constant], page 32.	+1
0344	228	constant[36]	1	See [constant], page 32.	+1
0345	229	constant[37]	1	See [constant], page 32.	+1
0346	230	constant[38]	1	See [constant], page 32.	+1
0347	231	constant[39]	1	See [constant], page 32.	+1
0350	232	constant[40]	1	See [constant], page 32.	+1

0351	233	constant[41]	1	See [constant], page 32.	+1
0352	234	constant[42]	1	See [constant], page 32.	+1
0353	235	constant[43]	1	See [constant], page 32.	+1
0354	236	constant[44]	1	See [constant], page 32.	+1
0355	237	constant[45]	1	See [constant], page 32.	+1
0356	238	constant[46]	1	See [constant], page 32.	+1
0357	239	constant[47]	1	See [constant], page 32.	+1
0360	240	constant[48]	1	See [constant], page 32.	+1
0361	241	constant[49]	1	See [constant], page 32.	+1
0362	242	constant[50]	1	See [constant], page 32.	+1
0363	243	constant[51]	1	See [constant], page 32.	+1
0364	244	constant[52]	1	See [constant], page 32.	+1
0365	245	constant[53]	1	See [constant], page 32.	+1
0366	246	constant[54]	1	See [constant], page 32.	+1
0367	247	constant[55]	1	See [constant], page 32.	+1
0370	248	constant[56]	1	See [constant], page 32.	+1
0371	249	constant[57]	1	See [constant], page 32.	+1
0372	250	constant[58]	1	See [constant], page 32.	+1
0373	251	constant[59]	1	See [constant], page 32.	+1
0374	252	constant[60]	1	See [constant], page 32.	+1
0375	253	constant[61]	1	See [constant], page 32.	+1
0376	254	constant[62]	1	See [constant], page 32.	+1
0377	255	constant[63]	1	See [constant], page 32.	+1

## 6 References

- Execution of byte code produced by bytecomp.el (<http://git.savannah.gnu.org/cgiit/emacs.git/tree/src/bytecode.c>)
- bytecomp.el — compilation of Lisp code into byte code (<http://git.savannah.gnu.org/cgiit/emacs.git/tree/lisp/emacs-lisp/bytecomp.el>)
- data.c — Primitive operations on Lisp data types (<http://git.savannah.gnu.org/cgiit/emacs.git/tree/src/data.c>)
- Emacs Byte-code Internals (<http://nullprogram.com/blog/2014/01/04/>)
- Emacs Wiki ByteCodeEngineering (<https://www.emacswiki.org/emacs/ByteCodeEngineering>)
- Assembler for Emacs' bytecode interpreter ([https://groups.google.com/forum/#!topic/gnu.emacs.sources/oMfZT\\_40xrc](https://groups.google.com/forum/#!topic/gnu.emacs.sources/oMfZT_40xrc) easm.el)
- Emacs Lisp Decompiler (<https://github.com/rocky/elisp-decompile>)
- GNU Emacs Lisp Reference Manual (<https://ftp.gnu.org/pub/gnu/emacs/>)
- GNU Emacs source for version 18.59 (<https://ftp.gnu.org/pub/old-gnu/emacs/emacs-18.59.tar.gz>)
- GNU Emacs source for version 19.34 (<https://ftp.gnu.org/pub/old-gnu/emacs/emacs-19.34b.tar.gz>)
- GNU Emacs source for version 20.1 (<https://ftp.gnu.org/pub/old-gnu/emacs/emacs-20.1.tar.gz>)
- GNU Emacs source code version 21.4 (<https://ftp.gnu.org/pub/gnu/emacs/emacs-21.4a.tar.gz>)
- GNU Emacs source code for version 22.1 (<https://ftp.gnu.org/pub/gnu/emacs/emacs-22.1.tar.gz>)
- GNU Emacs source code for version 22.1 (<https://ftp.gnu.org/pub/gnu/emacs/emacs-23.1.tar.gz>)
- GNU Emacs source code for version 23.1 (<https://ftp.gnu.org/pub/gnu/emacs/emacs-23.2.tar.gz>)
- GNU Emacs source code for version 24.1 (<https://ftp.gnu.org/pub/gnu/emacs/emacs-24.1.tar.gz>)
- GNU Emacs source code for version 24.1 (<https://ftp.gnu.org/pub/gnu/emacs/emacs-24.1.tar.gz>)
- GNU Emacs source code for version 25.3 (<https://ftp.gnu.org/pub/gnu/emacs/emacs-25.3.tar.gz>)
- GNU Emacs source code for version 25.3 (<https://ftp.gnu.org/pub/gnu/emacs/emacs-25.3.tar.gz>)
- <https://github.com/larsbrinkhoff/emacs-history> Lars Brinkhoff's Emacs History

# Instruction Index

## A

add1.....	82
aref.....	71
aset.....	72
assq.....	58

## B

bobp.....	129
bolp.....	128
buffer-substring.....	108

## C

call.....	30
car.....	62
car-safe.....	78
cdr.....	63
cdr-safe.....	79
char-after.....	122
char-syntax.....	132
concat2.....	97
concat3.....	98
concat4.....	99
concatN.....	100
condition-case.....	143
cons.....	64
consp.....	45
constant.....	32
constant2.....	33
current-buffer.....	105
current-column.....	125

## D

delete-region.....	130
diff.....	88
discard.....	137
discardN.....	138
downcase.....	102
dup.....	139

## E

elt.....	74
end-of-line.....	131
eobp.....	127
eolp.....	126
eq.....	48
eqlsign.....	83
equal.....	56

## F

following-char.....	123
forward-char.....	113
forward-line.....	115
forward-word.....	114
fset.....	54

## G

geq.....	87
get.....	55
goto.....	37
goto-char.....	110
goto-if-nil.....	38
goto-if-nil-else-pop.....	40
goto-if-not-nil.....	39
goto-if-not-nil-else-pop.....	41
gtr.....	84

## I

insert.....	120
insertN.....	121
integerp.....	60
interactive-p.....	142

## L

length.....	70
leq.....	86
list1.....	65
list2.....	66
list3.....	67
list4.....	68
listN.....	69
listp.....	47
lss.....	85

## M

mark.....	142
match-beginning.....	135
match-end.....	136
max.....	92
member.....	57
memq.....	49
min.....	93
mult.....	91



## N

narrow-to-region .....	118
nconc .....	80
negate .....	89
not .....	50
nreverse .....	75
nth .....	61
nthcdr .....	73
numberp .....	59

## P

plus .....	90
point .....	109
point-max .....	111
point-min .....	112
pophandler .....	34
preceding-char .....	124
pushcatch .....	36
pushconditioncase .....	35

## Q

quo .....	94
-----------	----

## R

read-char .....	142
rem .....	95
return .....	42
Rgoto .....	145
Rgotoifnil .....	145
Rgotoifnilelsep .....	145
Rgotoifnonnil .....	145
Rgotoifnonnilelsep .....	145

## S

save-current-buffer .....	142
save-current-buffer-1 .....	107
save-excursion .....	133
save-window-excursion .....	142
scan-buffer .....	142
set .....	53
set-buffer .....	106
set-mark .....	142
set-marker .....	134
setcar .....	76
setcdr .....	77
skip-chars-backward .....	117
skip-chars-forward .....	116
stack-ref .....	26
stack-set .....	140
stack-set2 .....	141
stringeqsign .....	103
stringlss .....	104
stringp .....	46
sub1 .....	81
substring .....	96
switch .....	43
symbol-function .....	52
symbol-value .....	51
symbolp .....	44

## T

temp-output-buffer-setup .....	143
temp-output-buffer-show .....	144

## U

unbind .....	31
unbind-all .....	144
upcase .....	101

## V

varbind .....	29
varref .....	27
varset .....	28

## W

widen .....	119
-------------	-----

# Bytecode Function Index

## A

aref ..... 16

## B

batch-byte-compile ..... 16

batch-byte-recompile-directory ..... 17

byte-compile ..... 6, 17

byte-compile-file ..... 17

byte-compile-lapcode ..... 2

byte-compile-make-args-desc ..... 6

byte-recompile-directory ..... 18

byte-recompile-file ..... 18

## C

compile-defun ..... 19

## D

disassemble ..... 19

display-call-tree ..... 19

## F

functionp ..... 19

## M

make-byte-code ..... 2, 5, 20

## S

symbol-function ..... 21

# Concept Index

## B

bytecode ..... 2, 5

## C

constants vector ..... 8

## D

disassembled byte-code ..... 19

## L

LAP ..... 2

library compilation ..... 18

## M

macro compilation ..... 16

## R

Reverse Polish Notation ..... 3