What should an agent carry between ARC-AGI-3 levels? Verbatim plans complete none of 1,186 next-level replays*

Carson Rodrigues

November 2026

Abstract

ARC-AGI-3 games reuse and extend their mechanics across levels and change their layout, so an agent that has solved level k holds two things it could reuse on level k+1: the **plan** it used, or the **mechanics** it learned. Entries carry a plan, a rule or both from level to level, and none we found measures which helps on hidden games. We measure which transfers, three ways: in the 340 released human replay sessions, in a controlled ablation of our own agent, and in paired hidden-set draws of a large language model (LLM) harness with its `solved_levels()` helper on and off. Replayed verbatim from the moment level k ends, a winning sequence completes the next level in 0 of 1,186 testable pairs (23 games with a working positive control, 144 distinct level transitions, so a 95 percent upper bound of 2.5 percent; control 99.7 percent). In the 452 of those pairs where the sequence is at least as long as the next human solution it also completes none (113 distinct transitions, upper bound 3.2 percent). Successive winning sequences are only slightly more alike than a shuffle (0.446 against 0.431; difference 0.015, session-cluster 95 percent interval 0.012 to 0.019). A mechanics model predicts the next level's movement at 0.740 (pair mean over 10 movement games; session-cluster 95 percent interval 0.687 to 0.791) against a 0.301 null, short of our 0.8 bar. The harness comparison is too coarse to confirm or refute anything: two hidden draws per arm average 24.65 with the helper and 27.89 without, a 3.2-point gap inside the 11 points the design resolves. For our own agent, one hidden draw per arm is consistent with a hidden metric that rewards first-level efficiency and barely registers later-level coverage.

1. The question

ARC-AGI-3 [1] is an interactive benchmark of turn-based games. In each, an agent sees a 64 by 64 grid of 16 colours, is told neither the goal nor the mechanics, and must clear a sequence of levels. The report lists 25 public games and two private hold-out sets of 55 games each; the Kaggle competition reruns a submitted notebook on its 110 hidden games, 55 of which score the public leaderboard (the "hidden 55" below) and the other 55 decide the final ranking. The benchmark scores agents by RHAE, relative human action efficiency. In the technical report [1], a completed level earns $100 \times \min(1.15, (\text{human actions}/\text{agent actions})^2)$, weighted by level number. Squaring the ratio rewards efficiency far more than coverage, so clearing many levels slowly earns almost nothing. Level 1 is bounded below by discovery; later levels are where an agent can be cheap, and only if something it holds still applies. The question is what to carry across levels.

*An earlier version of this paper was submitted to the ARC Prize 2026 Paper Track on Kaggle.

2. Prior work

Entries fall into three families. Harnesses let a language model work in a Python read-eval-print loop (REPL) against the game frames: the Duck [2] and Franzen's Milestone-2 solution [3]. Franzen's level-up prompt tells the model to plan afresh and reuse the previous level's mechanics; rellik13's fork [4] pins each cleared level's rule and last 30 winning actions. StochasticGoose [5] is a convolutional neural network (CNN) that predicts whether an action changes the frame and resets at each level. Some notebooks [6] search the public games' source, which the hidden games do not expose. Papers report RHAE of 93 to 100 on the 25 public games with their best frontier-model configurations (Tycho [7], Twin [8], PRO-LONG [9], Schema [10], VISTA [11], Memento 3 [12], Kepler [13]), a set that the study introducing AERA, the Adaptive Epistemic Reasoning Agent [14], finds reachable by non-intelligent strategies. The memory ablations we found are on public games: PRO-LONG gains 18.0 points on average across frontier models over a baseline agent without its log, NVIDIA's Object-Oriented Agents (NOOA) [15] 11.8 over plain markdown files, and Tracing [16] finds that scripts an agent writes for one task are almost never called on a later one (33 of 630 references cross a task boundary; a task there is a level). We found no paired hidden-set comparison of what to carry across levels (a web search with three queries on 30 October 2026, and an arXiv search for "ARC-AGI-3" on 2 November 2026 that returned 31 papers, screened by abstract; not a systematic review). Two October preprints read in full use only the public games: Lencevicius [17] varies what a harness carries between turns (dropped turns, summaries, a note-taking instruction, replayed reasoning) for one model on four games, and Liu et al. [18] release 144 human think-aloud and 250 agent trajectories, annotated by the level that introduces each mechanism; neither compares a plan with mechanics carried between levels.

This paper is a measurement study whose predictions were filed in `HYPOTHESES.md`. The track has placed empirical studies before: the 2024 second-place paper examined test-time training [19].

3. The two memories

Plan memory (the `solved_levels()` helper in `inference/utils/level_memory.py`, our harness fork): on completing level k it records W_k, the actions since the last reset (resets excluded, click coordinates verbatim), and shows the last 60 of them to the model at level $k{+}1$.

Mechanics memory (`arc3/agents/model_based.py`, our explorer): per-action modal displacements of rigid object groups, the colours that block a swept path, per-key reliability windows, and any goal predicate inferred from the template class Gone / Count / Touch / Overlap / Appeared. Layout is discarded and the object vocabulary is kept.

A plan is a trajectory through one layout, so it transfers only if the next solution is nearly the same sequence; a mechanics model transfers if the next level obeys the same rules, whatever its layout. Tracing [16] fits this: most of its scripts embed the state of the current level.

4. Human replays (E21)

E21 is the twenty-first experiment in our hypotheses log. Its population is all 340 sessions in the public release mirror [20] (the release post counts 342), on the public 25 games, replayed in the same local builds. The tests and bars are fixed in `HYPOTHESES.md` (pushed 15 October 03:05 UTC, after a 12-session smoke that already showed plan transfer (M1, defined below) at 0 of 65, before any full result). The full run completed on 16 October.

- **F** fidelity gate: every recorded action is replayed and every frame compared; a session is testable up to its first mismatch.
- **M1** plan transfer: from a snapshot at the moment level k completed, execute W_k and ask whether level $k{+}1$ completes within $|W_k|$ actions (a budget at least as long as the next human solution in only 469 of the 1,237 testable pairs, 452 of the 1,186 without tn36; replay completes none of them). Controls: C1 W_k shuffled $\times 5$, C2 the level's own W_{k+1} as a positive control (each sequence runs once, in full, so its budget is its own length), C3 uniform random actions of the same length $\times 5$.
- **M2** plan similarity: $1 - \text{Levenshtein}(W_k, W_{k+1})/\max$ length, computed over action ids, against shuffled W_k.
- **M3** mechanics transfer: each action's modal displacement learned on level k, scored on level $k{+}1$ steps where something moved; the ceiling is that model scored on level k, the null the exact mean over all non-identity label permutations. A movement game is one of the 12 games that are not click-driven.

309 sessions replay frame-exactly; of 1,314 completed level pairs, 1,237 (94.1 percent) are testable. Games are named by their four-character environment id [1]. The positive control fails on every pair of one game (tn36), so M1 is quoted on the other 1,186 pairs (23 games); the caveats give the filed figures with tn36 included. Table 1 gives the filed predictions and Figure 1 plots them.

Table 1: E21 results against the filed predictions.

filed prediction	bar	measured	verdict
P21a W_k completes level $k{+}1$	at most 10 percent, 0 on at least 20 games	0 of 1,186 pairs, 0 of 23 games (0 of 144 distinct transitions)	met
P21a control C2 (own W_{k+1})	at least 90 percent	99.7 percent	met
P21b M3 transfer, movement games	at least 0.8	0.740 (ceiling 0.906; pair mean over 431 pairs in 10 movement games; per game 0.00 to 0.99)	failed
P21b M3 against its permuted null	at least 3 times	2.5 times (null 0.301 over 421 pairs; 0.757 on those 421)	failed
P21c M2 similarity beats shuffle	fewer than 13 games	17 of 20 games (19 of 25 under the filed rule)	failed

One of three predictions was met, and the failures matter more. Replaying a plan completes nothing, with a working positive control. The 1,186 pairs rest on only 144 distinct (game, level) transitions, about eight sessions each, so the interval is quoted at both units: the Clopper-Pearson 95 percent upper bound on the replay success rate is 0.31 percent treating pairs as independent and 2.5 percent at transition level (0 of 144). Both are far below the 10 percent bar. In the 452 pairs whose budget $|W_k|$ is at least the next human solution's length (113 distinct transitions) replay also completes none: the 95 percent upper bound is 0.81 percent over pairs and 3.2 percent over transitions (`experiments/budget_check.out`, `experiments/e21_numbers.out`). In the other 734 the next human solution is longer than $|W_k|$, so a replay could complete the level only in fewer actions than that human used; they stay in the 1,186 but test transfer only if such a shorter solution exists. Successive winning sequences are only slightly more alike than a shuffle (0.446 against 0.431, pooled over all 1,314 pairs; difference 0.015, session-cluster 95 percent interval 0.012 to 0.019, 2,000 resamples of sessions) and are above it on 17 of the 20 games where a shuffle can differ; on five

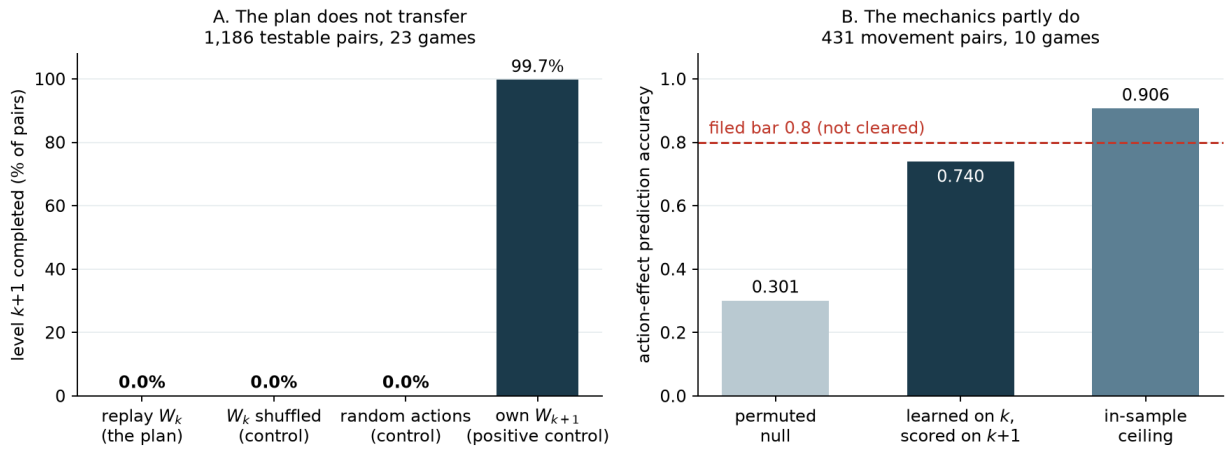


Figure 1: E21 results, drawn from `experiments/E21_level_transfer.json` by `paper/make_fig_e21.py`. Panel A: the share of testable pairs in which level k+1 is completed, over 1,186 pairs from 23 games (tn36 excluded because its positive control fails). Replaying W_k, a shuffled W_k and random actions complete none; the level's own W_{k+1} completes 99.7 percent. Panel B: the action-effect accuracy of a mechanics model learned on level k and scored on level k+1 (431 pairs in 10 movement games), against its permuted null (over the 421 of those pairs that have one; the mean on those 421 is 0.757) and its in-sample ceiling, with the 0.8 bar filed in advance, which it did not clear.

games (lp85, r11l, s5i5, tn36, vc33) a shuffle leaves the score unchanged in every pair, and on three (ls20, m0r0, tu93) similarity sits below it. The plan has structure but cannot be replayed. That is what our harness fork's `solved_levels()` hands its model. Shuffled plans and random actions also complete 0 percent. Replay fails alike in the 12 click-driven and the 11 movement-driven games of the 23.

Caveats. The positive control fails on all 51 tn36 pairs (and 3 lf52, 1 sc25), so M1 is quoted without tn36 (with it: 0 of 1,237, control 95.6 percent, the filed run); s5i5 has no testable pair; six other games record no movement, so M3 is silent there. 188 of 6,185 random-control runs (3.0 percent, all lf52) exceeded a 60-second budget, filed before any affected session was scored: random sequences drive lf52 into states whose step cost grows without bound. They are reported as unevaluable, because counting them as failures would flatter P21a. M3 has data on 10 of the 12 movement games; three of them (tu93, wa30, re86) hold 48 percent of its 431 pairs, which rest on 56 distinct transitions. The pair mean 0.740 has a session-cluster 95 percent interval of 0.687 to 0.791 (99 sessions, 2,000 resamples), below the 0.8 bar, and leaving out any one game gives a mean between 0.704 and 0.787. The game-weighted mean (the unweighted mean of the ten per-game means) is 0.682, with a game-cluster 95 percent interval of 0.46 to 0.86 (10 games, 2,000 resamples), which includes 0.8, so the shortfall shows over pairs and sessions but is not resolved over games. Per game, M3 is 0.99 on dc22, 0.97 on g50t, 0.90 on re86, 0.89 on ls20 and tu93, and 0.75 on sp80 and wa30, but 0.36 on tr87, 0.30 on m0r0 and 0.00 on cd82 (one transition, 10 pairs); we have not diagnosed the three low games.

5. Two agents

5a. Mechanics memory on and off (our explorer, public 25 development set). Memory on scores 0.277 and clears 13 levels, off 0.227 and 11, on our local scorer, from one seed pair (seed 0,

agent version v5) with no interval for the difference. `EXPERIMENT_LOG.csv` in the released repository holds four further memory-on runs on the same 25 games and 2,000-action budget: seed 1 of the same v5 agent (0.283, 14 levels) and seeds 0, 2 and 3 of the later v7 agent (0.280, 0.276 and 0.278; v7 also learns which moves lose the game and keeps scenery and thin bars out of goal predicates). All five memory-on scores lie between 0.276 and 0.283. Memory off was run once on the public 25 (seed 0, v5), so the off arm has no seed spread and the 0.050 gap has no interval. Level-1 cost is identical, as it must be since nothing is carried into a first level, and a second level is reached only with memory on.

5b. `solved_levels()` on and off (LLM harness, hidden 55). The model is Intel/Qwen3.8-Flash-Next-W4A16-AutoRound (the Intel base) in Franzen's Milestone-2 harness. The Intel notebooks mount the weights as the Kaggle model dfranzen/intel-qwen3.8-flash-next-w4a16-autoround (Transformers/default, version 1), Franzen's upload of Intel's quantization, together with a separate speculative-decoding draft checkpoint, dfranzen/albucino-qwen3-8-flash-next-drafter (version 1); we did not record a Hugging Face revision of the weights. Serving and sampling are Franzen's settings [3], set explicitly in our notebook configurations: one RTX PRO 6000, at most 10 concurrent game streams, a 131,072-token (128 Ki) context window with at most 12,288 (12 Ki) generated tokens per request, thinking enabled, temperature 0.7, top-p 0.95, top-k 20. A scored rerun runs on the competition's hardware under its 9-hour notebook limit, shared by all 110 games, at no charge to the entrant, and does not draw on the account's weekly GPU quota. A draw is one scored rerun of a notebook on the 55 hidden games. The helper variant (v2) was paired with its twin without the helper (v1), two draws each, taken from 19 to 25 October (Table 2); a pair on the Swift base (UkisAI Swift1.5 post-train) was dropped after its first draw scored 4.92. That pair was v6-swift (helper on) and v3-swift (helper off), and the filed rule names it (v6 - v3); v3-swift, smoke-tested on two public games, was never submitted for a scored rerun, and the draw plan dropped both Swift variants after v6's draw. `HYPOTHESES.md` filed no stopping rule for the number of draws. The draw plan in the harness repository (`kaggle/plan.json`) set two draws per variant before the first draw. On 26 October, after the draws so far had scored like unmodified copies of the notebook, the plan was changed: a second helper variant on the Intel base (v7i, level memory plus a note pinned at each context drain), queued for two draws, was dropped and never ran on the hidden games, and the remaining daily slots went to v1f from 27 October and to v10 from 30 October, so those variants have three and four draws. v2 differs from v1 in two ways: it adds an optional REPL call, `solved_levels()`, that the level-up message mentions once, and it rewords the budget-bar line of the prompt (`ARC3_BAR_GUIDANCE=budget`). Both arms keep Franzen's level-transfer guidance, which already tells the model to reuse the previous level's mechanics. We do not know how often v2's model called the helper: the logs of scored reruns are not visible to entrants, so the calls in its two scored draws (57477157 and 57575322) cannot be counted. The comparison therefore tests the helper together with the reworded line.

Table 2: Hidden-set draws (55 games each) by variant.

variant	helper	draw 1	draw 2	draw 3	mean	kernel versions
v2-level-memory	on	29.54	19.75		24.65	2, 4
v1-franzen-faithful	off	29.93	25.85		27.89	2, 5
v1f (v1 code, faster model load)	off	29.44	21.86	28.19	26.50	1

Leaderboard scores of first-time copies of the reference notebook (hundreds of teams, one draw each;

the thread gives no sample size and does not say whether every copy was unedited or whether failed runs were dropped) have mean 25.77, standard deviation (SD) 3.93 [21], and an independent study reports SD 3.99 over ten evaluations of one frozen harness on twenty public games [22]; two single draws therefore differ with SD about 5.5. The rule filed before any pair ran claims an effect only above 11 points, twice that, and predicted none. The means of the v2 and v1 arms differ by 3.2 (0.8 SD, where 3.93 is the SD of a difference between two-draw means), the helper arm lower. No effect is claimed; two draws per arm resolve only 11 points (the 95 percent interval for off minus on runs from -4.5 to $+10.9$), so the data leave an effect of either sign open. Pooling the three v1f draws with v1 gives five draws without the helper: mean 27.05, SD 3.30, 2.4 points above the helper arm. As of 2 November, all thirteen valid Intel draws, across five variants (v1, v1f, v2, v8i, which is v1 plus a slot-priority rule called D' in our logs, and v10, which is v1f plus start-up hardening and three harness fixes: a guarded RESET, a notice after cut-off replies, and attempt-loss stops), average 26.35 (SD 3.18), indistinguishable from an unmodified copy of the notebook we forked. The draws not in Table 2 are 24.95 and 26.47 (v8i, kernel versions 1 and 3) and 24.51, 29.78, 27.60 and 24.72 (v10, version 1).

Two earlier draws, one per arm (22 and 23 October), returned 0.00 and are excluded from every count and mean. We attribute them to the platform ending a rerun after 15 minutes without a game move, together with slower model loading, so they say nothing about either arm. Both arms were redrawn after a keepalive fix: a game reset sent every five minutes until the model server is ready.

6. The floor and the hidden ranking

Contact curiosity is a term in the explorer's planner that prefers states where the mover touches a rarely contacted object class. Table 3 sets the hidden score of each explorer submission beside the public-set score of its nearest measured twin.

Table 3: Explorer submissions, hidden score against the nearest measured public-set score.

submission	agent	public 25 (nearest measured twin)	hidden 55
57095368	explorer, crashed to cyclic fallback	n/a	0.15
57170721	random, 60 actions/game	n/a	0.12
57123503	explorer, memory on	0.280	0.08
57199354	explorer, memory off	0.227 (v5 twin)	0.08
57248168	explorer, contact curiosity off	0.204 (v4 twin)	0.01

The first four rows suggest the hidden metric ignores the agent: a random agent outscores the working one, and a memory switch worth $+0.050$ publicly (the v5 pair, 0.277 against 0.227) is worth 0.000 here. The fifth row differs by about one level: with contact curiosity off, the explorer scores 0.01 against 0.08 on the hidden 55 in one draw each ($0.07 \times 55 = 3.9$ points). Contact curiosity is worth $+0.080$ publicly on the v4 pair, all of it from one game, lp85; without lp85 the contact-on agent scores lower than the contact-off agent on the public 25.

Contact curiosity is consistent with a gain in first-level efficiency: it cuts median level-1 cost from 21.2 to 8.6 times the human cost (medians over 10 and 11 games; on the nine games the two sets share, 21.95 against 8.59 times; `experiments/level1_cost_check.out`), and the hidden metric squares that ratio. Memory is consistent with later-level coverage, a second level on two more games, which the metric nearly ignores. Here the hidden ranking says little about this paper's treatment.

Three public games supply 90 percent of our public 0.280, the hidden 0.08 sums to 4.4 points over 55 games (0.08×55), roughly one such level, and on 13 October 1,087 of 4,233 teams sat in the (0.05, 0.23] band that contains our 0.08.

7. Limitations and scope

Scope: one benchmark (ARC-AGI-3), human replays on the public 25 games only, one LLM base model (a second pair was dropped); nothing here tests transfer outside ARC-AGI-3. The replay test (M1) needs only recorded multi-level sessions, a deterministic replayable build and a level-completion signal, so it could be repeated on other game suites whose levels reuse mechanics; we ran it on one.

Contamination, agent view and outcomes. The 55 games behind the harness draws are the half of the competition's hidden games whose aggregate score the public leaderboard shows, and the same 55 were scored on every draw; the final ranking uses the other half. We know of no public release of these games and did not test whether the model had seen them. The explorer was developed on the public 25 games, so 5a is development-set evidence; its hidden scores are in Table 3. For the harness arms, the `arc_agi` 0.9.8 package that the notebooks install does not serve the human baseline action counts in its game listings, but we did not audit the model's Python sandbox for other information about the hidden games, and the logs of scored reruns are not visible to entrants, so we have not read the model's view of any hidden game. The only outcome available for a hidden draw is its aggregate score. We therefore report no solved, partly solved or failed outcomes per game or level for the harness arms and no counts of tool or harness failures (timeouts, replies cut off at the output limit, lost attempts); the only failures reported are the two 0.00 draws attributed to the platform. For the explorer, 5a gives the score and the number of levels cleared, not per-game outcomes.

The effect model expresses only rigid displacements, so the explorer memorises click and recolour mechanics and cannot plan toward them; outside the template class, mechanics memory gives nothing. The LLM arm has two draws per variant against a 3.93-point copy spread, its second draws ran with slower model loading, and the two draws of each arm ran on different kernel versions. E21 measures human play, so it bounds what is available to transfer and says nothing about what an agent uses. M1 tests a verbatim replay within the budget $|W_k|$. A model that adapts a plan it is shown can do things M1 does not test, and 330 of the 1,237 sequences W_k are longer than the 60 actions the harness shows.

Other filed predictions mostly failed. The explorer's level-1 efficiency (P1) and next-state accuracy (P4) predictions were not met. The click-effect (E12), ordered-goal (E13) and first goal-proposer (E19) extensions were negative. The proposer follow-ups gained about 0.015 on the public 25 and replicated (E20 and E20b with one proposer, E20c with another). E20c with the first proposer lost a game, and E20d failed its gate. All are in `HYPOTHESES.md`.

8. Conclusion

Replaying a winning plan verbatim completes no next level in human play, and the harness arm with the plan-returning helper, which also had a reworded prompt line, averaged 3.2 points below its twin over two draws each, inside the draw noise. Mechanics predict next-level movement at 0.740, short of the bar we filed, though predicting a move is not solving a level. For anyone aiming at 85 percent, later levels must be cheap, and verbatim replay did not supply them; a replay that

adapts the plan is untested. Next entrants should log that a feature is used before crediting it, and report several draws against the copy spread.

Linked competition submission

57477157 (`v2-level-memory`, kernel version 2): Franzen's Milestone-2 harness plus `solved_levels()` and a reworded budget-bar line; 29.54 hidden, the better of two draws and one SD above our 13-draw Intel mean, so expect a private score nearer 26.

Code and data

Code, data and every experiment log are released with the paper, at commit cb494af of arc-prize-2026 and commit 662b680 of arc-agi-3; the paths below are those of these commits.

- https://github.com/rodriguescarson/arc-prize-2026 holds the explorer (`src/arc_prize_2026/arc3/agents/model_based.py`), the replay code (`src/arc_prize_2026/arc3/level_transfer.py`, tested by `tests/test_level_transfer.py`), the 340 replay sessions in packed form (`data/human_replays_packed`, terms in its `NOTICE`), `EXPERIMENT_LOG.csv` and `submission/SUBMISSIONS.md`.
- Its folder `paper/level-transfer` holds `HYPOTHESES.md`, the figure, the experiment outputs, `CLAIM-MAP.md` (the source file of each number) and the scripts that regenerate the numbers of Sections 4 and 5b and the level-1 costs of Section 6 (`experiments/e21_numbers.py`, `experiments/hidden_draws.py`, `experiments/budget_check.py`, `experiments/level1_cost_check.py`). The other numbers of Sections 5a and 6 are read from `EXPERIMENT_LOG.csv`, `submission/SUBMISSIONS.md` and the per-run `results.json` files under the repository-root `experiments/` folder.
- https://github.com/rodriguescarson/arc-agi-3 holds the harness fork (`harness/ARC3-Inference/inference/utils/level_memory.py`), the notebook builder and its cells (`kaggle/build_notebook.py`, `kaggle/cells/`), the variant configurations (`kaggle/variants/`) and its submission log (`docs/SUBMISSIONS.md`).

Disclosure

Competing interests: the author is an entrant in the ARC Prize 2026 ARC-AGI-3 competition on Kaggle, which awards cash prizes, and the linked submission was scored in it. An earlier version of this paper was submitted to the competition's Paper Track, which also awards cash prizes.

Funding: this work received no external funding.

Data rights: the replay sessions come from the ARC Prize human-testing release [20]. Neither the release post nor its Hugging Face mirror names a licence; both call the data open source. The `arc-prize-2026` repository's `data/human_replays_packed` redistributes the mirror's 340 sessions repacked as NumPy files (the frames, actions, per-step level counts and game states of one session, with its environment and session identifiers and no timestamps). Its NOTICE states that these files are not covered by the repository's MIT-0 licence and keep the terms of the original release; we grant no licence to them and make no claim about what the source permits. We did not review the sessions for personal data.

Claude Code (Anthropic) wrote most of the code, ran the experiments and drafted this text under the author's direction. The author set the hypotheses and the filed predictions, reviewed every change and approved each claim; every number from our own runs comes from the released code or the Kaggle submission list and traces to a file in the repository; numbers from other sources are cited, except the 13 October leaderboard count in Section 6, which comes from a public leaderboard download that is not redistributed.

References

1. ARC Prize Foundation. ARC-AGI-3: A New Challenge for Frontier Agentic Intelligence. arXiv:2603.24621, https://arxiv.org/abs/2603.24621, 2026.
2. Tufa Labs. The Duck harness, winning solution to ARC-AGI-3 Milestone 1. https://github.com/Tufalabs/duck-harness, 2026.
3. D. Franzen. ARC-AGI-3 Milestone 2 solution. https://github.com/da-fr/arc-agi-3-solution, 2026 (Kaggle notebook https://www.kaggle.com/code/dfranzen/arc-agi-3-milestone-2-solution).
4. rellik13 (Kaggle user sirikilohit). arc-agi-3-duck-18-1gc-submit. Kaggle notebook, https://www.kaggle.com/code/sirikilohit/arc-agi-3-duck-18-1gc-submit, 2026.
5. D. Smit. StochasticGoose. https://github.com/DriesSmit/ARC3-solution, 2025.
6. nihilisticneuralnet. [0.46] ARC-AGI-3: Persistent Memory BFS ARC Solver. Kaggle notebook, https://www.kaggle.com/code/nihilisticneuralnet/0-46-arc-agi-3-persistent-memory-bfs-arc-solver, 2026.
7. J. Lehmann, A. Aioanei, S. Vahdati. Tycho: Active Abstraction with Programmatic World Models for ARC-AGI-3. arXiv:2607.28287, https://arxiv.org/abs/2607.28287, 2026.
8. A. Skoutnev et al. Twin: Playing an Unknown Game with a Test-Time Digital Twin. arXiv:2608.14490, https://arxiv.org/abs/2608.14490, 2026.
9. A. Fox et al. PRO-LONG: Programmatic Memory Enables Long-Horizon Reasoning. arXiv:2607.20064, https://arxiv.org/abs/2607.20064, 2026.
10. G. Zeng et al. Schema: Discovering Unknown Environments via Agentic Program Induction. arXiv:2609.39140, https://arxiv.org/abs/2609.39140, 2026.
11. Q. Han et al. VISTA: A Visual Harness for Reasoning in an Interactive World. arXiv:2610.02200, https://arxiv.org/abs/2610.02200, 2026.
12. H. Zhao et al. Memento 3: Model-Based Recursive Self-Improvement through Reflective Rulebooks. arXiv:2610.11794, https://arxiv.org/abs/2610.11794, 2026.
13. W. Wu. Kepler: Auditable World Models for ARC-AGI-3. arXiv:2610.00834, https://arxiv.org/abs/2610.00834, 2026.
14. K. H. Liew. Explore Before You Solve: The Speed-Depth Trade-off in Epistemic Agents for ARC-AGI-3. arXiv:2605.25931, https://arxiv.org/abs/2605.25931, 2026.
15. P. Furgale et al. NVIDIA-labs OO Agents: Native Python Object-Oriented Agents. arXiv:2607.20709, https://arxiv.org/abs/2607.20709, 2026.
16. C. Wu, J. Passenger, Y. Song. Tracing the Thoughts of a Coding Agent Playing ARC-AGI-3: Lessons for Continual Learning. arXiv:2610.11450, https://arxiv.org/abs/2610.11450, 2026.
17. R. Lencevicius. When the harness decides success: state that cannot be re-observed. arXiv:2610.26632, https://arxiv.org/abs/2610.26632, 2026.
18. S. Liu et al. How Humans Learn Unfamiliar Worlds: A Think-Aloud Dataset on ARC-AGI-3. arXiv:2610.34523, https://arxiv.org/abs/2610.34523, 2026.
19. E. Akyürek et al. The Surprising Effectiveness of Test-Time Training for Few-Shot Learning

(the ARC Prize 2024 results list it as "... for Abstract Reasoning"). arXiv:2411.07279, https://arxiv.org/abs/2411.07279, 2024.
20. G. Kamradt (ARC Prize). Measuring Human Performance on ARC-AGI-3. https://arcprize.org/blog/arc-agi-3-human-dataset, 14 April 2026 (Hugging Face mirror by magic-sword: https://huggingface.co/datasets/magic-sword/arc_agi_3_public_demo_human_testing).
21. S. Pham. Incredible notebook performance variation (Daniel Franzen's copies data analysis). Kaggle discussion 745062, https://www.kaggle.com/discussions/general/745062, October 2026.
22. J. Lehmann, S. Vahdati. Can LLMs Improve Their Own Harness? A Controlled Study on ARC-AGI-3. arXiv:2610.30499, https://arxiv.org/abs/2610.30499, 2026.