2. Configura, de forma global, tu usuario y tu dirección de email con los siguientes datos:

a. Usuario: apellido_nombre

```
FPB04+alumnofp@FPB04 MINGW64 ~
$ git config --global user.name Hernandez_Rodrigo

FPB04+alumnofp@FPB04 MINGW64 ~
$ git config --global user.name
Hernandez_Rodrigo
```

b. Email: nombre@apellidos

```
FPB04+alumnofp@FPB04 MINGW64 ~
$ git config --global user.email rodrigo@hernandezsanchez

FPB04+alumnofp@FPB04 MINGW64 ~
$ git config --global user.email
rodrigo@hernandezsanchez
```

3. Repositorio local:

a. Crea un repositorio local en una carpeta llamada repoExamen.

```
FPB04+alumnofp@FPB04 MINGW64 ~
$ cd Desktop/

FPB04+alumnofp@FPB04 MINGW64 ~/Desktop
$ mkdir repoExamen
```

b. Muestra el estado del repositorio.

```
FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen
$ git init
Initialized empty Git repository in C:/Users/alumnofp/Desktop/repoExamen/.git/

FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (main)
$ git status
On branch main

No commits yet

nothing to commit (create/copy files and use "git add" to track)
```

4. Repositorio remoto:

a. Enlaza tu repositorio local con el remoto: https://github.com/soniaGut/git-markdown.git

```
FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (main)
$ git remote add origin https://github.com/soniaGut/git-markdown.git

FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (main)
$ git remote
origin
```

b. Actualiza el contenido del repositorio local con el contenido del remoto.

```
FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (main)
$ git status
On branch main

No commits yet

nothing to commit (create/copy files and use "git add" to track)

FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (main)
$ git pull origin main
remote: Enumerating objects: 35, done.
remote: Counting objects: 100% (35/35), done.
remote: Compressing objects: 100% (27/27), done.
remote: Total 35 (delta 2), reused 32 (delta 2), pack-reused 0 (from 0)
Unpacking objects: 100% (35/35), 6.93 KiB | 59.00 KiB/s, done.
From https://github.com/soniaGut/git-markdown
 * branch            main       -> FETCH_HEAD
 * [new branch]      main       -> origin/main
```

c. Muestra el estado del repositorio.

```
FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (main)
$ git status
On branch main
nothing to commit, working tree clean
```

***ACLARACIÓN

En src/components/Contador.vue la función sumar resta en lugar de sumar:

a. Corrige el error.

b. Sube los cambios a tu repositorio remoto.

```
FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (Hernandez_Rodrigo)
$ git commit -m "chore: arreglo función suma en Contador.vue"
[Hernandez_Rodrigo 1c25f4f] chore: arreglo función suma en Contador.vue
 1 file changed, 1 insertion(+), 1 deletion(-)
```

git commit -m “chore: arreglo/mantenimiento de function sumar() de la configuración de Contador.vue”


8. Vas a provocar un conflicto y resolverlo.


f. Fusiona feature-https en tu rama de trabajo. Debe aparecer el conflicto.

```
FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (Hernandez_Rodrigo)
$ git merge feature-https
Auto-merging src/config.js
CONFLICT (content): Merge conflict in src/config.js
Automatic merge failed; fix conflicts and then commit the result.
```

g. Abre el fichero y resuelve el conflicto dejando como versión definitiva: export const API_URL = 'https://api.tareasdaw.es:9090'.

Uso del comando: nano src/config.js

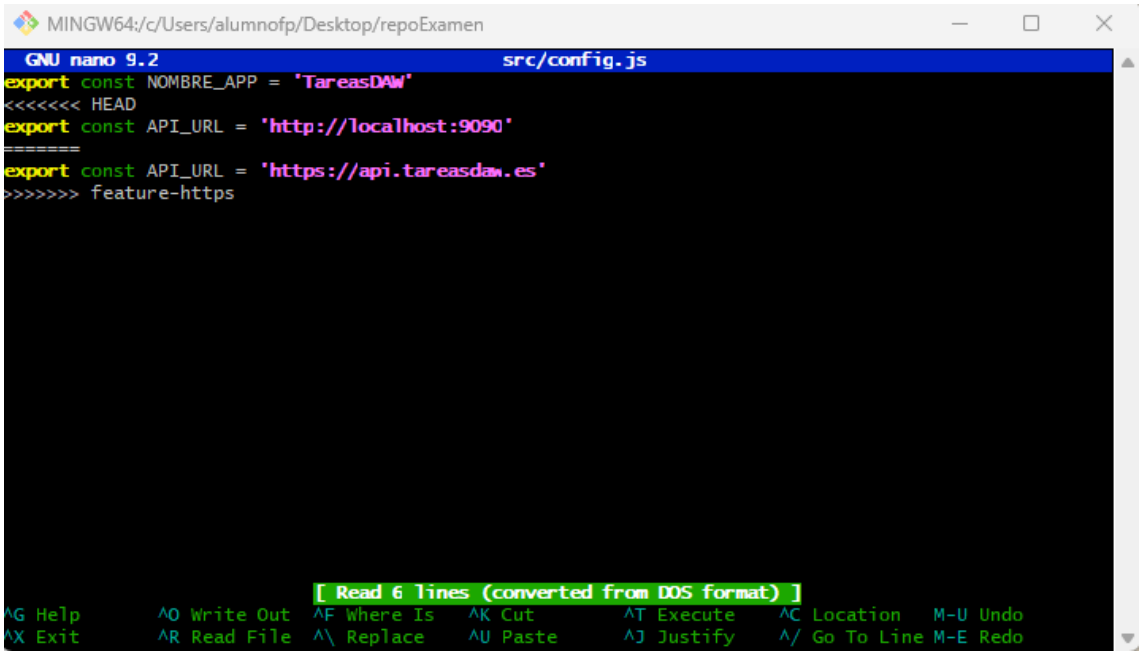

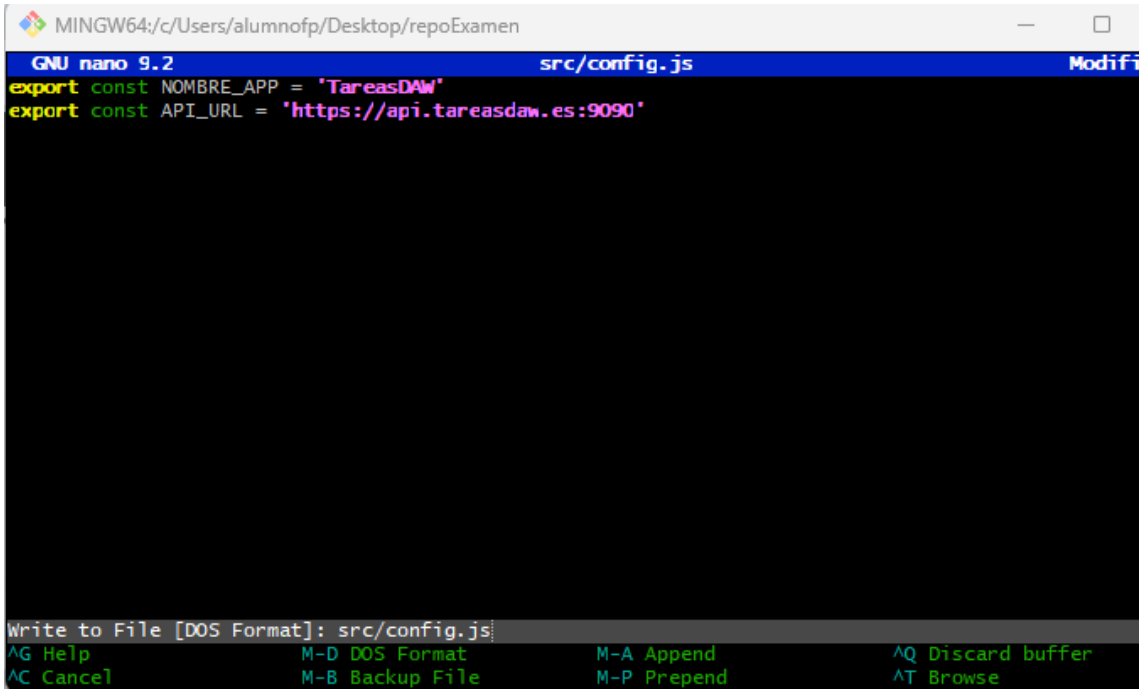

Hago control X.

Me solicita guardar cambios. Pulso Y (yes) y enter para que me saque.

Posteriormente add, commit con el comentario adecuado y nos sacará de la rama temporal “Hernandez_Rodrigo |MERGING” hacia “Hernandez_Rodrigo”.

Finalmente, git push origin Hernandez_Rodrigo.

```
FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (Hernandez_Rodrigo|MERGING)
$ nano src/config.js

FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (Hernandez_Rodrigo|MERGING)
$ git status
On branch Hernandez_Rodrigo
You have unmerged paths.
  (fix conflicts and run "git commit")
  (use "git merge --abort" to abort the merge)

Unmerged paths:
  (use "git add <file>..." to mark resolution)
        both modified:   src/config.js

no changes added to commit (use "git add" and/or "git commit -a")

FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (Hernandez_Rodrigo|MERGING)
$ git add src/config.js

FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (Hernandez_Rodrigo|MERGING)
$ git commit -m "chore: arreglo merge en archivo src/config.js"
[Hernandez_Rodrigo 2261461] chore: arreglo merge en archivo src/config.js

FPB04+alumnofp@FPB04 MINGW64 ~/Desktop/repoExamen (Hernandez_Rodrigo)
$ git push origin  Hernandez_Rodrigo
```