

aXet.oasis: Your AI partner in the software development life cycle

Designed to streamline the use of generative AI in our daily services.

It is part of the **aXet** platform.

aXet.oasis – Access


The first step to start using aXet.oasis is download [here](#).

In this step, your manager should contact the Connector from your region (you can check the table below for the info) to get some more guidance and explain your use case.


Connectors CoE	Geografia	Email
Alvaro Moreno Egea	Spain	amorenoe@emeal.nttdata.com
Jose Antonio Perez Sanjose	Spain	iperesan@emeal.nttdata.com
Juan Antonio Alcaide Alcaide	Spain	jalcaida@emeal.nttdata.com
Rafael De Los Santos Guirado	Spain	rdelossa@emeal.nttdata.com
Raquel Maria Marin Camara	Spain	rmarinca@emeal.nttdata.com
Sergio Robles Narbona	Spain	sroblesn@emeal.nttdata.com
Sergio Daniel Valenzuela Vallejos	LATAM	jalcaida@emeal.nttdata.com
Giovanni Castagnoli González	LATAM	gcastall@emeal.nttdata.com
Eugeni Aguilar Almodovar	India	eaguilar@emeal.nttdata.com
Priscila Carneiro Gomes	Portugal	pcarneir@emeal.nttdata.com


aXet.oasis – Interface

After you download and open **aXet.oasis**, the first screen you will see is the Okta Device Authentication modal. To start logging in, click the ‘*Sign in with OKTA Device Code*’ button. This action will open a new browser window automatically.

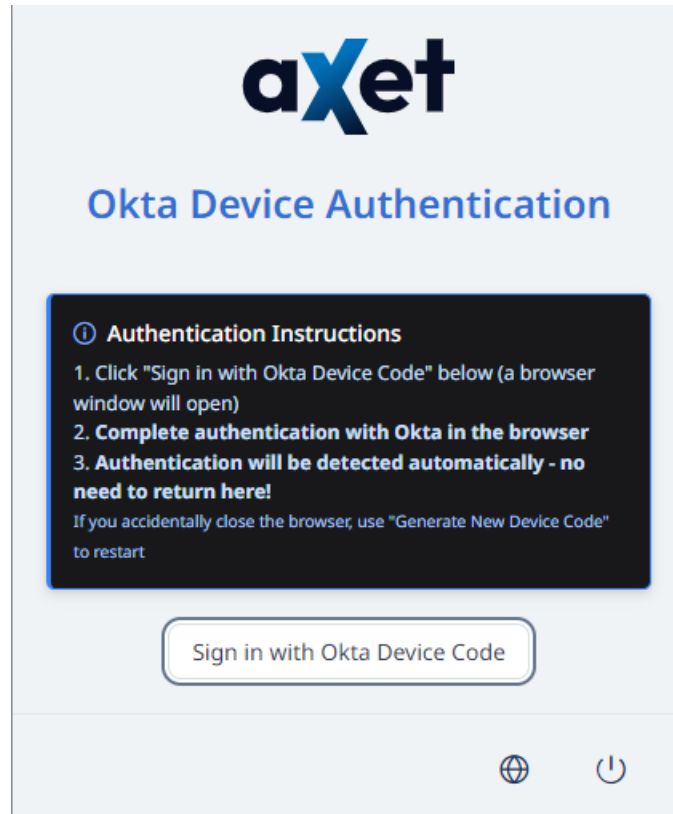


In the browser, you will see a screen with a code. Complete the login in OKTA.

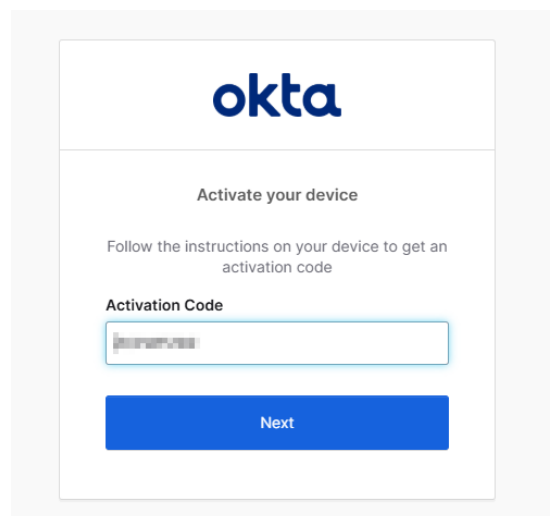

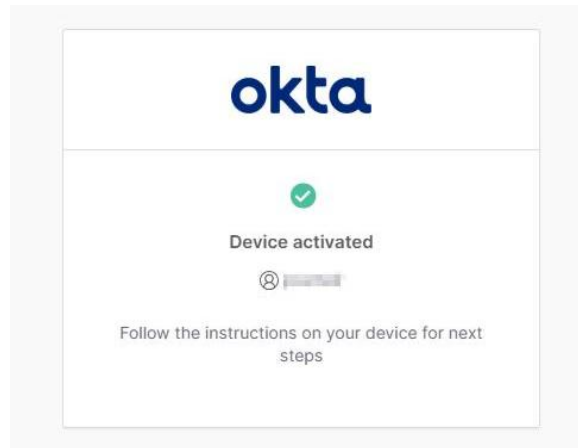

Once you have completed authentication in your browser, the device will be activated. You will then see a confirmation screen. After this step, you can go back to .oasis and start using it by selecting your project.

After the first authentication, you will find the Login/Select project page where you should input your Project ID (1), established previously with your Manager. It's possible to Start a new Workspace session (2) or open a Workspace session that was previously saved (3).

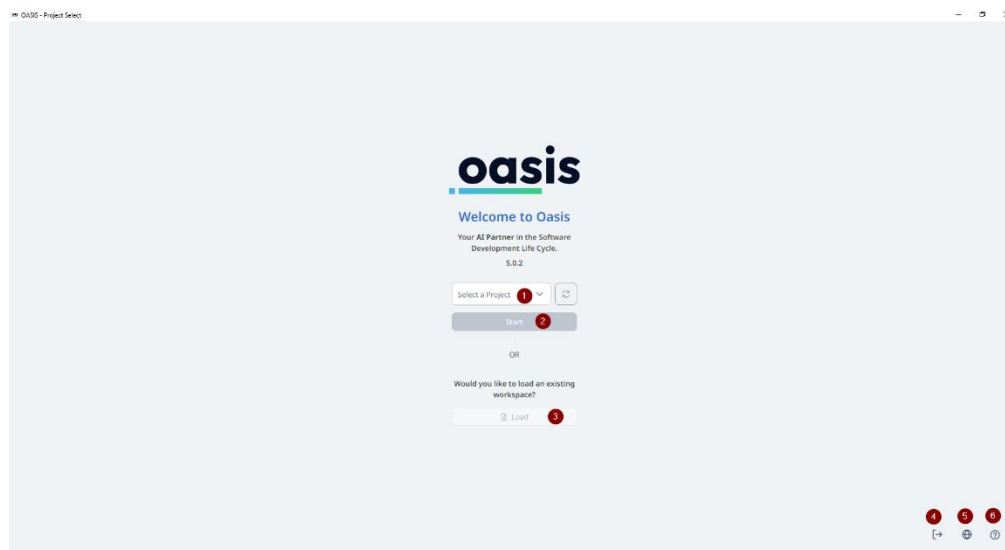


(4) The Log-out button enables the log-out and redirects the user back to the OKTA authentication screen.

(5) The Language button opens a drop-down menu where it's possible to change the interface language between English (EN), Portuguese (PT) and Spanish (ES).

(6) The Help button displays a drop-down with the following options:

- *'Documentation'* button - Clicking this button directly opens SharePoint's non-technical documentation for users (user guide and quick help).
- *'Support'* button - Clicking this button opens a new message directly in the email application with the support email filled in. In the body of the email is a description of what should be in the support request email.
- *'Feedback'* button - Clicking this button opens a new message directly in the email application with the support email filled in.

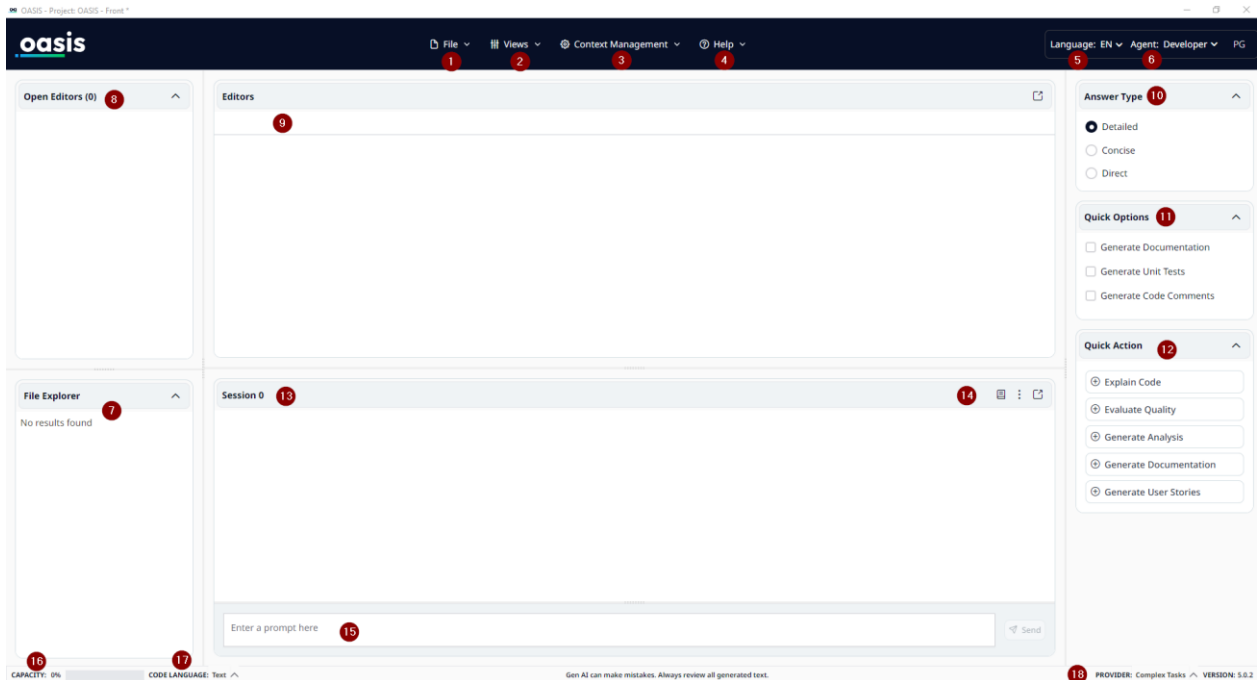


The Homepage interface of **aXet.oasis** is displayed in the previous image, and the explanation for each point highlighted follows:


1. File. Clicking on this button will allow three different main options:

- **Open Folder:** to open a folder directory with the files that will be used to input information to the **.oasis** (example: .txt, code files). This location will be considered the Current Workspace Directory to be used by the AI and is available in the left-hand section of the *'File Explorer'*.
- **Workspace** to manage the session with the following sub-menu options:
 - **'Save'** and **'Save As...'** : enables the saving of the current state of the entire workspace, including open files, saved parameters and everything that has been written in the sessions.

- **‘Close’**: the application closes the workspace and returns to the main login screen.
- **‘New’**: similarly to the ‘Close’ button, it closes the workspace and returns to the main login screen, to enable the creation of a new workspace session.
- It has the possibility to close the program **Exit**.

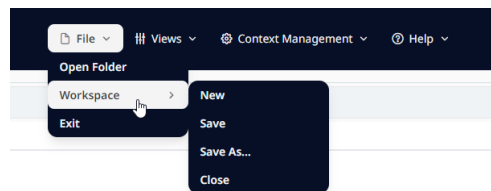


2. Views. It enables the removal or addition of each one of the working spaces available inside **.oasis** (*Chat AI* and *Explorer Studio*). The individual working panels (*File explorer*, *Editors*, *Session* and *Quick Options*) can be hidden independently as well. Additionally, the main orientation of the working spaces can be switched to ‘vertical’ or ‘horizontal’. These configurations allow **.oasis** to adapt to the user’s preference and task at hand. For example, when there are no files in the workspace, it’s possible to remove the “*Explorer Studio*” working space from your interface (*File Explorer* and *Editors* panels are hidden) for better visibility of the information. The “*Explorer Studio*” area can be re-added as needed through this button.

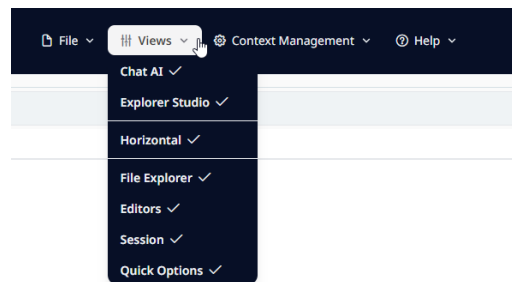


3. Context Management: The main way to configure what **aXet.oasis** is aware of and how it behaves. Two options are presented here:

1. **Parameters:** The parameters inform the model on the context of the project and tasks to perform, while also enabling the creation of rules for the AI to follow. This option opens a modal window with different sections available for documentation : Global, Requirements, Architecture, Technologies, Current Context, Rules.


2. **RAG:** Retrieval-Augmented Generation enables Oasis to produce more accurate and context-specific answers with the capacity to look at additional internal information from a knowledge base uploaded by the users for construction of the answers provided. This option opens a modal window with instructions on how to upload the intended files.

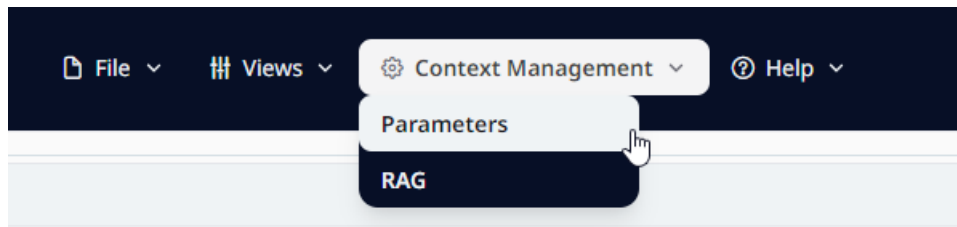


4. **Help.** A fast way to get to the documentation (user guide and prompting help). You can also contact the support team about issues you might have (as like usability of. **oasis**, PoC actions, or bugs/errors) or to give feedback about your experience with the app. In case you are submitting a bug be sure to add the application version, annex the session and a full print screen with the description of the bug.

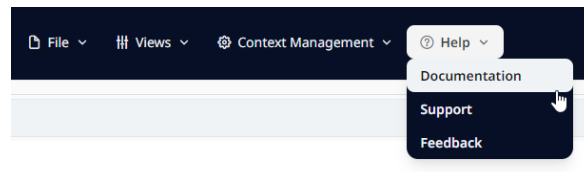


5. **Language.** Possibility to change the language of interface between English (EN), Portuguese (PT) and Spanish (ES).
6. **Agent** (also known as **Persona**). The persona is an option that allows you to configure how **aXet.oasis** behaves, changing the type of responses and content according to the mindset or personality it should adopt. Available possibilities are Analyst, Architect, Business Analyst, DB Admin, Developer, DevOps Specialist, Migrate, Project Manager, QA Tester, Researcher, Security Specialist, Unit Tester.
7. **File Explorer.** It shows what is inside of the folder that the user decided to open on File (1) > Open Folder (title of the panel "*File Explorer (<folder-name>)*"). In this component you have the possibility to search for files in the open folder, to close the open folder, to refresh the open folder and to collapse all sub-folders displayed.

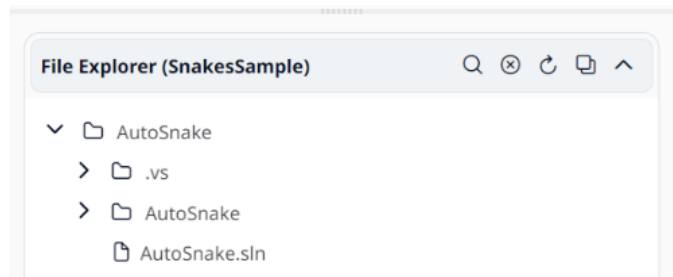

8. Open Editors. It shows the name of the files (code, .txt, etc) that you decided to select on “*File Explorer*” (7) that will be displayed for view only on “*Editors*”(9) (title of the panel “*Open Editors (<number-of-open-files>)*”). In this component you have the possibility to close all files and refresh all files as well.



9. Editors. It displays the files previously selected on ‘*File Explorer*’, which are opened on the *Open Editors* (8) panel, enabling the visualization of the content of the opened files. Additionally, **aXet.oasis** will use these files as input to the prompts performed, so that it can provide better answers.

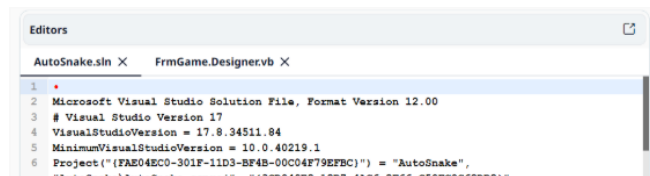

10. Answer type. This configuration will help **aXet.oasis** to know how to format the answer it returns, with more detailed explanations (Detailed option) or straightforward answers with little detail (Direct option). A middle-ground option is available for straightforward answers with summarized details (Concise option).


11. Quick Options. This section enables the quick configuration of the Rules area in the Parameters, with some very common rules available to select.

12. Quick Action. This section allows the quick selection of a pre-written prompt message to be immediately sent to the model in the session.

13. ChatAI/Sessions. Workspace area which contains the session(s), and the chat box where the interaction with the AI model occurs.


14. Session options: menu that contains options to control the sessions, Assisted mode configuration, Tools functionality and RAG usage.

- **Session options:** the More options button opens a menu on the bar that enables the following functionalities:
 - **Rename session:** to rename the current session of ChatAI interaction.
 - **New session:** to open a new session of ChatAI interaction, independent from the one already in use (independent conversation, independent capacity).
 - **New session (copy chat history):** to open a new session of ChatAI interaction, independent from the one already in use but containing the chat history of the selected session.
 - **Close session:** when there are multiple sessions, this button enables the closing of the currently selected session.
 - **Branch out:** similar to the option '*New session (copy chat history)*' but with the capability to merge the newly created branch to the main session (by using the *Solve session* option) or discard it (by using the *Close* option). One can open multiple branches for one specific session and branch out sessions that are already branches from other main sessions. While a child session branch is active, the main session is blocked for edition. The name of a branched out session is "<Name-of-main-session>.<number-of-active-branch-out>" (e.g. 'Main session.1', 'Main session.2' for 2 branches of the same 'Main session'; 'Main session.1.1' for a branch out of 'Main session.1'). This is a useful feature where .oasis uses the information from the main conversation, allowing the user to explore new ideas from that point, without affecting the original conversation.

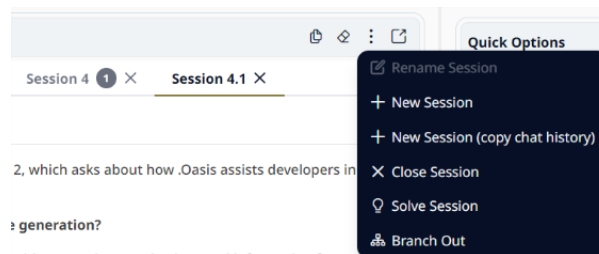


- **Assisted Mode.** A configurable option for assisted chat, i.e. there will be two AI agents interacting with each other within the interface, simulating an ongoing conversation on a specific topic. When assisted chat is turned on the models will continuously try to solve the provided problem. They will chat between each other. You can pause their conversation and send a message yourself. While the conversation is ongoing you cannot edit the opened files, context parameters, and the roles.

- **Autonomous Chat / Tools:** A configurable option that allows **aXet.oasis** to perform file and folder operations directly from chat instructions when active. With Autonomous Chat you can create folders and files in the current workspace directory using natural language. When operations finish, a detailed execution report appears in the chat, showing all tool call results and direct access buttons to the created files. All actions are limited to the open folder in the workspace for security. Autonomous Chat is only available if a folder is open in File Explorer and only one session is active.



- **RAG mode:** a configurable option that enables **aXet.oasis** to consult the uploaded knowledge base in RAG (3). With this option ON, the answers provided contain references to snippets of the text in the documents consulted, and are more context-specific.



15. Prompt input. Chat box where the prompt/request is made by the user, i.e. where the interaction with the AI model occurs. This interaction can be done through the button 'Send' or by using the shortcut 'Ctrl + Enter'.

16. Capacity (bar). The capacity bar shows how much of the context window is currently used by the prompt, chat history, context parameters and files opened in the editor. As the chat history grows it will eventually become larger than the model's capacity, so aXet.oasis uses several strategies to manage the chat history. If the input background is already over the model's limit of tokens it will give a text error message. The model's provided capacity is 128k tokens (GPT-4o, GPT-4o mini and GPT 4.1) and 1 million tokens (GPT-4.1 nano).

17. Code Language. A dropdown to select the how the information on the open file, usually code, is displayed in the 'Editors' (9.). If the user selects the code language according to the file opened it will change the setup of colours according to the code properties.

18. Provider. An option to select the underlying model that **aXet.oasis** uses. The models might be hosted on different platforms and have differing abilities, speed or capacity. Currently there are four available options: GPT 4o, GPT 4o mini, GPT 4.1 and GPT 4.1 nano

The parameters will open a modal that will have the following interface:

19. Sections of Context Parameters. In each section, you will have the opportunity to provide specific context that will guide the model (examples available in the + button). This information is crucial for obtaining a more accurate and relevant response from the AI.

20. Clear button. Clicking this button will delete the text that has been entered in the selected section.

21. Clear all button. Clicking this button will remove all text from every section within the 'Context Parameters'.

22. Save button. This button will store any information that the user has updated or entered in the parameter sections and then close the modal window.

23. Cancel button. This button allows the user to abort their current actions and close the modal window without making any changes.

The screenshot shows a modal window titled 'Context Parameters' with a tabbed interface. The tabs are: Global (selected), Requirements, Architecture, Technologies, Current Context, and Rules. The 'Global' tab is active, displaying a text input area with a placeholder: 'A high-level overview of the project or context in which you are working, or in which the code will be used'. A '+' button is located at the top right of the text area. At the bottom of the modal, there are four buttons: 'Clear' (labeled 20), 'Clear All' (labeled 21), 'Save' (labeled 22), and 'Cancel' (labeled 23).

aXet.oasis - User guide

aXet.oasis - Agent Role / Persona


The Roles are the simplest way to configure how aXet.oasis behaves, with what it responds and with how it responds. The 'Assistant Role' changes what the model will try to do.

Personas like Developer will try to generate code, a persona like Analyst is less likely to respond directly with code. You should select the Assistant Agent Role that best suits the needs of the project or request you are making.

These are the roles you can select, and the descriptions of their main functions/objectives:

- **Developer:** Generate code based on technical requirements, use case, description, architecture or any other valid input.
- **Business Analyst:** Generate detailed descriptions and documentation of a software system's intended behaviour. It focuses on how the system should work from a user's perspective, outlining its features, functions, and user interactions.
- **Analyst:** Generate technical documentation and comments for the code systems provided.
- **Architect:** Generate solution architecture proposal based on project requirements. Can be used to brainstorm with human architects to achieve the best solution.
- **Migrator:** Assist in the translation of code from one programming language to another, or code modernization, maintaining logical consistency.
- **Unit Tester:** Create unit tests based on code, improving test coverage and reducing development time.
- **QA Tester:** Enhance the software testing process by leveraging AI to assess requirements for testability, generate comprehensive test cases and detailed test plans directly from requirements, create secure and relevant test data, and provide automated test scripts based on detailed test specifications, ensuring all scenarios, edge cases, and test objectives are covered.
- **DevOps Specialist:** Generate solution to manage deployment processes, optimize infrastructure, and ensure continuous integration and delivery (CI/CD).

- **Security Specialist:** Generate technical solutions to implement security measures to protect software from vulnerabilities, conducting security assessments, and ensuring the software complies with security standards.
- **Project Manager:** Assist in developing and configuring a project from initiation to completion, managing timelines, resources, and budgets to ensure that project objectives align with business goals.
- **DB Admin:** Assist to designing, implementing, and maintaining database systems to ensure data integrity, security, and optimal performance.
- **Research:** Assist in the design, execution, and refinement of research initiatives to foster innovation on SDLC initiatives, to enhance knowledge discovery, and drive impactful solutions.
- **Linguist:** Provide clear, detailed, and accessible explanations to simplify complex concepts, ensuring understanding and offering step-by-step support to complete tasks effectively.

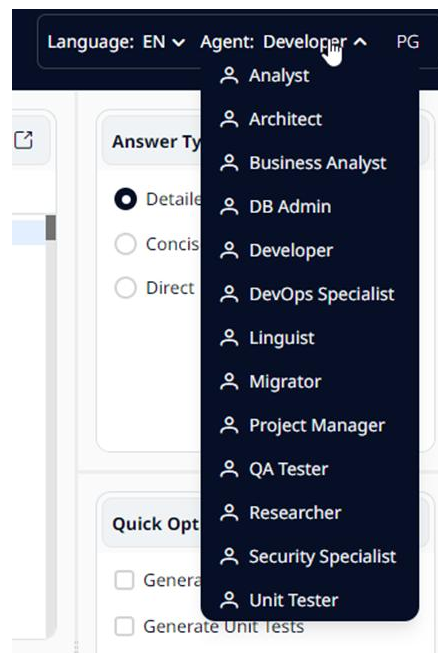


aXet.oasis - Answer type

The **Answer type** will change how the model addresses you, by changing the format of the answer it will provide.

- **Detailed:** the answers will be detailed and complete, with step-by-step explanations of the code or the solution to the problem posed.

- **Concise:** the answers will be straightforward, presenting and explaining the code, but in a more summarized way.
- **Direct:** the answers will be more direct and simplified (e.g. code only), without explanations or additional details about the question.

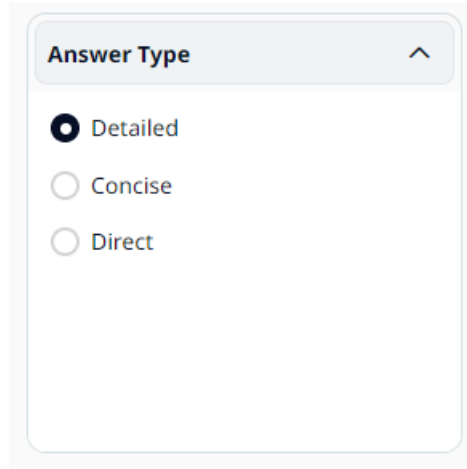A screenshot of a user interface element titled "Answer Type" with an upward-pointing chevron icon. It contains three radio button options: "Detailed" (which is selected), "Concise", and "Direct".

aXet.oasis - Context Parameters

The '*Context Parameters*' are at the heart of using **aXet.oasis**, they allow you to provide the model information and to configure its behaviour.

- **Global:** High-level overview of the project or context in which you are working, or in which the code will be used. This might include the project's goals, the target audience, the type of software being developed the problem it aims to solve, or any other broad information that sets the stage for the specific work you are doing. It's not meant for specific questions or code snippets, but rather to provide a summary of the project's goals, scope, and any other relevant information that applies to the entire project.
- **Requirements:** Details about what the software needs to do, the constraints it must operate within, or the features it must have. Requirements are critical as they guide the development process and ensure that the final product meets the needs of the users or stakeholders.
- **Architecture:** Design decisions, including the definition of system components, quality attributes, and guiding principles.
- **Technologies:** Details about the technology stack, programming languages, and libraries.


- **Current Context:** Extra information that should be kept on **.oasis**mind when working on the specific tasks. It can contain relevant information, instructions, guidelines or status information.
- **Rules:** Any constraints, requirements, or specific guidelines that must be followed when developing code or providing solutions. This section is crucial as it sets the boundaries within which the solution must be crafted.

aXet.oasis - Opened Files

The Opened files are displayed in **aXet.oasis**, allowing you to easily understand your code or other files.


Currently, **aXet.oasis** has the capacity to read and interpret the following files:

- **Text-based files and code files** (e.g. .txt, .c, .py, .cs, js, .html etc.), enabling you to work with structured or unstructured textual and programming data with ease and precision.
 - Use cases include:
 - Extracting meaningful insights, keywords, or relationships from text files such as reports, logs, or documentation.
 - Analyzing and comprehending code files to identify structures, dependencies, or errors, and providing optimization suggestions.
 - Parsing configuration files or scripts to validate syntax and ensure correct formatting.
 - Assisting in debugging by pinpointing issues or inefficiencies in code and logs.
 - Enhancing productivity in software development by streamlining code review processes or summarizing long sections of source code.

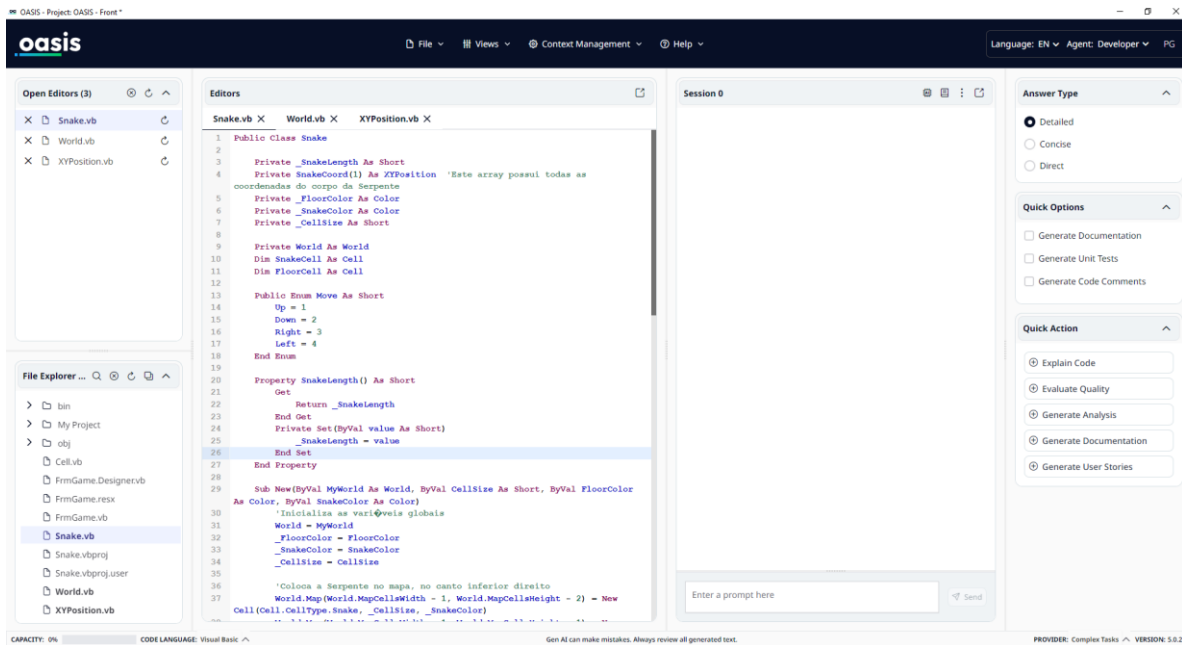


- **Image files** (e.g. JPEG, PNG, and GIF), including diagrams, charts, and design schematics, empowering you to work with visual resources as seamlessly as with text-based files.
- Use cases include:
 - Extracting text, metadata, and relationships from diagrams and workflows.
 - Understanding UI/UX wireframes or designs during product development.
 - Analyzing charts for trends, patterns, or insights.

- The Text View mode allows you to **edit the textual content extracted from PDF files**. This functionality addresses the limitations of the PDF text extraction process, empowering you to refine and improve the quality of the extracted text for enhanced GenAI analysis. Edited text content in the "Text viewer" is saved in the workspace file (*.oaw format) and doesn't alter the original file.

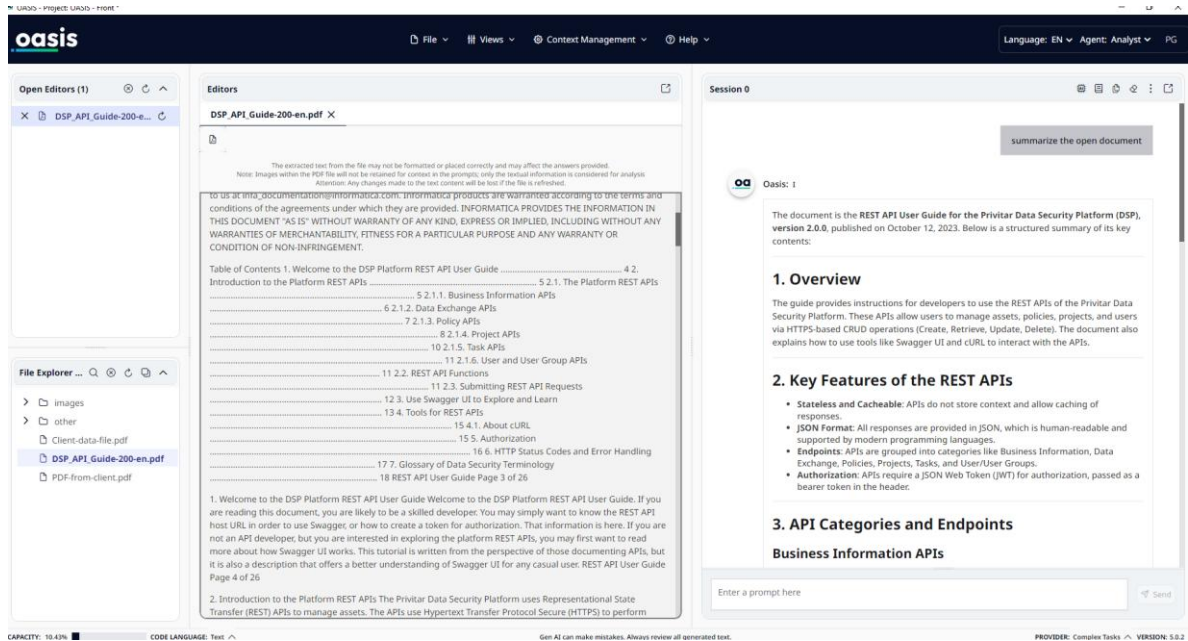

When a file is edited in the Text View, a small black circle appears next to its name in the Open Editors panel and Editors tab, making it easy to identify files with unsaved changes. The marker disappears once the file is refreshed.


Undo and redo buttons are available in the Text View toolbar, with keyboard shortcuts (Ctrl+Z for undo, Ctrl+Y for redo). These buttons are only active when the corresponding action is possible and are reset after a file refresh or when a file is first opened.

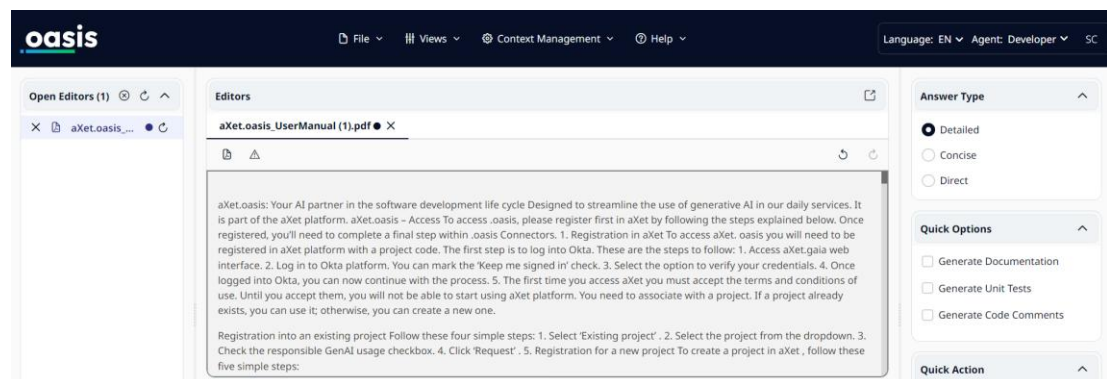

aXet.oasis - Capacity Bar

The “*Capacity Bar*” shows how much of the context window is currently used by the prompt, chat history, context parameters and files opened in the editor. As the chat history grows it would eventually become larger than the model's capacity, so **.oasis** uses several strategies to manage the chat history. Therefore, for a large enough conversation some messages will not be shown to the model (they will still be in the chat history in **.oasis**). This can result in the used capacity reducing after some messages.

If you want to keep the history for longer you can try to remove less important files from the open editors, or when adding a file removing another.

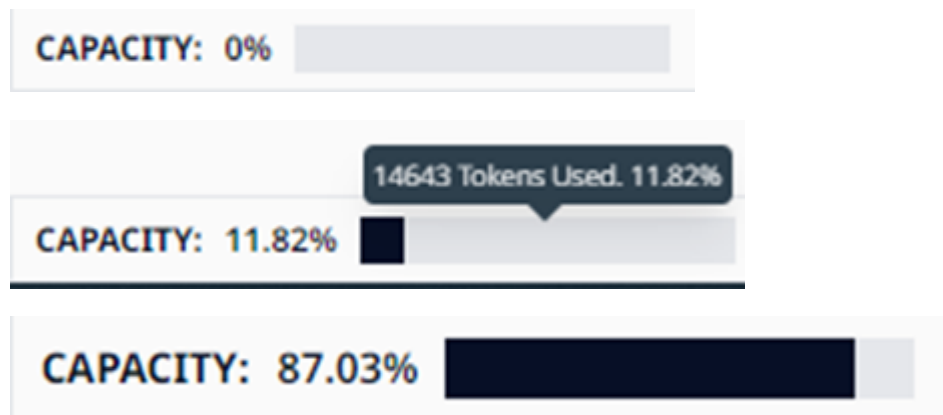

aXet.oasis – Contacts

On this section you can find the contacts of people responsible for **aXet.oasis**. In case of any support or request you can send an email for the following address: oasis.support.team@emeal.nttdata.com.

aXet.oasis - What is Retrieval-Augmented Generation (RAG) and How to Use It

Understanding RAG

Retrieval-Augmented Generation (RAG) is a powerful method that enhances large language models (LLMs) by providing them with specific, targeted data to improve

their responses. Instead of relying solely on the LLM's pre-trained information, RAG allows you to upload your own documents, which the model uses as a source of knowledge. This approach ensures that the responses are more accurate, context-specific, and relevant to the content you provided.

In other words, by using RAG, you create a personalized "knowledge base" that the LLM consults to answer your queries. This is especially useful when the information you need is detailed, niche, or frequently updated — beyond what the language model might already know.

When you activate RAG on **aXet.oasis**, the system does two things:

1. Combines its built-in intelligence and preconfigured settings (Parameters and open files).
2. Utilizes additional data from the custom-made knowledge base you upload.

The result? More precise and context-aware answers tailored to your specific needs.

When Should You Use RAG?

- **When LLM Answers Need Specific Tailored Information:** Use RAG when a standard language model's response might not include nuanced or detailed knowledge specific to your area.
- **For Sensitive or Specialist Data:** Incorporate RAG when you're working with proprietary or specialist content that the AI won't know otherwise.
- **To Keep Context Relevant:** RAG ensures that your queries focus on a specific context relevant to your uploaded data, limiting unnecessary or overly broad answers.

How Does RAG Work?

1. **Document Upload:** You start by uploading documents to the RAG system to your project. These could be files like text files, PDFs, Word documents (DOCX), or PowerPoint presentations (PPT), though only the text content will be extracted to train the AI. For best results, documents must be well-structured and concise. The documents uploaded are available to all users in the project to use in the RAG.
2. **Indexing:** Once uploaded, the documents are processed and indexed. This is the step where the system organizes the content to make it searchable and easier to retrieve when needed.

3. **Context Building:** During interactions with the AI, turn on the RAG mode to enable the RAG system to dynamically search your uploaded documents for relevant sections related to your queries. It includes only the necessary fragments in its analysis, ensuring the response aligns with the specific context.
4. **Response Generation:** The AI combines the retrieved fragments with its pre-trained knowledge to craft a complete and accurate response. After the answer is presented, the system provides references to show which parts of your uploaded documents were used.

The documents are uploaded per project, so all affiliated users will be able to use them when RAG mode is enabled.

How to Use RAG in the Application

1. Uploading Documents.

- Go to the **Context Management** button on the homepage.
- Select the **RAG** option from the dropdown menu.
- In the **Upload Documents** area, use the drag-and-drop space or click to open a file selection window to choose the files to upload. Beware of the project initially selected in the Log-in page when uploading, as the documents will be made available for the entire project user list.
- You can use the Cancel button to clear the entire list of files to upload or remove them individually as well from the list.
- Click the Upload button to initiate the sending of the files to the RAG system.
- Monitor the upload process in the progress bar. Any errors (e.g., unsupported file type or invalid size) will be listed.

Tip: Use the "Document Guidelines" button for practical advice on structuring files for better performance during indexing and response generation.

2. Managing Uploaded Files


- After clicking Upload, the sent files are displayed in the **Document Overview** table.
- The table shows:


- Tip: Use the Refresh button in the Documents Overview table to update the list and check the latest indexing status, especially if there are delays in the process. While the documents are being indexed you can Close the window and resume your work in the open sessions.***



- With RAG active:
 - The AI responds to your questions by referencing your uploaded files.
 - Relevant documents are intelligently identified and used to craft responses.
 - Fragments of the documents used are shown below the response. Clicking on references allows you to view the exact text in a pop-up window.

Important: If you have images open in the editor, they will not contribute to the response generation. You'll receive a warning to notify you of this restriction.

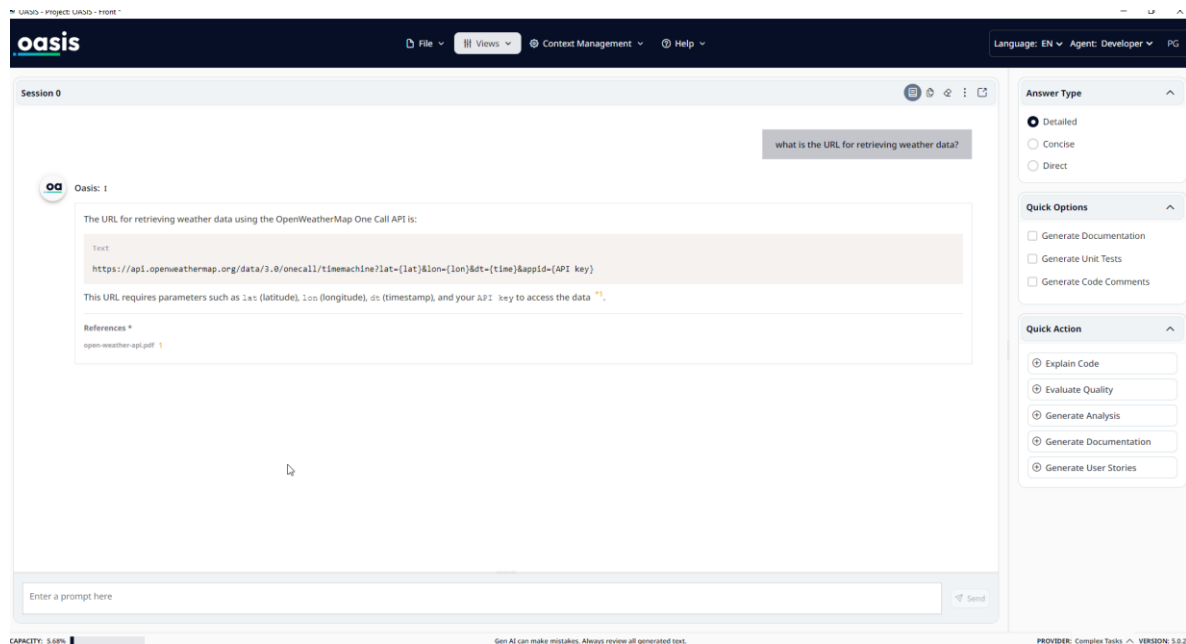

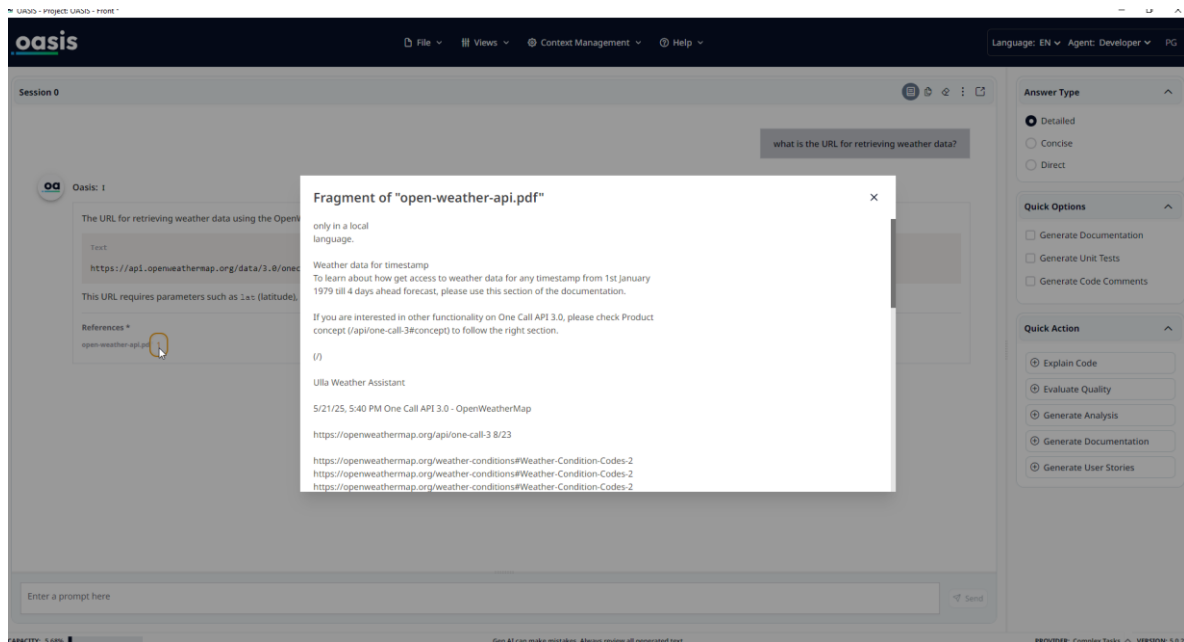

4. Removing or Managing Files

- Files can be deleted individually from the Documents Overview table, at any status of indexation.
- Remember: Files uploaded will remain available and are **not subject to automatic deletion after 30 days**.

5. Optimizing Documents for Best Results

To get the best responses from the AI, ensure your documents are:

- Well-structured, with clear sections, headers, and concise language.
- Relevant to the context you'll be discussing with the AI.
- Free of unnecessary or redundant information that might confuse the model.

aXet.oasis – FAQs

What is aXet.oasis?

aXet.oasis is a sophisticated Natural Language Studio designed to facilitate productivity across all phases of the Software Development Life Cycle (SDLC). Embracing a Generative AI First approach, this platform serves as the Home Environment for all team members, regardless of their role, enabling them to produce project increments and achieve end-to-end results efficiently.


Key features of **aXet.oasis** include:

- **Role Simulation:** Acts as a virtual assistant, or team of assistants, that can take on complete tasks or components within a project. It provides functionalities akin to having an expert team member, leveraging advanced AI capabilities.
- **Context and Communication:** Users can brief the platform comprehensively about the project context and expected outcomes. From there, they can engage in natural language queries to gather information or request specific outputs.
- **Versatile Outputs:** **aXet.oasis** can generate functional documentation, technical specifications, code, tests, and other deliverables necessary across a wide array of technological scenarios.

By integrating the latest models, technologies, and practices, **aXet.oasis** ensures users gain a competitive edge and empowers less experienced individuals to become fully productive and autonomous in their tasks.

What can I do with aXet.oasis?

Once **aXet.oasis** is tailored to your project's context, it can be utilized either from the project's inception or at any phase within the Software Development Life Cycle (SDLC). Using **aXet.oasis** implies adopting a new mindset on approaching projects. Instead of manually undertaking every task, you can delegate the majority of the intensive work to AI. This allows team members to concentrate on aspects that add business value, apply their technical expertise, and enhance unique features. You can produce outcomes on all phases of SDLC:

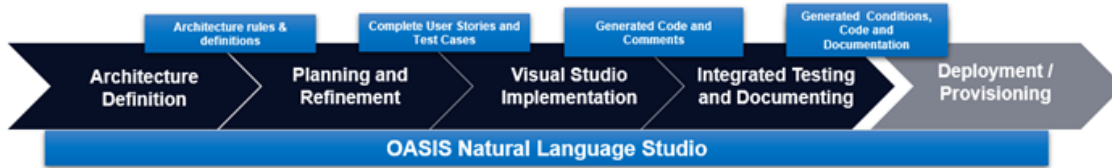


On what use cases can I use it?

aXet.oasis is a versatile tool that can be applied successfully across various scenarios. Its functionality closely resembles that of having an expert collaborator by your side. If you can articulate your task or project to a person and expect them to perform actions based on that explanation, it is highly likely that **aXet.oasis** can replicate these tasks effectively. Among the diverse applications, **aXet.oasis** has demonstrated notable success across a range of use cases. For detailed information and a full list of success stories, please visit:

<https://axet.nttdata.com/home/usecases>

I - For Existing Software

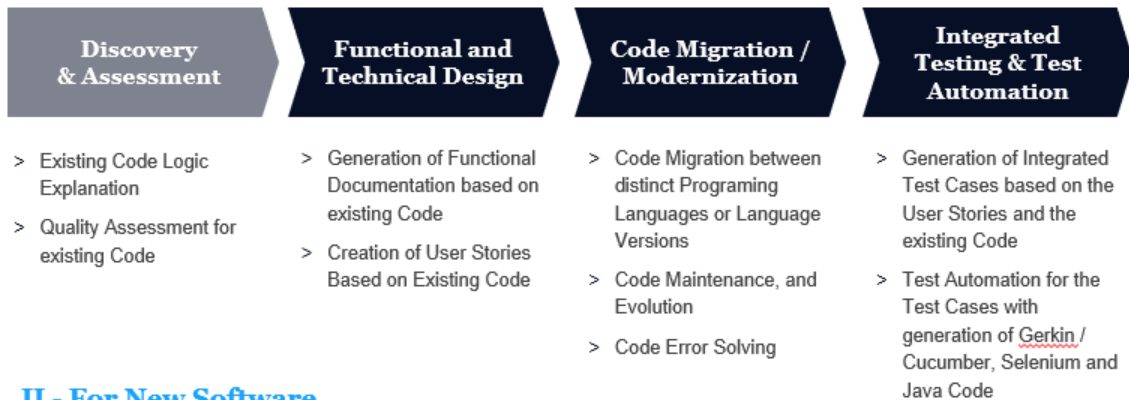

II - For New Software



How can I have access to aXet.oasis?

To use **aXet.oasis**, you must be registered in a project. More information [here](#).

Once your registration in aXet is complete, you will be able to download aXet.oasis installer at: [aXet](#).

For guidance, you can consult the **aXet.oasis** user manual.

What is considered improper use of the asset? What consequences might there be?

aXet.oasis must only be used for the projects for which you are authorized to do so, and only for the acceptable use cases highlighted in [Internal recommendations on the use of Generative AI](#). For more information see: [Internal Transformation Corporate Whitepaper](#). Improper use or attempts at circumventing security measures will result in loss of access.

How can I, as a manager, have access to aXet.oasis and to a project?

As a manager, you can access **aXet.oasis** and manage project membership by following these steps:

1. Accessing Projects:

- Go to aXet admin panel <https://axet.nttdata.com/core/>.
- Log in using your Okta credentials.
- Register in aXet project. More information [here](#).

2. Granting Access to Team Members:

- As a project manager, you can provide access to team members in two ways:
 - You may invite team members directly, which grants them immediate access to the project;
 - Team members may request access. In this case, you are responsible for reviewing each request and approving or denying access as appropriate.

For additional support, please consult the platform's help documentation available at [aXet](#) or contact the support team.

Where can I download aXet.oasis?

To install **aXet.oasis**, please visit the official aXet portal at [aXet](#). There, you can quickly locate and download the latest version of the **aXet.oasis** installer for Windows and MacOS. If you need any assistance or encounter difficulties during the download process, please consult the support resources provided on the portal.

I am working with MacOS and cannot install because it displays the error message “‘oasis’ is damaged and can’t be opened. You should move it to the Bin”.

Please follow these instructions:

1. Execute the DMG File and install OASIS (Drag to Applications Icon).
2. Open Terminal.
3. Execute the following command: **sudo xattr -r -d com.apple.quarantine /Applications/Oasis.app.**
4. Put your password when prompted.
5. Close Terminal.

aXet.oasis – Glossary

This is a glossary of relevant terms:

- **Assisted Mode.** An option for assisted chat. When assisted chat is turned on the models will continuously try to solve the provided problem. They will chat between each other. You can pause their conversation and send a message yourself. While the conversation is going you cannot edit the opened files, context parameters, and the roles.
- **Capacity bar.** Displays how much of the model's capacity is currently occupied by the opened files, context parameters and chat history. This is only updated after a reply is received. If you try to send more information than the model can handle you will get an error.
- **Context Parameters.** The main way for you to configure what aXet.oasis knows and how it behaves. They inform the model on the project and allow you to create rules for the assistant to follow.
- **Deep Learning.** Deep Learning is a type of Machine Learning that uses complex neural networks with three or more layers. These neural networks attempt to emulate the behavior of the human brain—though far from matching its capacity—but allow it to "learn" from large amounts of data. While a single-layer neural network can make approximate predictions, additional hidden layers add complexity to the model and help optimize its accuracy.
- **Fine-Tuning.** Fine-Tuning is a training technique that involves reusing predefined and pre-trained neural network architectures. It is a process where a "fine-tuning" of some layers of the network is performed to obtain the desired outputs. In other words, certain representations of the pre-trained model are slightly adjusted to make it more relevant to the problem to be solved. This avoids training the network from scratch.
- **Generative AI.** Generative Artificial Intelligence is a field of Artificial Intelligence that encompasses systems and algorithms capable of generating new, original, and creative content. This type of AI learns from enormous datasets and generates new similar content (text, images, music, and other types of data). It falls within a specific type of Machine Learning known as Deep Learning, which is based on the use of deep neural networks. These networks are configured in various architectures, such as Generative Adversarial Networks (GANs) or diffusion models based on Transformers.

- **LM and LLM – Large Language Models.** Language models (LM) are machine learning models that predict the next word in a sentence, considering the context of previous words. They are based on a probabilistic description of language phenomena. A colossal language model or LLM, also called a large language model, is a language model consisting of a neural network with many parameters, trained on large amounts of unlabeled text through self-supervised or semi-supervised learning. These models can be used in a wide range of natural language processing tasks, such as text creation, document summarization, or language translation.
- **Machine Learning.** Machine Learning is a branch of computer science that aims to enable computers to perform tasks without being explicitly programmed to do so. These are models that can gradually improve their accuracy based on the data provided. Its most basic application is the practice of using algorithms to process data, learn from it, and then be able to make a prediction or suggestion about something. It comprises three categories of learning: supervised, unsupervised, and reinforcement learning.
- **Neural Networks.** Neural networks are a type of computational model that teaches machines to process data in a way inspired by the human brain. It consists of a set of units, called artificial neurons, connected to transmit signals. The input information passes through the neural network (where it undergoes various operations), producing output values.
- **NLP.** Natural Language Processing (NLP) is a field within artificial intelligence and applied linguistics that studies interactions using natural language between humans and machines. It focuses on processing human communications, breaking them into parts, and identifying the most relevant elements of the message. With Natural Language Understanding and Generation, it aims for machines to understand, interpret, and manipulate human language.
- **Open AI.** Open AI is an artificial intelligence (AI) research lab founded in 2015 that operates with the declared intention of promoting and developing friendly and democratized AI. OpenAI systems run on a supercomputing platform based on Microsoft's Azure, and some of its best-known works are generative AIs like ChatGPT (the leading conversational AI) or DALL·E (the AI for generating images from natural language).
- **Persona/Assistant Role** The persona and roles are option that allow you to configure how the aXet.oasis behaves, changing the type of responses, length and content.

- **Prompts.** A "prompt" in AI refers to an instruction or request that a user makes to an LLM, chatbot, or AI model. This instruction can come not only in natural language (text or audio) but also in other formats like images or code. The careful and concise preparation of these instructions is known as "prompting," and it ultimately aims to obtain the desired results or responses from LLMs or generative models of images and videos.
- **Provider.** The provider is the company that gives us access to their LLM's, this is a 'model as a service' paradigm, where the provider creates the model and uses their hardware to run the inference, and we use the model paying only for the tokens consumed and generated. In aXet.oasis you have several providers and models available.
- **RAG.** Retrieval-Augmented Generation (RAG) is a methodology to optimize LLMs so that they take into account a reference knowledge base when generating responses. This way, with RAG, we augment LLMs' capabilities with internal, more current, or specific data.
- **Reinforcement Learning.** Reinforcement Learning is a type of learning in ML models where the machine is guided to learn from the repetition of actions and associated rewards. The agent, representing the machine, takes actions in an environment and receives rewards when correct decisions are made. Over time, the agent learns to choose the correct actions to maximize its reward. Reinforcement Learning from Human Feedback is the technique behind large language models like ChatGPT.
- **Supervised Learning.** Supervised Learning is a type of learning in Machine Learning models that relies on labeled data and has high accuracy and easily interpretable results, which is why it is widely used in industry. Its main drawback is that it requires data to be previously labeled (which can be costly or unfeasible in many cases).
- **Token.** In the context of large language models or LLMs, a token is a basic unit of information for text processing. These tokens generally correspond to words or phrases, but they can also be punctuation marks or numbers. Transforming text into chains of tokens allows LLMs to process user prompts and generate corresponding responses. A model like GPT-3.5 could handle 4,096 tokens or around 8,000 words. The number of tokens processed in an input grows as more complex LLMs are trained.
- **Tools/Auto CRUD** An option to enable/disable the tools. The tools allow aXet.oasis to automatically create files and folders, run code and commands. If this enabled the generated code will be added to files and tests will be run, allowing the model to quickly debug the generated code. Note that this may

result in unexpected changes in your files but only in the opened folder. Back up the opened folder to ensure the continuity of important data.

- **Transformer.** It is a neural network architecture that has served as the basis for deep learning models used in modern generative AI models. Transformers specialize in processing sequential information, such as natural language, and for this, they employ the self-attention mechanism, where different weights are given to each part of the input. These models take a sentence in the form of a sequence of vectors, convert it into an encoded vector, which is then decoded into an output sequence. This architecture was proposed by a group of Google researchers in 2017, in the seminal paper "Attention is all you need."
- **Unsupervised Learning.** Unsupervised Learning is a type of learning in ML models that uses unlabeled data and, unlike Supervised Learning models, can detect hidden patterns in the data without human intervention. This includes clustering algorithms, for example, to group customers into segments and detect similar behaviors.