
TASK S4.01

SQL Modeling

Level 1

Descàrrega els arxius CSV, estudia'ls i dissenya una base de dades amb un esquema d'estrella que contingui, almenys 4 taules de les quals puguis realitzar les següents consultes:

Database 'starmarketplace'

Database design

The database will have the name 'starmarketplace', as the statement asks I will build the DB from the CSVs that are provided to us. As in the previous exercise I will consider that it is a database of a marketplace. We are asked to design the DB with a star scheme that contains at least 4 tables. Analyzing the CSV files I see that the fact table, the central DB is 'transactions' since analyzed in detail is the one that has the greatest cardinality and also the one that contains the Foreign Key (card_id, business_id, product_ids and user_id) of the rest of the tables, although we have not yet declared the relationships.

The tables (companies, credit_cards, products, european_users, american_users) are the dimension tables of this DB. In these tables, which all have a much lower cardinality , we find fields that offer characteristics about the metrics contained in the table of facts 'transactions'.

For this exercise of creation and design of the DB, and import of the CSV data I will use a ETL method and I will proceed following this steps:

1. Create the DB.
2. Table creation: I will create tables for each CSV without many restrictions and wide margin in the DataType, neither I will designate PK or FK at the starting moment: So I can make an indiscriminate import without risk of errors.

The 'european_users' and 'american-users' tables contain the same type of data and structures, the rational thing is to unify them under a single 'users' table. The fact that the data in these 2 tables are separate by continent, gives us in itself valuable information that we would lose if we limited ourselves to joining them. That is why it is very important to add to the new table a field that I will call 'continent' that will give us the information of whether the customers are European or American.

3. Data import from CSV to DB tables.
4. Data Cleaning & Data Transforming:
I will debug and analyze the tables by adjusting the appropriate DataType and data-length for each field of each table.
5. Data modeling: We will create the relationships between the table of facts and those of dimensions.
6. At the starting moment we will also load the 'products' table & its data to the DB, although we will not yet create the relationships with 'transactions' since it is requested at level 3. Anyway, I have already detected that the relationship between 'transactions' and 'products' is from many to many, in each transaction several products can be purchased and each product can be sold many times (or appear in many transactions). At the appropriate time I will use an intermediate table to create the relationship and convert the relationship ('n' to 'n') into a relationship ('1 a n' vs 'n a 1').

Step 1 - Database creation and initialization

Character definition for enhanced compatibility with “ñ” and other characters in MySQL 8.

```

8  -- Database creation and initialization
9  • CREATE DATABASE starmarketplace
10 CHARACTER SET utf8mb4; -- Character Definition for Enhanced Compatibility with "ñ" and Other Characters in MySQL 8
11
12 • USE starmarketplace
13 ;

```

	Time	Action	Response
✓ 1	01:00:01	CREATE DATABASE starmarketplace CHARACTER SET utf8mb4	1 row(s) affected
✓ 2	01:00:01	USE starmarketplace	0 row(s) affected

Step 2 - Table creation:

As a general rule I will create all the fields of all the tables with DataType VARCHAR with this I will avoid errors in the data loading. Later I will adjust the DataType to its real data type. The PK fields, mainly 'id' if its possible I will put them as INT and the other numerical fields I will put it INT, DECIMAL or FLOAT as appropriate or DATE or TIMESTAMP if is date. I also would like to comment that I incorporate the clause “IF NOT EXIST” as a good praxis to avoid any error in case that the table already exists.

‘products’ table - dimension table:

- This table allows us to create the 'id' as INT
- Important to highlight the 'price' field we must load as VARCHAR since the \$ symbol makes it impossible to load as a DECIMAL field

```

17  -- Creation table 'products'
18  • CREATE TABLE IF NOT EXISTS products (
19      id INT,
20      product_name VARCHAR(255),
21      price VARCHAR(255),
22      colour VARCHAR(50),
23      weight VARCHAR(50),
24      warehouse_id VARCHAR(50)
25  );

```

	Time	Action	Response
✓ 1	21:29:15	CREATE TABLE IF NOT EXISTS pr...	0 row(s) affected

'companies' table - dimension table:

- I have to create the 'company_id' column as a VARCHAR because is alphanumerical.
- The rest will be also VARCHAR.

starmarketplace

- Tables
 - companies**
 - products
- Views

Object Info **Session**

Table: companies

Columns:

Column	DataType
company_id	varchar(15)
company_name	varchar(255)
phone	varchar(150)
email	varchar(150)
country	varchar(150)
website	varchar(255)

```

27  -- Creation table 'companies'
28  CREATE TABLE IF NOT EXISTS companies (
29      company_id VARCHAR(15),
30      company_name VARCHAR(255),
31      phone VARCHAR(150),
32      email VARCHAR(150),
33      country VARCHAR(150),
34      website VARCHAR (255)
35  );
  
```

100% 3:35

Action Output

	Time	Action	Response
1	20:03:04	CREATE TABLE IF NOT EXISTS...	0 row(s) affected

'credit_cards' table - dimension table:

- I have to create the 'company_id' column as a VARCHAR because is alphanumerical.
- The rest will be also VARCHAR. Except 'user_id' & 'cvv' that is clear an INT.

starmarketplace

- Tables
 - companies
 - credit_cards**
 - products
- Views

Object Info **Session**

Table: credit_cards

Columns:

Column	DataType
id	varchar(20)
user_id	int
iban	varchar(50)
pan	varchar(30)
pin	varchar(4)
cvv	int
track1	varchar(255)
track2	varchar(255)
expiring_date	varchar(20)

```

37  -- Creation table 'credit_cards'
38  CREATE TABLE IF NOT EXISTS credit_cards (
39      id VARCHAR(20),
40      user_id int,
41      iban VARCHAR(50),
42      pan VARCHAR(30),
43      pin VARCHAR(4),
44      cvv int,
45      track1 VARCHAR(255),
46      track2 VARCHAR(255),
47      expiring_date VARCHAR(20)
48  );
  
```

100% 3:48

Action Output

	Time	Action	Response
1	20:04:15	CREATE TABLE IF NOT EXISTS...	0 row(s) affected

'users' table - dimension table:

- This point is very important since here I have made the decision to create a single 'users' table that will receive the data of the 'european_users' and 'american_users' tables.
- The justification: they are two tables of identical structure and type of content.
- The problem: if we join the two tables into one without making changes, we would lose relevant information that is the belonging of a country to a continent or another.
- The solution: creation of a new 'continent' field in this 'users' table that, when we import, it will receive the information of the continent to which each country belongs.
- We created the 'id' field as INT since clearly all the data is of this type.
- We create the rest of the fields VARCHAR to avoid errors, later we will convert 'birth-date' to the appropriate type.

starmarketplace

Tables

companies

credit_cards

products

users

Object Info

Session

Table: users

Columns:

id	int
name	varchar(100)
surname	varchar(100)
phone	varchar(150)
email	varchar(150)
birth_date	varchar(100)
continent	varchar(150)
country	varchar(150)
city	varchar(150)
postal_code	varchar(100)
address	varchar(255)

```

-- Creation table 'users'
CREATE TABLE IF NOT EXISTS users (
    id INT,
    `name` VARCHAR(100),
    surname VARCHAR(100),
    phone VARCHAR(150),
    email VARCHAR(150),
    birth_date VARCHAR(100),
    continent VARCHAR(150),
    country VARCHAR(150),
    city VARCHAR(150),
    postal_code VARCHAR(100),
    address VARCHAR(255)
);

```

100%

3:63

Action Output

	Time	Action	Response
✓ 1	20:47:52	CREATE TABLE IF NOT EXISTS users (...	0 row(s) affect

'transactions' table - fact table:

- This is the table of facts. It is the center of the star we want to create.
- It contains the FK and a large number of rows or records, with more possibility of having errors when loading data, for this reason we will use VARCHAR in most columns.
- 'Id' I created it as VARCHAR and later we will find if there are duplicates or errors.
- 'Declined' as it is 0 or 1 I think it as TINYINT
- 'User_id' is clearly an INT

Object Info **Session**

Table: transactions

Columns:

Column	Data Type
id	varchar(255)
card_id	varchar(20)
business_id	varchar(20)
timestamp	varchar(30)
amount	varchar(10)
declined	tinyint
product_ids	varchar(255)
user_id	int
lat	varchar(50)
longitude	varchar(50)

```

64
65  -- Creation table 'transactions'
66  CREATE TABLE IF NOT EXISTS transactions (
67      id VARCHAR(255),
68      card_id VARCHAR(20),
69      business_id VARCHAR(20),
70      `timestamp` VARCHAR(30),
71      amount VARCHAR(10),
72      declined TINYINT,
73      product_ids VARCHAR(255),
74      user_id INT,
75      lat VARCHAR(50),
76      longitude VARCHAR(50)
77  );
  
```

100% 3:77

Action Output

	Time	Action	Response
✓ 1	20:56:51	CREATE TABLE IF NOT EXISTS transac...	0 row(s) affected

Step 3 - Data import

First of all, comment that working with MacOS I have encountered a problem when loading data related to the protection of the MySQL server to data loading.

- Error Code: 1290. The MySQL server is running with the --secure-file-priv option
 - I have investigated it and there could be several causes and possible solutions. In principle there is a restriction of the MySQL server that limits the import only from a specific directory of the system: /usr/local/mysql/data/
 - An easy solution was to copy the CSVs to this directory, but I have opted for an alternative solution that is to modify the configuration of MySQL Workbench, which in my case was also exercising a protection / limitation.
 - I have edited the connection to the MySQL server Workbench settings/advance/others : OPT_LOCAL_INFILE=1
 - I have to run the following statement to tell Workbench that the files will be in local: SET GLOBAL local_infile = 1
 - Finally because of this, now the LOAD call to import will be on local: LOAD DATA LOCAL
- Error Code: 1290.
The MySQL server is running with the --secure-file-priv option.

```
82  -- Command to avoid MySQL restrictions on MacOS
83  • SET GLOBAL local_infile = 1;
84
85  -- Check local_infile
86  • SHOW VARIABLES LIKE 'local_infile';
```

100% 15:80

Result Grid Filter Rows: Search Export:

Variable_name	Value
local_infile	ON

Result 4

Action Output

	Time	Action	Response
✓ 1	21:00:25	SET GLOBAL local_infile = 1	0 row(s) affected
✓ 2	21:00:30	SHOW VARIABLES LIKE 'local_infile'	1 row(s) returned

Below I present the import of tables:

- All imports have been processed correctly with the table design that I have established in the previous point.
- I first present the statement with its result and then a small sample of rows of a SELECT ALL.
- In general: the fields are separated by commas, text by quotation marks and all have a header row
- In certain tables I will comment on specific cases.

Import data to 'products':

-Total 100 rows imported

```

88 -- Import CSV data to 'products'
89 • LOAD DATA LOCAL
90 INFILE '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_4_Modelat_SQL/Dades_originals_S4/products.csv'
91 INTO TABLE products
92 FIELDS TERMINATED BY ','
93 ENCLOSED BY '"'
94 IGNORE 1 ROWS
95 ;

```

100% 1:79

Action Output

	Time	Action	Response	Duration / F
1	21:11:28	LOAD DATA LOCAL INFILE '/Users/roge...	100 row(s) affected Records: 100 Deleted: 0 Skipped: 0 Warnings: 0	0.033 sec

6 • `SELECT * FROM starmarketplace.products;`

100% 1:6

Result Grid Filter Rows: Search Export:

id	product_name	price	colour	weight	warehouse_id
1	Direwolf Stannis	\$161.11	#7c7c7c	1	WH-4
2	Tarly Stark	\$9.24	#919191	2	WH-3
3	duel tourney Lannister	\$171.13	#d8d8d8	1.5	WH-2
4	warden south duel	\$71.89	#111111	3	WH-1
5	skywalker ewok	\$171.22	#dbdbdb	3.2	WH-0
6	dooku solo	\$136.60	#c4c4c4	0.8	WH--1
7	north of Casterly	\$63.33	#b7b7b7	0.6	WH--2
8	Winterfell	\$32.37	#383838	1.4	WH--3
9	Winterfell	\$76.40	#b5b5b5	1.2	WH--4
10	Karstark Dorne	\$119.52	#f4f4f4	2.4	WH--5

Import data to 'companies':

-Total 100 rows imported

```
-- Import CSV data to 'companies'
97  LOAD DATA LOCAL
98  INFILE '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_4_Modelat_SQL/Dades_originals_S4/companies.csv'
99  INTO TABLE companies
100  FIELDS TERMINATED BY ','
101  ENCLOSED BY '"'
102  IGNORE 1 ROWS
103 ;
```

100% 14:94

Action Output

	Time	Action	Response	Duration / Fetch
1	21:25:14	LOAD DATA LOCAL INFILE '/Users/roge...	100 row(s) affected Records: 100 Deleted: 0 Skipped: 0 Warnings: 0	0.055 sec

```
6  SELECT * FROM starmarketplace.companies
7  LIMIT 10;
```

100% 10:7

Result Grid

company_id	company_name	phone	email	country	website
b-2222	Ac Fermentum Incorporated	06 85 56 52 33	donec.porttitor.tellus@yahoo.net	Germany	https://instagram.com/site
b-2226	Magna A Neque Industries	04 14 44 64 62	risus.donec.nibh@icloud.org	Australia	https://whatsapp.com/group/9
b-2230	Fusce Corp.	08 14 97 58 85	risus@protonmail.edu	United States	https://pinterest.com/sub/cars
b-2234	Convallis In Incorporated	06 66 57 29 50	mauris.ut@aol.couk	Germany	https://cnn.com/user/110
b-2238	Ante Iaculis Nec Foundation	08 23 04 99 53	sed.dictum.proin@outlook.ca	New Zealand	https://netflix.com/settings
b-2242	Donec Ltd	01 25 51 37 37	at.iaculis@hotmail.couk	Norway	https://nytimes.com/user/110
b-2246	Sed Nunc Ltd	02 62 64 73 48	nibh@yahoo.org	United Kingdom	https://cnn.com/one
b-2250	Amet Nulla Donec Corporation	07 15 25 14 74	mattis.integer.eu@protonmail.net	Italy	https://netflix.com/sub/cars
b-2254	Nascetur Ridiculus Mus Inc.	06 26 87 61 84	suspendisse.dui@icloud.net	United States	https://ebay.com/sub
b-2258	Vestibulum Lorem PC	02 02 87 33 40	aenean.massa.integer@aol.net	Belgium	https://pinterest.com/sub/cars

Import data to 'credit_cards':

- Total 5000 rows imported

```
106 -- Import CSV data to 'credit_cards'
107 LOAD DATA LOCAL
108 INFILE '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_4_Modelat_SQL/Dades_originals_S4/credit_cards.csv'
109 INTO TABLE credit_cards
110 FIELDS TERMINATED BY ','
111 ENCLOSED BY '"'
112 IGNORE 1 ROWS
113 ;
```

100% 16:102

Action Output

	Time	Action	Response	Duration / Fetch
1	21:26:04	LOAD DATA LOCAL INFILE '/Users/roge...	5000 row(s) affected Records: 5000 Deleted: 0 Skipped: 0 Warnings: 0	0.054 sec

```
6  SELECT * FROM starmarketplace.credit_cards
7  LIMIT 10;
```

100% 1:4

Result Grid

id	user_id	iban	pan	pin	cvv	track1	track2	expiring_date
CcU-2938	275	TR3019503122135768176...	5424465566813633	3257	984	%B8383712448554646^Wovsx...	%B7653863056044187=800716333...	10/30/22
CcU-2945	274	DO2685476374853747521...	5142423821948828	9080	887	%B4621311609958661^Uftuyfs...	%B4149568437843501=510714033...	08/24/23
CcU-2952	273	BG45IVQL52710525608255	4556 453 55 5287	4598	438	%B2183285104307501^Cddyty...	%B6778580257827162=690685974...	06/29/21
CcU-2959	272	CR7242477244335841535	372461377349375	3583	667	%B7281111956795320^Xocddij...	%B4246154489281853=280522391...	02/24/23
CcU-2966	271	BG72LKTQ15627628377363	448566 886747 7265	4900	130	%B4728932322756223^Jhlgs...	%B2318571115599881=890821578475	10/29/24
CcU-2973	270	PT8780622813509242945...	544 58654 54343 384	8760	887	%B4761405253275637^Hjnnip...	%B7816169831446746=1310277279	01/30/25
CcU-2980	269	DE39241881883086277136	402400 7145845969	5075	596	%B7320483593870549^Ookzq...	%B2474313962214151=041221913...	07/24/22
CcU-2987	268	GE89681434837748781813	3763 747687 76666	2298	797	%B4750646345146674^Pjmylrf...	%B5441935173418615=410370453...	10/31/23
CcU-2994	267	BH62714428368066765294	344283273252593	7545	595	%B1583759784015674^Gmqo...	%B4141467473024349=650680095...	02/28/22
CcU-3001	266	CY4908742665477458126...	511722 924833 2244	9562	867	%B6227288756728648^Awxilfc...	%B3429355750963453=530526830...	09/16/22

Import data to 'users':

- Total 5000 rows imported, 3990 from 'european_users' & 1010 from 'american_users'.
- In this import I have taken advantage of the possibility of entering a fixed value in one of the fields at the time of importing a CSV that lacks that field. Use for it SET continent = "xxxx". In these cases it is important to include the fields from the CSV (id, name, surname, phone, email, birth_date, country, city, postal_code, address) so that the import locates each data in its position.
- I take advantage of the 'continent' field to preserve the relevant geographic area information while reducing the size of the DB and I can keep my design in star.

```

115 -- Import 'european_users' CSV data to 'users'
116 • LOAD DATA LOCAL
117   INFILE '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_4_Modelat_SQL/Dades originals_S4/european_users.csv'
118   INTO TABLE users
119   FIELDS TERMINATED BY ','
120   ENCLOSED BY '"'
121   IGNORE 1 ROWS
122   (id, `name`, surname, phone, email, birth_date, country, city, postal_code, address)
123   SET continent = "Europe"
124 ;

```

100% 16:111

Action Output

	Time	Action	Response	Duration / Fetch Time
1	21:27:53	LOAD DATA LOCAL INFILE '/Users/roge...	3990 row(s) affected Records: 3990 Deleted: 0 Skipped: 0 Warnings: 0	0.050 sec

```

126 -- Import 'american_users' CSV data to 'users'
127 • LOAD DATA LOCAL
128   INFILE '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_4_Modelat_SQL/Dades originals_S4/american_users.csv'
129   INTO TABLE users
130   FIELDS TERMINATED BY ','
131   ENCLOSED BY '"'
132   IGNORE 1 ROWS
133   (id, `name`, surname, phone, email, birth_date, country, city, postal_code, address)
134   SET continent = "America"
135 ;

```

100% 25:123

Action Output

	Time	Action	Response	Duration / Fetch Time
1	21:29:28	LOAD DATA LOCAL INFILE '/Users/roge...	1010 row(s) affected Records: 1010 Deleted: 0 Skipped: 0 Warnings: 0	0.017 sec

6 • SELECT * FROM starmarketplace.users;

100% 1:3

Result Grid

Filter Rows: Search Export: Fetch rows:

id	name	surname	phone	email	birth_date	continent	country	city	postal_code	address
147	Brody	Talley	(307) 307-2751	metus.sit.amet@outlook.org	Jun 13, 1991	America	United States	Houston	77001	469-5852 Tellus Street
148	Kerry	Adkins	(528) 872-1974	augue.eu.tempor@icloud.couk	Mar 13, 1983	America	United States	Chicago	60601	Ap #422-4836 Nunc Rd.
149	Brock	Doyle	(265) 140-9567	curtus.a@aol.edu	Feb 19, 1986	America	United States	Chicago	60601	Ap #172-5737 Lorem St.
150	Oleg	Coleman	1-131-139-5673	dis@outlook.edu	Dec 2, 1981	America	United States	Chicago	60601	722-3056 Eu
151	Meghan	Hayden	0800 746 6747	arcu.vel@hotmail.ca	Jul 2, 1980	Europe	United Kingdom	London	EC1A 1BB	Ap #432-4493 Aliquet Rd.
152	Hakeem	Alford	(0111) 367 0184	adipiscing.ligula@google.edu	Sep 30, 1979	Europe	United Kingdom	Birmingham	B1 1AA	551-8930 Lobortis Street
153	Keegan	Pugh	(016977) 3851	sodales.nisi@aol.org	Jul 27, 1994	Europe	United Kingdom	London	EC1A 1BB	Ap #312-5898 Consecte..
154	Cooper	Bullock	(021) 2521 6627	et@outlook.net	Nov 2, 1986	Europe	United Kingdom	Manchester	M1 1AE	872-1866 Pede Rd.
155	Joshua	Russell	055 4409 5286	justo.nec.ante@outlook.edu	Jan 23, 1984	Europe	United Kingdom	Manchester	M1 1AE	Ap #285-4727 Auctor. Av.
156	Remedios	Case	055 3114 1566	mollis.phasellus.libero@aol.com	Oct 9, 1994	Europe	United Kingdom	Liverpool	L1 1AA	479-3690 Turpis Road

Import data to 'transactions':

- Total 100,000 rows imported, due to its large volume of rows it is a delicate process and where errors can appear, we have minimized it thanks to the DataType in the creation.
- Important for this CSV, the separation for field is the ";", since in the products_ids column the comma is used to separate the 'product_ids'. If we use the comma as in other tables, the load would give an error.
- This table of facts it will contains the FKs to create the relationships and also the measures that will allow us to make calculations and conclusions about the characteristics of the dimension tables.

```

137 -- Import CSV data to 'transactions'
138 • LOAD DATA LOCAL
139 INFILE '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_4_Modelat_SQL/Dades_originals_S4/transactions.csv'
140 INTO TABLE transactions
141 FIELDS TERMINATED BY ';'
142 ENCLOSED BY ''
143 IGNORE 1 ROWS
144 ;

```

100% 2:135

Action Output

	Time	Action	Response	Duration / Fetch
1	21:33:21	LOAD DATA LOCAL INFILE '/Users/roge...	100000 row(s) affected Records: 100000 Deleted: 0 Skipped: 0 Warnings: 0	0.367 sec

```

6 • SELECT * FROM starmarketplace.transactions
7 LIMIT 10;

```

100% 1:4

Result Grid

id	card_id	business...	timestamp	amount	declined	product_ids	user_id	lat	longitude
CDDA7E40-544D-47BB-A4ED-671DD8A950D9	CcS-6894	b-2466	2018-12-12 08:05:17	161.88	0	75, 73, 98	2313	59.620509743...	16.55997715...
09456357-8E9B-475A-8257-87A023699964	CcS-5135	b-2342	2024-05-20 22:49:08	171.13	0	3	554	45.764588419...	4.843056518...
C47C7C84-C174-4973-A76B-825A9DB5582A	CcS-8415	b-2250	2018-11-04 23:16:18	497.29	0	92, 85, 36, 23	3834	52.068496084...	4.301099382...
2FB526AA-3844-4DDF-AC09-2EBCC255EE76	CcS-6553	b-2610	2022-06-17 09:17:25	344.15	0	5, 27	1972	39.475985131...	-0.376419443...
0D877407-B85E-40D2-9229-6BD6F2B8DF0A	CcS-7678	b-2454	2020-11-29 07:29:16	435.1	0	38, 32, 82, 62	3097	51.436569850...	5.478525648...
A0BD09EE-7199-41CF-9CB5-3205509FA02F	CcS-6416	b-2438	2021-05-24 22:28:26	364.11	0	92, 64	1835	51.495191890...	18.88912480...
29322BF7-84F4-4A6C-9FFC-C60B6BBD8DCD	CcS-5036	b-2222	2022-05-19 04:50:50	678.61	0	6, 12, 100, 22, 23	455	51.609077736...	19.16003875...
3F614E9B-1EEC-4FB7-8B88-ABCD6C519EED	CcS-8216	b-2526	2019-08-18 21:09:25	207.52	0	69, 97, 31	3635	33.458167495...	-112.0828957...
133534F1-81E5-4688-B4AF-54E516504E9E	CcS-7160	b-2614	2021-12-23 23:58:33	368.64	0	51, 3, 68	2579	60.481217507...	18.81002401...
185D9EC6-9540-4E4F-B38D-395B26C467AC	CcS-5819	b-2550	2019-03-23 19:42:15	57.25	0	69	1238	42.145406999...	12.21245353...

Step 4 - Data cleaning & data transformation

In this step we will work with the data and tables. I will go table by table correcting data errors, changing DataType to fit the content, I will declare the PK and other processes I will follow these steps:

- Exploratory data analysis (EDA).
- Creation of primary keys.
- Normalization of data types.

'Products' table:

- Primary Key → 'id'.
- Fix 'price' by eliminating \$ and changing type to DECIMAL.
- Fix 'weight' change type to DECIMAL.

```

172  -- Transformation
173  ●  ALTER TABLE products
174      ADD PRIMARY KEY (id)
175      ;

```

100% 23:164

Action Output

	Time	Action	Response
✓ 5	20:47:46	ALTER TABLE products ADD PRIMARY KEY (id)	0 row(s) affected

```

177  ●  UPDATE products
178      SET price = REPLACE(price, '$', '')
179      WHERE id >= 1
180      ;
181  ●  ALTER TABLE products
182      MODIFY price DECIMAL(10, 2)
183      ;
184  ●  ALTER TABLE products
185      MODIFY weight DECIMAL(5, 1)
186      ;

```

100% 21:173

Action Output

	Time	Action	Response
✓ 1	21:39:46	UPDATE products SET price = REPLACE(price, '\$', '') WHERE id >= 1	100 row(s) affected Rows matched: 100 Changed: 100 Warnings: 0
✓ 2	21:39:49	ALTER TABLE products MODIFY price DECIMAL(10, 2)	100 row(s) affected Records: 100 Duplicates: 0 Warnings: 0
✓ 3	21:39:54	ALTER TABLE products MODIFY weight DECIMAL(5, 1)	100 row(s) affected Records: 100 Duplicates: 0 Warnings: 0

'companies' table:

- Primary Key → 'company_id'.
- It is not necessary to change types, neither of the PK nor of the rest of the fields.
- Using EDA analysis, I have verified that this table has no duplicates or anything remarkable, just to mention that apparently by numbering the company_id it seems that there is only a part of the companies in this dataset.

```

188  -- Cleaning & transforming 'companies' table
189
190  • SELECT COUNT(*) FROM companies;           -- 100 rows
191  • SELECT DISTINCT company_id FROM companies; -- 100 different id (this is OK) No duplicate
192  • SELECT DISTINCT company_name FROM companies; -- 100 different company_name (this is OK) No duplicate
193  • SELECT MIN(company_id), MAX(company_id) FROM companies;
194  • SELECT * FROM companies WHERE company_name IS NULL;

```

105

100%

18:196

<

```

196  -- Transformation
197  • ALTER TABLE companies
198  ADD PRIMARY KEY (company_id)
199  ;

```

100%	↕	2:185	
Action Output ↕			
		Time	Action
			Response
✓ 1	10:55:40	ALTER TABLE companies ADD PRIMARY KEY (company_id)	
			0 row(s) a

'credit_cards' table:

- Primary Key → 'id'.
- It is not necessary to change types of the PK (id) or the rest of the fields except 'expiring_date, which I will explain below.
- Using EDA analysis, I have verified that this table has no duplicates or anything remarkable about it.
- As a curious fact after the pre-analysis, the number of unique cards is 5000 equivalent to the number of unique 'user_id' and the unique 'iban' number. This indicates that each user has only one card registered and that there is no account (iban) with 2 or more cards.

```

201  -- Cleaniung & transformation 'credit_cards' table
202
203  • SELECT COUNT(*) FROM credit_cards;           -- 5000 rows
204  • SELECT DISTINCT id FROM credit_cards;         -- 5000 rows there is not any duplicated id
205  • SELECT DISTINCT user_id FROM credit_cards;    -- 5000 rows there isn't any user that have more than 1 credit card registered
206  • SELECT DISTINCT iban FROM credit_cards;       -- 5000 rows there isn't any iban (account) with 2 or more cards
207  • SELECT MIN(user_id), MAX(user_id) FROM credit_cards; -- min 1 max 5000 could be that all 5000 users have credit cards registered
208  • SELECT * FROM credit_cards WHERE expiring_date IS NULL; -- No Nulls on that field

```

	Time	Action	Response	Duration
✓ 1	11:50:55	SELECT COUNT(*) FROM credit_cards	1 row(s) returned	0.00
✓ 2	11:50:58	SELECT DISTINCT company_id FROM companies	100 row(s) returned	0.00
✓ 3	11:51:01	SELECT DISTINCT company_name FROM companies	100 row(s) returned	0.00
✓ 4	11:51:03	SELECT MIN(company_id), MAX(company_id) FROM companies	1 row(s) returned	0.00
✓ 5	11:51:06	SELECT * FROM companies WHERE company_name IS NULL	0 row(s) returned	0.00

```

210  -- Transformation
211  • ALTER TABLE credit_cards
212  ADD PRIMARY KEY (id)
213  ;

```

	Time	Action	Response
✓ 1	12:19:32	ALTER TABLE credit_cards ADD PRIMARY KEY (id)	0 row(s) affected

- The expiration date provided in the dataset is not in standard SQL date format. Therefore, the `expiring_date` column is initially defined as `VARCHAR(10)` and later converted to a `DATE` type using `STR_TO_DATE`. The original format is (MM/DD/YY), which was validated by detecting the leap year 2028 (02/29/28). To ensure data integrity, an intermediate column (`expiring_date_temp`) will be used during the conversion process and then renamed as the final `expiring_date` column.

```

214 -- Expiring date normalization
215 • ALTER TABLE credit_cards
216   ADD expiring_date_temp DATE
217   ;
218 -- Data checking in order to erase original column and rename the new one
219 • UPDATE credit_cards
220   SET expiring_date_temp = STR_TO_DATE(expiring_date, '%m/%d/%Y')
221   WHERE expiring_date IS NOT NULL
222   LIMIT 100000
223   ;
224 • SELECT expiring_date, expiring_date_temp -- Check
225   FROM credit_cards
226   LIMIT 10
227   ;
228 • ALTER TABLE credit_cards -- Drop the column
229   DROP COLUMN expiring_date
230   ;
231 • ALTER TABLE credit_cards -- and rename
232   RENAME COLUMN expiring_date_temp TO expiring_date
233   ;

```

Action Output				
	Time	Action	Response	Duration
✓ 1	12:33:39	ALTER TABLE credit_cards ADD expiring_date_temp DATE	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.045 sec
✓ 2	12:33:44	UPDATE credit_cards SET expiring_date_temp = STR_TO_DATE(expiring...	5000 row(s) affected Rows matched: 5000 Changed: 5000 Warnings: 0	0.062 sec
✓ 3	12:33:47	SELECT expiring_date, expiring_date_temp -- Check FROM credit_cards...	10 row(s) returned	0.00080
✓ 4	12:34:10	ALTER TABLE credit_cards -- Drop the column DROP COLUMN expiring...	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.029 sec
✓ 5	12:34:21	ALTER TABLE credit_cards -- and rename RENAME COLUMN expiring_dat...	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.031 sec

ORIGINAL → TRANSFORMED

Result Grid			Filter Rows:	Search	Export:
expiring_date	expiring_date_temp				
09/27/25	2025-09-27				
12/28/28	2028-12-28				
11/26/26	2026-11-26				
07/27/27	2027-07-27				
04/25/26	2026-04-25				
11/27/26	2026-11-27				
12/27/29	2029-12-27				
02/28/26	2026-02-28				
11/25/28	2028-11-25				
02/28/25	2025-02-28				

'users' table:

- Primary Key → 'id'.
- It is not necessary to change types of the PK (id) or the rest of the fields except 'birth_date' that I want to convert in DATE datatype .
- Using EDA analysis, I have verified that this table does not have duplicates in the 'id' so it will not give us problems as PK also the 'id' has correlative numbers from 1 to 5000.
- Also in the analysis I have discovered that even if there are no completely duplicate rows there are 2 records with the same email, in principle it does not give us a bigger problem, except if we had to do operations with the email or email marketing campaigns. These two records only coincide with the email which could be due to a typing error in the registration by the user.

```
235 -- Cleaning & transforming 'users' table
```

```
236
237 • SELECT COUNT(*) FROM users;           -- 5000 rows
238 • SELECT DISTINCT id FROM users;         -- 5000 rows
239 • SELECT DISTINCT email FROM users;      -- 4999 different email
240 • SELECT MIN(id), MAX(id) FROM users;    -- id from 1 to 5000
241 • SELECT * FROM users WHERE email IS NULL; -- there is no null email so should we have duplicated?
242 • SELECT email, COUNT(id) FROM users
243   GROUP BY email                         -- Confirmed de email 'et@outlook.net' is duplicated
244   HAVING COUNT(id) > 1
245 ;
246 • SELECT * FROM users                   -- This rows are completly different just the same email
247   WHERE email = 'et@outlook.net';
```

100% 83:246

Result Grid Filter Rows: Search Export:

id	name	surname	phone	email	birth_date	continent	country	city	postal_code	address
154	Cooper	Bullock	(021) 2521 6627	et@outlook.net	Nov 2, 1986	Europe	United Kingdom	Manchester	M1 1AE	872-1866 Pede Rd.
11	Joan	Baird	(981) 429-8106	et@outlook.net	Feb 25, 1990	America	United States	Los Angeles	90001	P.O. Box 687

users 55

Action Output

	Time	Action	Response	Duration / Fe
✓ 1	13:35:48	SELECT COUNT(*) FROM users	1 row(s) returned	0.034 sec / 0
✓ 2	13:35:53	SELECT DISTINCT id FROM users	5000 row(s) returned	0.0072 sec /
✓ 3	13:35:58	SELECT DISTINCT email FROM users	4999 row(s) returned	0.0049 sec /
✓ 4	13:36:09	SELECT MIN(id), MAX(id) FROM users	1 row(s) returned	0.0064 sec /
✓ 5	13:36:17	SELECT * FROM users WHERE email IS NULL	0 row(s) returned	0.0035 sec /
✓ 6	13:36:27	SELECT email, COUNT(id) FROM users GROUP BY email HAVING COUNT(id) > 1	1 row(s) returned	0.012 sec / 0.
✓ 7	13:38:04	SELECT * FROM users WHERE email = 'et@outlook.net'	2 row(s) returned	0.0051 sec /

Possible duplicated
EXACT EMAIL LOCALIZED

```
249 -- Transformation
250 • ALTER TABLE users
251   ADD PRIMARY KEY (id)
252 ;
```

100% 35:242

Action Output

	Time	Action	Response
✓ 1	13:49:35	ALTER TABLE users ADD PRIMARY KEY (id)	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0

- The 'birth_date' provided in the CSV is not in standard SQL date format. Therefore, the 'birth_date' column is initially defined as VARCHAR(100) to import and now I convert it to a DATE datatype using STR_TO_DATE.

To ensure data integrity, an intermediate column (birth_date_temp) will be used during the conversion process and then renamed as the final birth_date column.

```

253  -- 'birth_date' normalization
254  • ALTER TABLE users
255  ADD birth_date_temp DATE
256  ;
257  -- Data checking in order to erase original column and rename the new one
258  • UPDATE users
259  SET birth_date_temp = STR_TO_DATE(birth_date, '%b %e, %Y')
260  WHERE birth_date IS NOT NULL
261  LIMIT 60000
262  ;
263  • SELECT birth_date, birth_date_temp -- Check
264  FROM users
265  LIMIT 10
266  ;
267  • ALTER TABLE users -- Drop the column
268  DROP COLUMN birth_date
269  ;
270  • ALTER TABLE users -- and rename
271  RENAME COLUMN birth_date_temp TO birth_date
272  ;

```

100% 32:247

Action Output

	Time	Action	Response
✓ 1	14:32:20	ALTER TABLE users ADD birth_date_temp DATE	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0
✓ 2	14:32:24	UPDATE users SET birth_date_temp = STR_TO_DATE(birth_date, '%b %e, %Y') WHERE birth...	5000 row(s) affected Rows matched: 5000 Changed: 5000 W
✓ 3	14:32:31	SELECT birth_date, birth_date_temp -- Check FROM users LIMIT 10	10 row(s) returned
✓ 4	14:32:39	ALTER TABLE users -- Drop the column DROP COLUMN birth_date	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0
✓ 5	14:32:46	ALTER TABLE users -- and rename RENAME COLUMN birth_date_temp TO birth_date	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0

Result Grid



Filter Rows:

Search

Export:



	birth_date	birth_date_temp	
	Nov 17, 1985	1985-11-17	
	Aug 23, 1992	1992-08-23	
	Apr 29, 1998	1998-04-29	
	Feb 18, 1989	1989-02-18	
	Sep 26, 1998	1998-09-26	
	Oct 15, 1989	1989-10-15	
	Dec 4, 1981	1981-12-04	
	Aug 1, 1993	1993-08-01	
	Jan 24, 1987	1987-01-24	
	Apr 30, 1984	1984-04-30	

'transactions' table:

- Primary Key → 'id'.
- It is not necessary to change types of the PK (id), but I am going to change types in many columns since they are FK and they have to be the same as their PK.
- Using a basic EDA, I have verified that this table has no duplicates or nulls in its 100,000 rows. I have also specifically probed that the columns that are going to be the FKs had no problems.

```

274  -- Cleaning & transforming 'transactions' table
275
276  ● SELECT COUNT(*) FROM transactions;           -- 100000 rows
277  ● SELECT DISTINCT id FROM transactions;         -- 100000 rows
278  ● SELECT DISTINCT card_id FROM transactions;    -- 50000 all card ID has been utilized at list once finished or not transaction
279  ● SELECT DISTINCT business_id FROM transactions; -- 100 all companies has transactions, finished or not
280  ● SELECT DISTINCT user_id FROM transactions;    -- 5000 all users has transactions, finished or not
281  ● SELECT * FROM transactions WHERE id IS NULL;
282  ● SELECT * FROM transactions WHERE `timestamp` IS NULL;
283  ● SELECT * FROM transactions WHERE amount IS NULL;
284  ● SELECT * FROM transactions WHERE declined IS NULL; | -- I haven't detect any NULL value in all the checked column.

```

	Time	Action	Response	Duration / Fetch Time
✓ 1	15:07:11	SELECT COUNT(*) FROM transactions	1 row(s) returned	0.045 sec / 0.00067
✓ 2	15:07:16	SELECT DISTINCT id FROM transactions	100000 row(s) returned	0.065 sec / 0.011 sec
✓ 3	15:07:22	SELECT DISTINCT card_id FROM transactions	5000 row(s) returned	0.046 sec / 0.00054
✓ 4	15:07:26	SELECT DISTINCT business_id FROM transactions	100 row(s) returned	0.044 sec / 0.00001
✓ 5	15:07:33	SELECT DISTINCT user_id FROM transactions	5000 row(s) returned	0.043 sec / 0.00046
✓ 6	15:07:37	SELECT * FROM transactions WHERE id IS NULL	0 row(s) returned	0.051 sec / 0.000012
✓ 7	15:07:40	SELECT * FROM transactions WHERE `timestamp` IS NULL	0 row(s) returned	0.056 sec / 0.000014
✓ 8	15:07:42	SELECT * FROM transactions WHERE amount IS NULL	0 row(s) returned	0.051 sec / 0.000013
✓ 9	15:07:45	SELECT * FROM transactions WHERE declined IS NULL	0 row(s) returned	0.050 sec / 0.00000

```

286  -- Transformation
287  ● ALTER TABLE transactions
288  ADD PRIMARY KEY (id)
289  ;

```

	Time	Action	Response
✓ 1	15:09:39	ALTER TABLE transactions ADD PRIMARY KEY (id)	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0

- Data transformation:
- Everything is OK except column 'business_id' that I will change name and 5 columns to which I will change DataType:
- business_id → VARCHAR(15)
- timestamp. → TIMESTAMP
- amount → DECIMAL(10, 2)
- lat → DECIMAL(20, 16)
- longitude → DECIMAL(20, 16)

```

291  -- change name and datatype column 'business_id'
292  • ALTER TABLE transactions
293    MODIFY COLUMN business_id VARCHAR(15)
294    ;
295  • ALTER TABLE transactions
296    RENAME COLUMN business_id TO company_id
297    ;
298  • ALTER TABLE transactions
299    MODIFY COLUMN `timestamp` TIMESTAMP
300    ;
301  • ALTER TABLE transactions
302    MODIFY COLUMN amount DECIMAL(10, 2)
303    ;
304  • ALTER TABLE transactions
305    MODIFY COLUMN lat DECIMAL(20, 16)
306    ;
307  • ALTER TABLE transactions
308    MODIFY COLUMN longitude DECIMAL(20, 16)
309    ;

```

100% 18:286

Action Output

	Time	Action	Response
✓ 1	19:31:40	ALTER TABLE transactions MODIFY COLUMN business_id VARCHAR(15)	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0
✓ 2	19:32:10	ALTER TABLE transactions RENAME COLUMN business_id TO company_id	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0
✓ 3	19:42:23	ALTER TABLE transactions MODIFY COLUMN `timestamp` TIMESTAMP	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0
✓ 4	19:43:46	ALTER TABLE transactions MODIFY COLUMN amount DECIMAL(10, 2)	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0
✓ 5	20:02:31	ALTER TABLE transactions MODIFY COLUMN lat DECIMAL(20, 16)	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0
✓ 6	20:02:57	ALTER TABLE transactions MODIFY COLUMN longitude DECIMAL(20, 16)	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0

Step 5 - Data modeling & star schema implementation

Now that we have all table & data cleaned and well organized is the moment to create the relationship between tables.

We have been asked to create a star design, that's why the FKs are established in the 'transactions', the fact table, and for the moment I will only relate 3 of the 4 dimension tables in a star scheme, because in another exercise we will be asked to create the 'products' relation.

```


310  -- DATA MODELING
311
312  -- FOREIGN KEY (FK) Creation
313
314  • ALTER TABLE transactions
315    ADD CONSTRAINT FK_CreditCardsTransactions FOREIGN KEY (card_id)
316    REFERENCES credit_cards(id)
317    ;
318  • ALTER TABLE transactions
319    ADD CONSTRAINT FK_CompaniesTransactions FOREIGN KEY (company_id)
320    REFERENCES companies(company_id)
321    ;
322  • ALTER TABLE transactions
323    ADD CONSTRAINT FK_UsersTransactions FOREIGN KEY (user_id)
324    REFERENCES users(id)
325    ;

```

100%	25:305		
Action Output			
	Time	Action	Response
✓ 1	21:30:19	ALTER TABLE transactions ADD CONSTRAINT FK_CreditCardsTransactions FOREIGN K...	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0
✓ 2	21:30:24	ALTER TABLE transactions ADD CONSTRAINT FK_CompaniesTransactions FOREIGN K...	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0
✓ 3	21:30:28	ALTER TABLE transactions ADD CONSTRAINT FK_UsersTransactions FOREIGN KEY (u...	100000 row(s) affected Records: 100000 Duplicates: 0 Warnings: 0

Star schema design:

- As requested in the statement after the whole process, table creation, data import, data cleaning and transformation and the creation of the Foreign Key, we obtain the DB model required in the statement:
- Dimensional Model in Star. (OK)
- Use at least 4 tables (OK)
- That allows you to ask the questions of Exercise 1 and 2. (OK)

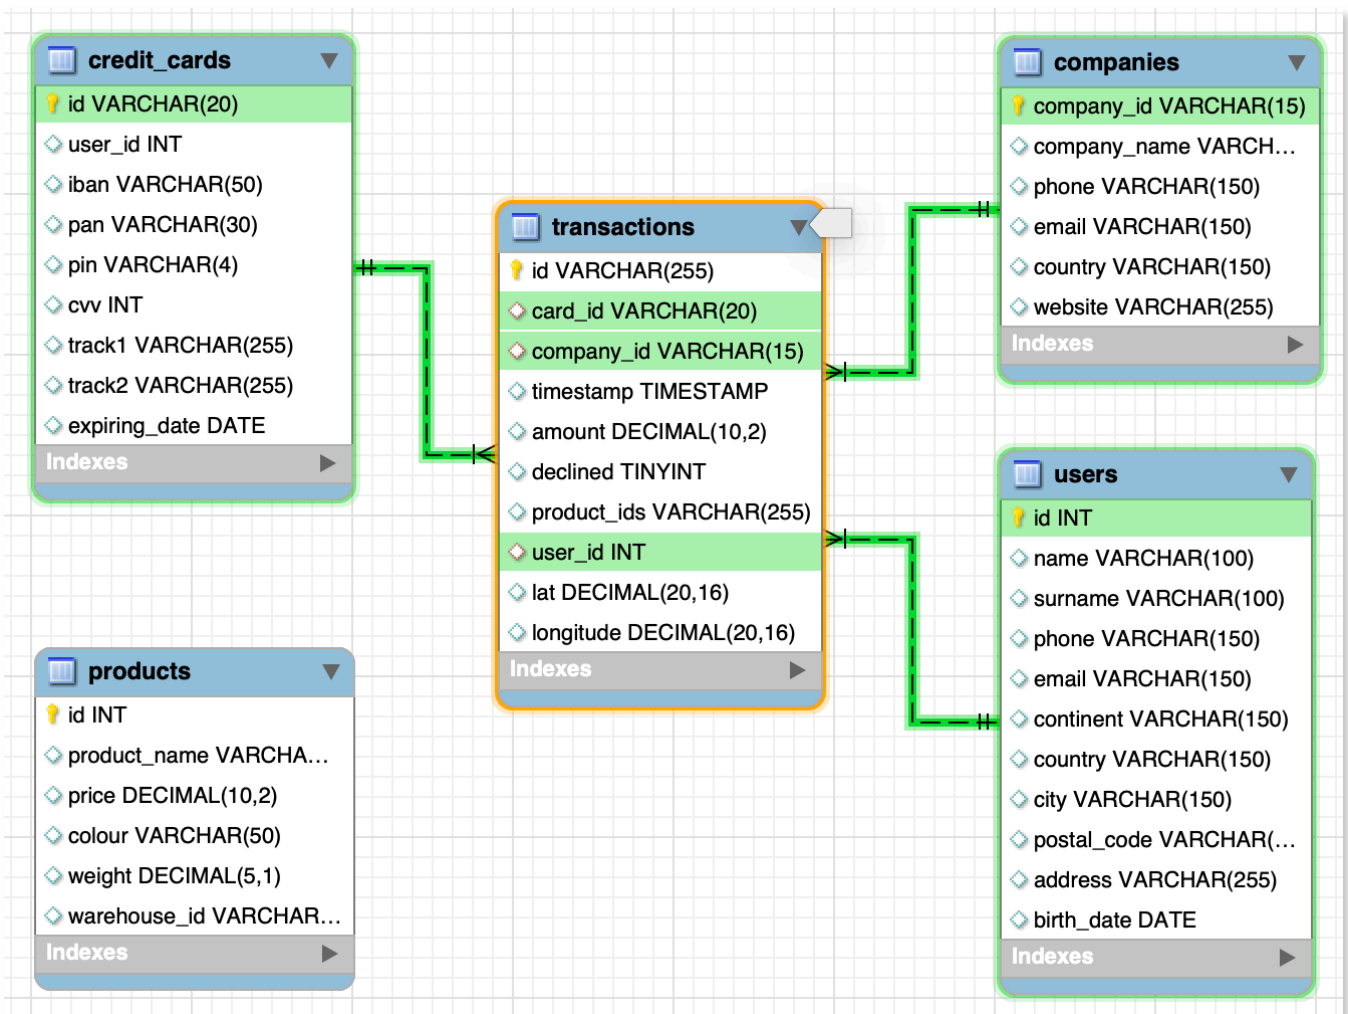

- Exercise 1

Realitza una subconsulta que mostri tots els usuaris amb més de 80 transaccions utilitzant almenys 2 taules.

Subquery using at list 2 tables:

- I perform a subquery of the 'transactions' table counting the number of transactions for each 'user_id' and filtering with HAVING, that shows only the 'user_id' with more than 80 'num_transactions'.
- I get the result (in this case 3 'user_id') shown in the table (alias 'transaction_user' and make a JOIN (INNER JOIN) with the table 'users' .
- The JOIN only returns me rows that are in the two tables, in this case 3 'user_id'.
- I show the desired fields of the JOIN sorted descending by 'total_transactions'.

```

334 • SELECT u.id,
335         u.`name`,
336         u.surname,
337         transaction_user.num_transactions AS total_transactions
338 FROM users u
339 JOIN (
340     SELECT t.user_id,
341            COUNT(t.id) AS num_transactions
342     FROM transactions t
343     WHERE declined = 0
344     GROUP BY t.user_id
345     HAVING num_transactions > 80
346 ) AS transaction_user
347 ON u.id = transaction_user.user_id
348 ORDER BY total_transactions DESC
349 ;

```

100% 4:328

Result Grid



Filter Rows:

Search

Export:



id	name	surname	total_transactions
185	Molly	Gilliam	107
289	Dxwgi	Hwcru	91
318	Bnyr	Astuw	86

Result 87

Action Output

	Time	Action	Response
1	11:47:34	SELECT u.id, u.`name`, u.surname, transaction_user.num_transaction...	3 row(s) returned

- Exercise 2

Mostra la mitjana d'amount per IBAN de les targetes de crèdit a la companyia Donec Ltd, utilitza almenys 2 taules.

- As the opposite is not requested, I will use a JOIN of 3 tables to have access to all the necessary fields.
- I apply WHERE filter for the requested company.
- I make a GROUP BY grouping by iban and use the AVG aggregator to calculate the average by iban.
- Finally I present the requested data, average of 'amount' grouped by iban and only those of the company Donec Ltd.
- I have ordered the presentation descending by average 'amount'.

```

356 • SELECT cc.iban,
357         c.company_name,
358         ROUND(AVG(t.amount),2) AS amount_average
359 FROM transactions t
360 JOIN credit_cards cc ON t.card_id = cc.id
361 JOIN companies c ON t.company_id = c.company_id
362 WHERE c.company_name = 'Donec Ltd'
363 GROUP BY cc.iban, c.company_name
364 ORDER BY AVG(t.amount) DESC
365 ;

```

100% 2:365

Result Grid Filter Rows: Search Export:

iban	company_name	amount_average
XX383017813919620199366352	Donec Ltd	680.69
XX637706357397570394973913	Donec Ltd	680.01
XX971393971465292202312259	Donec Ltd	645.46
XX171847116928892375969307	Donec Ltd	628.89
XX225424638818542406223575	Donec Ltd	608.68
XX748890729057195711766071	Donec Ltd	607.29
TN9614563570667381893122	Donec Ltd	605.41
XX481908034037364242591185	Donec Ltd	605.36
XX194675519739256335753508	Donec Ltd	597.19

Result 94

Action Output

	Time	Action	Response
1	12:36:14	SELECT cc.iban, c.company_name, ROUND(AVG(t.amount),2) AS amount_...	371 row(s) returned

Level 2

Crea una nova taula que reflecteixi l'estat de les targetes de crèdit basat en si les tres últimes transaccions han estat declinades aleshores és inactiu, si almenys una no és rebutjada aleshores és actiu. Partint d'aquesta taula respon:


```

374 • CREATE TABLE IF NOT EXISTS credit_card_activated (
375     card_id VARCHAR(20) PRIMARY KEY,
376     activated TINYINT
377 );
378
379 • INSERT INTO credit_card_activated
380     (card_id, activated)
381     SELECT cc.id, 1 FROM credit_cards cc
382     WHERE cc.id = cc.id
383 ;
384
385 • WITH
386     last_transactions_card AS (
387     SELECT t.card_id,
388           t.`timestamp`,
389           t.declined,
390           ROW_NUMBER () OVER (PARTITION BY t.card_id ORDER BY t.`timestamp` DESC) AS card_position
391     FROM transactions t),
392
393     cards_three_declined AS (
394     SELECT card_id,
395           SUM(declined) AS total_declined
396     FROM last_transactions_card
397     WHERE card_position <= 3
398     GROUP BY card_id
399     HAVING total_declined = 3)
400
401 UPDATE credit_card_activated cca
402 SET
403     activated = 0
404 WHERE cca.card_id IN (SELECT card_id FROM cards_three_declined)
405 AND cca.card_id IS NOT NULL
406 LIMIT 40000
407 ;

```

-- Status table creation to store the status

-- Insert initial values into table (5000 rows)

-- All the Credit cards from credit_card table

-- I fill all 'activated' with 1 -- > activated

-- CTEs for code simplification

-- Find transactions by card

-- With ROW_NUMBER I can know card_position by card

-- Find cards thatn have 3 declined

-- in their 3 last transaction

-- Update statement setting 'activated' to 0

-- just for the 'card_id' with 3 declined

-- in its last 3 transactions

-- 2 lines necessities to bypass

-- the MySQL Workbench safe mode

100% 56:415

Action Output

	Time	Action	Response
✓ 1	21:42:32	CREATE TABLE IF NOT EXISTS credit_card_activated (card_id VAR...	0 row(s) affected
✓ 2	21:42:58	INSERT INTO credit_card_activated (card_id, activated) -- Inse...	5000 row(s) affected Records: 5000 Duplicates: 0 Warnings: 0
✓ 3	21:43:48	WITH -- CTEs for code simplification last_transactions_card...	5 row(s) affected Rows matched: 5 Changed: 5 Warnings: 0

- Exercise 1

Quantes targetes estan actives?

```
415 • SELECT COUNT(*)
416     FROM credit_card_activated
417     WHERE activated = 1
418     ;
```

100% 1:408

Result Grid   Filter Rows: Export: 

COUNT(*)
4995

Result 149

Action Output 

	Time	Action	Response
✓ 1	21:49:47	SELECT COUNT(*) FROM credit_card_activated WHERE activated = 1	1 row(s) returned

Level 3

Crea una taula amb la qual puguem unir les dades del nou arxiu products.csv amb la base de dades creada, tenint en compte que des de transaction tens product_ids. Genera la següent consulta:

```
429 • CREATE TABLE transaction_product (
430     transaction_product_id INT AUTO_INCREMENT PRIMARY KEY,
431     transaction_id VARCHAR(255),
432     product_id INT,
433     FOREIGN KEY (transaction_id) REFERENCES transactions(id),
434     FOREIGN KEY (product_id) REFERENCES products(id),
435     UNIQUE (transaction_id, product_id)
436 );
```

100% 2:418

Action Output

	Time	Action	Response
✓ 1	22:32:13	CREATE TABLE transaction_product (transaction_product_id INT AUTO_INCREME...	0 row(s) affected

```
439 • INSERT INTO transaction_product (transaction_id, product_id)
440     SELECT t.id AS transaction_id,
441            jt.product_id
442     FROM transactions t,
443     JSON_TABLE(
444         CONCAT('[', REPLACE(product_ids, ' ', ''), ']'),
445         '$[*]' COLUMNS (product_id INT PATH '$')
446     ) AS jt
447 ;
```

100% 1:429

Action Output

	Time	Action	Response
✓ 1	23:00:13	INSERT INTO transaction_product (transaction...	253391 row(s) affected Records: 253391 Duplicates: 0 Warnings: 0

452 • `SELECT * FROM starmarketplace.transaction_product;`

100% 51:452

Result Grid



Filter Rows:



Search

Edit:



Export/Import:




	transacti...	transaction_id	product_id
1		00043A49-2949-494B-A5DD-A5BAE3BB19DD	16
2		00043A49-2949-494B-A5DD-A5BAE3BB19DD	26
4		00043A49-2949-494B-A5DD-A5BAE3BB19DD	87
3		00043A49-2949-494B-A5DD-A5BAE3BB19DD	97
5		000447FE-B650-4DCF-85DE-C7ED0EE1CAAD	66
6		000447FE-B650-4DCF-85DE-C7ED0EE1CAAD	69
7		000447FE-B650-4DCF-85DE-C7ED0EE1CAAD	87
9		00045D6B-ED2E-4F2F-8186-CEE074D875D0	11
10		00045D6B-ED2E-4F2F-8186-CEE074D875D0	16

transaction_product 179

Action Output



	Time	Action	Response
✓ 1	23:04:26	SELECT * FROM starmarketplace.transaction_...	253391 row(s) returned

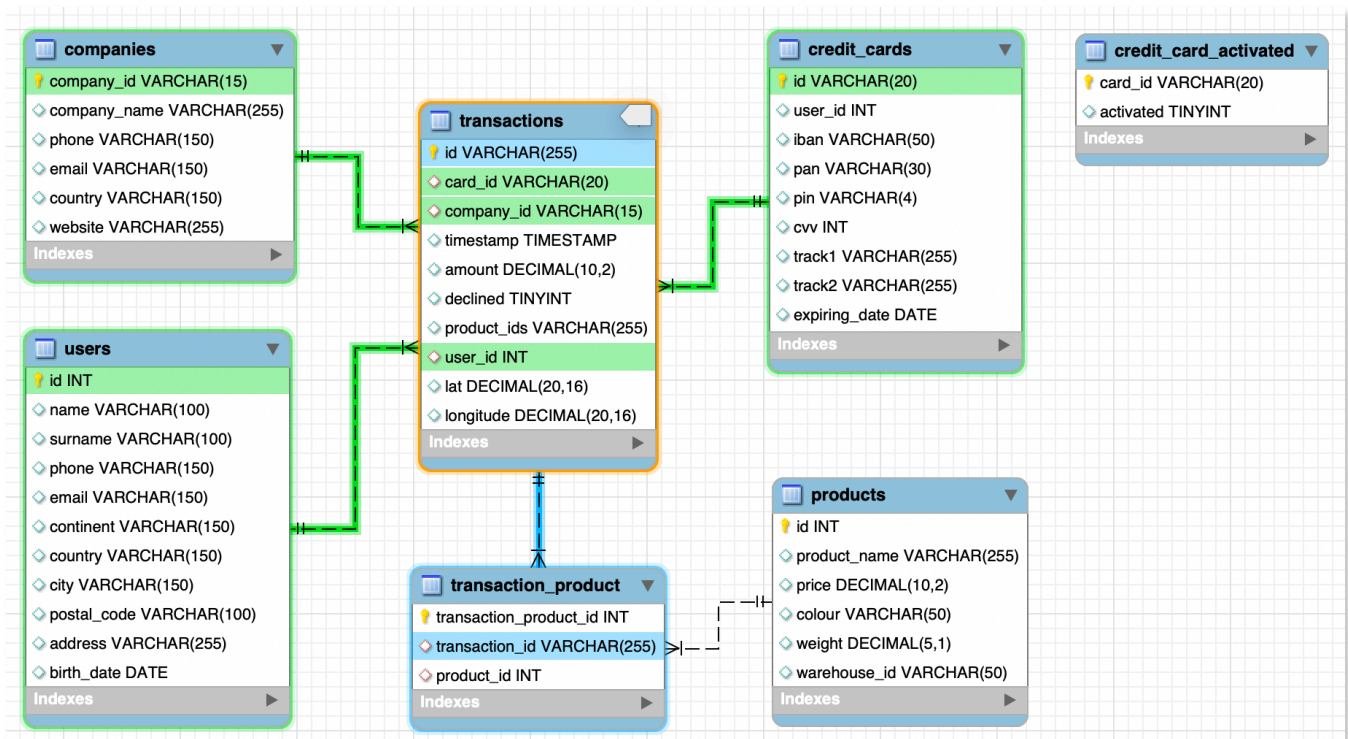

- Exercise 1

Necessitem conèixer el nombre de vegades que s'ha venut cada producte.

```
453 • SELECT p.id,  
454         p.product_name AS product,  
455         COUNT(tp.transaction_id) AS sales_qty  
456 FROM transaction_product tp  
457 JOIN transactions t ON tp.transaction_id = t.id  
458 JOIN products p ON tp.product_id = p.id  
459 WHERE t.declined = 0  
460 GROUP BY tp.product_id  
461 ORDER BY COUNT(tp.transaction_id) DESC  
462 ;
```

100% 14:453

Result Grid Filter Rows: Search Export:

	id	product	sales_qty
	52	riverlands the duel	2642
	29	Tully maester Tarly	2627
	21	duel Direwolf	2603
	16	the duel warden	2602

Result 9

Action Output

	Time	Action	Response
✓ 1	13:13:34	SELECT p.id, p.product_name AS product, COUNT(tp.transaction_id) AS sales_qty FRO...	100 row(s) returned

