

TASK S5.01

CONSULTAS MONGODB

Descripció

Treballarem amb una base de dades que conté col·leccions relacionades amb una aplicació d'entreteniment cinematogràfic:


- users: Emmagatzema informació d'usuaris/es, incloent-hi noms, emails i contrasenyes xifrades.
- theatres: Conté dades de cinemes, com ID, ubicació (direcció i coordenades geogràfiques).
- sessions: Guarda sessions d'usuari, incloent-hi ID d'usuari i tokens JWT per a l'autenticació.
- movies: Inclou detalls de pel·lícules, com a trama, gèneres, durada, elenc, comentaris, any de llançament, directors, classificació i premis.
- comments: Emmagatzema comentaris d'usuaris/es sobre pel·lícules, amb informació de l'autor/a del comentari, ID de la pel·lícula, text del comentari i la data.

Duràs a terme algunes consultes que et demana el client/a, el qual està mesurant si seràs capaç o no de fer-te càrrec de la part analítica del projecte vinculat amb la seva base de dades.

Level 1

Crea una base de dades amb MongoDB utilitzant com a col·leccions els arxius adjunts.

Level 1 - Database creation

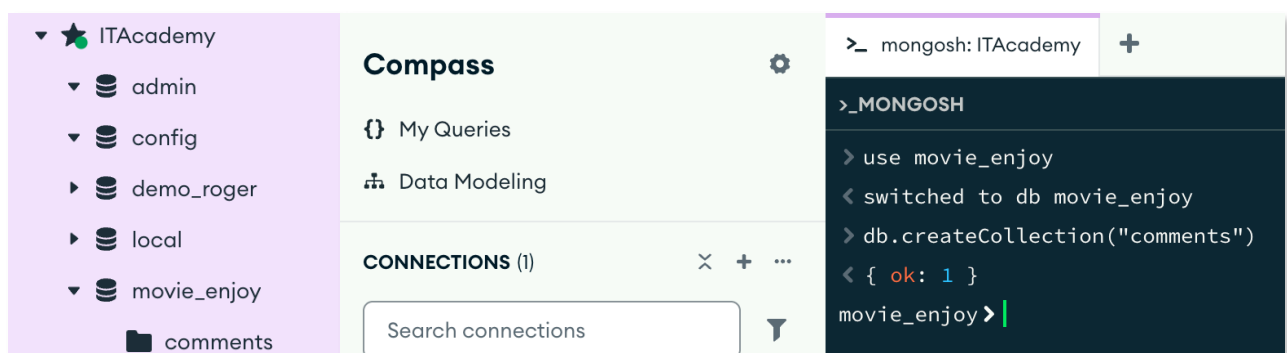

```
rogerdefez@MacBook-Air-de-Roger ~ % mongoimport --db movie_enjoy --collection comments --file '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_5_DB_No_Relacionals/Dades originals_S5/comments.json'
2026-03-05T20:33:48.558+0100 connected to: mongod://localhost/
2026-03-05T20:33:49.278+0100 50304 document(s) imported successfully, 0 document(s) failed to import.
rogerdefez@MacBook-Air-de-Roger ~ % mongoimport --db movie_enjoy --file '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_5_DB_No_Relacionals/Dades originals_S5/movies.json'
2026-03-05T20:49:18.125+0100 no collection specified
2026-03-05T20:49:18.127+0100 using filename 'movies' as collection
2026-03-05T20:49:18.136+0100 connected to: mongod://localhost/
2026-03-05T20:49:19.099+0100 23539 document(s) imported successfully, 0 document(s) failed to import.
rogerdefez@MacBook-Air-de-Roger ~ % mongoimport --db movie_enjoy --file '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_5_DB_No_Relacionals/Dades originals_S5/sessions.json'
2026-03-05T20:50:36.430+0100 no collection specified
2026-03-05T20:50:36.431+0100 using filename 'sessions' as collection
2026-03-05T20:50:36.438+0100 connected to: mongod://localhost/
2026-03-05T20:50:36.462+0100 1 document(s) imported successfully, 0 document(s) failed to import.
rogerdefez@MacBook-Air-de-Roger ~ % mongoimport --db movie_enjoy --file '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_5_DB_No_Relacionals/Dades originals_S5/theaters.json'
2026-03-05T20:52:05.709+0100 no collection specified
2026-03-05T20:52:05.710+0100 using filename 'theaters' as collection
2026-03-05T20:52:05.716+0100 connected to: mongod://localhost/
2026-03-05T20:52:05.732+0100 1564 document(s) imported successfully, 0 document(s) failed to import.
rogerdefez@MacBook-Air-de-Roger ~ % mongoimport --db movie_enjoy --file '/Users/rogerdefez/Documents/Cursos i Llibres/BootCamp IT Academy/03_Especialitzacio/Sprint_5_DB_No_Relacionals/Dades originals_S5/users.json'
2026-03-05T20:52:56.529+0100 no collection specified
2026-03-05T20:52:56.530+0100 using filename 'users' as collection
2026-03-05T20:52:56.539+0100 connected to: mongod://localhost/
2026-03-05T20:52:56.567+0100 185 document(s) imported successfully, 0 document(s) failed to import.
rogerdefez@MacBook-Air-de-Roger ~ %
```

Compass interface showing the 'comments' collection in the 'movie_enjoy' database. The left sidebar shows the database structure with 'comments' selected. The main panel displays two documents:

```
{ "_id": ObjectId('5a9427648b0beeb69579d3'), "name": "Cameron Duran", "email": "cameron_duran@fakegmail.com", "movie_id": ObjectId('573a1390f29313caab4d4217'), "text": "Quasi dicta culpa asperiores queraat perferendis neque. Est animi pari...", "date": "1983-04-27T20:39:15.000+00:00" }
```

```
{ "_id": ObjectId('5a9427648b0beeb69579ea'), "name": "Cameron Duran", "email": "cameron_duran@fakegmail.com", "movie_id": ObjectId('573a1390f29313caab4d433d'), "text": "Ad asperiores mollitia aperiam non incidunt. Totam fugiat cumque praes...", "date": "1989-01-21T14:20:47.000+00:00" }
```

Compass interface showing the 'movies' collection in the 'movie_enjoy' database. The left sidebar shows the database structure with 'movies' selected. The main panel displays a document:

```
{ "_id": ObjectId('573a1390f29313caab4d4323'), "plot": "A young boy, oppressed by his mother, goes on an outing in the country ...", "genres": Array (3), "runtime": 14, "rated": "UNRATED", "cast": Array (4), "num_mflix_comments": 2, "poster": "https://m.media-amazon.com/images/M/MV5BMTMzMDCxMjgyNl5BMl5BanBnXkFtZT...", "title": "The Land Beyond the Sunset", "fullplot": "Thanks to the Fresh Air Fund, a slum child escapes his drunken mother ...", "languages": Array (1), "released": "1912-10-28T00:00:00.000+00:00", "directors": Array (1), "writers": Array (1), "awards": Object, "lastupdated": "2015-08-29 00:27:45.437000000", "year": 1912, "imdb": Object, "countries": Array (1), "type": "movie", "tomatoes": Object }
```

Compass

My Queries
Data Modeling

CONNECTIONS (1)

Search connections

- ITAcademy
 - admin
 - config
 - demo_roger
 - local
 - movie_enjoy
 - comments
 - movies
 - sessions**
 - theaters
 - users

ITAcademy > movie_enjoy > sessions

Documents 1 Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#) ⚡

Explain Reset Find Options ▶

25 1 - 1 of 1

```
{
  "_id": ObjectId('5a97f9c91c807bb9c6eb5fb4'),
  "user_id": "t3qulfeem@kwiv5.6ur",
  "jwt": "eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpYXQiOiJlMTk5MDkzMjEsIm5iZiI6IjE6M..."
}
```

Compass

My Queries
Data Modeling

CONNECTIONS (1)

Search connections

- ITAcademy
 - admin
 - config
 - demo_roger
 - local
 - movie_enjoy
 - comments
 - movies
 - sessions
 - theaters**
 - users

ITAcademy > movie_enjoy > theaters

Documents 1.6K Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#) ⚡

Explain Reset Find Options ▶

25 1 - 25 of 1564

```
{
  "_id": ObjectId('59a47286cfa9a3a73e51e72e'),
  "theaterId": 1008,
  "location": Object
}
```

```
{
  "_id": ObjectId('59a47286cfa9a3a73e51e736'),
  "theaterId": 1017,
  "location": Object
}
```

```
{
  "_id": ObjectId('59a47286cfa9a3a73e51e730'),
  "theaterId": 1002,
  "location": Object
}
```

Compass

My Queries
Data Modeling

CONNECTIONS (1)

Search connections

- ITAcademy
 - admin
 - config
 - demo_roger
 - local
 - movie_enjoy
 - comments
 - movies
 - sessions
 - theaters
 - users**
 - sample_airbnb

ITAcademy > movie_enjoy > users

Documents 185 Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#) ⚡

Explain Reset Find Options ▶

25 1 - 25 of 185

```
{
  "_id": ObjectId('59b99db9cfa9a34dcd7885bf'),
  "name": "Jon Snow",
  "email": "kit_harington@gameofthron.es",
  "password": "$2b$12$fDEu1Ru66tLWAVidMN.b0.929B1fnyqdGuhWMyzF0Af/ATY0yLoY6"
}
```

```
{
  "_id": ObjectId('59b99db9cfa9a34dcd7885c0'),
  "name": "Sansa Stark",
  "email": "sophie_turner@gameofthron.es",
  "password": "$2b$12$ncIVE81..AtA0ysPZkL19.G5V0EdIwvsZh1f18lxWEr3d1pG/Uusi"
}
```

```
{
  "_id": ObjectId('59b99db9cfa9a34dcd7885c1'),
  "name": "Arya Stark",
  "email": "maisie_williams@gameofthron.es",
  "password": "$2b$12$19h3KjeTg3/sPNFHztdb6eGWKrcIwLVXVsh9POS15PS9kS1guZEq"
}
```

Level 1 - Database creation and initialization

Para la importación del Json comments he usado el comando incluyendo 'collection' debido a que ya tengo creada la colección en mi DB de mongoDB

```
mongoimport --db movie_enjoy --collection comments --file "comments.json"
```

Para movies.json y el resto de Json, uso la ventaja que Mongoimport crea la colección en la DB en caso de que no se le indique --collection

```
mongoimport --db movie_enjoy --file "movies.json"
```

Exercise 1

- A. Mostra els 2 primers comentaris que hi ha en la base de dades.
- B. Quants usuaris tenim registrats?
- C. Quants cinemes hi ha en l'estat de Califòrnia?
- D. Quin va ser el primer usuari/ària en registrar-se?
- E. Quantes pel·lícules de comèdia hi ha en la nostra base de dades?

A. Mostra els 2 primers comentaris que hi ha en la base de dades.

The screenshot shows the MongoDB Atlas Aggregations Builder interface. The breadcrumb navigation is ITAcademy > movie_enjoy > comments. The 'Documents' tab shows 50K documents. The 'Aggregations' tab is active, showing a pipeline with one stage: \$limit: 2. The 'PIPELINE OUTPUT PREVIEW' section shows a sample of 2 documents:

```
1 [
2   {
3     $limit:
4     /**
5      * Provide the number of documents to limit
6      */
7     2
8   }
9 ]
```


PIPELINE OUTPUT PREVIEW
Sample of 2 documents

OUTPUT OPTIONS

```
{
  "_id": "ObjectId('5a9427648b0beeb69579d3')",
  "name": "Cameron Duran",
  "email": "cameron_duran@fakegmail.com",
  "movie_id": "ObjectId('573a1390f29313caabcd4217')",
  "text": "Quasi dicta culpa asperiores quaerat perferendis neque. Est animi pari...",
  "date": "1983-04-27T20:39:15.000+00:00"
}
```

```
{
  "_id": "ObjectId('5a9427648b0beeb69579ea')",
  "name": "Cameron Duran",
  "email": "cameron_duran@fakegmail.com",
  "movie_id": "ObjectId('573a1390f29313caabcd433d')",
  "text": "Ad asperiores mollitia aperiam non incidunt. Totam fugiat cumque praes...",
  "date": "1989-01-21T14:20:47.000+00:00"
}
```

B. Quants usuaris tenim registrats?

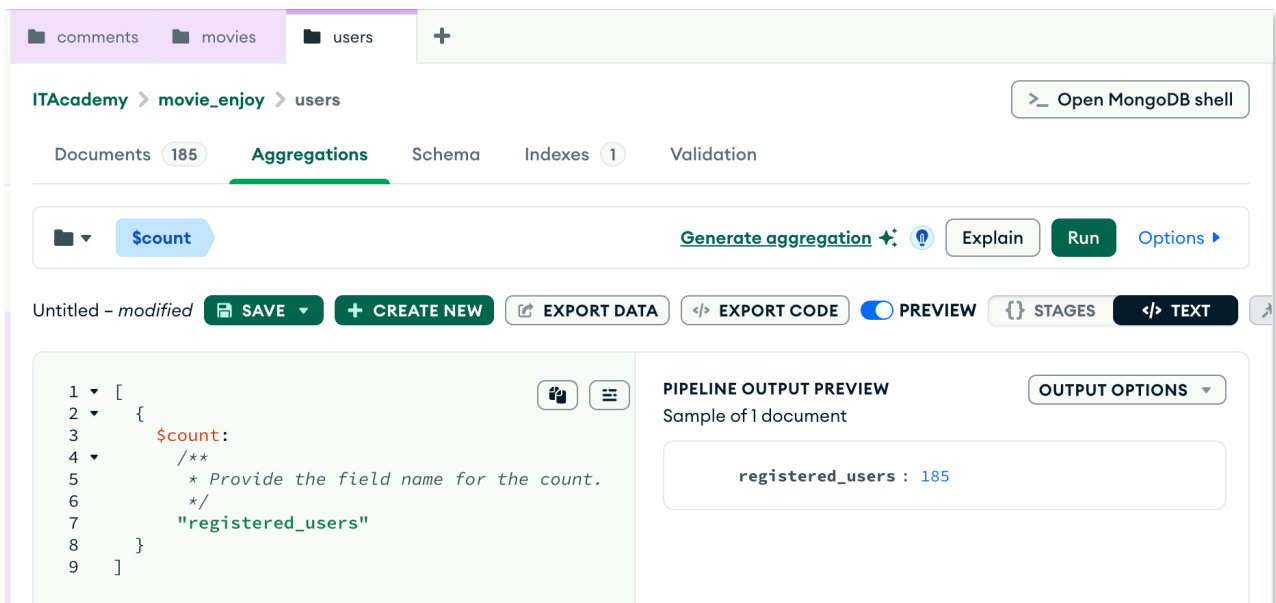


The screenshot shows the MongoDB Compass interface for the 'users' collection. The 'Aggregations' tab is active, displaying a single pipeline stage: '\$count'. The pipeline is defined as follows:

```
1 [
2   {
3     $count:
4       /**
5        * Provide the field name for the count.
6        */
7       "registered_users"
8   }
9 ]
```

The 'PIPELINE OUTPUT PREVIEW' section shows a sample of 1 document with the result: `registered_users : 185`.

C. Quants cinemes hi ha en l'estat de Califòrnia?

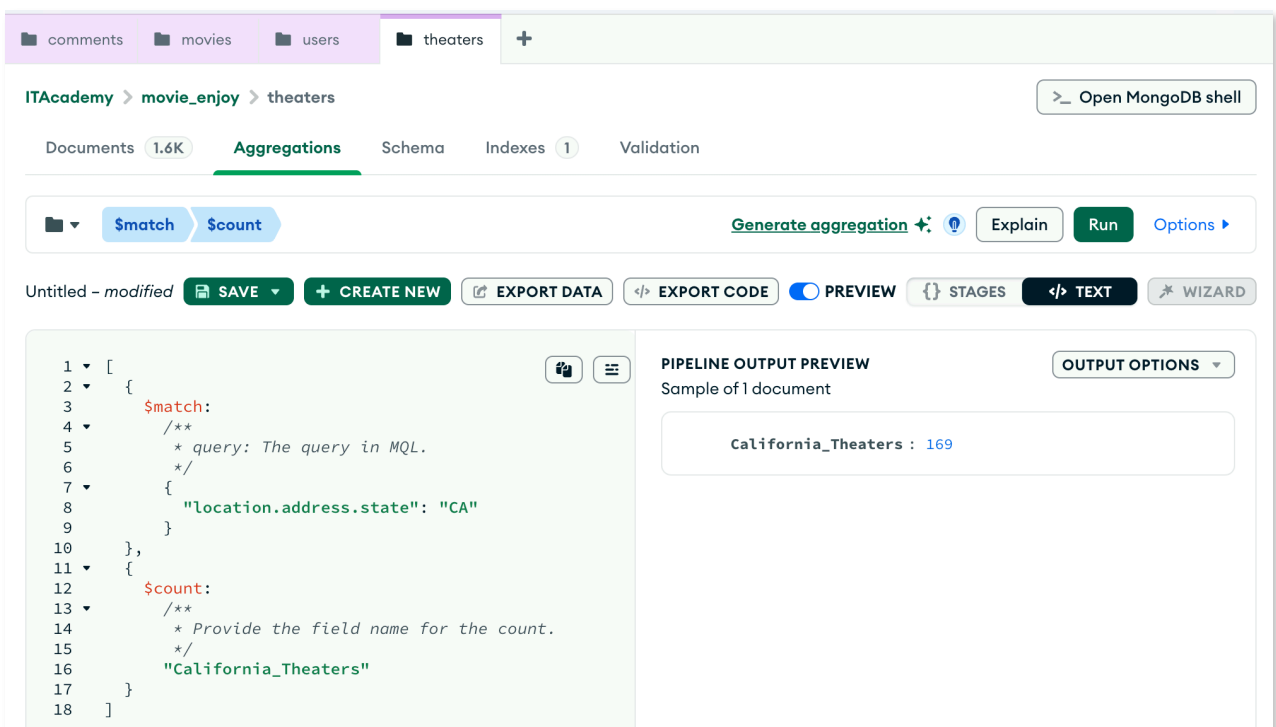

The screenshot shows the MongoDB Compass interface for the 'theaters' collection. The 'Aggregations' tab is active, displaying a pipeline with two stages: '\$match' and '\$count'. The pipeline is defined as follows:

```
1 [
2   {
3     $match:
4       /**
5        * query: The query in MQL.
6        */
7       {
8         "location.address.state": "CA"
9       }
10  },
11  {
12    $count:
13      /**
14       * Provide the field name for the count.
15       */
16      "California_Theaters"
17  }
18 ]
```

The 'PIPELINE OUTPUT PREVIEW' section shows a sample of 1 document with the result: `California_Theaters : 169`.

D. Quin va ser el primer usuari/ària en registrar-se?

The screenshot shows the MongoDB Compass interface for the 'movie_enjoy' database, specifically the 'users' collection. The 'Aggregations' tab is active, and a pipeline with two stages is defined: '\$sort' and '\$limit'. The '\$sort' stage sorts by '_id' in ascending order, and the '\$limit' stage limits the results to 1 document. The 'PIPELINE OUTPUT PREVIEW' on the right shows a sample of 1 document for the user 'Ned Stark'.

```
1 [
2   {
3     $sort:
4       /**
5        * Provide any number of field/order pairs.
6        */
7     {
8       _id: 1
9     }
10  },
11  {
12    $limit:
13      /**
14       * Provide the number of documents to limit.
15       */
16      1
17  }
18 ]
```

PIPELINE OUTPUT PREVIEW
Sample of 1 document

```
{
  "_id": ObjectId('59b99db4cfa9a34dcd7885b6'),
  "name": "Ned Stark",
  "email": "sean_bean@gameofthron.es",
  "password": "$2b$12$UREFwsRUoyF0CRqGNK0Lz00HM/jLhgUCNNI..."
}
```

D. Quantes pel·lícules de comèdia hi ha en la nostra base de dades?

The screenshot shows the MongoDB Compass interface for the 'movie_enjoy' database, specifically the 'movies' collection. The 'Aggregations' tab is active, and a pipeline with two stages is defined: '\$match' and '\$count'. The '\$match' stage filters for movies with the genre 'Comedy', and the '\$count' stage counts the number of documents. The 'PIPELINE OUTPUT PREVIEW' on the right shows a sample of 1 document with the total count of comedy movies.

```
1 [
2   {
3     $match:
4       /**
5        * query: The query in MQL.
6        */
7     {
8       genres: "Comedy"
9     }
10  },
11  {
12    $count:
13      /**
14       * Provide the field name for the count.
15       */
16      "Total_Comedy_movies"
17  }
18 ]
```

PIPELINE OUTPUT PREVIEW
Sample of 1 document

```
{
  "Total_Comedy_movies": 7024
}
```

Exercise 2

Mostra'm tots els documents de les pel·lícules produïdes en 1932, però que el gènere sigui drama o estiguin en francès.

The screenshot shows the MongoDB Compass interface for the 'movie_enjoy' database, specifically the 'movies' collection. The 'Aggregations' tab is active, and a pipeline is being built. The pipeline consists of a single stage: \$match. The match criteria are: year: 1932, \$or: [{ genres: 'Drama' }, { languages: 'French' }]. The pipeline output preview shows a sample of 10 documents, including details like title, runtime, cast, and release date.

```
1 [
2   {
3     $match:
4       /**
5        * query: The query in MQL.
6        */
7       {
8         year: 1932,
9         $or: [
10          {
11            genres: "Drama"
12          },
13          {
14            languages: "French"
15          }
16        ]
17      }
18    ]
19  ]
```

PIPELINE OUTPUT PREVIEW
Sample of 10 documents

```
{
  "_id": ObjectId('573a1391f29313caabcd9458'),
  "plot": "A young artist draws a face at a canvas on his easel. Suddenly the mou...",
  "runtime": 55,
  "rated": "UNRATED",
  "cast": Array (4),
  "num_mflix_comments": 1,
  "poster": "https://m.media-amazon.com/images/M/MV5BYWY3ODE5ZWetYjlmYi00NjA4LTk4ZW...",
  "title": "The Blood of a Poet",
  "lastupdated": "2015-09-16 13:13:05.537000000",
  "languages": Array (1),
  "released": 2010-05-20T00:00:00.000+00:00,
  "directors": Array (1),
  "writers": Array (1),
  "awards": Object,
  "year": 1932,
  "imdb": Object,
  "countries": Array (1),
  "type": "movie",
  "tomatoes": Object
}
```

The screenshot shows the MongoDB Compass interface for the 'movie_enjoy' database, specifically the 'movies' collection. The 'Aggregations' tab is active, and the results of the aggregation pipeline are displayed. The results are shown as a list of documents, including details like title, runtime, cast, and release date.

```
{
  "_id": ObjectId('573a1391f29313caabcd9458'),
  "plot": "A young artist draws a face at a canvas on his easel. Suddenly the mou...",
  "runtime": 55,
  "rated": "UNRATED",
  "cast": Array (4),
  "num_mflix_comments": 1,
  "poster": "https://m.media-amazon.com/images/M/MV5BYWY3ODE5ZWetYjlmYi00NjA4LTk4ZW...",
  "title": "The Blood of a Poet",
  "lastupdated": "2015-09-16 13:13:05.537000000",
  "languages": Array (1),
  "released": 2010-05-20T00:00:00.000+00:00,
  "directors": Array (1),
  "writers": Array (1),
  "awards": Object,
  "year": 1932,
  "imdb": Object,
  "countries": Array (1),
  "type": "movie",
  "tomatoes": Object
}
```

Exercise 3

Mostra'm tots els documents de pel·lícules estatunidenques que tinguin entre 5 i 9 premis que van ser produïdes entre 2012 i 2014.

The screenshot shows the MongoDB Atlas interface for the 'movie_enjoy' database. The 'Aggregations' tab is active, displaying a pipeline with a single stage: `$match`. The query is: `{ 'countries': 'USA', 'awards.wins': { '$gte': 5, '$lte': 9 }, 'year': { '$gte': 2012, '$lte': 2014 } }`. The 'PIPELINE OUTPUT PREVIEW' shows a sample of 10 documents, with the first document displayed: `{ '_id': ObjectId('573a13acf29313caabd29366'), 'fullplot': 'The manager of the negative assets sector of Life magazine, Walter Mit...', 'imdb': Object, 'year': 2013, 'plot': 'When his job along with that of his co-worker are threatened, Walter t...', 'genres': Array (3), 'rated': 'PG', 'metacritic': 54, 'title': 'The Secret Life of Walter Mitty', 'lastupdated': '2015-08-31 00:10:51.747000000', 'languages': Array (3), 'writers': Array (3), 'type': 'movie' }`.

The screenshot shows the MongoDB Atlas interface for the 'movie_enjoy' database. The 'Aggregations' tab is active, displaying the 'ALL RESULTS' view. The document shown is: `{ '_id': ObjectId('573a13acf29313caabd29366'), 'fullplot': 'The manager of the negative assets sector of Life magazine, Walter Mit...', 'imdb': Object, 'year': 2013, 'plot': 'When his job along with that of his co-worker are threatened, Walter t...', 'genres': Array (3), 'rated': 'PG', 'metacritic': 54, 'title': 'The Secret Life of Walter Mitty', 'lastupdated': '2015-08-31 00:10:51.747000000', 'languages': Array (3), 'writers': Array (3), 'type': 'movie', 'tomatoes': Object, 'poster': 'https://m.media-amazon.com/images/M/MV5BODYwNDYxNDk1Nl5BMl5BanBnXkFtZT...', 'num_mflix_comments': 1, 'released': '2013-12-25T00:00:00.000+00:00', 'awards': Object, 'countries': Array (2), 'cast': Array (4), 'directors': Array (1), 'runtime': 114 }`.

Level 2

Exercise 1

Compte quants comentaris escriu un usuari/ària que utilitza "GAMEOFTHRON.ES" com a domini de correu electrònic.

The screenshot shows the MongoDB Atlas interface for the 'comments' collection. The 'Aggregations' tab is active, displaying a pipeline with two stages: '\$match' and '\$count'. The '\$match' stage filters for documents where the 'email' field contains '@gameofthron.es'. The '\$count' stage counts the number of documents, outputting the result to the field 'num_comments'. The pipeline output preview shows a single document: {'num_comments': 22841}.

```
1 [
2   {
3     $match:
4       /**
5        * query: The query in MQL.
6        */
7     {
8       email: {
9         $regex: "@gameofthron.es"
10      }
11    },
12  },
13  {
14    $count:
15      /**
16       * expression: Grouping expression or string.
17       */
18      "num_comments"
19    }
20  ]
21 ]
```

PIPELINE OUTPUT PREVIEW
Sample of 1 document

```
{
  "num_comments": 22841
}
```

Exercise 2

Quants cinemes hi ha en cada codi postal situats dins de l'estat Washington D. C. (DC)?

The screenshot shows the MongoDB Atlas interface for the 'theaters' collection. The 'Aggregations' tab is active, displaying a pipeline with two stages: '\$match' and '\$group'. The '\$match' stage filters for theaters where the location address state is 'DC'. The '\$group' stage groups the results by zip code and counts the number of theaters in each group.

```
1 [
2   {
3     $match:
4     /**
5      * query: The query in MQL.
6      */
7     {
8       "location.address.state": "DC"
9     }
10  },
11  {
12    $group:
13    /**
14     * _id: The id of the group.
15     * fieldN: The first field name.
16     */
17    {
18      _id: "$location.address.zipcode",
19      total_theaters_zipcode: {
20        $sum: 1
21      }
22    }
23  }
24 ]
```

The pipeline output preview shows a sample of 3 documents:

```
{ "_id": "20016", "total_theaters_zipcode": 1 }
{ "_id": "20010", "total_theaters_zipcode": 1 }
{ "_id": "20002", "total_theaters_zipcode": 1 }
```

Level 3

Exercise 1

Troba totes les pel·lícules dirigides per John Landis amb una puntuació IMDb (Internet Movie Database) d'entre 7,5 i 8.

The screenshot shows the MongoDB Atlas Aggregations editor interface. The top navigation bar includes tabs for 'comments', 'movies', 'users', and 'theaters'. The current view is 'movie_enjoy > movies'. The 'Aggregations' tab is selected, showing a single stage named '\$match'. The query is:


```
1 [
2   {
3     $match:
4       /**
5        * query: The query in MQL.
6        */
7     {
8       directors: "John Landis",
9       "imdb.rating": {
10        $gte: 7.5,
11        $lte: 8
12      }
13    }
14  }
15 ]
```

The right panel shows the 'PIPELINE OUTPUT PREVIEW' with a sample of 4 documents. The first document is:

```
{
  "_id": ObjectId('573a1397f29313caabce6d94'),
  "fullplot": "Faber College has one frat house so disreputable it will take anyone. ...",
  "imdb": Object,
  "year": 1978,
  "plot": "At a 1962 college, Dean Vernon Wormer is determined to expel the entire...",
  "genres": Array (1),
  "rated": "R",
  "metacritic": 82,
  "title": "Animal House",
  "lastupdated": "2015-09-13 00:02:47.803000000",
  "languages": Array (2),
  "writers": Array (3),
  "type": "movie"
}
```

Exercise 2

Mostra en un mapa la ubicació de tots els teatres de la base de dades.

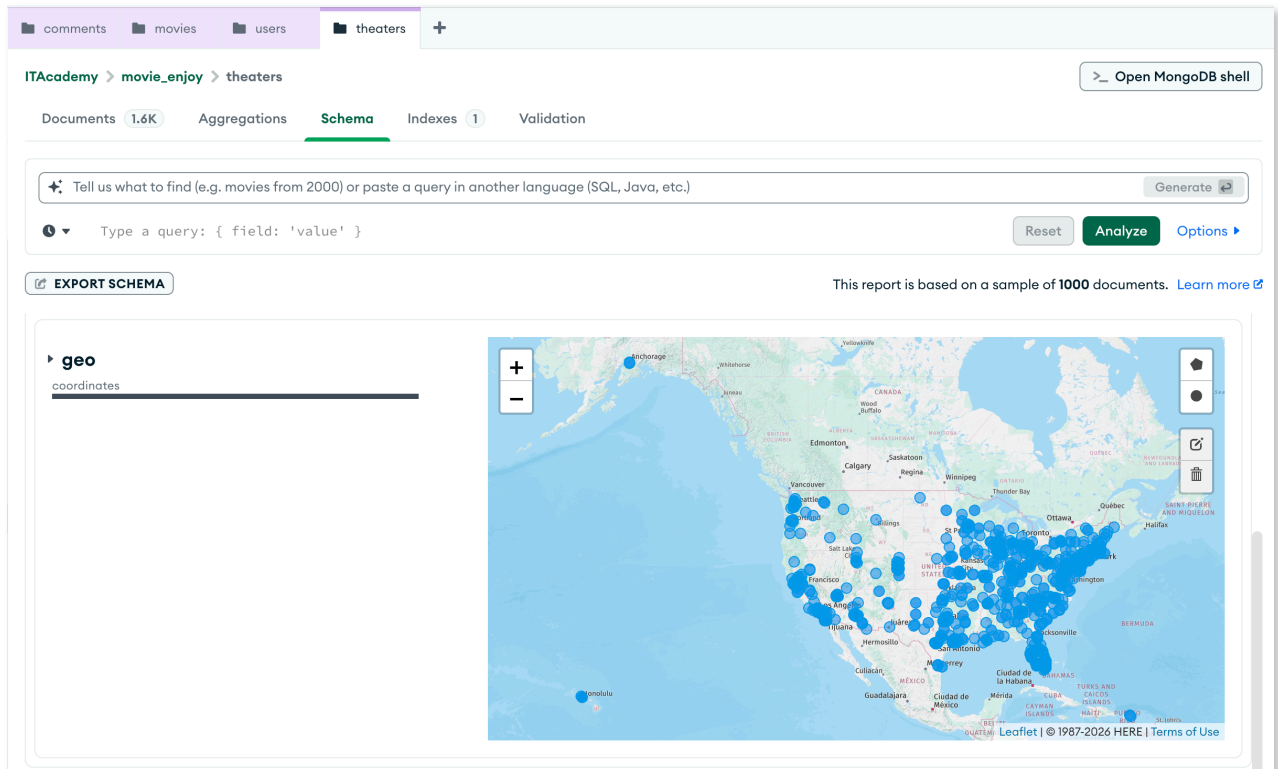

Step 1 - Database creation and initialization

Character definition for enhanced compatibility with “ñ” and other characters in MySQL 8.

```

8  -- Database creation and initialization
9  • CREATE DATABASE starmarketplace
10 CHARACTER SET utf8mb4; -- Character Definition for Enhanced Compatibility with "ñ" and Other Characters in MySQL 8
11
12 • USE starmarketplace
13 ;

```

	Time	Action	Response
✓ 1	01:00:01	CREATE DATABASE starmarketplace CHARACTER SET utf8mb4	1 row(s) affected
✓ 2	01:00:01	USE starmarketplace	0 row(s) affected

Step 2 - Table creation:

As a general rule I will create all the fields of all the tables with DataType VARCHAR with this I will avoid errors in the data loading. Later I will adjust the DataType to its real data type. The PK fields, mainly 'id' if its possible I will put them as INT and the other numerical fields I will put it INT, DECIMAL or FLOAT as appropriate or DATE or TIMESTAMP if is date. I also would like to comment that I incorporate the clause “IF NOT EXIST” as a good praxis to avoid any error in case that the table already exists.

‘products’ table - dimension table:

- This table allows us to create the 'id' as INT
- Important to highlight the 'price' field we must load as VARCHAR since the \$ symbol makes it impossible to load as a DECIMAL field

```

17  -- Creation table 'products'
18  • CREATE TABLE IF NOT EXISTS products (
19      id INT,
20      product_name VARCHAR(255),
21      price VARCHAR(255),
22      colour VARCHAR(50),
23      weight VARCHAR(50),
24      warehouse_id VARCHAR(50)
25  );

```

	Time	Action	Response
✓ 1	21:29:15	CREATE TABLE IF NOT EXISTS pr...	0 row(s) affected