MIT Art, Design and Technology University
MIT School of Computing, Pune

Department of Information Technology

SUBJECT – FULL STACK FRONT END DEVELOPMENT

COURSE CODE – 23IT3001

Class - T.Y. SMAD

Name of the Student

Suhasini Somnath Nanaware- ADT23SOCB1566

Subject Teacher

Prof. Rohini Bhosale

A.Y. 2025 – 2026 (SEM-V)

Assignment 1: React Project Setup and Navigation

Aim:

To create a React project using create-react-app, set up routing using react-router-dom, and build a top navigation bar with links to different pages such as Home**,** Menu**,** Cart**,** Checkout, and Profile for a *Multi-Cuisine Restaurant Website*.

Theory:

Introduction to React

React is an open-source JavaScript library developed by Facebook for building dynamic user interfaces. It's ideal for single-page applications (SPAs) that need fast updates without reloading the page.
React works on a component-based architecture**,** allowing developers to break the UI into small reusable components such as Navbar, Home, Menu, Cart, etc.
It also uses a Virtual DOM, which efficiently updates only the changed parts of the webpage, improving speed and performance.

React Project Setup using create-react-app

To begin a React project easily, developers use the create-react-app command-line tool. It handles all configuration automatically and provides an optimized environment.

```
npx create-react-app multi-cuisine-restaurant
cd multi-cuisine-restaurant
npm install react-router-dom
npm start
```

Key Features of create-react-app:

1. Pre-configured Webpack and Babel setup
2. Built-in development server with live reloading
3. ES6+ and JSX support
4. Fast and simple setup

After running the setup command, the tool generates all the necessary files and dependencies required for a React environment.

React Router and Single Page Application (SPA)

React Router enables **client-side navigation** in SPAs — meaning users can switch pages without refreshing.
It provides the following key components:

- **BrowserRouter:** Wraps the application to enable routing.
- **Routes / Route:** Define which components should display for which path.
- **Link / NavLink:** Allow navigation between pages.

This ensures a smooth browsing experience for users moving between **Home**, **Menu**, **Cart**, and **Profile** sections.

Navigation Bar (Navbar)

A **Navigation Bar** is a crucial UI component that provides links to major sections of the website.
In this project, the Navbar includes:

- A restaurant logo on the **left corner**
- Links to **Home, Menu, Cart, Checkout, and Profile**
- A gradient background for an attractive appearance
- Responsiveness for mobile and desktop screens

Features of a Good Navbar:

1. Visually consistent across pages
2. Clear and easy navigation
3. Responsive layout
4. Attractive color scheme

Components and Routing Structure

In a React project, each webpage or screen is generally represented as a component. Examples of such components include Home, Products, Cart, Checkout, and Profile. Each of these components is connected using React Router routes. When the user clicks a link in the navigation bar, the URL changes and the corresponding component is rendered — all without reloading the page. This creates a smooth and seamless navigation experience for the user.

Working of Navigation in React

1. The whole app is wrapped in <BrowserRouter>.
2. Each page is defined as a <Route> inside <Routes>.
3. The Navbar uses <Link> to navigate between routes.
4. React Router updates the view dynamically without reloading.
5. Footer remains consistent across all pages.

Advantages of Using React Router and Navigation

1. Improved User Experience: Page transitions are instant without full reloads.

2. SEO Friendly: Routes can be defined clearly with specific URLs.

3. Component-Based Organization: Each route corresponds to a specific component, making maintenance easier.

4. Scalability: New pages and routes can be added easily as the application grows.

5. Performance: Navigation happens on the client-side, reducing server load.

Code Implementation:

App.jsx

```
import React from "react";

import { Routes, Route } from "react-router-dom";

import Navbar from "./components/Navbar";

import Home from "./pages/Home";

import Menu from "./pages/Menu";

import About from "./pages/About";

import Cart from "./pages/Cart";

import Checkout from "./pages/Checkout";

import Profile from "./pages/Profile";

import Login from "./pages/Login";

import Register from "./pages/Register";

import Footer from "./components/Footer";

import { CartProvider } from "./context/CartContext";


export default function App() {
```

```
return (
<CartProvider>
<Navbar />
<div className="main-content">
<Routes>
<Route path="/" element={<Home />} />
<Route path="/menu" element={<Menu />} />
<Route path="/about" element={<About />} />
<Route path="/cart" element={<Cart />} />
<Route path="/checkout" element={<Checkout />} />
<Route path="/profile" element={<Profile />} />
<Route path="/login" element={<Login />} />
<Route path="/register" element={<Register />} />
</Routes>
</div>
<Footer />
</CartProvider>
);
}
```

Navbar.jsx

```
import React from "react";
import { Link } from "react-router-dom";
import "./Navbar.css";

export default function Navbar() {
  return (
    <nav className="navbar">
      <div className="nav-container">
        <Link to="/" className="nav-logo">
          🍽 Gourmet Delight
        </Link>

        <ul className="nav-links">
          <li><Link to="/">Home</Link></li>
          <li><Link to="/menu">Menu</Link></li>
          <li><Link to="/about">About</Link></li>
          <li><Link to="/cart">🛒 Cart</Link></li>
          <li><Link to="/register">Register</Link></li>
          <li><Link to="/login">Login</Link></li>
          <li><Link to="/profile">Profile</Link></li>

        </ul>
      </div>
```

```
    </nav>
  );
}
```

Navbar.css

```
.navbar {
  background: linear-gradient(135deg, #ff9966, #ff5e62);
  padding: 1rem 0;
  box-shadow: 0 3px 10px rgba(0, 0, 0, 0.15);
  position: sticky;
  top: 0;
  z-index: 100;
  width: 100%;
  transition: all 0.3s ease;
}

.nav-container {
  display: flex;
  align-items: center;
  justify-content: space-between;
  max-width: 1250px;
  margin: 0 auto;
  padding: 0 2rem;
}
```

```
/* Logo */
.nav-logo {
  font-size: 1.8rem;
  font-weight: 700;
  color: #fff;
  text-decoration: none;
  letter-spacing: 1px;
  transition: transform 0.3s ease;
}

.nav-logo:hover {
  transform: scale(1.05);
}

/* Links */
.nav-links {
  list-style: none;
  display: flex;
  align-items: center;
  gap: 2rem;
}

.nav-links a {
  color: #fff;
```

```
  text-decoration: none;
  font-weight: 500;
  font-size: 1rem;
  letter-spacing: 0.5px;
  position: relative;
  transition: color 0.3s ease;
}

.nav-links a::after {
  content: "";
  position: absolute;
  width: 0%;
  height: 2px;
  left: 0;
  bottom: -4px;
  background: #fff;
  transition: width 0.3s ease;
}

.nav-links a:hover::after {
  width: 100%;
}

.nav-links a:hover {
```

```
  color: #ffe6d5;
}

/* Right-side Icons */
.nav-icons {
  display: flex;
  align-items: center;
  gap: 1.5rem;
}

.nav-icons i {
  color: #fff;
  font-size: 1.4rem;
  cursor: pointer;
  transition: transform 0.3s ease;
}

.nav-icons i:hover {
  transform: scale(1.2);
  color: #ffe6d5;
}

/* Mobile Responsive */
@media (max-width: 768px) {
```

```
  .nav-container {
    flex-wrap: wrap;
    justify-content: center;
  }

  .nav-links {
    gap: 1rem;
    flex-wrap: wrap;
  }

  .nav-icons {
    margin-top: 0.5rem;
  }
}
```

Output:



Conclusion:

We successfully set up a React project with routing and a responsive navigation bar for a **Multi-Cuisine Restaurant Website**. The navigation provides seamless transitions between pages, enhancing user experience and demonstrating effective SPA functionality using React Router.

Assignment 2: Home Page Development

Aim:

To design and develop the Home Page layout of a React-based **Multi-Cuisine Restaurant Website** that includes featured dishes or categories and a functional search bar to filter dishes by name or cuisine type.

Theory:

Introduction

The **Home Page** is the central entry point of any website or application. For a restaurant website, it introduces the theme, displays featured cuisines or signature dishes, and helps users explore the menu easily.
In this assignment, the Home Page is created using React components with **Bootstrap and custom CSS** for styling. It also includes a dynamic search bar that filters dishes by their name or cuisine category in real-time.

Concept of Components in React

React uses a component-based architecture**,** where every UI section is built using small, reusable pieces called components**.**
In this assignment:

- Home.js acts as the **page-level component** (main layout).
- MenuCard.js acts as a **reusable subcomponent** to display dish details like image, name, cuisine type, and price.

Each component manages its own logic and design, ensuring modularity**,** code reusability**,** and easy updates in the future.

Designing the Home Page Layout

The Home Page layout consists of:

1. A hero section/banner to welcome users to the restaurant.
2. A search bar to filter dishes by name or cuisine.
3. A featured dishes section displaying popular or signature dishes.
4. A footer section with restaurant information.

Bootstrap's grid system (container, row, col) ensures a clean, responsive layout that adapts to different devices like mobiles, tablets, and desktops.

Featured Dishes or Categories

The featured dishes section displays highlighted menu items dynamically using React's map() function.
A sample dish object includes:

- id – Unique ID
- name – Dish name
- cuisine – Cuisine type (e.g., Italian, Japanese, Indian)
- price – Dish price
- image – Dish image

This structure allows adding new dishes easily without changing the main layout — promoting scalability and reusability**.**

Search Bar Functionality

A search bar improves user interactivity by allowing quick filtering.
In React, this is implemented by:

1. Creating a state variable for the search term (useState).
2. Using an input field that updates the state via onChange.
3. Applying a filter() function to show only dishes matching the input text.

This provides instant and dynamic search results without reloading the page.

Styling and Responsiveness

The website is styled using Bootstrap and custom CSS**:**

- Responsive grid layout for dishes.
- Centered search bar with spacing.
- Cards with shadows and rounded edges for aesthetic presentation.
- A sticky footer for branding consistency.

Code Implementation:

MenuCard.jsx

```
import React from "react";
import { useCart } from "../context/CartContext";
import "./MenuCard.css";

export default function MenuCard({ item }) {
  const { addToCart } = useCart();

  return (
    <div className="menu-card shadow-sm">
      <img
        src={item.img}
        alt={item.name}
        className="menu-card-img"
        loading="lazy"
      />

      <div className="menu-card-body">
        <h4 className="menu-card-title">{item.name}</h4>
        <p className="menu-card-cuisine">{item.cuisine}</p>
        <p className="menu-card-desc">{item.desc}</p>
```

```
        <div className="menu-card-footer">
          <strong className="menu-card-price">₹{item.price.toFixed(2)}</strong>
          <button
            className="btn-add"
            onClick={() => addToCart(item)}
          >
            Add to Cart 🍽
          </button>
        </div>
      </div>
    </div>
  );
}
```

MenuCard.css

```
.menu-card {
  background: #fff;
  border-radius: 15px;
  overflow: hidden;
  transition: transform 0.3s ease, box-shadow 0.3s ease;
  display: flex;
  flex-direction: column;
}

.menu-card:hover {
```

```
  transform: translateY(-5px);
  box-shadow: 0 10px 20px rgba(0, 0, 0, 0.15);
}

.menu-card-img {
  width: 100%;
  height: 200px;
  object-fit: cover;
}

.menu-card-body {
  padding: 1rem;
  text-align: left;
}

.menu-card-title {
  font-size: 1.3rem;
  color: #ff5e62;
  margin-bottom: 0.3rem;
}

.menu-card-cuisine {
  color: #777;
  font-size: 0.9rem;
  margin-bottom: 0.5rem;
```

```
  font-style: italic;
}

.menu-card-desc {
  color: #555;
  font-size: 0.95rem;
  margin-bottom: 1rem;
  line-height: 1.4;
}

.menu-card-footer {
  display: flex;
  align-items: center;
  justify-content: space-between;
}

.menu-card-price {
  font-weight: 600;
  color: #222;
  font-size: 1.1rem;
}

.btn-add {
  background: linear-gradient(135deg, #ff9966, #ff5e62);
  border: none;
```

```
  color: white;
  padding: 0.5rem 1rem;
  border-radius: 8px;
  font-weight: 500;
  transition: background 0.3s ease;
  cursor: pointer;
}
.btn-add:hover {
  background: linear-gradient(135deg, #ff5e62, #ff9966);
}
```

Home.jsx

```
import React from "react";
import "bootstrap/dist/css/bootstrap.min.css";
import "./Home.css";
import { useNavigate } from "react-router-dom";

export default function Home() {
  const navigate = useNavigate();

  const dishes = [
    { name: "Korean Bibimbap", price: "₹499", specialty: "Spicy rice bowl with veggies", img: "public/images/bibimbap.jpeg" },
    { name: "Japanese Sushi Platter", price: "₹899", specialty: "Assorted veggie sushi rolls", img: "public/images/sushi.jpeg" },
    { name: "Italian Pasta", price: "₹599", specialty: "Creamy Alfredo with herbs", img: "public/images/italian-pasta.jpeg" },
```

```
    { name: "Indian Thali", price: "₹449", specialty: "Complete traditional meal", img: "public/images/indian-thali.jpeg" },
    { name: "Chinese Dumplings", price: "₹399", specialty: "Soft and juicy veggie dumplings", img: "public/images/dumplings.jpeg" },
    { name: "French Crepes", price: "₹349", specialty: "Light & sweet dessert crepes", img: "public/images/crepes.jpeg" },
  ];


    return (
    <div className="home-page">
      {/* Hero Section */}
      <section className="hero-section">
        <div className="hero-overlay animate-fade-in">
          <h1 className="animate-slide-up">Discover Global Flavors in One Place</h1>
          <p className="animate-slide-up delay-1">
            ✨ Authentic vegetarian cuisines inspired by Korean, Japanese, Indian, and Chinese kitchens — crafted with care and love. ✨
          </p>
          <button
            className="btn-explore animate-slide-up delay-2"
            onClick={() => navigate("/menu")}
          >
            Explore Menu
          </button>
        </div>
      </section>
```

```
{/* 🍽 Explore Menu Section */}
<section className="menu-preview container my-5 text-center">
  <h2 className="fw-bold section-title text-brown mb-4">🍽 Explore Our Menu</h2>
  <div className="row g-4">
    {dishes.map((dish, index) => (
      <div className="col-md-4 col-sm-6" key={index}>
        <div className="card menu-card shadow-sm border-0">
          <img src={dish.img} alt={dish.name} className="card-img-top" />
          <div className="card-body">
            <h5 className="fw-bold text-brown">{dish.name}</h5>
            <p className="text-muted small">{dish.specialty}</p>
            <p className="fw-semibold text-accent">{dish.price}</p>
            <button
              className="btn btn-outline-accent mt-2"
              onClick={() => alert(`🍴 ${dish.name}\n${dish.specialty}\nPrice: ${dish.price}`)}
            >
              View Dish
            </button>
          </div>
        </div>
      </div>
    ))}
```

```
    </div>
  </section>


  {/* ☕ About Preview */}
  <section className="about-preview container d-flex flex-column flex-md-row align-items-center justify-content-between my-5 py-4">
    <div className="about-img">
      <img
        src="https://images.unsplash.com/photo-1579027989536-b7b1f875659b?auto=format&fit=crop&w=900&q=80"
        alt="Restaurant Interior"
        className="img-fluid rounded shadow"
      />
    </div>
    <div className="about-text mt-4 mt-md-0 text-center text-md-start">
      <h2 className="fw-bold text-brown">About Gourmet Delight</h2>
      <p className="text-muted mt-2">
        We bring together authentic flavors from around the world in one
        comforting vegetarian menu. Every dish is made fresh with love and
        care.
      </p>
      <button className="btn btn-accent mt-2">Read More</button>
    </div>
  </section>
```

```
{/* 💬 Testimonials */}
<section className="testimonials py-5 text-center">
  <div className="container">
    <h2 className="fw-bold text-brown mb-4">💬 What Our Customers Say</h2>
    <div className="row g-4">
      {[
        { name: "Aarav Sharma", text: "Perfect mix of authentic flavors and cozy vibes!", img: "https://randomuser.me/api/portraits/men/32.jpg" },
        { name: "Sana Kapoor", text: "Everything tasted like home but with a gourmet twist!", img: "https://randomuser.me/api/portraits/women/44.jpg" },
        { name: "Rohan Mehta", text: "Highly recommended for vegetarians who love global cuisine!", img: "https://randomuser.me/api/portraits/men/76.jpg" },
      ].map((review, index) => (
        <div className="col-md-4" key={index}>
          <div className="card testimonial-card p-4 border-0 shadow-sm">
            <img
              src={review.img}
              alt={review.name}
              className="rounded-circle mb-3"
              width="80"
              height="80"
            />
            <p className="fst-italic text-muted">"{review.text}"</p>
            <h6 className="fw-bold text-accent mt-2">{review.name}</h6>
          </div>
```

```
        </div>
      ))}
    </div>
  </div>
</section>


{/* ✉ Newsletter */}
<section className="newsletter text-center py-5">
  <div className="container">
    <h2 className="fw-bold text-brown mb-3">
      Join Our Foodie Family 🍰
    </h2>
    <p className="text-muted mb-4">
      Subscribe for exclusive offers and the latest menu updates!
    </p>
    <div className="d-flex justify-content-center flex-wrap gap-2">
      <input
        type="email"
        placeholder="Enter your email"
        className="form-control w-auto px-3 rounded-pill"
      />
      <button className="btn btn-accent rounded-pill">Subscribe</button>
    </div>
  </div>
</section>
```

```
    </div>
  );
}
```

Home.css.

```
home-page {
  font-family: "Poppins", sans-serif;
  color: #333;
  text-align: center;
  overflow-x: hidden;
}

/* Background Hero Section */
.hero-section {
  background-image: url("https://images.unsplash.com/photo-1504674900247-0877df9cc836?auto=format&fit=crop&w=1500&q=80");
  background-size: cover;
  background-position: center;
  height: 100vh;
  display: flex;
  justify-content: center;
  align-items: center;
  position: relative;
}
```

```
.hero-overlay {
  background-color: rgba(249, 186, 193, 0.55);
  color: #fff;
  padding: 40px;
  border-radius: 20px;
  text-align: center;
  width: 90%;
  max-width: 700px;
  animation: fadeIn 2s ease;
}

.hero-overlay h1 {
  font-size: 2.8rem;
  margin-bottom: 15px;
  font-weight: 700;
  color: #fff;
}

.hero-overlay p {
  font-size: 1.2rem;
  margin-bottom: 25px;
  line-height: 1.6;
}

.btn-explore {
```

```
  background-color: #e74c3c;
  color: white;
  padding: 12px 30px;
  border-radius: 30px;
  text-decoration: none;
  font-weight: 600;
  border: none;
  cursor: pointer;
  transition: all 0.3s ease;
}

.btn-explore:hover {
  background-color: #ff6b5a;
  transform: scale(1.05);
}

/* Animation Effects */
@keyframes fadeIn {
  from { opacity: 0; transform: translateY(20px); }
  to { opacity: 1; transform: translateY(0); }
}

.animate-fade-in {
  animation: fadeIn 2s ease forwards;
}
```

```
@keyframes slideUp {
  from { opacity: 0; transform: translateY(50px); }
  to { opacity: 1; transform: translateY(0); }
}

.animate-slide-up {
  opacity: 0;
  animation: slideUp 1.5s ease forwards;
}

.delay-1 { animation-delay: 0.5s; }
.delay-2 { animation-delay: 1s; }

/* Intro Section */
.home-intro {
  padding: 60px 20px;
  background-color: #fffaf5;
}

.home-intro h2 {
  font-size: 2rem;
  margin-bottom: 30px;
  color: #e74c3c;
}
```

```
.dishes-container {
  display: flex;
  flex-wrap: wrap;
  justify-content: center;
  gap: 25px;
}

/* ✅ Dish Cards — Uniform Look */
.dish-card {
  background-color: #fff;
  border-radius: 15px;
  box-shadow: 0 4px 15px rgba(0, 0, 0, 0.1);
  width: 300px;
  overflow: hidden;
  transition: all 0.3s ease;
}

.dish-card:hover {
  transform: scale(1.05);
  box-shadow: 0 8px 25px rgba(0, 0, 0, 0.2);
}

/* ✅ All images same height, properly fitted */
.dish-card img {
```

```
  width: 100%;
  height: 220px; /* fixed height for all images */
  object-fit: cover; /* ensures image fills area neatly */
  border-bottom: 3px solid #ffe6e6; /* optional for aesthetic separation */
}

.dish-card:hover img {
  transform: scale(1.05);
}

.dish-card h3 {
  margin: 15px 0 10px;
  color: #333;
}

.dish-card p {
  padding: 0 15px 20px;
  color: #666;
  font-size: 0.95rem;
  line-height: 1.4;
}
```

Footer.jsx

```
import React from "react";
import "./Footer.css";
```

```
export default function Footer() {
  return (
    <footer className="footer">
      <div className="footer-container">
        <p>© 2025 Gourmet Delight — All Rights Reserved 🍴</p>
        <p>
          Follow us:
          <a href="#"> Instagram </a>|
          <a href="#"> Facebook </a>|
          <a href="#"> Twitter </a>
        </p>
      </div>
    </footer>
  );
}
```

Footer.css

```
.footer {
  background: rgb(234, 214, 188);
  color: #fff;
  padding: 1.5rem 0;
  text-align: center;
  margin-top: auto;
}
```

```
.footer-container {
  max-width: 1200px;
  margin: 0 auto;
  font-size: 0.9rem;
}

.footer a {
  color: #ff9966;
  text-decoration: none;
  margin: 0 0.3rem;
  transition: color 0.3s;
}

.footer a:hover {
  color: #ff5e62;
}
```

Output:

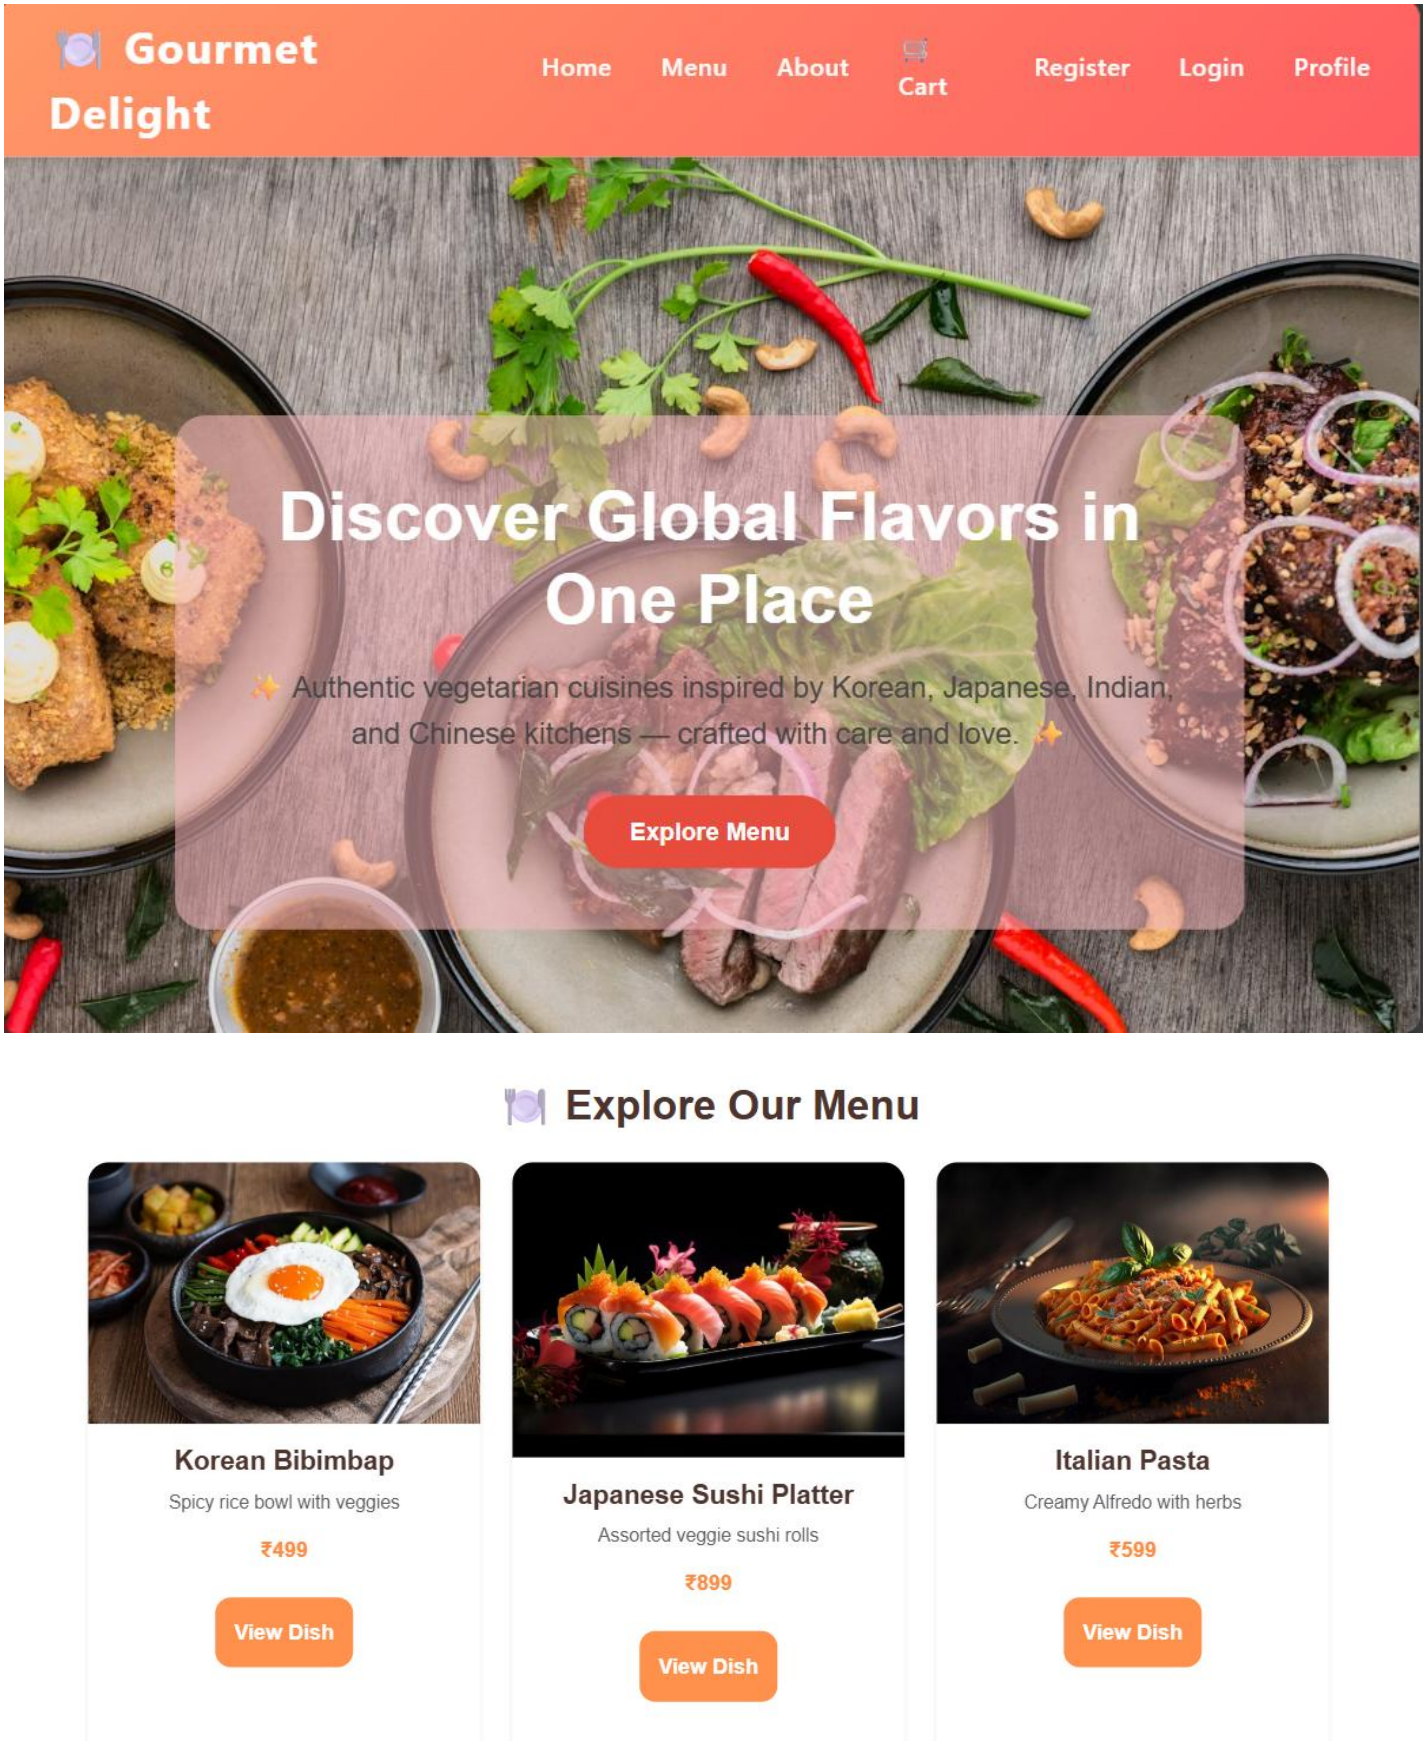
🍽️ Gourmet Delight
Home
Menu
About
🛒 Cart
Register
Login
Profile
Discover Global Flavors in One Place
✨ Authentic vegetarian cuisines inspired by Korean, Japanese, Indian, and Chinese kitchens — crafted with care and love. ✨
Explore Menu
🍽️ Explore Our Menu
Korean Bibimbap
Spicy rice bowl with veggies
₹499
View Dish
Japanese Sushi Platter
Assorted veggie sushi rolls
₹899
View Dish
Italian Pasta
Creamy Alfredo with herbs
₹599
View Dish

Indian Thali

Complete traditional meal

₹449

View Dish

Chinese Dumplings

Soft and juicy veggie dumplings

₹399

View Dish

French Crepes

Light & sweet dessert crepes

₹349

View Dish

About Gourmet Delight

We bring together authentic flavors from around the world in one comforting vegetarian menu. Every dish is made fresh with love and care.

Read More

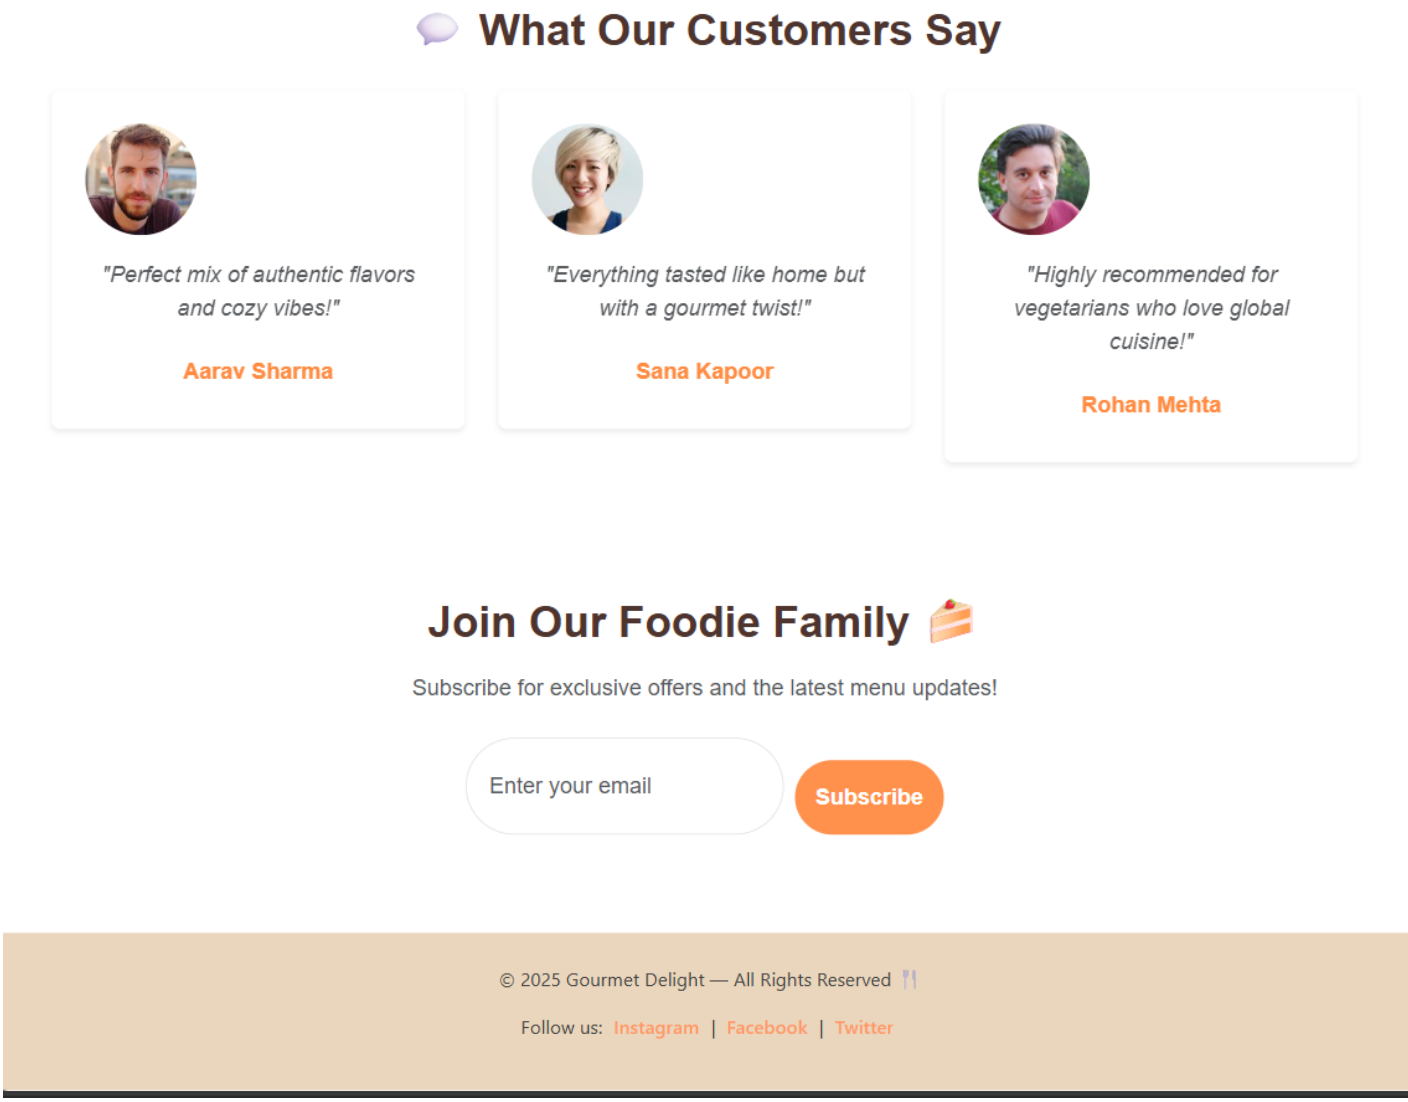

Conclusion:

We successfully implemented the Home Page of the **Multi-Cuisine Restaurant React** *Website* with a **f**eatured dishes section**,** dynamic search functionality**,** and responsive layout**.** This demonstrates the use of React components**,** state management, and Bootstrap styling to build a professional and interactive homepage.

Assignment 3: Fetch Product Data & Routing

Aim:

To understand and implement Routing in React using **react-router-dom**, and to design a **Menu (Products)** page that displays a list of 12 dishes with their details and an option to Add to Cart**.**

Theory:

What is Routing in React?

Routing in React allows navigation between different pages or views in a **Single Page Application (SPA)** — without reloading the page.
It provides a **smooth and fast experience** using client-side routing.

React Router Components:

Component	Description
BrowserRouter	Wraps the entire app and keeps UI in sync with URL.
Routes	Container for all route definitions.
Route	Defines a path and the component that renders for that path.
Link	Used for navigation without page reloads.
NavLink	Like Link, but highlights active routes.
useNavigate	A hook for programmatic navigation.

How Routing Works:

1. The whole app is wrapped in <BrowserRouter>.
2. Inside <Routes>, multiple <Route> elements define paths.
3. Clicking a <Link> updates the URL and renders the respective component.
4. The page doesn’t reload — only the component changes.

Advantages:

- Fast navigation
- No page reload
- Better UX
- Clean structure and reusability
- Supports dynamic paths like /menu/:id

Code Implementation:

App.jsx

```
import React from "react";

import { Routes, Route } from "react-router-dom";

import Navbar from "./components/Navbar";

import Home from "./pages/Home";

import Menu from "./pages/Menu";

import About from "./pages/About";

import Cart from "./pages/Cart";

import Checkout from "./pages/Checkout";

import Profile from "./pages/Profile";

import Login from "./pages/Login";

import Register from "./pages/Register";

import Footer from "./components/Footer";

import { CartProvider } from "./context/CartContext";


export default function App() {

  return (

    <CartProvider>

      <Navbar />
```

```
      <div className="main-content">
        <Routes>
          <Route path="/" element={<Home />} />
          <Route path="/menu" element={<Menu />} />
          <Route path="/about" element={<About />} />
          <Route path="/cart" element={<Cart />} />
          <Route path="/checkout" element={<Checkout />} />
          <Route path="/profile" element={<Profile />} />
          <Route path="/login" element={<Login />} />
          <Route path="/register" element={<Register />} />
        </Routes>
      </div>
      <Footer />
    </CartProvider>
  );
}
```

Menu.jsx

```
import React, { useState, useMemo } from "react";
import menuData from "../data/menuData";
import "./Menu.css";

export default function Menu() {
  const [cuisine, setCuisine] = useState("All");
  const [message, setMessage] = useState("");

  const cuisines = useMemo(
    () => ["All", ...new Set(menuData.map(item => item.cuisine))],
    []
  );

  const filtered =
    cuisine === "All"
      ? menuData
      : menuData.filter(item => item.cuisine === cuisine);

function addToCart(item) {
  const cart = JSON.parse(localStorage.getItem("restro_cart")) || [];
```

```
  const existingItem = cart.find(i => i.id === item.id);
  if (existingItem) {
    existingItem.quantity += 1;
  } else {
    cart.push({ ...item, quantity: 1 });
  }

  localStorage.setItem("restro_cart", JSON.stringify(cart));

  window.dispatchEvent(new Event("cartUpdated"));

  setMessage(`${item.name} added to cart 🛒`);
  setTimeout(() => setMessage(""), 2000);
}



  return (
    <div className="menu-page">
      <h1 className="menu-title">Our Delicious Menu</h1>

      {message && <div className="cart-message">{message}</div>}

      <div className="filter-container">
        <label htmlFor="cuisine">Filter by Cuisine:</label>
        <select
```

```
        id="cuisine"
        value={cuisine}
        onChange={e => setCuisine(e.target.value)}
      >
        {cuisines.map(c => (
          <option value={c} key={c}>
            {c}
          </option>
        ))}
      </select>
    </div>

    <div className="menu-grid">
      {filtered.map(item => (
        <div className="menu-card" key={item.id}>
<img src={item.img} alt={item.name} className="menu-img" />


          <div className="menu-info">
            <h3 className="dish-name">{item.name}</h3>
            <p className="dish-cuisine">{item.cuisine}</p>
            <p className="dish-desc">{item.desc}</p>
            <p className="dish-price">₹{item.price}</p>
            <button
              className="order-btn"
```

```
              onClick={() => addToCart(item)}
            >
              Add to Cart 🛒
            </button>
          </div>
        </div>
      ))}
    </div>
  </div>
);
}
```

Menu.css

```
/* ===== Menu Page Styling ===== */

.menu-page {
  padding: 40px 8%;
  background: linear-gradient(180deg, #fff7f2, #ffe7d1);
  min-height: 100vh;
  font-family: 'Poppins', sans-serif;
  text-align: center;
}

.menu-title {
  font-size: 2.5rem;
```

```
  color: #3c2a1e;
  margin-bottom: 30px;
  letter-spacing: 1px;
}

.filter-container {
  display: flex;
  justify-content: center;
  align-items: center;
  gap: 15px;
  margin-bottom: 40px;
  flex-wrap: wrap;
}

.filter-container label {
  font-weight: 600;
  color: #4b3f37;
}

.filter-container select {
  padding: 10px 15px;
  border-radius: 8px;
  border: 1px solid #ccc;
  background: white;
  font-size: 1rem;
```

```
  cursor: pointer;
  transition: 0.3s;
}

.filter-container select:hover {
  border-color: #ff9c33;
}

/* ===== Menu Cards Grid ===== */

.menu-grid {
  display: grid;
  grid-template-columns: repeat(auto-fill, minmax(300px, 1fr));
  gap: 35px;
  justify-items: center;
  align-items: stretch;
}

/* ===== Menu Card ===== */
.menu-card {
  width: 100%;
  max-width: 320px;
  background: #fff;
  border-radius: 16px;
  box-shadow: 0 4px 12px rgba(0, 0, 0, 0.1);
```

```
  overflow: hidden;
  display: flex;
  flex-direction: column;
  height: 520px; /* ✅ fixed equal height */
  transition: transform 0.3s ease, box-shadow 0.3s ease;
}

.menu-card:hover {
  transform: translateY(-8px);
  box-shadow: 0 8px 18px rgba(0, 0, 0, 0.15);
}

/* ===== Image Styling ===== */
.menu-image {
  width: 100%;
  height: 240px; /* consistent height */
  object-fit: contain; /* ✅ ensures full image visible */
  background-color: #fff;
  padding: 8px;
  display: block;
  border-bottom: 1px solid #eee;
  border-top-left-radius: 16px;
  border-top-right-radius: 16px;
}
```

```
/* ===== Info Section ===== */
.menu-info {
  flex: 1;
  display: flex;
  flex-direction: column;
  justify-content: space-between;
  padding: 16px;
  text-align: left;
}

.dish-name {
  font-size: 1.25rem;
  color: #2e2e2e;
  margin: 8px 0 4px;
}

.dish-cuisine {
  color: #777;
  font-size: 0.95rem;
  margin-bottom: 8px;
}

.dish-desc {
  color: #555;
  font-size: 0.9rem;
```

```
  margin-bottom: 10px;
  flex-grow: 1;
  overflow: hidden;
  text-overflow: ellipsis;
}

/* ===== Price and Button ===== */
.dish-price {
  font-weight: bold;
  color: #e67e22;
  margin-bottom: 12px;
  font-size: 1rem;
  text-align: left;
}

/* ✅ Always visible Add to Cart button */
.order-btn {
  background-color: #ff8c00;
  color: #fff;
  border: none;
  padding: 10px 16px;
  border-radius: 8px;
  cursor: pointer;
  font-weight: 600;
  transition: background 0.3s, transform 0.2s;
```

```
  align-self: center;
  width: 100%;
  max-width: 200px;
  margin-top: auto; /* pushes button to bottom */
}

.order-btn:hover {
  background-color: #e67e22;
  transform: scale(1.05);
}

/* ===== Responsive ===== */
@media (max-width: 1024px) {
  .menu-grid {
    grid-template-columns: repeat(2, 1fr);
  }
}

@media (max-width: 768px) {
  .menu-grid {
    grid-template-columns: 1fr;
  }

  .menu-title {
    font-size: 2rem;
```

```
  }

  .filter-container {
    flex-direction: column;
  }

  .menu-card {
    height: auto;
  }

  .menu-image {
    height: 200px;
  }
}

/* ===== Add to Cart Message ===== */
.cart-message {
  background-color: #fff3cd;
  color: #856404;
  padding: 10px 20px;
  border-radius: 12px;
  margin-bottom: 15px;
  display: inline-block;
  font-weight: 600;
  animation: fadeOut 2s ease-in-out;
```

```
}

@keyframes fadeOut {
  0% { opacity: 0; transform: translateY(-5px); }
  20% { opacity: 1; transform: translateY(0); }
  80% { opacity: 1; }
  100% { opacity: 0; transform: translateY(-5px); }
}
```

MenuCard.jsx

```
import React from "react";
import { useCart } from "../context/CartContext";
import "./MenuCard.css";

export default function MenuCard({ item }) {
  const { addToCart } = useCart();

  return (
    <div className="menu-card shadow-sm">
      <img
        src={item.img}
        alt={item.name}
        className="menu-card-img"
        loading="lazy"
      />
```

```
      <div className="menu-card-body">
        <h4 className="menu-card-title">{item.name}</h4>
        <p className="menu-card-cuisine">{item.cuisine}</p>
        <p className="menu-card-desc">{item.desc}</p>

        <div className="menu-card-footer">
          <strong className="menu-card-price">₹{item.price.toFixed(2)}</strong>
          <button
            className="btn-add"
            onClick={() => addToCart(item)}
          >
            Add to Cart 🍽
          </button>
        </div>
      </div>
    </div>
  );
}
```

MenuCard.css

```
.menu-card {
  background: #fff;
  border-radius: 15px;
  overflow: hidden;
  transition: transform 0.3s ease, box-shadow 0.3s ease;
  display: flex;
  flex-direction: column;
}

.menu-card:hover {
  transform: translateY(-5px);
  box-shadow: 0 10px 20px rgba(0, 0, 0, 0.15);
}

.menu-card-img {
  width: 100%;
  height: 200px;
  object-fit: cover;
}

.menu-card-body {
  padding: 1rem;
  text-align: left;
}
```

```
.menu-card-title {
  font-size: 1.3rem;
  color: #ff5e62;
  margin-bottom: 0.3rem;
}

.menu-card-cuisine {
  color: #777;
  font-size: 0.9rem;
  margin-bottom: 0.5rem;
  font-style: italic;
}

.menu-card-desc {
  color: #555;
  font-size: 0.95rem;
  margin-bottom: 1rem;
  line-height: 1.4;
}

.menu-card-footer {
  display: flex;
  align-items: center;
  justify-content: space-between;
```

```
}

.menu-card-price {
  font-weight: 600;
  color: #222;
  font-size: 1.1rem;
}

.btn-add {
  background: linear-gradient(135deg, #ff9966, #ff5e62);
  border: none;
  color: white;
  padding: 0.5rem 1rem;
  border-radius: 8px;
  font-weight: 500;
  transition: background 0.3s ease;
  cursor: pointer;
}

.btn-add:hover {
  background: linear-gradient(135deg, #ff5e62, #ff9966);
}
```

Output:

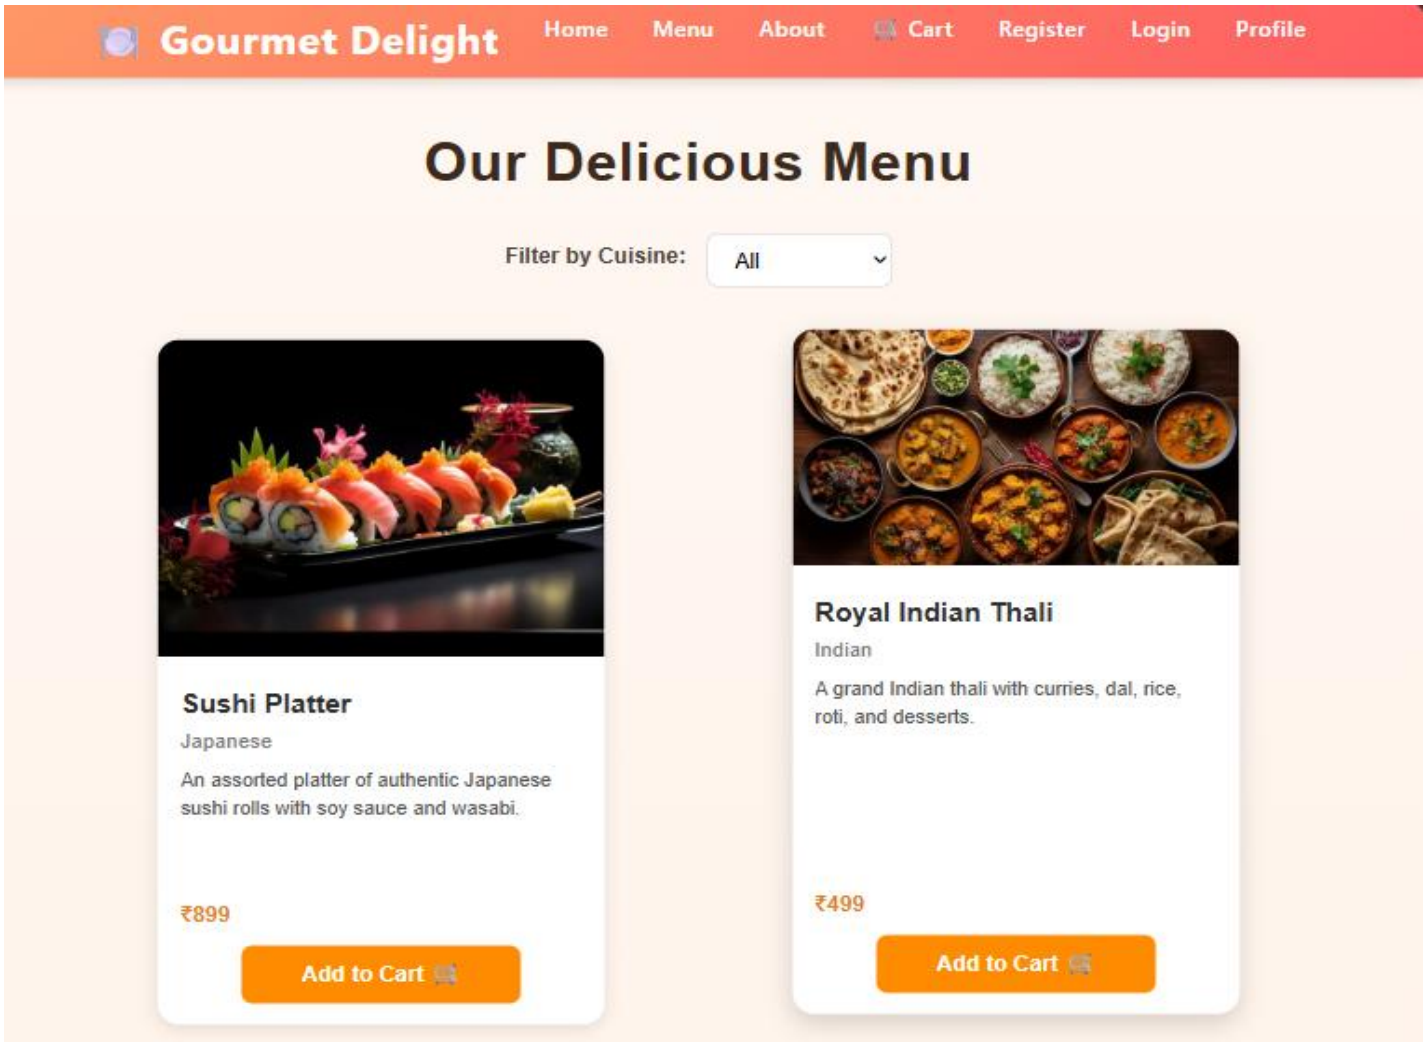
Gourmet Delight
Home
Menu
About
Cart
Register
Login
Profile
Our Delicious Menu
Filter by Cuisine:
All
Sushi Platter
Japanese
An assorted platter of authentic Japanese sushi rolls with soy sauce and wasabi.
₹899
Add to Cart
Royal Indian Thali
Indian
A grand Indian thali with curries, dal, rice, roti, and desserts.
₹499
Add to Cart

Creamy Italian Pasta

Italian

Rich and creamy Alfredo pasta made with Italian herbs and parmesan cheese.

₹399

Add to Cart 🛒

Korean Bibimbap

Korean

Traditional Korean rice bowl topped with vegetables, fried egg, and spicy gochujang sauce.

₹449

Add to Cart 🛒

Chinese Dumplings

Chinese

Soft, steamed dumplings filled with fresh vegetables and authentic flavors.

₹299

Add to Cart 🛒

Thai Green Curry

Thai

Fragrant green curry made with coconut milk, vegetables, and Thai herbs.

₹479

Add to Cart 🛒

Mexican Tacos

Mexican

Crispy tacos filled with spicy beans, salsa, and creamy guacamole.

₹349

Add to Cart 🛒

French Crepes

French

Delicate French crepes with fresh fruits, chocolate syrup, and whipped cream.

₹379

Add to Cart 🛒

Grilled Salmon

Continental

Perfectly grilled salmon served with butter sauce and veggies.

₹699

Add to Cart 🛒

Paneer Butter Masala

Indian

Creamy paneer curry cooked in rich tomato and butter gravy.

₹359

Add to Cart 🛒

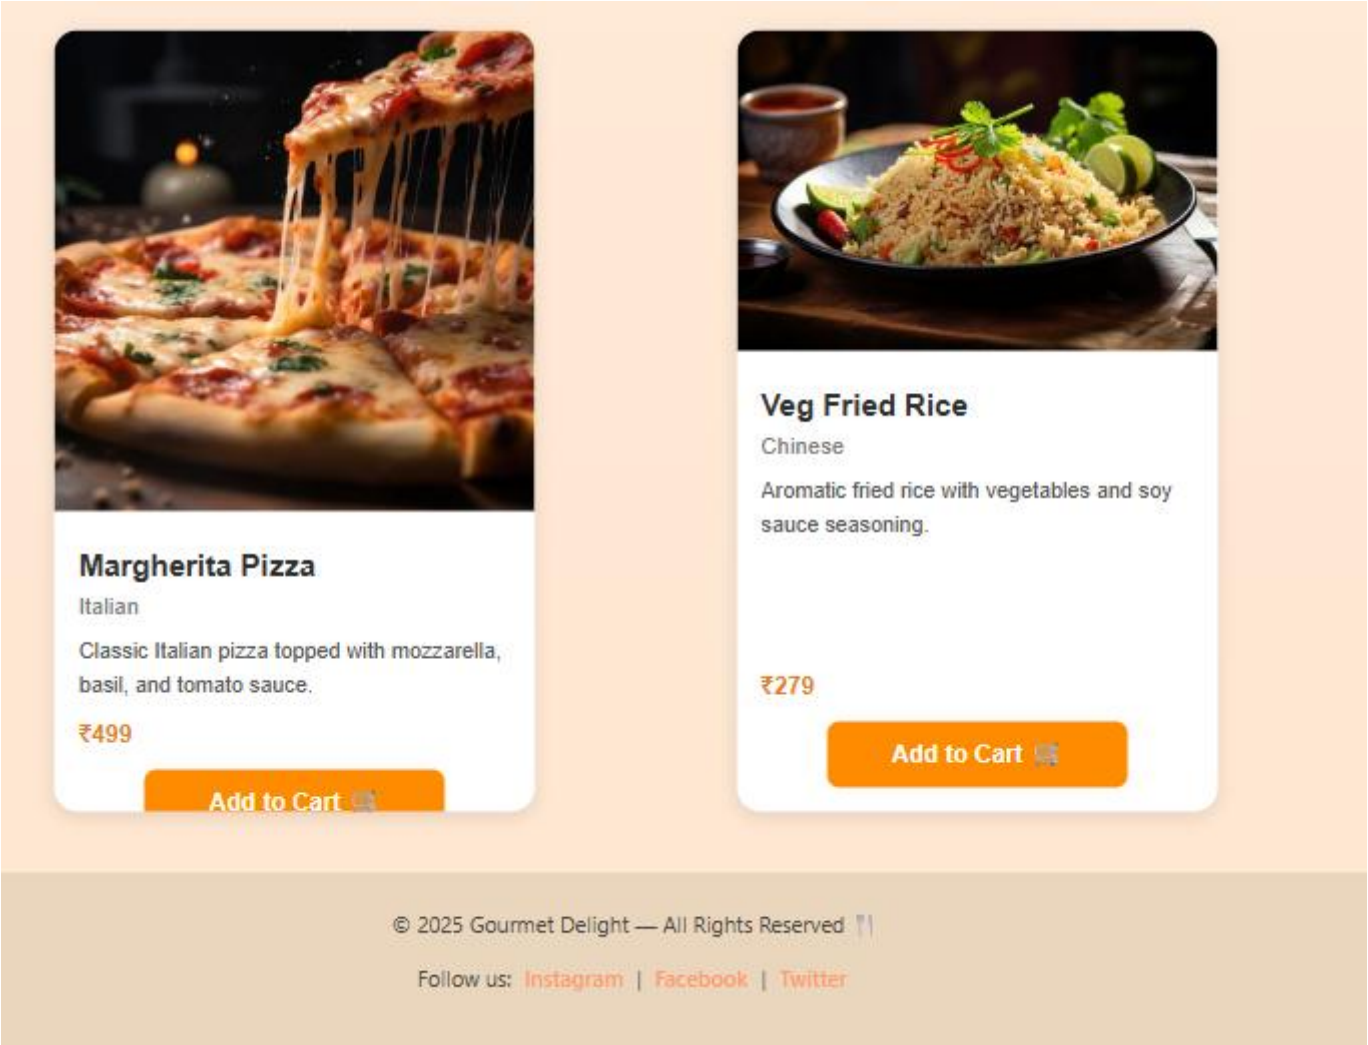

Conclusion:

We successfully implemented React Router DOM for client-side routing and fetched product (dish) data from an array/JSON file**,** displayed it dynamically, and enabled smooth page navigation using SPA (Single Page Application) logic.

Assignment 4: Products Page

Aim:

To design and develop a Menu Page (Products Page) in React that dynamically displays a list of dishes with details such as image, name, description, price, and quantity, along with an **"Add to Cart"** button..

Theory:

Introduction

The Products (Menu) Page is the main section of any restaurant or e-commerce app. It lists all dishes in a structured layout, allowing users to browse, view, and add them to their cart.
In React, this is built as a functional component that uses state, props, and reusable subcomponents**.**

Component-Based Architecture

React divides the UI into independent and reusable components**.**

For this assignment:

- **Products.js (Menu.js)** → handles data, filtering, and logic.
- **ProductCard.js (MenuCard.js)** → displays each dish's details.

This modular approach keeps the app scalable and easy to maintain**.**

Featured Dishes or Categories

We create a list (array) of dishes, each with:

- name
- description
- price
- quantity
- image

The dishes are rendered dynamically using map() — making it easy to add or modify menu items.

Search Bar Functionality

- Uses React's **state** (useState) to store user input.
- Updates dynamically via **onChange()**.
- Filters dishes using the **filter()** function.
- Provides **real-time search results** as the user types.

Routing & Navigation

Navigation to /menu happens using React Router's <Link> or <NavLink>. This allows users to switch between pages without reloading the site, giving a **Single Page Application (SPA)** experience.

Code Implementation:

Menu.jsx

```
import React, { useState, useMemo } from "react";

import menuData from "../data/menuData";

import "./Menu.css";


export default function Menu() {

  const [cuisine, setCuisine] = useState("All");

  const [message, setMessage] = useState("");


  const cuisines = useMemo(

    () => ["All", ...new Set(menuData.map(item => item.cuisine))],

    []

  );


  const filtered =

    cuisine === "All"
```

```
      ? menuData
      : menuData.filter(item => item.cuisine === cuisine);

function addToCart(item) {
  const cart = JSON.parse(localStorage.getItem("restro_cart")) || [];

  const existingItem = cart.find(i => i.id === item.id);
  if (existingItem) {
    existingItem.quantity += 1;
  } else {
    cart.push({ ...item, quantity: 1 });
  }

  localStorage.setItem("restro_cart", JSON.stringify(cart));

  window.dispatchEvent(new Event("cartUpdated"));

  setMessage(`${item.name} added to cart 🛒`);
  setTimeout(() => setMessage(""), 2000);
}


  return (
    <div className="menu-page">
      <h1 className="menu-title">Our Delicious Menu</h1>
```

```
      {message && <div className="cart-message">{message}</div>}

      <div className="filter-container">
        <label htmlFor="cuisine">Filter by Cuisine:</label>
        <select
          id="cuisine"
          value={cuisine}
          onChange={e => setCuisine(e.target.value)}
        >
          {cuisines.map(c => (
            <option value={c} key={c}>
              {c}
            </option>
          ))}
        </select>
      </div>

      <div className="menu-grid">
        {filtered.map(item => (
          <div className="menu-card" key={item.id}>
<img src={item.img} alt={item.name} className="menu-img" />


            <div className="menu-info">
```

```
            <h3 className="dish-name">{item.name}</h3>
            <p className="dish-cuisine">{item.cuisine}</p>
            <p className="dish-desc">{item.desc}</p>
            <p className="dish-price">₹{item.price}</p>
            <button
              className="order-btn"
              onClick={() => addToCart(item)}
            >
              Add to Cart 🛒
            </button>
          </div>
        </div>
      ))}
    </div>
  </div>
);
}
```

Menu.css:

```
/* ===== Menu Page Styling ===== */


.menu-page {
  padding: 40px 8%;
  background: linear-gradient(180deg, #fff7f2, #ffe7d1);
  min-height: 100vh;
  font-family: 'Poppins', sans-serif;
```

```
  text-align: center;
}

.menu-title {
  font-size: 2.5rem;
  color: #3c2a1e;
  margin-bottom: 30px;
  letter-spacing: 1px;
}

.filter-container {
  display: flex;
  justify-content: center;
  align-items: center;
  gap: 15px;
  margin-bottom: 40px;
  flex-wrap: wrap;
}

.filter-container label {
  font-weight: 600;
  color: #4b3f37;
}

.filter-container select {
```

```
  padding: 10px 15px;
  border-radius: 8px;
  border: 1px solid #ccc;
  background: white;
  font-size: 1rem;
  cursor: pointer;
  transition: 0.3s;
}

.filter-container select:hover {
  border-color: #ff9c33;
}

/* ===== Menu Cards Grid ===== */

.menu-grid {
  display: grid;
  grid-template-columns: repeat(auto-fill, minmax(300px, 1fr));
  gap: 35px;
  justify-items: center;
  align-items: stretch;
}

/* ===== Menu Card ===== */
.menu-card {
```

```
  width: 100%;
  max-width: 320px;
  background: #fff;
  border-radius: 16px;
  box-shadow: 0 4px 12px rgba(0, 0, 0, 0.1);
  overflow: hidden;
  display: flex;
  flex-direction: column;
  height: 520px; /* ✅ fixed equal height */
  transition: transform 0.3s ease, box-shadow 0.3s ease;
}

.menu-card:hover {
  transform: translateY(-8px);
  box-shadow: 0 8px 18px rgba(0, 0, 0, 0.15);
}

/* ===== Image Styling ===== */
.menu-image {
  width: 100%;
  height: 240px; /* consistent height */
  object-fit: contain; /* ✅ ensures full image visible */
  background-color: #fff;
  padding: 8px;
  display: block;
```

```
  border-bottom: 1px solid #eee;
  border-top-left-radius: 16px;
  border-top-right-radius: 16px;
}

/* ===== Info Section ===== */
.menu-info {
  flex: 1;
  display: flex;
  flex-direction: column;
  justify-content: space-between;
  padding: 16px;
  text-align: left;
}

.dish-name {
  font-size: 1.25rem;
  color: #2e2e2e;
  margin: 8px 0 4px;
}

.dish-cuisine {
  color: #777;
  font-size: 0.95rem;
  margin-bottom: 8px;
```

```
}

.dish-desc {
  color: #555;
  font-size: 0.9rem;
  margin-bottom: 10px;
  flex-grow: 1;
  overflow: hidden;
  text-overflow: ellipsis;
}

/* ===== Price and Button ===== */
.dish-price {
  font-weight: bold;
  color: #e67e22;
  margin-bottom: 12px;
  font-size: 1rem;
  text-align: left;
}

/* ✅ Always visible Add to Cart button */
.order-btn {
  background-color: #ff8c00;
  color: #fff;
  border: none;
```

```
  padding: 10px 16px;
  border-radius: 8px;
  cursor: pointer;
  font-weight: 600;
  transition: background 0.3s, transform 0.2s;
  align-self: center;
  width: 100%;
  max-width: 200px;
  margin-top: auto; /* pushes button to bottom */
}

.order-btn:hover {
  background-color: #e67e22;
  transform: scale(1.05);
}

/* ===== Responsive ===== */
@media (max-width: 1024px) {
  .menu-grid {
    grid-template-columns: repeat(2, 1fr);
  }
}

@media (max-width: 768px) {
  .menu-grid {
```

```
    grid-template-columns: 1fr;
  }

  .menu-title {
    font-size: 2rem;
  }

  .filter-container {
    flex-direction: column;
  }

  .menu-card {
    height: auto;
  }

  .menu-image {
    height: 200px;
  }
}

/* ===== Add to Cart Message ===== */
.cart-message {
  background-color: #fff3cd;
  color: #856404;
  padding: 10px 20px;
```

```
  border-radius: 12px;
  margin-bottom: 15px;
  display: inline-block;
  font-weight: 600;
  animation: fadeOut 2s ease-in-out;
}

@keyframes fadeOut {
  0% { opacity: 0; transform: translateY(-5px); }
  20% { opacity: 1; transform: translateY(0); }
  80% { opacity: 1; }
  100% { opacity: 0; transform: translateY(-5px); }
}
```

Output:

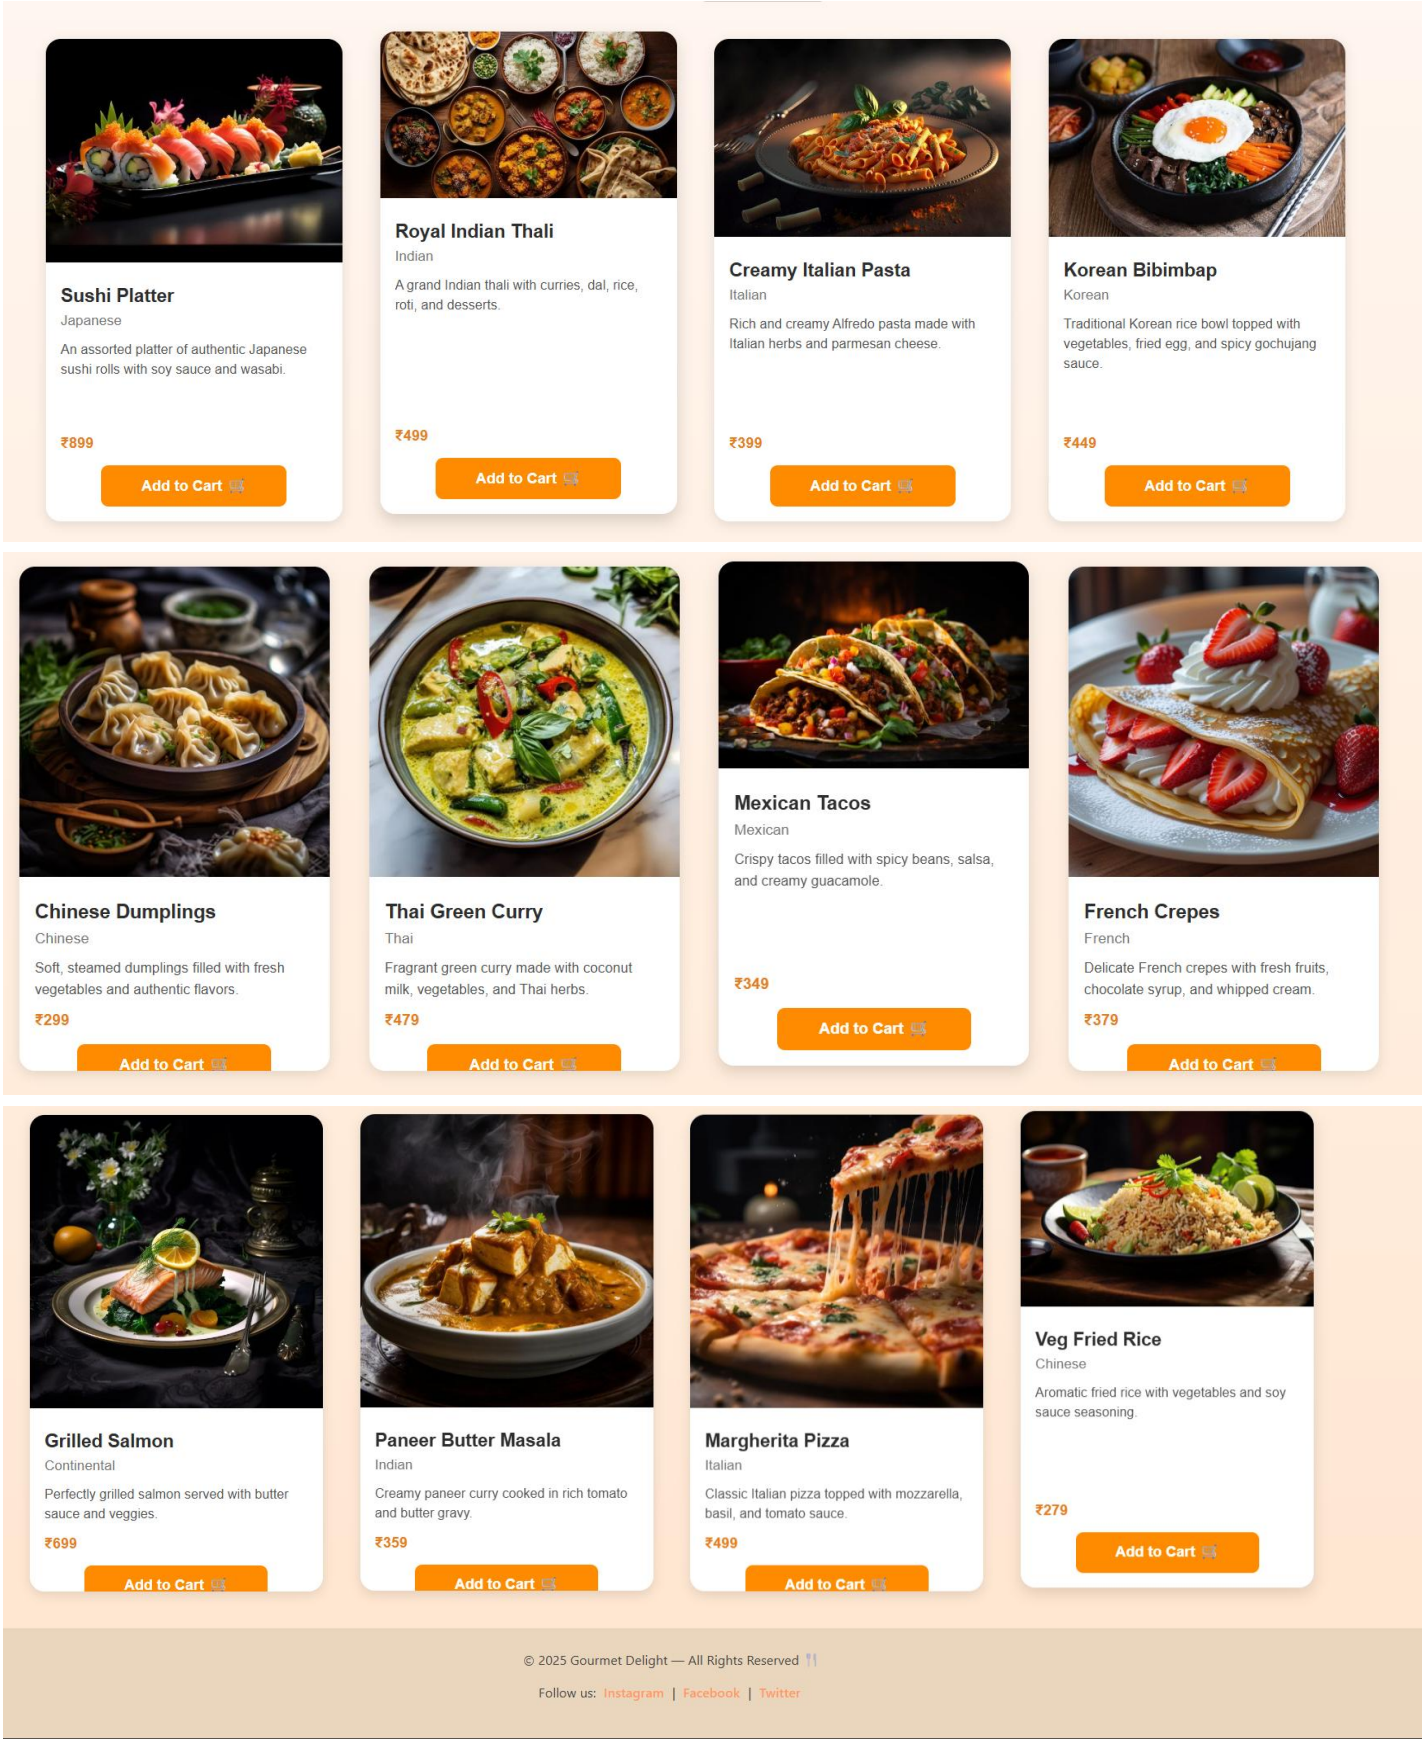

Conclusion:

We successfully designed and developed a **Products (Menu) Page** in React that dynamically displays product details and allows users to search **and** add items to the cart**,** following a modular component-based architecture**.**

Assignment 5: Cart Page

Aim:

To design and develop a **Cart Page** in React that lets users view, modify, or delete dishes added from the Menu Page, while dynamically updating the total amount**.**

Theory

Introduction

The Cart Page acts as a temporary storage for all dishes users plan to order.
It allows:

- Updating quantity
- Removing dishes
- Viewing the total bill dynamically

This is achieved using **React state management** (useState) and **React Router navigation**.

Data Flow

- Dishes are added to localStorage (from Menu page).
- The Cart Page retrieves them on load and manages all changes locally.
- When quantities or items are changed, the state and localStorage update simultaneously**.**

Component Structure

Component	Description
DishCard.js	Contains “Add to Cart” button (from Assignment 4)
Cart.js	Displays all added dishes, with total amount and controls
App.js	Handles routing between /menu and /cart

Quantity & Deletion

- Quantity changes update totals instantly using useState.
- Items can be removed using filter().

Code Implementation:

Cart.jsx

```
import React from "react";
import { useCart } from "../context/CartContext";
import CartItem from "../components/CartItem";
import "./Cart.css";

export default function Cart() {
  const { cart, removeFromCart, updateQty, clearCart } = useCart();

  const subtotal = cart.reduce((s, i) => s + i.price * i.qty, 0);
  const delivery = cart.length > 0 ? 2.5 : 0;
  const total = subtotal + delivery;

  const handleCheckout = () => {
    alert(
      "🎉 Checkout successful! (Simulated)\nThank you for dining with Gourmet Delight!"
    );
    clearCart();
  };

  return (
    <div className="cart-page">
      {/* 🔷 Hero Banner */}
```

```
<div className="cart-hero">
  <div className="overlay">
    <h1 className="hero-title">Your <span>Cart</span></h1>
    <p className="hero-subtitle">Review your delicious picks before checkout 🍽️</p>
  </div>
</div>

<div className="cart-container">
  {cart.length === 0 ? (
    <div className="empty-cart">
      <img
        src="https://cdn-icons-png.flaticon.com/512/2038/2038854.png"
        alt="Empty Cart"
        className="empty-img"
      />
      <p>
        Your cart is empty! Visit the{" "}
        <a href="/menu" className="link-menu">Menu</a> to add dishes 🍲
      </p>
    </div>
  ) : (
    <>
      {/* 🔽 Cart Items */}
      <div className="cart-list">
```

```
{cart.map((item) => (
  <div className="cart-item" key={item.id}>
    <img src={item.img} alt={item.name} className="cart-item-img" />

    <div className="cart-item-info">
      <h4>{item.name}</h4>
      <p className="cart-item-price">₹{item.price.toFixed(2)}</p>

      <div className="qty-row">
        <label>Qty:</label>
        <input
          type="number"
          min="1"
          value={item.qty}
          onChange={(e) =>
            updateQty(item.id, Math.max(1, +e.target.value))
          }
        />
      </div>
    </div>

    <div className="cart-item-actions">
      <strong className="item-total">
        ₹{(item.price * item.qty).toFixed(2)}
      </strong>
```

```
        <button
          className="btn-remove"
          onClick={() => removeFromCart(item.id)}
        >
          ✕ Remove
        </button>
      </div>
    </div>
  ))}
</div>

{/* 🔻 Order Summary */}
<div className="cart-summary">
  <h3>Order Summary</h3>
  <div className="summary-line">
    <span>Subtotal</span>
    <span>₹{subtotal.toFixed(2)}</span>
  </div>
  <div className="summary-line">
    <span>Delivery</span>
    <span>₹{delivery.toFixed(2)}</span>
  </div>
  <div className="summary-total">
    <span>Total</span>
    <strong>₹{total.toFixed(2)}</strong>
```

```
            </div>

            <div className="cart-buttons">
              <a href="/checkout" className="btn-checkout">
                ✅ Proceed to Checkout
              </a>
              <button className="btn-clear" onClick={clearCart}>
                🗑 Clear Cart
              </button>
            </div>
          </div>
        </>
      )}
    </div>
  </div>
 );
}
```

Cart.css

```
/* 🔷 Page Layout */
.cart-page {
  font-family: "Poppins", sans-serif;
  padding-bottom: 50px;
  background-color: #fafafa;
}
```

```
/* ⬍ Hero Section */
.cart-hero {
  background: url("https://images.unsplash.com/photo-1600891964092-4316c288032e?auto=format&fit=crop&w=1500&q=80")
    center/cover no-repeat;
  color: white;
  height: 250px;
  position: relative;
  display: flex;
  align-items: center;
  justify-content: center;
}

.cart-hero .overlay {
  background: rgba(249, 244, 244, 0.55);
  text-align: center;
  padding: 40px;
  border-radius: 20px;
}

.hero-title {
  font-size: 2.8rem;
  letter-spacing: 1px;
}
```

```
.hero-title span {
  color: #f12816;
}

.hero-subtitle {
  font-size: 1.1rem;
  margin-top: 10px;
  opacity: 0.9;
}

/* 🛒 Cart Container */
.cart-container {
  display: grid;
  grid-template-columns: 2fr 1fr;
  gap: 30px;
  padding: 40px 60px;
}

@media (max-width: 900px) {
  .cart-container {
    grid-template-columns: 1fr;
    padding: 20px;
  }
}
```

```
/* ◈ Empty Cart */
.empty-cart {
  text-align: center;
  grid-column: span 2;
}

.empty-img {
  width: 120px;
  margin-bottom: 15px;
  opacity: 0.8;
}

.link-menu {
  color: #ff6347;
  font-weight: bold;
}

/* ◈ Cart Items */
.cart-list {
  display: flex;
  flex-direction: column;
  gap: 20px;
}
```

```
.cart-item {
  background-color: #fff;
  border-radius: 15px;
  padding: 20px;
  display: flex;
  align-items: center;
  box-shadow: 0 4px 10px rgba(0, 0, 0, 0.1);
  transition: transform 0.25s ease, box-shadow 0.25s ease;
}

.cart-item:hover {
  transform: translateY(-5px);
  box-shadow: 0 6px 15px rgba(0, 0, 0, 0.15);
}

.cart-item-img {
  width: 100px;
  height: 100px;
  border-radius: 12px;
  object-fit: cover;
  margin-right: 20px;
}

.cart-item-info {
  flex: 1;
```

```
  text-align: left;
}

.cart-item-info h4 {
  font-size: 1.1rem;
  margin-bottom: 5px;
}

.cart-item-price {
  color: #666;
  margin-bottom: 8px;
}

.qty-row {
  display: flex;
  align-items: center;
  gap: 8px;
}

.qty-row input {
  width: 60px;
  padding: 5px;
  border: 1px solid #ccc;
  border-radius: 8px;
  text-align: center;
```

```
}

.cart-item-actions {
  text-align: right;
}

.item-total {
  font-size: 1rem;
  display: block;
  margin-bottom: 8px;
}

.btn-remove {
  background-color: #ff4d4d;
  border: none;
  color: white;
  padding: 6px 12px;
  border-radius: 8px;
  cursor: pointer;
  transition: background-color 0.25s ease;
}

.btn-remove:hover {
  background-color: #e63939;
}
```

```
/* ⬍ Summary Section */
.cart-summary {
  background-color: #fff;
  border-radius: 15px;
  padding: 25px;
  box-shadow: 0 4px 12px rgba(0, 0, 0, 0.1);
  height: fit-content;
}

.cart-summary h3 {
  text-align: center;
  margin-bottom: 20px;
  color: #333;
}

.summary-line,
.summary-total {
  display: flex;
  justify-content: space-between;
  margin: 8px 0;
  font-size: 1rem;
}

.summary-total strong {
```

```
  color: #ff6347;
  font-size: 1.2rem;
}

.cart-buttons {
  display: flex;
  justify-content: space-between;
  margin-top: 25px;
}

.btn-checkout,
.btn-clear {
  flex: 1;
  margin: 5px;
  padding: 10px 15px;
  border-radius: 25px;
  border: none;
  font-weight: bold;
  color: white;
  cursor: pointer;
  transition: all 0.3s;
}

.btn-checkout {
  background-color: #27ae60;
```

```
}

.btn-checkout:hover {
  background-color: #219150;
}

.btn-clear {
  background-color: #ff6347;
}

.btn-clear:hover {
  background-color: #e74c3c;
}
```

CartItem.jsx

```
import React from "react";
import "./CartItem.css";

export default function CartItem({ item, removeFromCart, updateQty }) {
  return (
    <div className="cart-item">
      <img src={item.img} alt={item.name} className="cart-item-img" />

      <div className="cart-item-info">
        <h4>{item.name}</h4>
```

```
        <p className="text-muted">₹{item.price.toFixed(2)}</p>

        <div className="qty-control">
          <label>Qty:</label>
          <input
            type="number"
            min="1"
            value={item.qty}
            onChange={(e) => updateQty(item.id, Math.max(1, +e.target.value))}
          />
        </div>
      </div>

      <div className="cart-item-actions">
        <strong className="total-price">
          ₹{(item.price * item.qty).toFixed(2)}
        </strong>
        <button className="btn-remove" onClick={() =>
removeFromCart(item.id)}>
          ✕
        </button>
      </div>
    </div>
  );
}
```

CartItem.css

```
.cart-item {
  display: flex;
  align-items: center;
  justify-content: space-between;
  background: #fff;
  border-radius: 12px;
  margin-bottom: 1rem;
  padding: 1rem;
  box-shadow: 0 4px 10px rgba(0,0,0,0.05);
  transition: transform 0.3s ease;
}

.cart-item:hover {
  transform: translateY(-3px);
}

.cart-item-img {
  width: 90px;
  height: 90px;
  border-radius: 10px;
  object-fit: cover;
}

.cart-item-info h4 {
```

```
  color: #ff5e62;
  font-size: 1.1rem;
}

.qty-control input {
  width: 60px;
  border: 1px solid #ddd;
  border-radius: 8px;
  padding: 0.3rem;
  text-align: center;
}

.btn-remove {
  background: #ffe5e5;
  border: none;
  color: #ff5e62;
  padding: 0.4rem 0.6rem;
  border-radius: 6px;
  cursor: pointer;
}
```

Output:

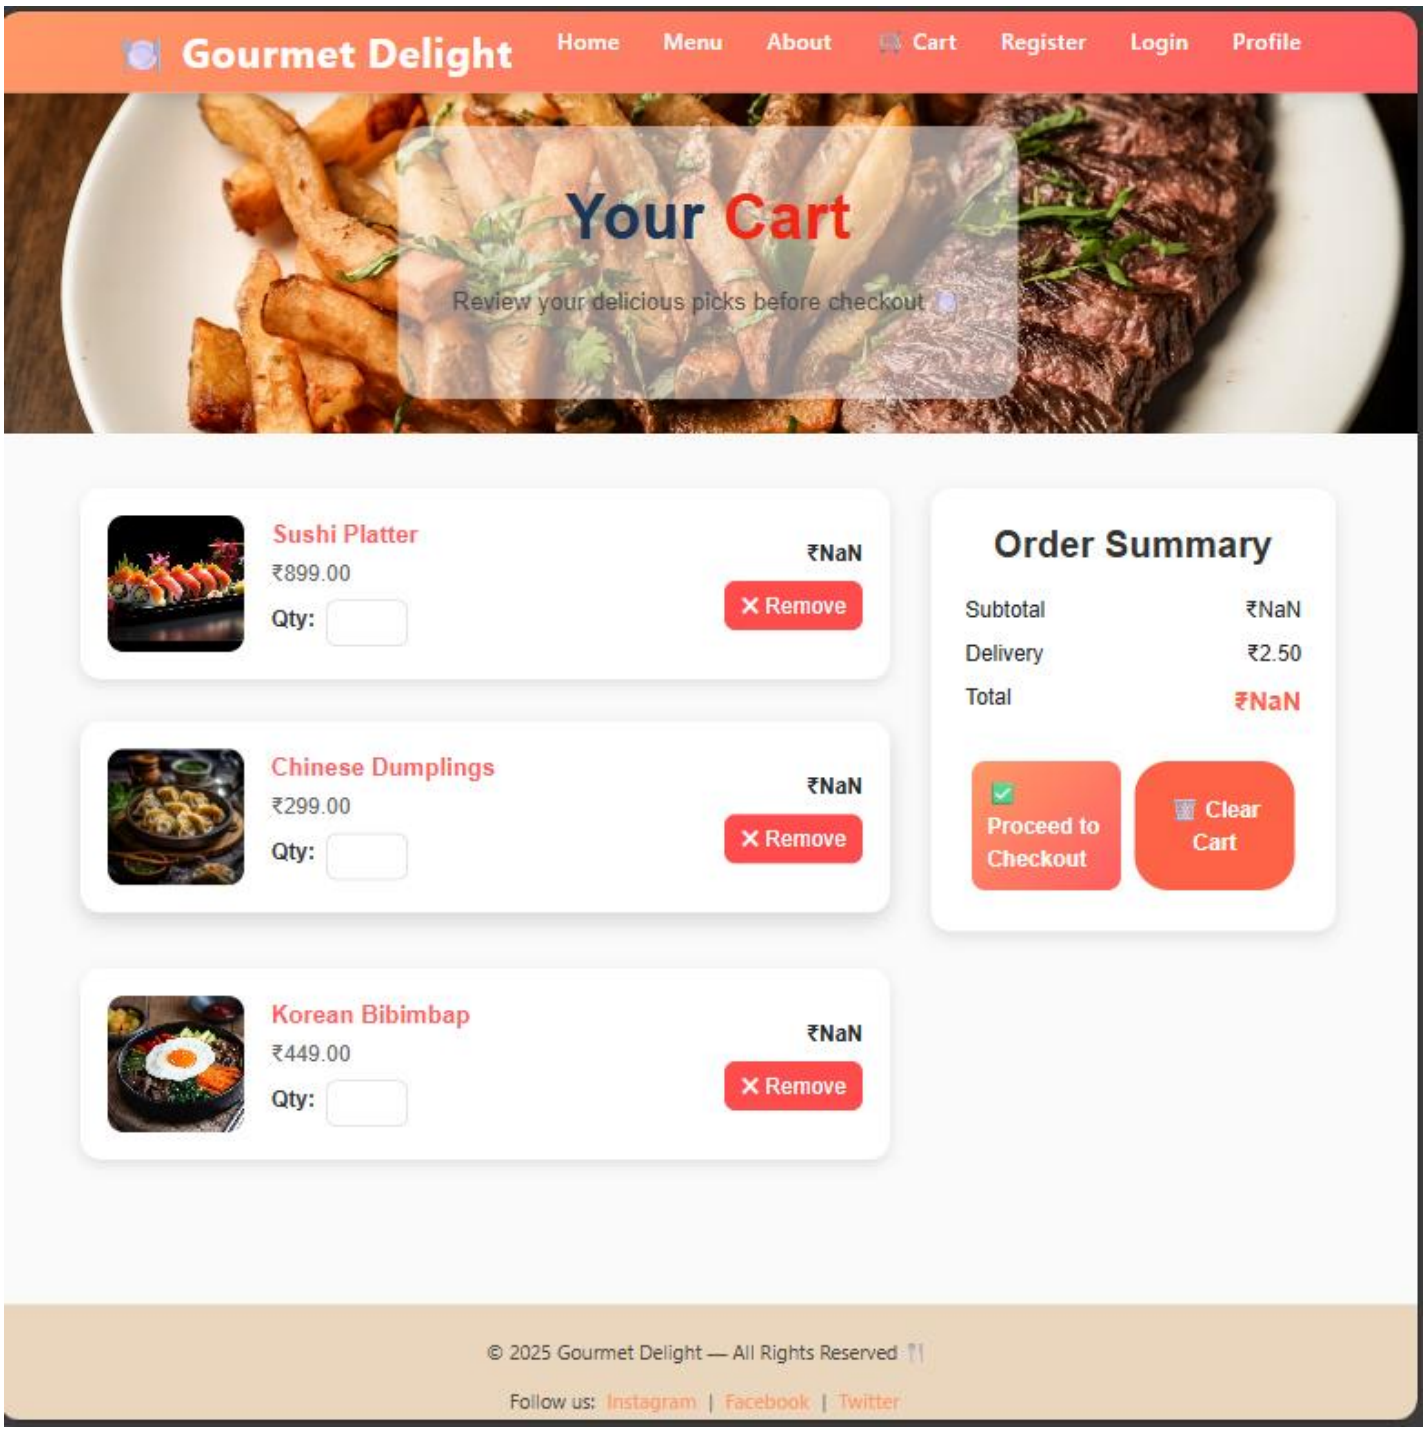

Conclusion:

We successfully implemented a **Cart Page** that:

- Shows all added items dynamically from localStorage.
- Allows quantity updates and deletion.
- Displays the real-time total amount**.**
- Navigates to the Checkout Page for order completion.

Assignment 6 : Checkout Page

Aim :

To design and develop a Checkout Page in React that collects user delivery information and displays an order summary of dishes added to the cart, allowing the user to confirm the order through a **Place Order** button.

Theory :

Introduction :

The Checkout Page is the final step of a food ordering or e-commerce web application. It enables users to:

- Provide delivery details (like name, address, city, and phone).
- Review their ordered dishes before confirming.
- Confirm their order through a "Place Order" button.

This page uses **React Router** for data transfer from the Cart Page and React state for managing user inputs and order details dynamically.

Role of Checkout Page :

The Checkout Page performs three main roles:

1. **Collecting User Details:** Captures name, address, contact number, and city for delivery.
2. **Reviewing Order Summary:** Displays the list of dishes, quantity, and total bill.
3. **Confirming the Order:** Allows the user to finalize the purchase.

Data Flow from Cart Page :

The cart page sends:

- List of dishes
- Quantity and prices
- Total amount
  to the Checkout Page using **navigate()** and **useLocation()** hooks from React Router DOM.
  This ensures smooth data transfer without any backend or page reloads.

Form Handling and User Input :

The Checkout Page includes a form to collect delivery details.
React’s **useState** hook manages and validates these inputs.
Validation ensures all required fields are filled before placing the order.

Order Summary Section :

This section displays:

- Dish name
- Quantity
- Price per item
- Subtotal and total amount

It helps users verify their entire order before confirming.

Hooks and React Concepts Used :

1. **useState()** – To handle form data and dynamic updates.
2. **useLocation()** – To access order details passed from the cart page.
3. **useNavigate()** – To redirect the user after successful order placement.
4. **Form Validation** – To ensure all details are entered before submission

Code Implementation:

Checkout.jsx

```
import React, { useState, useRef, useEffect } from "react";

import jsPDF from "jspdf";

import html2canvas from "html2canvas";

import CheckoutForm from "../components/CheckoutForm";


export default function Checkout() {

  const [details, setDetails] = useState({

    name: "",

    address: "",

    phone: "",

    payment: "cod",

  });
```

```
const [done, setDone] = useState(false);
const [cartItems, setCartItems] = useState([]);
const receiptRef = useRef();

// ✅ Load cart items when component mounts
useEffect(() => {
  const items = JSON.parse(localStorage.getItem("cartItems")) || [];
  setCartItems(items);
}, []);

// ✅ Handle order confirmation
function handleSubmit(e) {
  e.preventDefault();

  // Fetch latest cart from localStorage to ensure updated data
  const updatedItems = JSON.parse(localStorage.getItem("cartItems")) || [];
  setCartItems(updatedItems);

  // Show receipt
  setDone(true);
}

// ✅ Handle receipt download as PDF
const handleDownload = async () => {
  const element = receiptRef.current;
```

```
  const canvas = await html2canvas(element, { scale: 2 });
  const imgData = canvas.toDataURL("image/png");

  const pdf = new jsPDF("p", "mm", "a4");
  const pdfWidth = pdf.internal.pageSize.getWidth();
  const imgHeight = (canvas.height * pdfWidth) / canvas.width;

  pdf.addImage(imgData, "PNG", 0, 0, pdfWidth, imgHeight);
  pdf.save("Order_Receipt.pdf");
};

// ✅ Calculate total price
const total = cartItems.reduce((sum, item) => sum + (item.price || 0), 0);

return (
  <div className="checkout-page">
    <div className="checkout-container">
      <h2>Checkout 🛍️</h2>
      <p className="subtitle">Fill in your details to complete the order.</p>

      {done ? (
        <div className="success-box" ref={receiptRef}>
          <div className="receipt-modern">
            <h2 className="receipt-title">🍴 Gourmet Delight</h2>
            <p className="receipt-tagline">Fine Taste, Delivered Fresh ✨</p>
```

```
<div className="receipt-section">
  <h3>👤 Customer Info</h3>
  <p><strong>Name:</strong> {details.name}</p>
  <p><strong>Address:</strong> {details.address}</p>
  <p><strong>Phone:</strong> {details.phone}</p>
  <p>
    <strong>Payment:</strong>{" "}
    {details.payment === "cod"
      ? "Cash on Delivery"
      : details.payment.toUpperCase()}
  </p>
</div>

<div className="receipt-section">
  <h3>□ Ordered Dishes</h3>
  {cartItems.length > 0 ? (
    <ul className="receipt-list">
      {cartItems.map((item, index) => (
        <li key={index}>
          <span>{item.name}</span>
          <span>₹{item.price}</span>
        </li>
      ))}
    </ul>
```

```
          ) : (
            <p className="empty-note">No dishes found in your order.</p>
          )}
        </div>

        <div className="receipt-total">
          <h3>Total: ₹{total}</h3>
        </div>

        <p className="thank-you">💖 Thank you for ordering with Gourmet Delight!</p>
      </div>

      <button onClick={handleDownload} className="download-btn">
        📄 Download Receipt
      </button>
    </div>
  ) : (
    <>
      <CheckoutForm />
      <form className="checkout-form" onSubmit={handleSubmit}>
        <label>Full Name</label>
        <input
          type="text"
          placeholder="Enter your name"
```

```
  required
  value={details.name}
  onChange={(e) =>
    setDetails({ ...details, name: e.target.value })
  }
/>

<label>Address</label>
<textarea
  placeholder="Enter delivery address"
  required
  value={details.address}
  onChange={(e) =>
    setDetails({ ...details, address: e.target.value })
  }
></textarea>

<label>Phone</label>
<input
  type="tel"
  placeholder="Enter your phone number"
  required
  value={details.phone}
  onChange={(e) =>
    setDetails({ ...details, phone: e.target.value })
```

```
            }
          />

          <label>Payment Method</label>
          <select
            value={details.payment}
            onChange={(e) =>
              setDetails({ ...details, payment: e.target.value })
            }
          >
            <option value="cod">Cash on Delivery</option>
            <option value="card">Credit/Debit Card</option>
            <option value="upi">UPI / Wallet</option>
          </select>

          <button type="submit">Confirm Order ✅</button>
        </form>
      </>
    )}
  </div>
</div>
);
}
```

Checkout.css

```
.checkout-page {
  background: #fafafa;
  min-height: 100vh;
  padding: 40px 0;
  display: flex;
  justify-content: center;
}

.checkout-container {
  width: 90%;
  max-width: 550px;
  background: #fff;
  padding: 30px;
  border-radius: 16px;
  box-shadow: 0 6px 20px rgba(0,0,0,0.1);
}

.checkout-container h2 {
  color: #333;
  text-align: center;
}

.subtitle {
  text-align: center;
```

```
  color: #666;
  margin-bottom: 20px;
}

.checkout-form label {
  display: block;
  margin-top: 12px;
  font-weight: 500;
  color: #333;
}

.checkout-form input,
.checkout-form textarea,
.checkout-form select {
  width: 100%;
  padding: 10px;
  margin-top: 5px;
  border-radius: 8px;
  border: 1px solid #ddd;
  font-size: 15px;
}

.checkout-form textarea {
  resize: none;
  height: 70px;
```

```
}

.btn-confirm {
  margin-top: 20px;
  width: 100%;
  background: #ff7f50;
  color: #fff;
  padding: 12px;
  font-weight: bold;
  border: none;
  border-radius: 10px;
  cursor: pointer;
  transition: 0.3s;
}

.btn-confirm:hover {
  background: #ff6347;
}

.receipt-modern {
  background: #fff;
  border-radius: 16px;
  padding: 25px 30px;
  box-shadow: 0 10px 25px rgba(0, 0, 0, 0.1);
  max-width: 450px;
```

```
  margin: 20px auto;
  font-family: "Poppins", sans-serif;
  color: #333;
}

.receipt-title {
  font-size: 1.8rem;
  font-weight: 600;
  color: #e67e22;
  text-align: center;
}

.receipt-tagline {
  text-align: center;
  font-size: 0.9rem;
  color: #888;
  margin-bottom: 15px;
}

.receipt-section {
  background: #f9f9f9;
  border-radius: 10px;
  padding: 15px;
  margin-bottom: 15px;
}
```

```
.receipt-section h3 {
  color: #444;
  margin-bottom: 8px;
  font-size: 1.1rem;
}

.receipt-list {
  list-style: none;
  padding: 0;
  margin: 0;
}

.receipt-list li {
  display: flex;
  justify-content: space-between;
  padding: 8px 0;
  border-bottom: 1px dashed #ddd;
}

.receipt-total {
  text-align: right;
  margin-top: 10px;
  font-size: 1.2rem;
  font-weight: bold;
```

```
  color: #2c3e50;
}

.thank-you {
  text-align: center;
  margin-top: 15px;
  font-style: italic;
  color: #27ae60;
}

.download-btn {
  background: #e67e22;
  color: #fff;
  border: none;
  padding: 10px 18px;
  border-radius: 8px;
  cursor: pointer;
  margin-top: 10px;
  font-weight: 500;
  display: block;
  margin-left: auto;
  margin-right: auto;
}

.download-btn:hover {
```

```
  background: #cf6d17;
}



.thank-note {
  margin-top: 15px;
  font-style: italic;
  color: #555;
}

.btn-download {
  background: #4caf50;
  color: #fff;
  border: none;
  padding: 10px 18px;
  border-radius: 8px;
  margin-top: 20px;
  cursor: pointer;
  font-weight: 600;
  transition: 0.3s;
}

.btn-download:hover {
  background: #388e3c;
}
```

CheckoutForm.jsx

```
import React, { useState } from "react";
import "./CheckoutForm.css";

export default function CheckoutForm() {
  const [form, setForm] = useState({
    name: "",
    address: "",
    phone: "",
    payment: "card",
  });

  function handleSubmit(e) {
    e.preventDefault();
    alert("✅ Order placed successfully!\nThank you for ordering with Gourmet Delight!");
    setForm({ name: "", address: "", phone: "", payment: "card" });
  }

  return (
    <div className="checkout-page">
      <h2 className="checkout-title">Checkout</h2>
      <form className="checkout-form" onSubmit={handleSubmit}>
        <label>Name</label>
        <input
```

```
  required
  value={form.name}
  onChange={(e) => setForm({ ...form, name: e.target.value })}
  placeholder="Enter your full name"
/>

<label>Delivery Address</label>
<textarea
  required
  value={form.address}
  onChange={(e) => setForm({ ...form, address: e.target.value })}
  placeholder="Enter complete delivery address"
/>

<label>Phone</label>
<input
  required
  type="tel"
  value={form.phone}
  onChange={(e) => setForm({ ...form, phone: e.target.value })}
  placeholder="Enter phone number"
/>

<label>Payment Method</label>
<select
```

```
          value={form.payment}
          onChange={(e) => setForm({ ...form, payment: e.target.value })}
        >
          <option value="card">Credit / Debit Card</option>
          <option value="upi">UPI</option>
          <option value="cod">Cash on Delivery</option>
        </select>

        <button type="submit" className="btn-checkout">Place Order</button>
      </form>
    </div>
  );
}
```

CheckoutForm.css

```
.checkout-page {
  background: #fff;
  border-radius: 15px;
  padding: 2rem;
  box-shadow: 0 6px 18px rgba(0,0,0,0.08);
  max-width: 600px;
  margin: 2rem auto;
}

.checkout-title {
```

```
  text-align: center;
  color: #ff5e62;
  margin-bottom: 1.5rem;
}

.checkout-form {
  display: flex;
  flex-direction: column;
  gap: 1rem;
}

.checkout-form input,
.checkout-form textarea,
.checkout-form select {
  border: 1px solid #ddd;
  border-radius: 8px;
  padding: 0.6rem;
  font-size: 1rem;
}

.btn-checkout {
  background: linear-gradient(135deg, #ff9966, #ff5e62);
  border: none;
  color: white;
  font-weight: 600;
```

```
  padding: 0.7rem;
  border-radius: 10px;
  cursor: pointer;
  transition: background 0.3s ease;
}

.btn-checkout:hover {
  background: linear-gradient(135deg, #ff5e62, #ff9966);
}
```

Output :

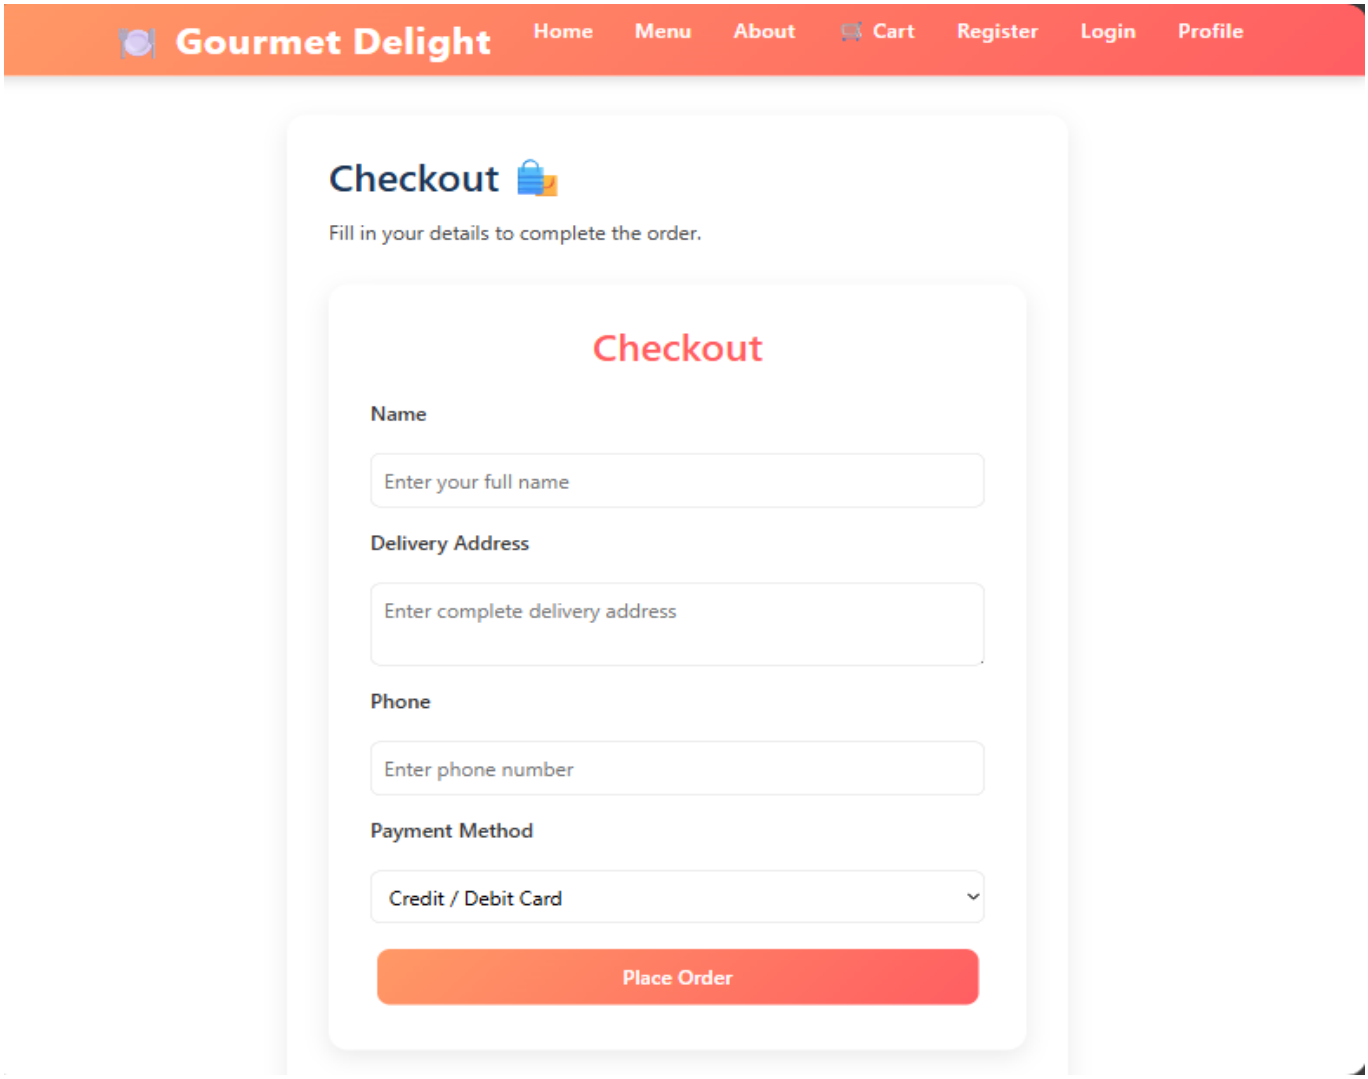

Full Name

Enter your name

Address

Enter delivery address

Phone

Enter your phone number

Payment Method

Cash on Delivery

Confirm Order ✅

© 2025 Gourmet Delight — All Rights Reserved 🍴

Follow us: Instagram | Facebook | Twitter

localhost:5175 says

✅ Order placed successfully!
Thank you for ordering with Gourmet Delight!

OK

Payment Method

Credit / Debit Card

Place Order

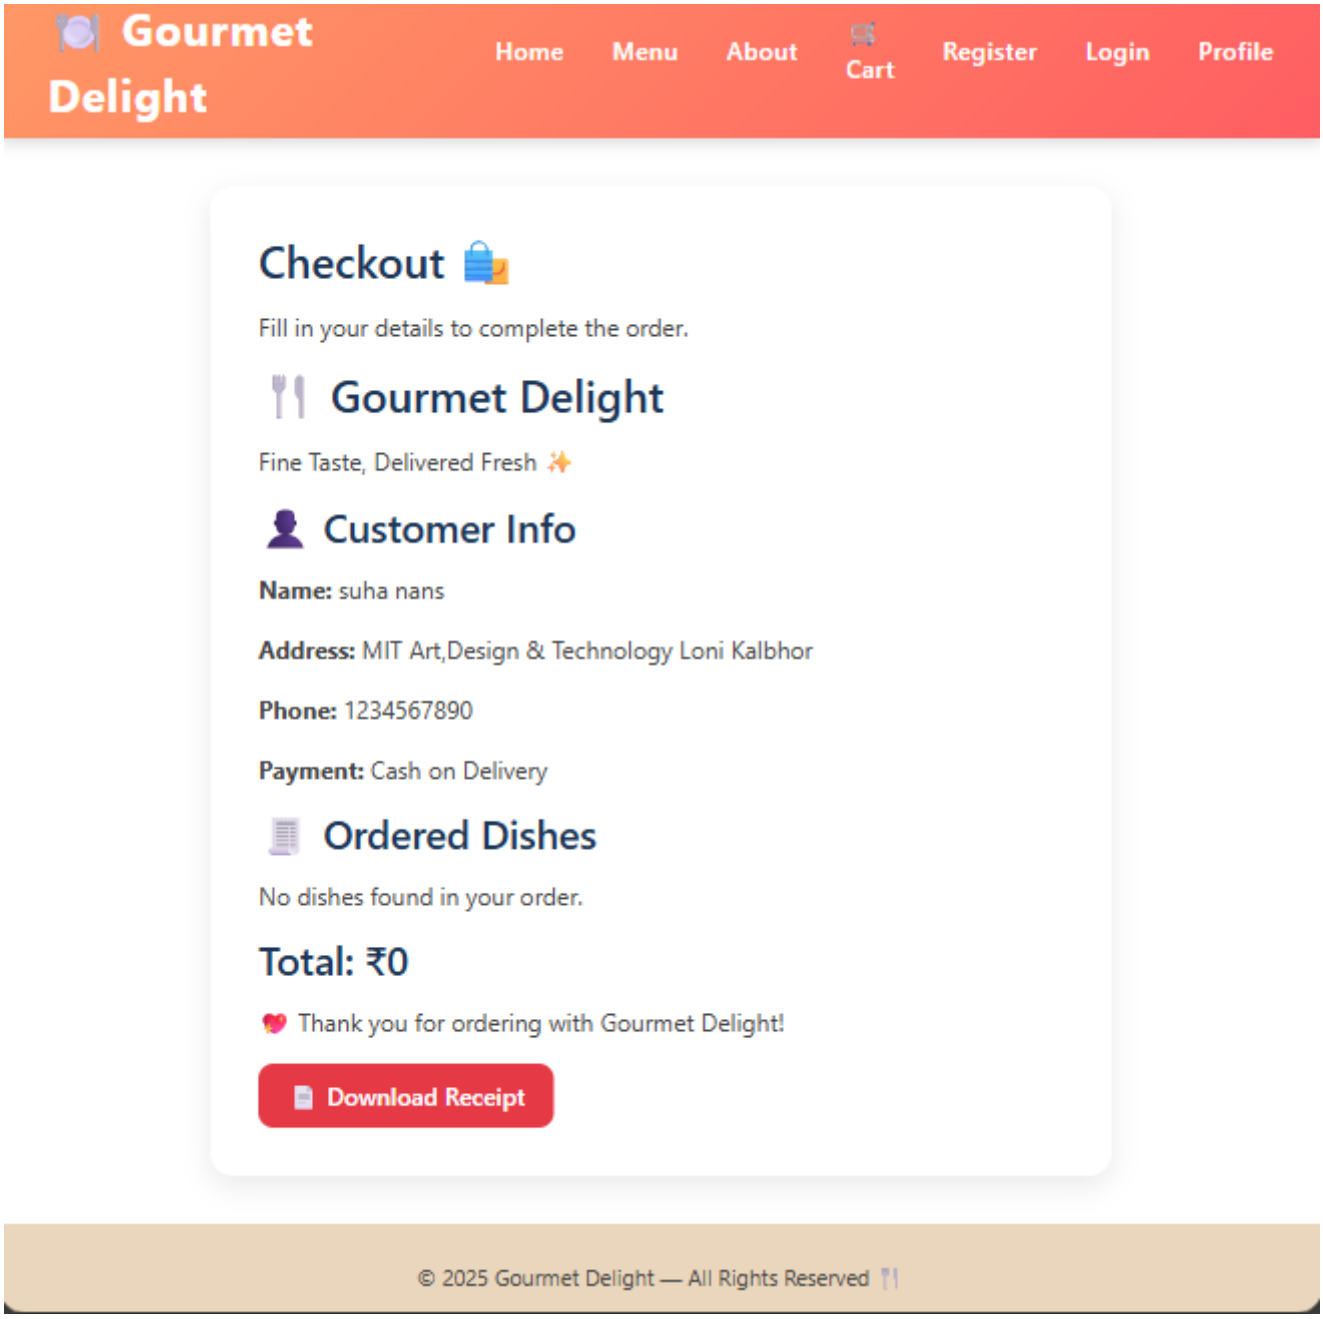

Conclusion :

We successfully implemented a **Checkout Page** in React that collects user delivery details, displays an order summary, and confirms the order.
This demonstrates the use of React Router, state management, and form validation for real-time interactive applications.

Assignment 7: Profile Page

Aim:

To design and implement a **Profile Page** in a React food ordering web application that displays user details collected during registration or login, along with their recent order summary.

Theory:

Introduction

The Profile Page provides each registered or logged-in customer with a personalized dashboard where they can view their stored details and review past orders.
In a React application, it uses local storage to maintain session data without requiring a backend server.

Purpose of the Profile Page

The main objectives of the Profile Page are:

1. To display all user details such as name, email, and contact number.
2. To show a summary of the most recent order.
3. To provide users the option to log out safely.
4. To offer a personalized experience for every logged-in customer.

Data Handling Mechanism

- During registration or login, user details are stored in localStorage**.**
- When the Profile Page loads:
    1. It checks if the user is logged in.
    2. Retrieves user data and order details from localStorage.
    3. Displays both in a structured layout.
- This allows persistent user sessions without backend dependency.

Component Design

- **Personal Information:** Displays name, email, and contact details.
- **Order Summary:** Shows ordered items, quantities, and total price.
- **Logout Button:** Clears session and redirects to homepage.

Code Implementation:

Profile.jsx

```
import React, { useState } from "react";
import "./Profile.css";

export default function Profile() {
  const user = JSON.parse(localStorage.getItem("restro_user"));
  const [editMode, setEditMode] = useState(false);
  const [userData, setUserData] = useState({
    name: user?.name || "",
    email: user?.email || "",
    favCuisine: "Japanese 🍣",
    memberSince: "2025",
  });

  function logout() {
    localStorage.removeItem("restro_user");
    window.location.href = "/login";
  }

  function handleEditChange(e) {
    setUserData({ ...userData, [e.target.name]: e.target.value });
  }

  function saveChanges() {
```

```
  localStorage.setItem("restro_user", JSON.stringify(userData));
  setEditMode(false);
  alert("Profile updated successfully!");
}

return (
  <div className="profile-page">
    <div className="profile-card">
      {user ? (
        <>
          <img
            src="https://cdn-icons-png.flaticon.com/512/3135/3135715.png"
            alt="User Avatar"
            className="profile-img"
          />

          {editMode ? (
            <div className="edit-form">
              <input
                type="text"
                name="name"
                value={userData.name}
                onChange={handleEditChange}
                placeholder="Enter your name"
              />
```

```
    <input
      type="email"
      name="email"
      value={userData.email}
      onChange={handleEditChange}
      placeholder="Enter your email"
    />
    <input
      type="text"
      name="favCuisine"
      value={userData.favCuisine}
      onChange={handleEditChange}
      placeholder="Favorite Cuisine"
    />
    <button onClick={saveChanges} className="save-btn">
      Save Changes 💾
    </button>
  </div>
) : (
  <>
    <h2>{userData.name || "Guest User"}</h2>
    <p className="email">{userData.email}</p>

    <div className="profile-details">
      <p><strong>Favorite Cuisine:</strong> {userData.favCuisine}</p>
```

```
      <p><strong>Member Since:</strong> {userData.memberSince}</p>
    </div>

    <div className="profile-actions">
      <button onClick={() => setEditMode(true)}>Edit ✏️</button>
      <button onClick={logout}>Logout 🚪</button>
    </div>
  </>
)}

{/* Recent Orders Section */}
<div className="order-history">
  <h3>🍜 Recent Orders</h3>
  <ul>
    <li>Sushi Platter - ₹899</li>
    <li>Veg Ramen Bowl - ₹499</li>
    <li>Spicy Korean Bibimbap - ₹599</li>
  </ul>
</div>

{/* Preferences Section */}
<div className="preferences">
  <h3>💖 Preferences</h3>
  <p>You enjoy authentic Asian cuisines with vegetarian options.</p>
</div>
```

```
          </>
        ) : (
          <div className="no-user">
            <h3>Please log in to view your profile.</h3>
            <a href="/login" className="login-btn">Login</a>
          </div>
        )}
      </div>
    </div>
  );
}
```

Profile.css

```
.profile-page {
  display: flex;
  justify-content: center;
  align-items: center;
  padding: 50px 20px;
}

.profile-card {
  background: #fff;
  padding: 30px;
  border-radius: 20px;
  box-shadow: 0 4px 15px rgba(0, 0, 0, 0.15);
```

```
  max-width: 400px;
  text-align: center;
}

.profile-img {
  width: 120px;
  height: 120px;
  border-radius: 50%;
  margin-bottom: 15px;
  border: 3px solid #ff6347;
}

.email {
  color: #555;
  margin-bottom: 10px;
}

.profile-details p {
  margin: 5px 0;
  color: #333;
}

.profile-actions button {
  background-color: #ff6347;
  border: none;
```

```
  color: white;
  margin: 8px;
  padding: 10px 18px;
  border-radius: 25px;
  cursor: pointer;
  transition: 0.3s;
}

.profile-actions button:hover {
  background-color: #e74c3c;
}

.order-history, .preferences {
  margin-top: 20px;
  text-align: left;
}

.order-history ul {
  list-style: none;
  padding: 0;
}

.order-history li {
  background: #f8f8f8;
  margin: 5px 0;
```

```
  padding: 10px;
  border-radius: 10px;
}

.edit-form input {
  display: block;
  width: 100%;
  margin: 8px 0;
  padding: 10px;
  border-radius: 10px;
  border: 1px solid #ccc;
}

.save-btn {
  background-color: #27ae60;
  color: white;
  border: none;
  padding: 10px 20px;
  border-radius: 25px;
  cursor: pointer;
}

.save-btn:hover {
  background-color: #219150;
}
```

ProfileForm.jsx

```
import React, { useState } from "react";
import "./ProfileForm.css";

export default function ProfileForm() {
  const stored = JSON.parse(localStorage.getItem("restro_user")) || {};
  const [form, setForm] = useState({
    name: stored.name || "",
    email: stored.email || "",
    phone: "",
    address: "",
  });

  function handleSubmit(e) {
    e.preventDefault();
    alert("✅ Profile updated successfully!");
    localStorage.setItem("restro_user", JSON.stringify(form));
  }

  return (
    <div className="profile-form">
      <h2 className="profile-title">My Profile</h2>

      <form onSubmit={handleSubmit} className="profile-fields">
        <label>Name</label>
```

```
<input
  value={form.name}
  onChange={(e) => setForm({ ...form, name: e.target.value })}
  required
/>

<label>Email</label>
<input
  type="email"
  value={form.email}
  onChange={(e) => setForm({ ...form, email: e.target.value })}
  required
/>

<label>Phone</label>
<input
  type="tel"
  value={form.phone}
  onChange={(e) => setForm({ ...form, phone: e.target.value })}
  placeholder="Enter your phone number"
/>

<label>Address</label>
<textarea
  value={form.address}
```

```
          onChange={(e) => setForm({ ...form, address: e.target.value })}
          placeholder="Enter your address"
        />

        <button type="submit" className="btn-update">Update Profile</button>
      </form>
    </div>
  );
}
```

ProfileForm.css

```
.profile-form {
  background: #fff;
  border-radius: 15px;
  padding: 2rem;
  box-shadow: 0 6px 18px rgba(0,0,0,0.08);
  max-width: 600px;
  margin: 2rem auto;
}

.profile-title {
  text-align: center;
  color: #ff5e62;
  margin-bottom: 1.5rem;
}
```

```
.profile-fields {
  display: flex;
  flex-direction: column;
  gap: 1rem;
}

.profile-fields input,
.profile-fields textarea {
  border: 1px solid #ddd;
  border-radius: 8px;
  padding: 0.6rem;
  font-size: 1rem;
}

.btn-update {
  background: linear-gradient(135deg, #ff9966, #ff5e62);
  border: none;
  color: white;
  font-weight: 600;
  padding: 0.7rem;
  border-radius: 10px;
  cursor: pointer;
  transition: background 0.3s ease;
}
```

```
.btn-update:hover {
  background: linear-gradient(135deg, #ff5e62, #ff9966);
}
```

Output:

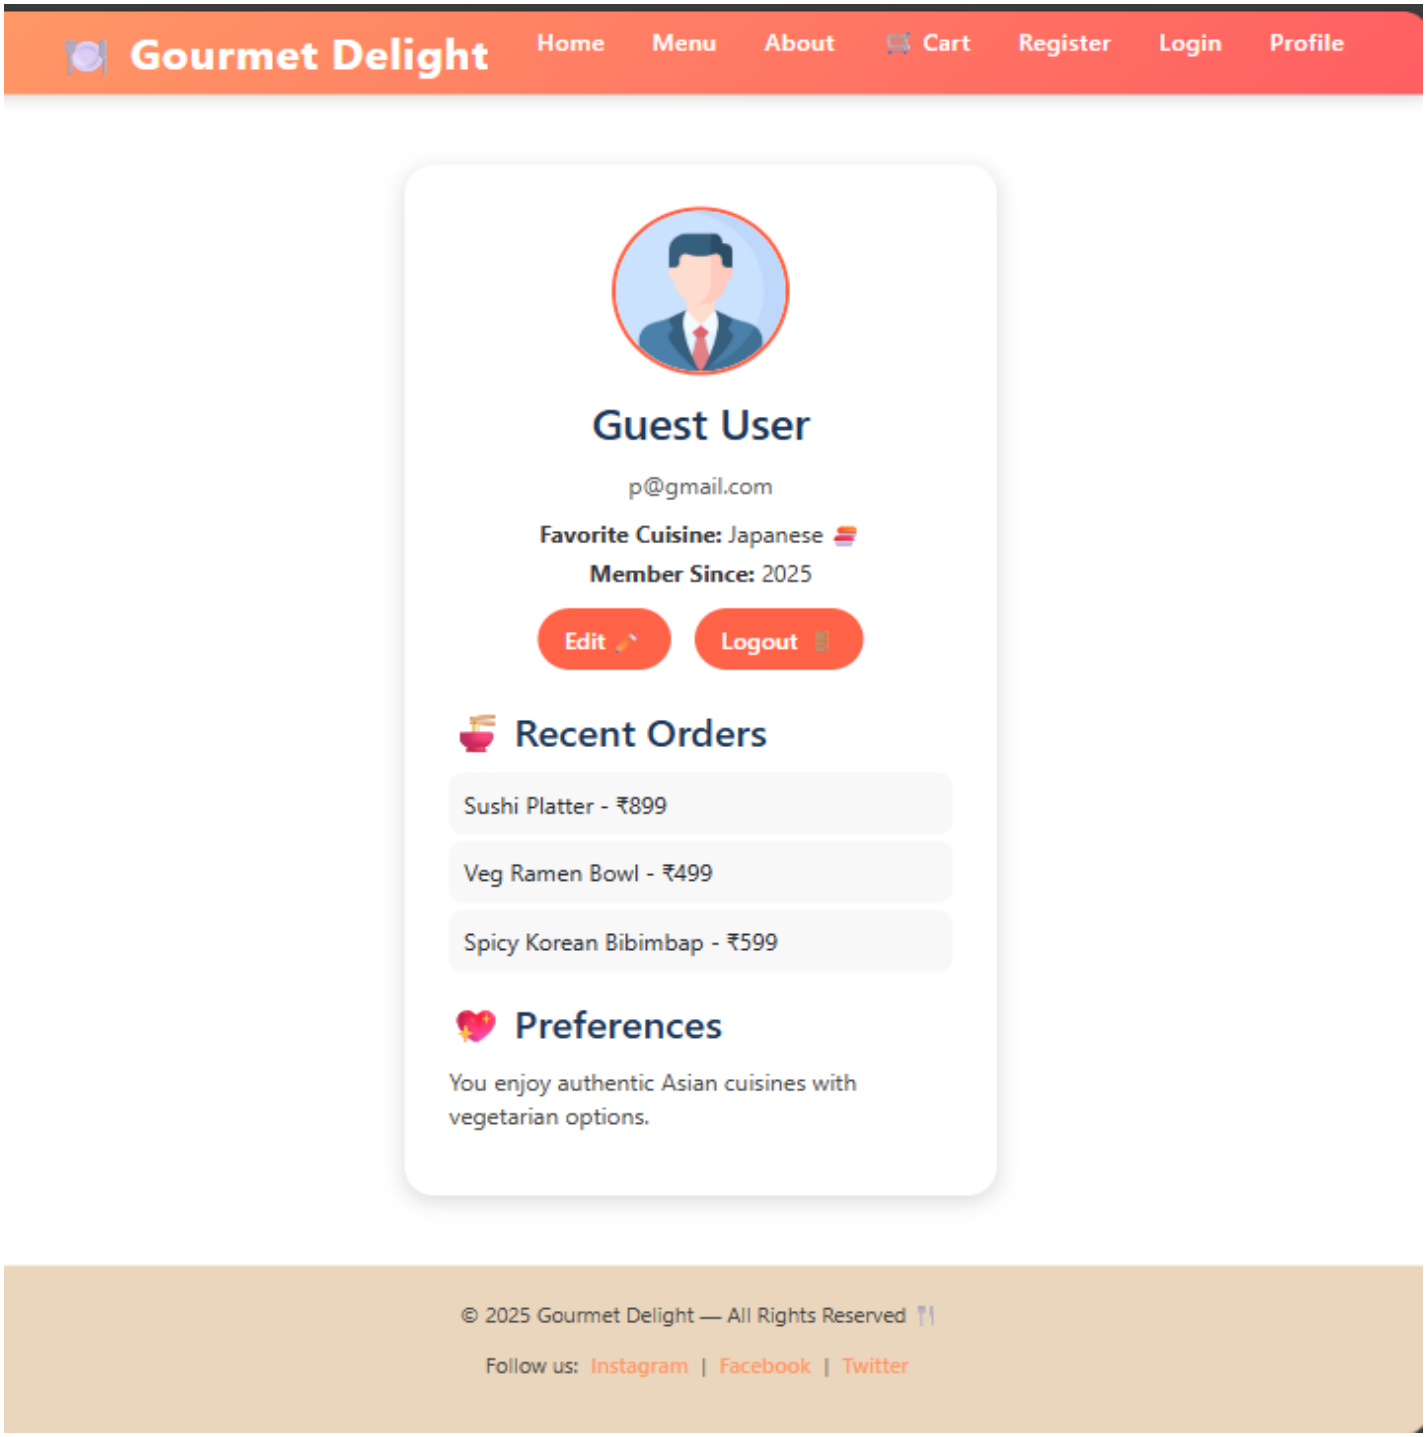

localhost:5175 says

Profile updated successfully!

OK

sd

p@gmail.com

Japanese 🍣

Save Changes 💾

🍜 Recent Orders

Sushi Platter - ₹899

Veg Ramen Bowl - ₹499

Spicy Korean Bibimbap - ₹599

💖 Preferences

You enjoy authentic Asian cuisines with vegetarian options.

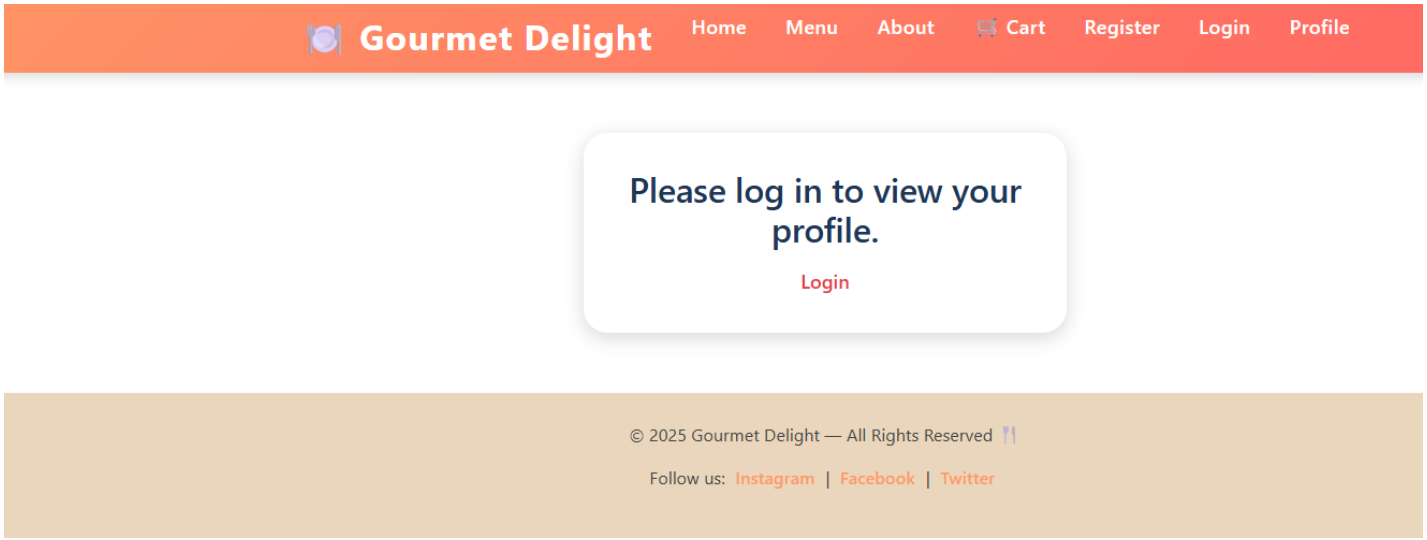

Conclusion:

We successfully implemented a **Profile Page** for our food ordering web application using React, React Router, and LocalStorage**.**
This page personalizes the user experience by displaying stored user information and recent order data dynamically without a backend server.

Assignment 8 : State Management

Aim:

To implement centralized state management in a React e-commerce application using the Context API.
The main goal is to maintain a global cart system that can be accessed and modified from any component, ensure data persistence during navigation, and restrict checkout access to only logged-in users — creating a realistic shopping and authentication workflow.

Theory:

Introduction

State management plays a vital role in modern React applications, especially when multiple components share dynamic data.
When an app grows larger, managing data using only useState within individual components becomes complex. To overcome this, React's Context API provides an efficient way to handle global state by making shared data accessible throughout the app without prop drilling.

In this project, the Context API is used to implement a global shopping cart that keeps all cart-related data synchronized across pages. It ensures that whenever a product is added, updated, or removed, the changes are instantly reflected everywhere.

Purpose

The key objectives of this implementation are:

1. To manage and update cart data globally using Context API.
2. To retain cart information even after page refresh using localStorage.
3. To control user access to the checkout page through authentication verification.
4. To improve user experience by maintaining session continuity across navigation.

Data Management

The Context API acts as a single source of truth for the entire app. A custom context, CartContext, stores:

- The list of items added to the cart.
- Functions to add, remove, and update item quantities.
- Synchronization with localStorage for data persistence.

Whenever cart data changes, it automatically updates both the app UI and localStorage. This means even if the user refreshes or revisits the site, their cart remains intact.

Authentication Handling

Before proceeding to checkout, the system checks whether the user is logged in (by verifying the isLoggedIn flag in localStorage).
If the user is not logged in, they are redirected to the Login Page, and their current cart data is temporarily saved under pendingCheckout.
After a successful login, the cart data is restored, allowing users to continue checkout seamlessly just like real-world e-commerce websites.

Component Flow

1. **CartContext.js** – Manages all cart logic and provides global access.
2. **Cart.js** – Displays all added items, allows updates/removals, and calculates total price.
3. **Checkout.js** – Displays the final order summary, collects shipping details, and places the order only if the user is logged in.
4. **Login.js** – Authenticates users and sets login status.
5. **App.js** – Wraps all components with the CartProvider to ensure global access.

Code Implementation:

CartItem.jsx

```
import React from "react";

import "./CartItem.css";


export default function CartItem({ item, removeFromCart, updateQty }) {

  return (

    <div className="cart-item">

      <img src={item.img} alt={item.name} className="cart-item-img" />


      <div className="cart-item-info">

        <h4>{item.name}</h4>

        <p className="text-muted">₹{item.price.toFixed(2)}</p>
```

```
        <div className="qty-control">
          <label>Qty:</label>
          <input
            type="number"
            min="1"
            value={item.qty}
            onChange={(e) => updateQty(item.id, Math.max(1, +e.target.value))}
          />
        </div>
      </div>

      <div className="cart-item-actions">
        <strong className="total-price">
          ₹{(item.price * item.qty).toFixed(2)}
        </strong>
        <button className="btn-remove" onClick={() =>
removeFromCart(item.id)}>
          ✕
        </button>
      </div>
    </div>
  );
}
```

CartItem.css

```
.cart-item {
  display: flex;
  align-items: center;
  justify-content: space-between;
  background: #fff;
  border-radius: 12px;
  margin-bottom: 1rem;
  padding: 1rem;
  box-shadow: 0 4px 10px rgba(0,0,0,0.05);
  transition: transform 0.3s ease;
}

.cart-item:hover {
  transform: translateY(-3px);
}

.cart-item-img {
  width: 90px;
  height: 90px;
  border-radius: 10px;
  object-fit: cover;
}
```

```
.cart-item-info h4 {
  color: #ff5e62;
  font-size: 1.1rem;
}

.qty-control input {
  width: 60px;
  border: 1px solid #ddd;
  border-radius: 8px;
  padding: 0.3rem;
  text-align: center;
}

.btn-remove {
  background: #ffe5e5;
  border: none;
  color: #ff5e62;
  padding: 0.4rem 0.6rem;
  border-radius: 6px;
  cursor: pointer;
}
```

Checkout.jsx

```
import React, { useState, useRef, useEffect } from "react";
import jsPDF from "jspdf";
```

```
import html2canvas from "html2canvas";
import CheckoutForm from "../components/CheckoutForm";

export default function Checkout() {
  const [details, setDetails] = useState({
    name: "",
    address: "",
    phone: "",
    payment: "cod",
  });
  const [done, setDone] = useState(false);
  const [cartItems, setCartItems] = useState([]);
  const receiptRef = useRef();

  // ✅ Load cart items when component mounts
  useEffect(() => {
    const items = JSON.parse(localStorage.getItem("cartItems")) || [];
    setCartItems(items);
  }, []);

  // ✅ Handle order confirmation
  function handleSubmit(e) {
    e.preventDefault();

    // Fetch latest cart from localStorage to ensure updated data
```

```
  const updatedItems = JSON.parse(localStorage.getItem("cartItems")) || [];
  setCartItems(updatedItems);

  // Show receipt
  setDone(true);
}

// ✅ Handle receipt download as PDF
const handleDownload = async () => {
  const element = receiptRef.current;
  const canvas = await html2canvas(element, { scale: 2 });
  const imgData = canvas.toDataURL("image/png");

  const pdf = new jsPDF("p", "mm", "a4");
  const pdfWidth = pdf.internal.pageSize.getWidth();
  const imgHeight = (canvas.height * pdfWidth) / canvas.width;

  pdf.addImage(imgData, "PNG", 0, 0, pdfWidth, imgHeight);
  pdf.save("Order_Receipt.pdf");
};

// ✅ Calculate total price
const total = cartItems.reduce((sum, item) => sum + (item.price || 0), 0);

return (
```

```
<div className="checkout-page">
  <div className="checkout-container">
    <h2>Checkout 🛍️</h2>
    <p className="subtitle">Fill in your details to complete the order.</p>

    {done ? (
      <div className="success-box" ref={receiptRef}>
        <div className="receipt-modern">
          <h2 className="receipt-title">🍴 Gourmet Delight</h2>
          <p className="receipt-tagline">Fine Taste, Delivered Fresh ✨</p>

          <div className="receipt-section">
            <h3>👤 Customer Info</h3>
            <p><strong>Name:</strong> {details.name}</p>
            <p><strong>Address:</strong> {details.address}</p>
            <p><strong>Phone:</strong> {details.phone}</p>
            <p>
              <strong>Payment:</strong>{" "}
              {details.payment === "cod"
                ? "Cash on Delivery"
                : details.payment.toUpperCase()}
            </p>
          </div>

          <div className="receipt-section">
```

```
<h3>□ Ordered Dishes</h3>
{cartItems.length > 0 ? (
  <ul className="receipt-list">
    {cartItems.map((item, index) => (
      <li key={index}>
        <span>{item.name}</span>
        <span>₹{item.price}</span>
      </li>
    ))}
  </ul>
) : (
  <p className="empty-note">No dishes found in your order.</p>
)}
</div>

<div className="receipt-total">
  <h3>Total: ₹{total}</h3>
</div>

<p className="thank-you">💖 Thank you for ordering with Gourmet Delight!</p>
</div>

<button onClick={handleDownload} className="download-btn">
  📄 Download Receipt
```

```
    </button>
  </div>
) : (
  <>
    <CheckoutForm />
    <form className="checkout-form" onSubmit={handleSubmit}>
      <label>Full Name</label>
      <input
        type="text"
        placeholder="Enter your name"
        required
        value={details.name}
        onChange={(e) =>
          setDetails({ ...details, name: e.target.value })
        }
      />

      <label>Address</label>
      <textarea
        placeholder="Enter delivery address"
        required
        value={details.address}
        onChange={(e) =>
          setDetails({ ...details, address: e.target.value })
        }
```

```
></textarea>

<label>Phone</label>
<input
  type="tel"
  placeholder="Enter your phone number"
  required
  value={details.phone}
  onChange={(e) =>
    setDetails({ ...details, phone: e.target.value })
  }
/>

<label>Payment Method</label>
<select
  value={details.payment}
  onChange={(e) =>
    setDetails({ ...details, payment: e.target.value })
  }
>
  <option value="cod">Cash on Delivery</option>
  <option value="card">Credit/Debit Card</option>
  <option value="upi">UPI / Wallet</option>
</select>
```

```
            <button type="submit">Confirm Order ✅</button>
          </form>
         </>
       )}
      </div>
    </div>
  );
}
```

Output

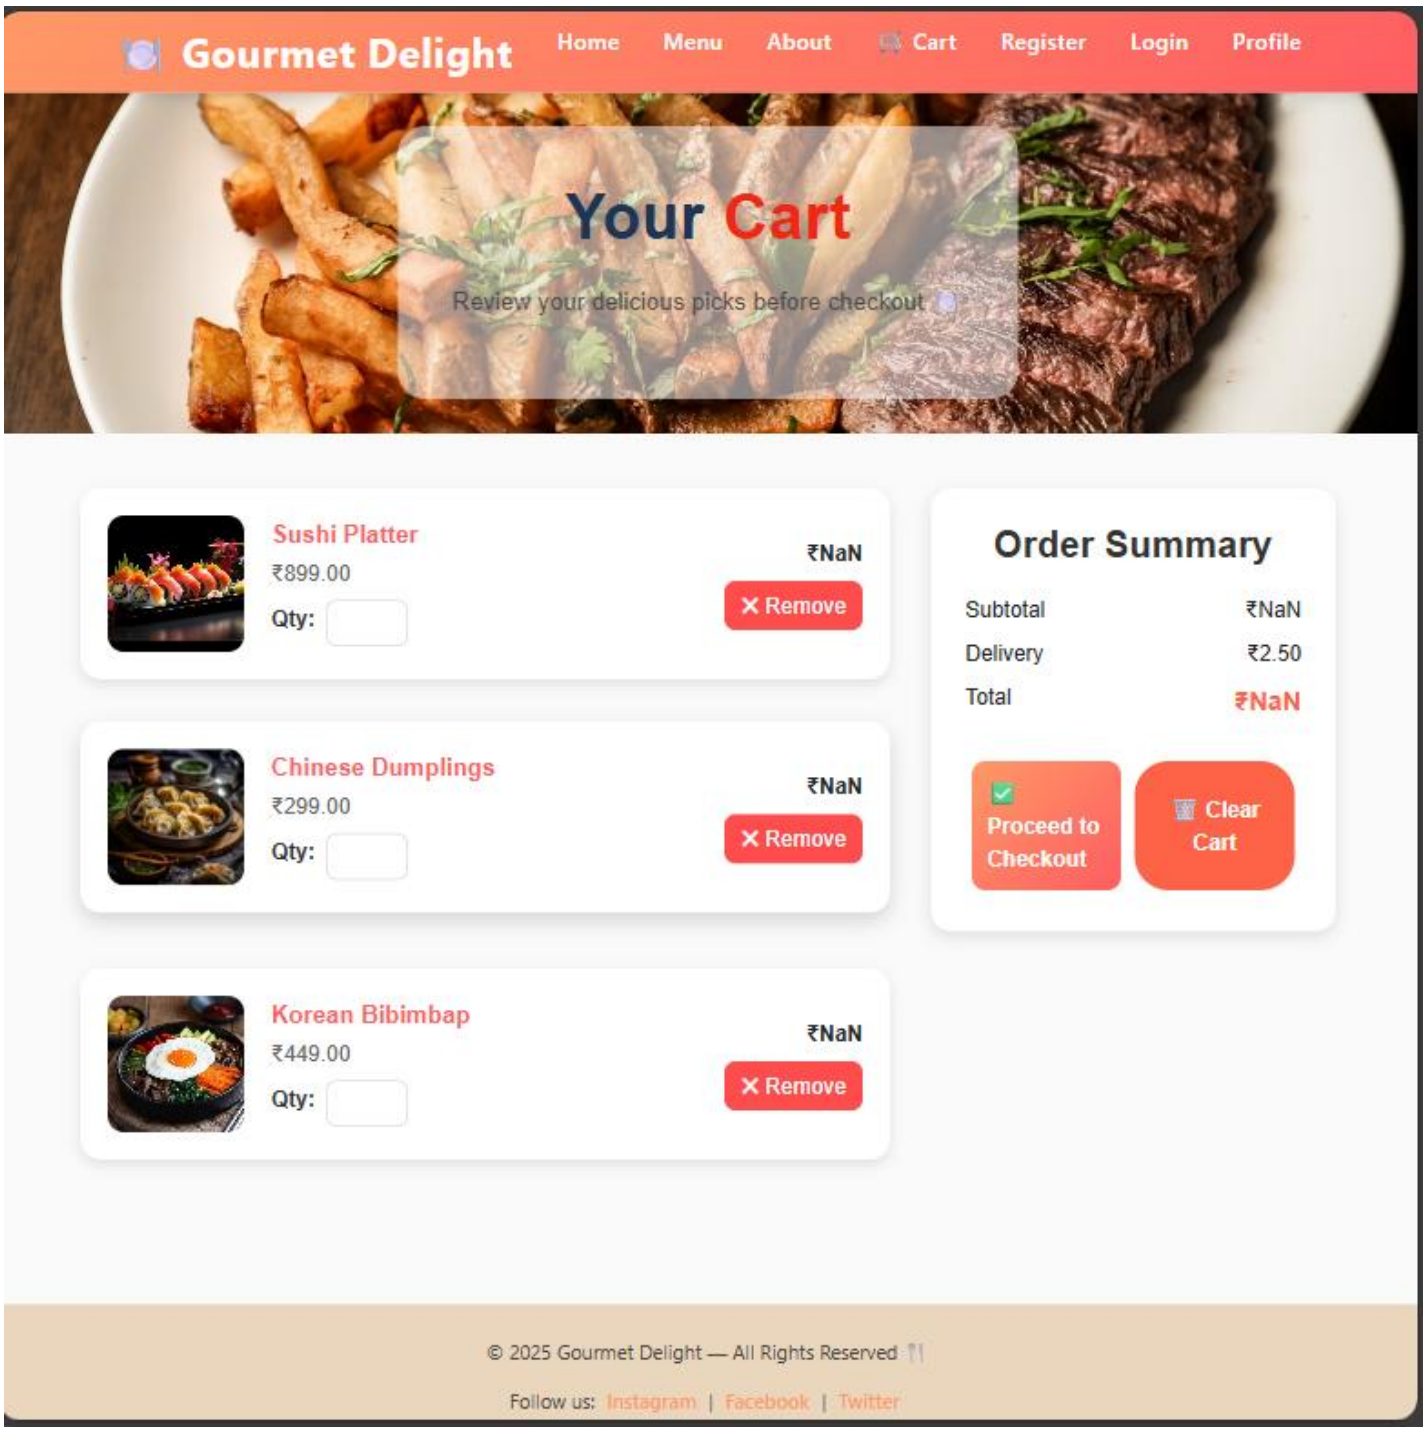

Conclusion:

This assignment successfully demonstrates centralized state management using React's Context API.
By creating a shared cart state with automatic persistence and login-based restrictions, the app achieves both scalability and real-world functionality**.**
The integration of global state, routing, and authentication highlights how modern React apps can remain modular, secure, and user-friendly without using complex external libraries like Redux.

Assignment 9 : Routing and Component Structure

Aim :

The aim of this assignment is to implement efficient navigation and modular component-based design in a React-based multi-cuisine restaurant website using React Router for page transitions and reusable UI components for better structure and maintainability. The goal is to create a seamless single-page application (SPA) experience where users can navigate between pages such as Home, Menu, Cart, Checkout, *and* Profile without full page reloads.

Theory :

Routing in React plays a vital role in creating single-page applications that feel fast, smooth, and dynamic. Instead of loading separate HTML files for every page, React Router dynamically renders the correct components based on the URL, allowing instant navigation without reloading the browser. This improves user experience and maintains app state across navigation.

In this project, React Router DOM is used to define routes for all major sections of the restaurant website, such as:

- `/` → Home page
- `/menu` → Menu page displaying available dishes
- `/cart` → Cart page showing selected dishes
- `/checkout` → Checkout page for final order confirmation
- `/login` and `/profile` → User authentication and profile pages

The **BrowserRouter** wraps the entire app, and the Routes component defines individual route paths. The Link component enables smooth client-side navigation without reloading the entire page.

A modular component structure has been implemented throughout the project for scalability and clarity. The key reusable components include:

- **Navbar.js** – A persistent top navigation bar appearing across all pages.
- **MenuCard.js** – Displays individual dishes with images, name, price, and “Add to Cart” functionality.
- **Cart.js** – Displays all selected dishes dynamically using React state or Context API.
- **Checkout.js** – Handles order placement and user confirmation.
- **Footer.js** – A fixed footer appearing across all routes.

By designing reusable components, code duplication is reduced, the layout remains consistent, and maintenance becomes easier. Each component handles specific UI logic - for example, the Navbar handles navigation links and authentication visibility, while the MenuCard handles product display and interactivity.

Routing also ensures conditional navigation**.** For example, users cannot access the checkout page unless they are logged in. If an unauthenticated user tries to proceed, the system redirects them to the login page, ensuring a secure and realistic shopping flow.

This modular and route-based structure supports future scalability - new pages like “Orders” or “Contact Us” can be easily added with minimal code changes.

Overall, this implementation demonstrates React Router’s efficiency in managing navigation and component-based design principles for building structured, scalable, and professional-grade web applications.

Code Implementation:

Navbar.jsx

```
import React from "react";

import { Link } from "react-router-dom";

import "./Navbar.css";


export default function Navbar() {

  return (

    <nav className="navbar">

      <div className="nav-container">

        <Link to="/" className="nav-logo">

          🍽 Gourmet Delight

        </Link>


        <ul className="nav-links">

          <li><Link to="/">Home</Link></li>
```

```
          <li><Link to="/menu">Menu</Link></li>
          <li><Link to="/about">About</Link></li>
          <li><Link to="/cart">🛒 Cart</Link></li>
          <li><Link to="/register">Register</Link></li>
          <li><Link to="/login">Login</Link></li>
          <li><Link to="/profile">Profile</Link></li>

        </ul>
      </div>
    </nav>
  );
}
```

Navbar.css

```
.navbar {
  background: linear-gradient(135deg, #ff9966, #ff5e62);
  padding: 1rem 0;
  box-shadow: 0 3px 10px rgba(0, 0, 0, 0.15);
  position: sticky;
  top: 0;
  z-index: 100;
  width: 100%;
  transition: all 0.3s ease;
}
```

```
.nav-container {
  display: flex;
  align-items: center;
  justify-content: space-between;
  max-width: 1250px;
  margin: 0 auto;
  padding: 0 2rem;
}

/* Logo */
.nav-logo {
  font-size: 1.8rem;
  font-weight: 700;
  color: #fff;
  text-decoration: none;
  letter-spacing: 1px;
  transition: transform 0.3s ease;
}

.nav-logo:hover {
  transform: scale(1.05);
}

/* Links */
```

```
.nav-links {
  list-style: none;
  display: flex;
  align-items: center;
  gap: 2rem;
}

.nav-links a {
  color: #fff;
  text-decoration: none;
  font-weight: 500;
  font-size: 1rem;
  letter-spacing: 0.5px;
  position: relative;
  transition: color 0.3s ease;
}

.nav-links a::after {
  content: "";
  position: absolute;
  width: 0%;
  height: 2px;
  left: 0;
  bottom: -4px;
  background: #fff;
```

```
  transition: width 0.3s ease;
}

.nav-links a:hover::after {
  width: 100%;
}

.nav-links a:hover {
  color: #ffe6d5;
}

/* Right-side Icons */
.nav-icons {
  display: flex;
  align-items: center;
  gap: 1.5rem;
}

.nav-icons i {
  color: #fff;
  font-size: 1.4rem;
  cursor: pointer;
  transition: transform 0.3s ease;
}
```

```
.nav-icons i:hover {
  transform: scale(1.2);
  color: #ffe6d5;
}

/* Mobile Responsive */
@media (max-width: 768px) {
  .nav-container {
    flex-wrap: wrap;
    justify-content: center;
  }

  .nav-links {
    gap: 1rem;
    flex-wrap: wrap;
  }

  .nav-icons {
    margin-top: 0.5rem;
  }
}
```

Menucard.jsx

```
import React from "react";
import { useCart } from "../context/CartContext";
```

```
import "./MenuCard.css";

export default function MenuCard({ item }) {
  const { addToCart } = useCart();

  return (
    <div className="menu-card shadow-sm">
      <img
        src={item.img}
        alt={item.name}
        className="menu-card-img"
        loading="lazy"
      />

      <div className="menu-card-body">
        <h4 className="menu-card-title">{item.name}</h4>
        <p className="menu-card-cuisine">{item.cuisine}</p>
        <p className="menu-card-desc">{item.desc}</p>

        <div className="menu-card-footer">
          <strong className="menu-card-price">₹{item.price.toFixed(2)}</strong>
          <button
            className="btn-add"
            onClick={() => addToCart(item)}
          >
```

```
            Add to Cart 🍽
          </button>
        </div>
      </div>
    </div>
  );
}
```

Menucard.css

```
.menu-card {
  background: #fff;
  border-radius: 15px;
  overflow: hidden;
  transition: transform 0.3s ease, box-shadow 0.3s ease;
  display: flex;
  flex-direction: column;
}

.menu-card:hover {
  transform: translateY(-5px);
  box-shadow: 0 10px 20px rgba(0, 0, 0, 0.15);
}

.menu-card-img {
  width: 100%;
```

```
  height: 200px;
  object-fit: cover;
}

.menu-card-body {
  padding: 1rem;
  text-align: left;
}

.menu-card-title {
  font-size: 1.3rem;
  color: #ff5e62;
  margin-bottom: 0.3rem;
}

.menu-card-cuisine {
  color: #777;
  font-size: 0.9rem;
  margin-bottom: 0.5rem;
  font-style: italic;
}

.menu-card-desc {
  color: #555;
  font-size: 0.95rem;
```

```
  margin-bottom: 1rem;
  line-height: 1.4;
}

.menu-card-footer {
  display: flex;
  align-items: center;
  justify-content: space-between;
}

.menu-card-price {
  font-weight: 600;
  color: #222;
  font-size: 1.1rem;
}

.btn-add {
  background: linear-gradient(135deg, #ff9966, #ff5e62);
  border: none;
  color: white;
  padding: 0.5rem 1rem;
  border-radius: 8px;
  font-weight: 500;
  transition: background 0.3s ease;
  cursor: pointer;
```

```
}

.btn-add:hover {
  background: linear-gradient(135deg, #ff5e62, #ff9966);
}
```

Footer.jsx

```
import React from "react";
import "./Footer.css";

export default function Footer() {
  return (
    <footer className="footer">
      <div className="footer-container">
        <p>© 2025 Gourmet Delight — All Rights Reserved 🍴</p>
        <p>
          Follow us:
          <a href="#"> Instagram </a>|
          <a href="#"> Facebook </a>|
          <a href="#"> Twitter </a>
        </p>
      </div>
    </footer>
  );
}
```

Footer.css

```
.footer {
  background: rgb(234, 214, 188);
  color: #fff;
  padding: 1.5rem 0;
  text-align: center;
  margin-top: auto;
}

.footer-container {
  max-width: 1200px;
  margin: 0 auto;
  font-size: 0.9rem;
}

.footer a {
  color: #ff9966;
  text-decoration: none;
  margin: 0 0.3rem;
  transition: color 0.3s;
}

.footer a:hover {
  color: #ff5e62;
```

}

Output:

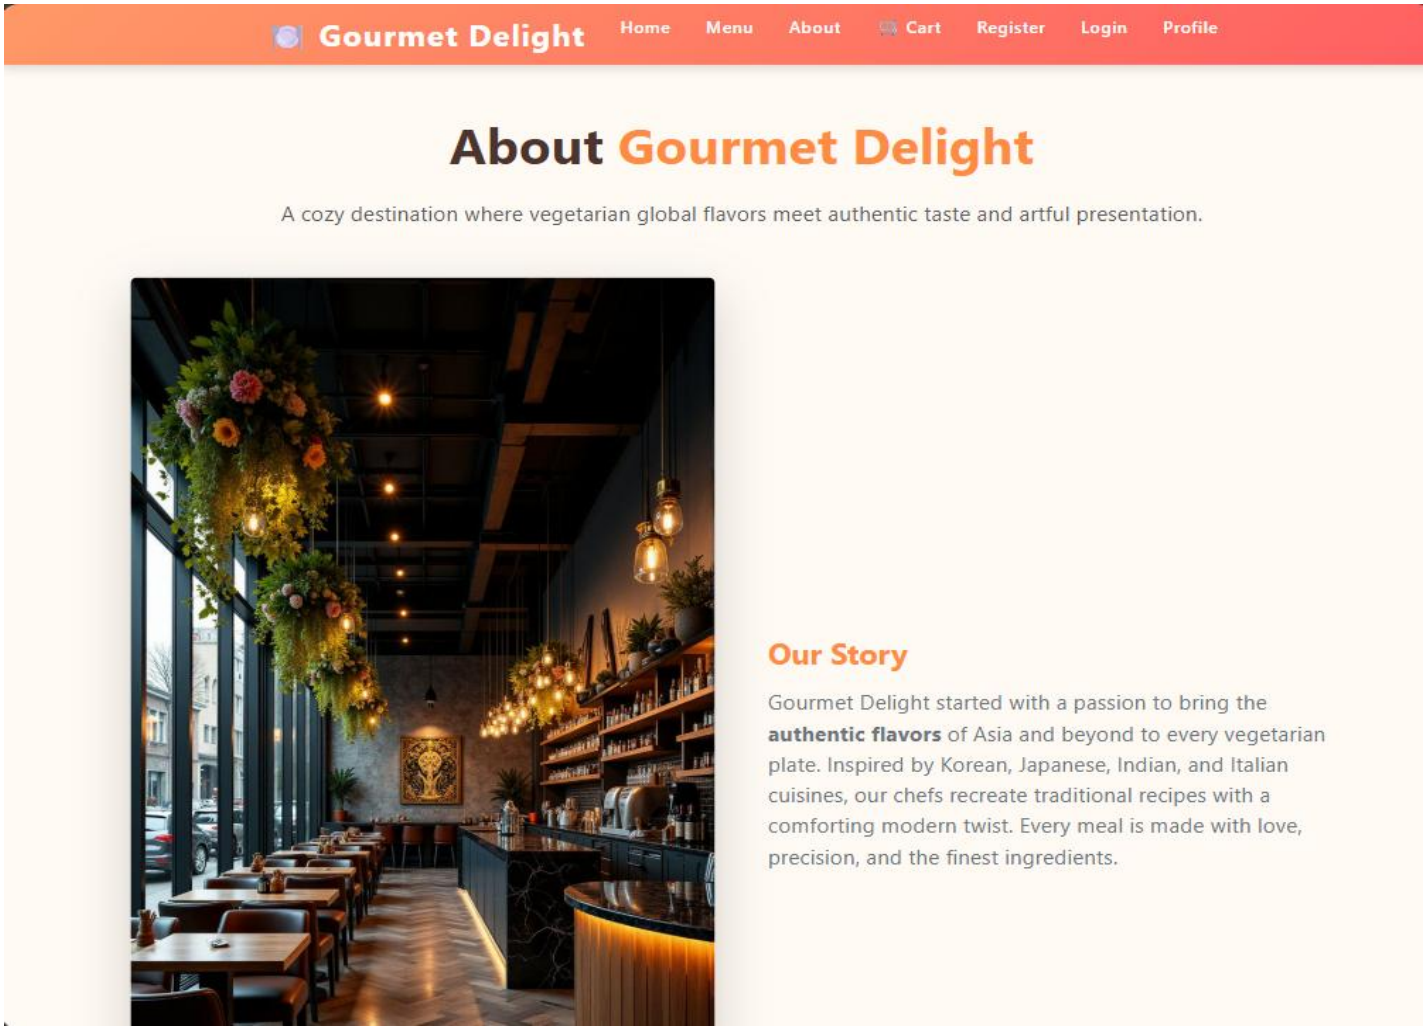
Gourmet Delight
Home
Menu
About
Cart
Register
Login
Profile
About Gourmet Delight
A cozy destination where vegetarian global flavors meet authentic taste and artful presentation.
Our Story
Gourmet Delight started with a passion to bring the authentic flavors of Asia and beyond to every vegetarian plate. Inspired by Korean, Japanese, Indian, and Italian cuisines, our chefs recreate traditional recipes with a comforting modern twist. Every meal is made with love, precision, and the finest ingredients.

Our Mission

Our mission is simple — to craft delicious vegetarian dishes that feel like **a warm hug on a plate.** We believe great food connects people, celebrates culture, and nourishes both body and soul. Every dish is thoughtfully curated to reflect our values of **authenticity, quality, and care.**

👩‍🍳 Meet Our Culinary Experts

Chef Arjun Mehta

Head Chef – Indian Cuisine

Chef Isabella Rossi

Italian Cuisine Specialist

Chef Kenji Tanaka

Japanese Cuisine Expert

Every Dish Tells a Story

From our kitchen to your heart — bringing flavors that comfort, inspire, and delight.

Visit Our Menu 🌸

© 2025 Gourmet Delight — All Rights Reserved 🍴

Follow us: Instagram | Facebook | Twitter

Conclusion :

We successfully implemented a modular and dynamic routing system in our multi-cuisine restaurant website using React Router. The application now supports seamless page transitions and efficient navigation without reloading. The use of reusable components like Navbar, MenuCard, and Footer enhances maintainability and scalability. By combining routing with modular UI design, we achieved a professional-grade, single-page React application that provides both performance and code clarity**.**

Assignment 10 : Full React Application

Aim :

The aim of this assignment is to set up a new React project using Create React App, configure the initial project structure, and implement basic navigation across multiple pages using React Router DOM. The primary goal is to understand how routing works within single-page applications and to create a top navigation bar that links key sections such as Home, Products, Cart, Checkout, and Profile, allowing smooth transitions without fullpage reloads.

Theory :

-All About React

Setting up a React project involves using Create React App, a command-line tool that provides a readyto-use environment for React development. This setup automatically includes important tools like Webpack, Babel, and ESLint, saving developers from manual configuration. The folder structure typically includes directories for components, pages, and assets, promoting modular design and easy scalability. Once the project is initialized, React Router DOM is introduced to handle navigation.

Traditional web pages refresh entirely when moving between routes, but React applications use client-side routing, which dynamically replaces the visible portion of the DOM without a full reload. The BrowserRouter component acts as the foundation of routing, while Route and Routes determine which component to render based on the current path. This approach creates a seamless user experience.

The Navbar is implemented as a reusable component using React Bootstrap or standard HTML/CSS, containing navigation links. Each link is created using the Link component instead of traditional anchor tags to prevent reloading. The Navbar stays consistent across all pages, while the content below it dynamically changes based on the route. This architecture mimics the structure of real-world web applications where only part of the UI updates, providing both performance and design advantages.

- Home Page

The Home page serves as the primary interface between users and the application. It is designed to be dynamic, modular, and informative. React's component-driven approach enables developers to build each section of the Home page as a separate component, such as the search bar, featured products, and promotional banners. Using the useState hook, the search functionality dynamically filters products in real time based on user input.

In this project, the Home page showcases featured products retrieved from a predefined product list. Each product is represented through a ProductCard component that displays its image, name, and price. The layout uses Bootstrap grid classes for responsiveness, ensuring proper alignment across devices. The search bar's value is stored in the component's state, and filtering is performed using JavaScript's array filter method combined with React's reactivity.

The overall design aligns with user experience principles, providing intuitive interaction and immediate feedback. This demonstrates how React components and state management work together to create dynamic, interactive pages.

- Product Page

The Products page is a core part of an e-commerce application, showcasing all items dynamically. Each product is displayed using a reusable ProductCard component, promoting modularity. The page uses the map function to iterate through an array of product objects, rendering consistent product cards efficiently. A search bar is also integrated to filter products dynamically by name or description. React's state management ensures that user interactions update the UI without manual DOM manipulation. Each ProductCard includes an "Add to Cart" button that triggers routing or context-based functions. Bootstrap's grid layout is used to maintain a clean and responsive design. The reusability of ProductCard emphasizes component-based architecture in React.

- Cart Page

The Cart page manages and displays items the user has added. Each cart item contains information such as name, price, quantity, and total. React's state and event handling enable real-time updates to quantities and total prices without reloading. The page structure includes a responsive table that lists items dynamically using the map method. Each input field for quantity triggers an onChange event that recalculates totals using setState. The Cart also features a "Proceed to Checkout" button that navigates users to the next step of purchase using React

Router. This component demonstrates two-way data binding, conditional rendering, and event-driven UI management in React.

- Checkout Page

The Checkout page integrates form handling, validation, and order confirmation logic. React's controlled components are used to manage form input fields such as name, address, and phone number. Each input's value is tied to component state, ensuring real-time synchronization between the UI and data model. Conditional checks ensure all required fields are filled before allowing submission. The order summary is dynamically generated from the cart data passed through routing state. React Router's useLocation hook retrieves this data. Finally, a confirmation alert and redirection complete the process, simulating a real-world checkout experience.

- Registration , Login and Profile

React's state and event handling mechanisms are used to build a detailed registration form. Controlled components capture data like personal details, address, health information, and occupation. Validation 56 ensures required fields are filled correctly. Upon successful registration, the user data is stored locally using localStorage for persistence. The Profile page retrieves and displays this stored information in a formatted structure. Conditional rendering in Navbar dynamically switches between "Login/Signup" and "My Profile" based on the user's login status. The architecture demonstrates user authentication flow and state persistence without external databases.

-State Management Using Context API

React's Context API provides a centralized mechanism for managing shared data across components without prop drilling. The CartContext stores global cart data, offering functions like addToCart, removeFromCart, and updateQuantity. By wrapping the App component inside CartProvider, all nested components gain access to the same global state. The Context synchronizes data with localStorage for persistence and automatically rehydrates data upon reload. Login validation logic is added before checkout, redirecting users to the login page if unauthorized. This integration demonstrates how React Context API eliminates redundancy, improves maintainability, and enforces session control efficiently.

- Component Structure

React Router DOM provides seamless navigation between multiple pages within a single-page application without reloading. Components like BrowserRouter, Routes, and Route define navigation paths and corresponding UI views. The Navbar and Footer remain consistent, while dynamic content is rendered within the route structure. Component modularity ensures that UI elements like Navbar, ProductCard, and CartItem are independent and reusable. This separation of concerns enhances readability and allows teams to extend functionality easily. The application demonstrates an optimal SPA design, where routing and component modularity together create a robust, scalable, and maintainable architecture.

Code Implementation:

App.jsx

```
import React from "react";

import { Routes, Route } from "react-router-dom";

import Navbar from "./components/Navbar";

import Home from "./pages/Home";

import Menu from "./pages/Menu";

import About from "./pages/About";

import Cart from "./pages/Cart";

import Checkout from "./pages/Checkout";

import Profile from "./pages/Profile";

import Login from "./pages/Login";

import Register from "./pages/Register";

import Footer from "./components/Footer";

import { CartProvider } from "./context/CartContext";
```

```
export default function App() {
  return (
    <CartProvider>
      <Navbar />
      <div className="main-content">
        <Routes>
          <Route path="/" element={<Home />} />
          <Route path="/menu" element={<Menu />} />
          <Route path="/about" element={<About />} />
          <Route path="/cart" element={<Cart />} />
          <Route path="/checkout" element={<Checkout />} />
          <Route path="/profile" element={<Profile />} />
          <Route path="/login" element={<Login />} />
          <Route path="/register" element={<Register />} />
        </Routes>
      </div>
      <Footer />
    </CartProvider>
  );
}


]
```

Home.jsx

```
import React from "react";

import "bootstrap/dist/css/bootstrap.min.css";

import "./Home.css";

import { useNavigate } from "react-router-dom";


export default function Home() {

  const navigate = useNavigate();


  const dishes = [

    { name: "Korean Bibimbap", price: "₹499", specialty: "Spicy rice bowl with veggies", img: "public/images/bibimbap.jpeg" },

    { name: "Japanese Sushi Platter", price: "₹899", specialty: "Assorted veggie sushi rolls", img: "public/images/sushi.jpeg" },

    { name: "Italian Pasta", price: "₹599", specialty: "Creamy Alfredo with herbs", img: "public/images/italian-pasta.jpeg" },

    { name: "Indian Thali", price: "₹449", specialty: "Complete traditional meal", img: "public/images/indian-thali.jpeg" },

    { name: "Chinese Dumplings", price: "₹399", specialty: "Soft and juicy veggie dumplings", img: "public/images/dumplings.jpeg" },

    { name: "French Crepes", price: "₹349", specialty: "Light & sweet dessert crepes", img: "public/images/crepes.jpeg" },

  ];


    return (

    <div className="home-page">

      {/* Hero Section */}
```

```
<section className="hero-section">
  <div className="hero-overlay animate-fade-in">
    <h1 className="animate-slide-up">Discover Global Flavors in One Place</h1>
    <p className="animate-slide-up delay-1">
      ✨ Authentic vegetarian cuisines inspired by Korean, Japanese, Indian, and Chinese kitchens — crafted with care and love. ✨
    </p>
    <button
      className="btn-explore animate-slide-up delay-2"
      onClick={() => navigate("/menu")}
    >
      Explore Menu
    </button>
  </div>
</section>


{/* 🍽 Explore Menu Section */}
<section className="menu-preview container my-5 text-center">
  <h2 className="fw-bold section-title text-brown mb-4">🍽 Explore Our Menu</h2>
  <div className="row g-4">
    {dishes.map((dish, index) => (
      <div className="col-md-4 col-sm-6" key={index}>
        <div className="card menu-card shadow-sm border-0">
          <img src={dish.img} alt={dish.name} className="card-img-top" />
```

```
            <div className="card-body">
              <h5 className="fw-bold text-brown">{dish.name}</h5>
              <p className="text-muted small">{dish.specialty}</p>
              <p className="fw-semibold text-accent">{dish.price}</p>
              <button
                className="btn btn-outline-accent mt-2"
                onClick={() => alert(`🍴 ${dish.name}\n${dish.specialty}\nPrice: ${dish.price}`)}
              >
                View Dish
              </button>
            </div>
          </div>
        </div>
      ))}
    </div>
  </section>


  {/* ☕ About Preview */}
  <section className="about-preview container d-flex flex-column flex-md-row align-items-center justify-content-between my-5 py-4">
    <div className="about-img">
      <img
        src="https://images.unsplash.com/photo-1579027989536-b7b1f875659b?auto=format&fit=crop&w=900&q=80"
        alt="Restaurant Interior"
```

```
        className="img-fluid rounded shadow"
      />
    </div>
    <div className="about-text mt-4 mt-md-0 text-center text-md-start">
      <h2 className="fw-bold text-brown">About Gourmet Delight</h2>
      <p className="text-muted mt-2">
        We bring together authentic flavors from around the world in one
        comforting vegetarian menu. Every dish is made fresh with love and
        care.
      </p>
      <button className="btn btn-accent mt-2">Read More</button>
    </div>
  </section>



  {/* 💬 Testimonials */}
  <section className="testimonials py-5 text-center">
    <div className="container">
      <h2 className="fw-bold text-brown mb-4">💬 What Our Customers Say</h2>
      <div className="row g-4">
        {[
          { name: "Aarav Sharma", text: "Perfect mix of authentic flavors and cozy vibes!", img: "https://randomuser.me/api/portraits/men/32.jpg" },
          { name: "Sana Kapoor", text: "Everything tasted like home but with a gourmet twist!", img: "https://randomuser.me/api/portraits/women/44.jpg" },
```

```
        { name: "Rohan Mehta", text: "Highly recommended for vegetarians who love global cuisine!", img: "https://randomuser.me/api/portraits/men/76.jpg" },
      ].map((review, index) => (
        <div className="col-md-4" key={index}>
          <div className="card testimonial-card p-4 border-0 shadow-sm">
            <img
              src={review.img}
              alt={review.name}
              className="rounded-circle mb-3"
              width="80"
              height="80"
            />
            <p className="fst-italic text-muted">"{review.text}"</p>
            <h6 className="fw-bold text-accent mt-2">{review.name}</h6>
          </div>
        </div>
      ))}
    </div>
  </div>
</section>

{/* ✉ Newsletter */}
<section className="newsletter text-center py-5">
  <div className="container">
    <h2 className="fw-bold text-brown mb-3">
```

```
          Join Our Foodie Family 🍰
        </h2>
        <p className="text-muted mb-4">
          Subscribe for exclusive offers and the latest menu updates!
        </p>
        <div className="d-flex justify-content-center flex-wrap gap-2">
          <input
            type="email"
            placeholder="Enter your email"
            className="form-control w-auto px-3 rounded-pill"
          />
          <button className="btn btn-accent rounded-pill">Subscribe</button>
        </div>
      </div>
    </section>
  </div>
);
}
```

About.jsx

```
import React from "react";
import "bootstrap/dist/css/bootstrap.min.css";
import "./About.css";

export default function About() {
```

```
  return (
    <div className="about-page py-5">
      {/* ✿ Header Section */}
      <div className="container text-center mb-5">
        <h2 className="fw-bold display-5 text-brown">
          About <span className="text-accent">Gourmet Delight</span>
        </h2>
        <p className="text-muted fs-5 mt-3">
          A cozy destination where vegetarian global flavors meet authentic taste and artful presentation.
        </p>
      </div>


      {/* 🍽 Our Story */}
      <div className="container my-5">
        <div className="row align-items-center g-5">
          <div className="col-md-6">
            <img
              src="public\images\Restaurant-interior.jpeg"
              alt="Restaurant interior"
              className="img-fluid rounded shadow-lg about-img"
            />
          </div>
          <div className="col-md-6 text-md-start text-center">
            <h3 className="fw-bold text-accent mb-3">Our Story</h3>
```

```
          <p className="text-secondary fs-5">
            Gourmet Delight started with a passion to bring the <b>authentic flavors</b> of Asia and beyond
            to every vegetarian plate. Inspired by Korean, Japanese, Indian, and Italian cuisines,
            our chefs recreate traditional recipes with a comforting modern twist.
            Every meal is made with love, precision, and the finest ingredients.
          </p>
        </div>
      </div>
    </div>

    {/* 🌟 Our Mission */}
    <div className="container my-5 mission-section">
      <div className="row align-items-center g-5 flex-md-row-reverse">
        <div className="col-md-6">
          <img
            src="https://images.unsplash.com/photo-1540189549336-e6e99c3679fe?auto=format&fit=crop&w=900&q=80"
            alt="Chef preparing meal"
            className="img-fluid rounded shadow-lg about-img"
          />
        </div>
        <div className="col-md-6 text-md-start text-center">
          <h3 className="fw-bold text-accent mb-3">Our Mission</h3>
          <p className="text-secondary fs-5">
```

```
        Our mission is simple — to craft delicious vegetarian dishes that feel like
        <b> a warm hug on a plate.</b> We believe great food connects people,
        celebrates culture, and nourishes both body and soul.
        Every dish is thoughtfully curated to reflect our values of
        <b> authenticity, quality, and care.</b>
      </p>
    </div>
  </div>
</div>


{/* 👨‍🍳🎯 Meet Our Chefs */}
<div className="container text-center my-5">
  <h3 className="fw-bold text-brown mb-4">👨‍🍳🎯 Meet Our Culinary Experts</h3>
  <div className="row g-4">
    {[
      {
        name: "Chef Arjun Mehta",
        role: "Head Chef – Indian Cuisine",
        img: "public/images/Chef-ArjunMehta.jpeg",
      },
      {
        name: "Chef Isabella Rossi",
        role: "Italian Cuisine Specialist",
        img: "public/images/Chef-IsabellaRossi.jpeg",
```

```
      },
      {
        name: "Chef Kenji Tanaka",
        role: "Japanese Cuisine Expert",
        img: "public/images/Chef-KenjiTanaka.jpeg",
      },
    ].map((chef, index) => (
      <div className="col-md-4" key={index}>
        <div className="card team-card border-0 shadow-sm p-4">
          <img
            src={chef.img}
            alt={chef.name}
            className="rounded-circle mx-auto mb-3 shadow"
            width="120"
            height="120"
          />
          <h5 className="fw-bold text-brown">{chef.name}</h5>
          <p className="text-muted">{chef.role}</p>
        </div>
      </div>
    ))}
  </div>
</div>


{/* 🌿 Closing Note */}
```

```
      <div className="text-center py-5 closing-note">
        <h4 className="fw-bold text-brown">Every Dish Tells a Story</h4>
        <p className="text-muted mt-2 mb-3">
          From our kitchen to your heart — bringing flavors that comfort, inspire, and delight.
        </p>
        <button className="btn btn-accent rounded-pill">Visit Our Menu ✿</button>
      </div>
    </div>
  );
}
```

Menu.jsx

```
import React, { useState, useMemo } from "react";
import menuData from "../data/menuData";
import "./Menu.css";

export default function Menu() {
  const [cuisine, setCuisine] = useState("All");
  const [message, setMessage] = useState("");

  const cuisines = useMemo(
    () => ["All", ...new Set(menuData.map(item => item.cuisine))],
    []
  );
```

```
  const filtered =
    cuisine === "All"
      ? menuData
      : menuData.filter(item => item.cuisine === cuisine);

function addToCart(item) {
  const cart = JSON.parse(localStorage.getItem("restro_cart")) || [];

  const existingItem = cart.find(i => i.id === item.id);
  if (existingItem) {
    existingItem.quantity += 1;
  } else {
    cart.push({ ...item, quantity: 1 });
  }

  localStorage.setItem("restro_cart", JSON.stringify(cart));

  window.dispatchEvent(new Event("cartUpdated"));

  setMessage(`${item.name} added to cart 🛒`);
  setTimeout(() => setMessage(""), 2000);
}
```

```
  return (
    <div className="menu-page">
      <h1 className="menu-title">Our Delicious Menu</h1>

      {message && <div className="cart-message">{message}</div>}

      <div className="filter-container">
        <label htmlFor="cuisine">Filter by Cuisine:</label>
        <select
          id="cuisine"
          value={cuisine}
          onChange={e => setCuisine()}
        >

            <option value={c} key={c}>
              {c}
            </option>
          ))}
        </select>
      </div>

      <div className="menu-grid">
        {filtered.map(item => (
          <div className="menu-card" key={item.id}>
<img src={item.img} alt={item.name} className="menu-img" />
```

```
            <div className="menu-info">
              <h3 className="dish-name">{item.name}</h3>
              <p className="dish-cuisine">{item.cuisine}</p>
              <p className="dish-desc">{item.desc}</p>
              <p className="dish-price">₹{item.price}</p>
              <button
                className="order-btn"
                onClick={() => addToCart(item)}
              >
                Add to Cart 🛒
              </button>
            </div>
          </div>
        ))}
      </div>
    </div>
  );
}
```

Cart.jsx

```
import React from "react";
import { useCart } from "../context/CartContext";
import CartItem from "../components/CartItem";
```

```
import "./Cart.css";

export default function Cart() {
  const { cart, removeFromCart, updateQty, clearCart } = useCart();

  i subtotal = ((s, i) => s + i.price * i.qty, 0);
  const delivery = cart.length > 0 ? 2.5 : 0;
  const total = subtotal + delivery;

  const handleCheckout = () => {
    alert(
      "🎉 Checkout successful! (Simulated)\nThank you for dining with Gourmet Delight!"
    );
    clearCart();
  };

  return (
    <div className="cart-page">
      {/* 🔷 Hero Banner */}
      <div className="cart-hero">
        <div className="overlay">
          <h1 className="hero-title">Your <span>Cart</span></h1>
          <p className="hero-subtitle">Review your delicious picks before checkout 🍽️</p>
```

```
  </div>
</div>

<div className="cart-container">
  {cart.length === 0 ? (
    <div className="empty-cart">
      <img
        src="https://cdn-icons-png.flaticon.com/512/2038/2038854.png"
        alt="Empty Cart"
        className="empty-img"
      />
      <p>
        Your cart is empty! Visit the{" "}
        <a href="/menu" className="link-menu">Menu</a> to add dishes ☕
      </p>
    </div>
  ) : (
    <>
      {/* 🔽 Cart Items */}
      <div className="cart-list">
        {cart.map((item) => (
          <div className="cart-item" key={item.id}>
            <img src={item.img} alt={item.name} className="cart-item-img" />

            <div className="cart-item-info">
```

```
  <h4>{item.name}</h4>
  <p className="cart-item-price">₹{item.price.toFixed(2)}</p>

  <div className="qty-row">
    <label>Qty:</label>
    <input
      type="number"
      min="1"
      value={item.qty}
      onChange={(e) =>
        updateQty(item.id, Math.max(1, +e.target.value))
      }
    />
  </div>
</div>

<div className="cart-item-actions">
  <strong className="item-total">
    ₹{(item.price * item.qty).toFixed(2)}
  </strong>
  <button
    className="btn-remove"
    onClick={() => removeFromCart(item.id)}
  >
    ✕ Remove
```

```
        </button>
      </div>
    </div>
  ))}
</div>

{/* 🔻 Order Summary */}
<div class="cart-summary">
  <h3>Order Summary</h3>
  <div class="summary-line">
    <span>Subtotal</span>
    <span>₹{subtotal.toFixed(2)}</span>
  </div>
  <div class="summary-line">
    <span>Delivery</span>
    <span>₹{delivery.toFixed(2)}</span>
  </div>
  <div class="summary-total">
    <span>Total</span>
    <strong>₹{total.toFixed(2)}</strong>
  </div>

  <div class="cart-buttons">
    <a href="/checkout" class="btn-checkout">
      ✅ Proceed to Checkout
```

```
            </a>
            <button className="btn-clear" onClick={clearCart}>
              🗑 Clear Cart
            </button>
          </div>
        </div>
      </>
    )}
  </div>
 </div>
);
}
```

Register.jsx

```
import React, { useState } from "react";
import { useNavigate } from "react-router-dom";
import "./Register.css";

export default function Register() {
  const [form, setForm] = useState({ name: "", email: "", password: "" });
  const [msg, setMsg] = useState("");
  const nav = useNavigate();

  function submit(e) {
    e.preventDefault();
```

```
  if (form.password.length < 6) {
    setMsg("Password must be at least 6 characters long.");
    return;
  }
  localStorage.setItem("user", JSON.stringify(form));
  setMsg("✅ Registered successfully!");
  setTimeout(() => nav("/login"), 1200);
}

return (
  <div className="auth-page">
    <h2>Create Your Account ✨</h2>
    {msg && <div className="alert">{msg}</div>}

    <form onSubmit={submit}>
      <label htmlFor="name">Full Name</label>
      <input
        type="text"
        id="name"
        placeholder="Enter your name"
        required
        value={form.name}
        onChange={(e) => setForm({ ...form, name: e.target.value })}
      />
```

```
    <label htmlFor="email">Email Address</label>
    <input
      type="email"
      id="email"
      placeholder="Enter your email"
      required
      value={form.email}
      onChange={(e) => setForm({ ...form, email: e.target.value })}
    />

    <label htmlFor="password">Password</label>
    <input
      type="password"
      id="password"
      placeholder="Create a password"
      required
      value={form.password}
      onChange={(e) => setForm({ ...form, password: e.target.value })}
    />

    <button type="submit" className="btn">
      Sign Up ✿
    </button>
  </form>
</div>
```

```
  );
}
```

Login.jsx

```
import React, { useState } from "react";
import { useNavigate } from "react-router-dom";
import "./Login.css"; // <-- Add this file for styling

export default function Login() {
  const [cred, setCred] = useState({ email: "", password: "" });
  const [err, setErr] = useState("");
  const nav = useNavigate();

  function submit(e) {
    e.preventDefault();
    if (!cred.email || cred.password.length < 6) {
      setErr("⚠ Enter a valid email and password (min 6 characters).");
      return;
    }
    localStorage.setItem("restro_user", JSON.stringify({ email: cred.email }));
    nav("/");
  }

  return (
    <div className="login-page">
```

```
<div className="login-card">
  <h2 className="login-title">Welcome Back 👋</h2>
  <p className="login-subtitle">Log in to continue to Gourmet Delight</p>

  {err && <div className="alert-error">{err}</div>}

  <form className="login-form" onSubmit={submit}>
    <div className="form-group">
      <label>Email</label>
      <input
        type="email"
        placeholder="Enter your email"
        value={cred.email}
        onChange={(e) => setCred({ ...cred, email: e.target.value })}
        required
      />
    </div>

    <div className="form-group">
      <label>Password</label>
      <input
        type="password"
        placeholder="Enter your password"
        value={cred.password}
        onChange={(e) => setCred({ ...cred, password: e.target.value })}
```

```
            required
          />
        </div>

        <button className="btn-login" type="submit">
          Login
        </button>

        <p className="signup-text">
          Don’t have an account? <a href="/register">Register here</a>
        </p>
      </form>
    </div>
  </div>
);
}
```

Profile.jsx

```
import React, { useState } from "react";
import "./Profile.css";

export default function Profile() {
  const user = JSON.parse(localStorage.getItem("restro_user"));
  const [editMode, setEditMode] = useState(false);
  const [userData, setUserData] = useState({
```

```
  name: user?.name || "",
  email: user?.email || "",
  favCuisine: "Japanese 🍣",
  memberSince: "2025",
});

function logout() {
  localStorage.removeItem("restro_user");
  window.location.href = "/login";
}

function handleEditChange(e) {
  setUserData({ ...userData, [e.target.name]: e.target.value });
}

function saveChanges() {
  localStorage.setItem("restro_user", JSON.stringify(userData));
  setEditMode(false);
  alert("Profile updated successfully!");
}

return (
  <div className="profile-page">
    <div className="profile-card">
      {user ? (
```

```
<>
  <img
    src="https://cdn-icons-png.flaticon.com/512/3135/3135715.png"
    alt="User Avatar"
    className="profile-img"
  />

  {editMode ? (
    <div className="edit-form">
      <input
        type="text"
        name="name"
        value={userData.name}
        onChange={handleEditChange}
        placeholder="Enter your name"
      />
      <input
        type="email"
        name="email"
        value={userData.email}
        onChange={handleEditChange}
        placeholder="Enter your email"
      />
      <input
        type="text"
```

```
      name="favCuisine"
      value={userData.favCuisine}
      onChange={handleEditChange}
      placeholder="Favorite Cuisine"
    />
    <button onClick={saveChanges} className="save-btn">
      Save Changes 💾
    </button>
  </div>
) : (
  <>
    <h2>{userData.name || "Guest User"}</h2>
    <p className="email">{userData.email}</p>

    <div className="profile-details">
      <p><strong>Favorite Cuisine:</strong> {userData.favCuisine}</p>
      <p><strong>Member Since:</strong> {userData.memberSince}</p>
    </div>

    <div className="profile-actions">
      <button onClick={() => setEditMode(true)}>Edit ✏️</button>
      <button onClick={logout}>Logout 🚪</button>
    </div>
  </>
)}
```

```
        {/* Recent Orders Section */}
        <div className="order-history">
          <h3>🍜 Recent Orders</h3>
          <ul>
            <li>Sushi Platter - ₹899</li>
            <li>Veg Ramen Bowl - ₹499</li>
            <li>Spicy Korean Bibimbap - ₹599</li>
          </ul>
        </div>

        {/* Preferences Section */}
        <div className="preferences">
          <h3>💖 Preferences</h3>
          <p>You enjoy authentic Asian cuisines with vegetarian options.</p>
        </div>
      </>
    ) : (
      <div className="no-user">
        <h3>Please log in to view your profile.</h3>
        <a href="/login" className="login-btn">Login</a>
      </div>
    )}
  </div>
</div>
```

```
  );
}
```

Output:

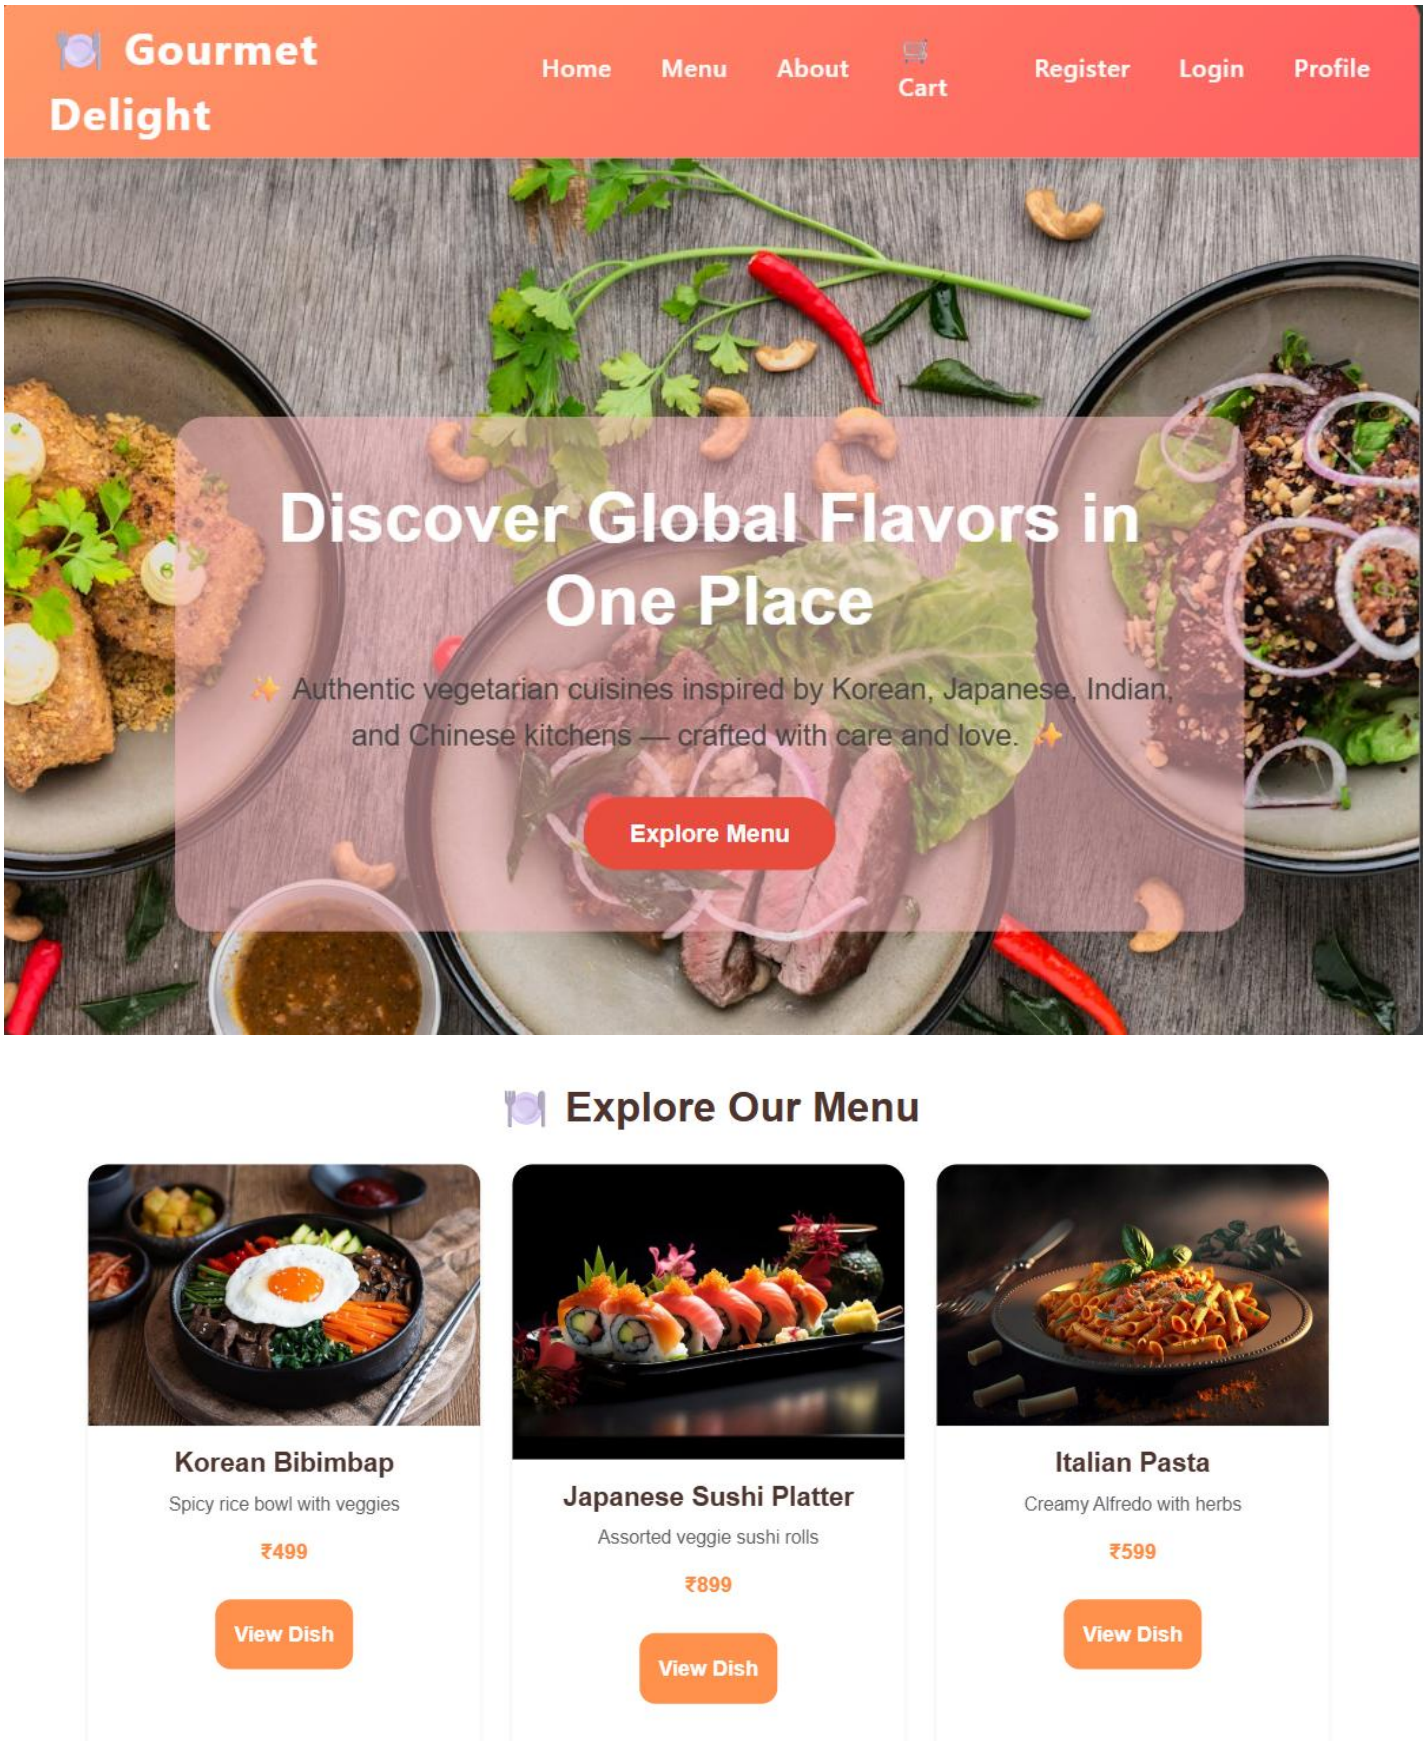
🍽️ Gourmet Delight
Home
Menu
About
🛒 Cart
Register
Login
Profile
Discover Global Flavors in One Place
✨ Authentic vegetarian cuisines inspired by Korean, Japanese, Indian, and Chinese kitchens — crafted with care and love. ✨
Explore Menu
🍽️ Explore Our Menu
Korean Bibimbap
Spicy rice bowl with veggies
₹499
View Dish
Japanese Sushi Platter
Assorted veggie sushi rolls
₹899
View Dish
Italian Pasta
Creamy Alfredo with herbs
₹599
View Dish

Indian Thali

Complete traditional meal

₹449

View Dish

Chinese Dumplings

Soft and juicy veggie dumplings

₹399

View Dish

French Crepes

Light & sweet dessert crepes

₹349

View Dish

About Gourmet Delight

We bring together authentic flavors from around the world in one comforting vegetarian menu. Every dish is made fresh with love and care.

Read More

💬 What Our Customers Say

"Perfect mix of authentic flavors and cozy vibes!"

Aarav Sharma

"Everything tasted like home but with a gourmet twist!"

Sana Kapoor

"Highly recommended for vegetarians who love global cuisine!"

Rohan Mehta

Join Our Foodie Family 🍰

Subscribe for exclusive offers and the latest menu updates!

Enter your email

Subscribe

© 2025 Gourmet Delight — All Rights Reserved 🍴

Follow us: Instagram | Facebook | Twitter

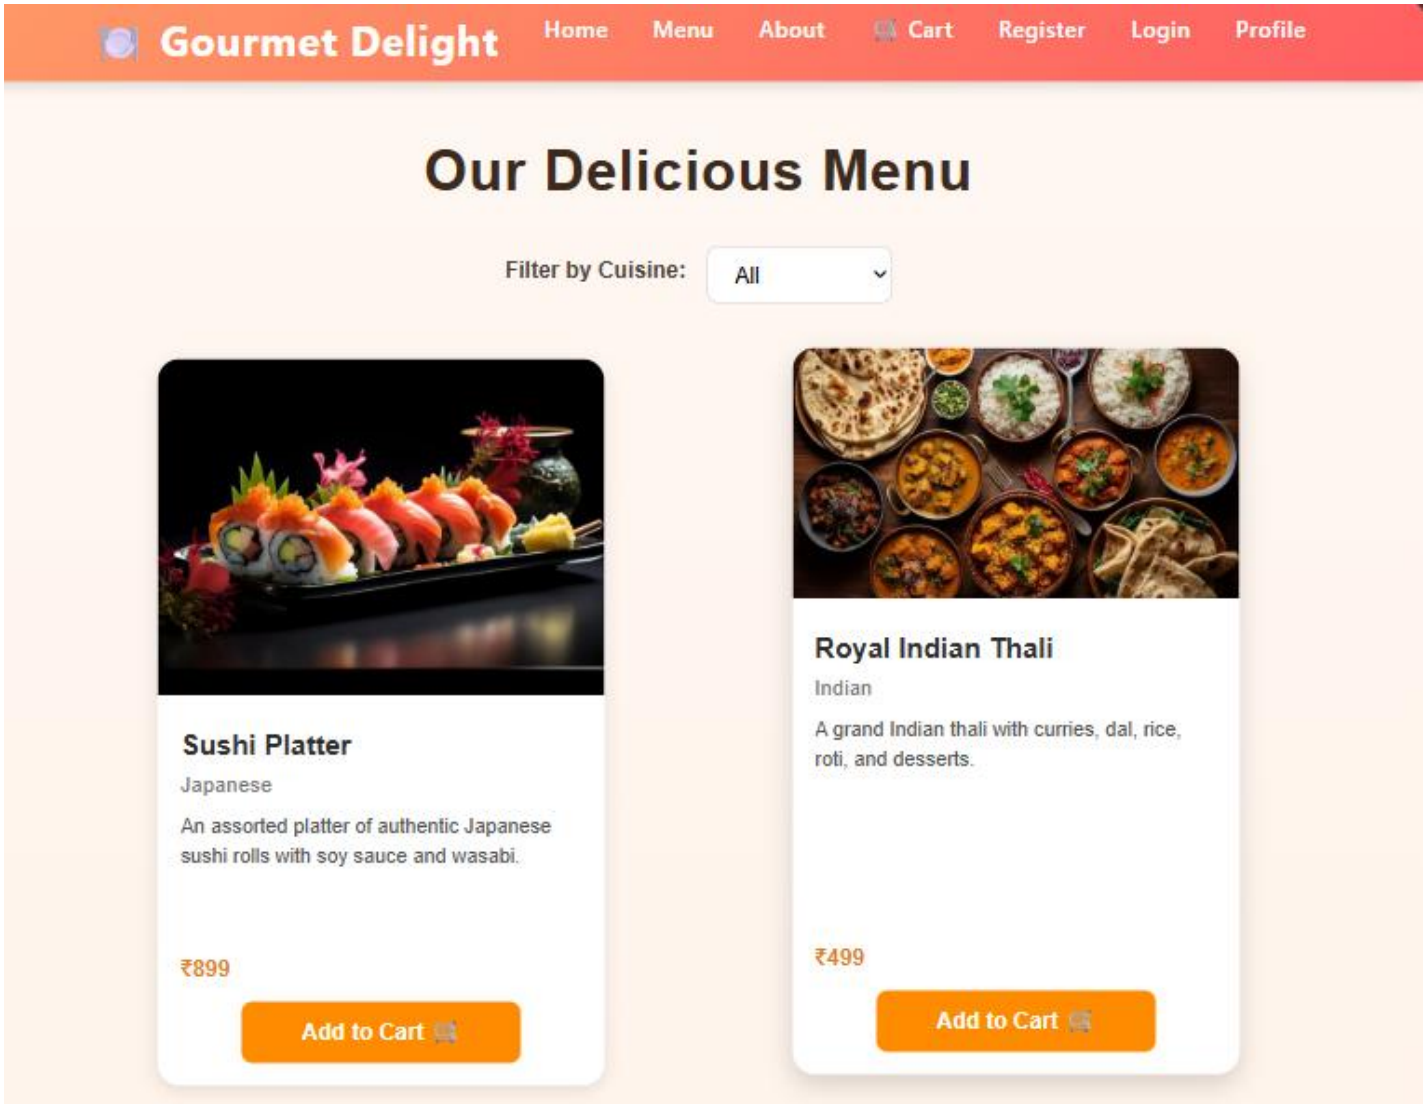
Gourmet Delight
Home
Menu
About
Cart
Register
Login
Profile
Our Delicious Menu
Filter by Cuisine:
All
Sushi Platter
Japanese
An assorted platter of authentic Japanese sushi rolls with soy sauce and wasabi.
₹899
Add to Cart
Royal Indian Thali
Indian
A grand Indian thali with curries, dal, rice, roti, and desserts.
₹499
Add to Cart

Creamy Italian Pasta

Italian

Rich and creamy Alfredo pasta made with Italian herbs and parmesan cheese.

₹399

Add to Cart 🛒

Korean Bibimbap

Korean

Traditional Korean rice bowl topped with vegetables, fried egg, and spicy gochujang sauce.

₹449

Add to Cart 🛒

Chinese Dumplings

Chinese

Soft, steamed dumplings filled with fresh vegetables and authentic flavors.

₹299

Add to Cart 🛒

Thai Green Curry

Thai

Fragrant green curry made with coconut milk, vegetables, and Thai herbs.

₹479

Add to Cart 🛒

Mexican Tacos

Mexican

Crispy tacos filled with spicy beans, salsa, and creamy guacamole.

₹349

Add to Cart 🛒

French Crepes

French

Delicate French crepes with fresh fruits, chocolate syrup, and whipped cream.

₹379

Add to Cart 🛒

Grilled Salmon

Continental

Perfectly grilled salmon served with butter sauce and veggies.

₹699

Add to Cart 🛒

Paneer Butter Masala

Indian

Creamy paneer curry cooked in rich tomato and butter gravy.

₹359

Add to Cart 🛒

Your Cart

Review your delicious picks before checkout 🍽️

Sushi Platter
₹899.00
Qty:
₹NaN
✕ Remove

Chinese Dumplings
₹299.00
Qty:
₹NaN
✕ Remove

Korean Bibimbap
₹449.00
Qty:
₹NaN
✕ Remove

Order Summary

Subtotal	₹NaN
Delivery	₹2.50
Total	₹NaN

✅ Proceed to Checkout

🗑️ Clear Cart

© 2025 Gourmet Delight — All Rights Reserved 🍴

Checkout

Fill in your details to complete the order.

Checkout

Name

Enter your full name

Delivery Address

Enter complete delivery address

Phone

Enter phone number

Payment Method

Credit / Debit Card

Place Order

Full Name

Enter your name

Address

Enter delivery address

Phone

Enter your phone number

Payment Method

Cash on Delivery

Confirm Order

© 2025 Gourmet Delight — All Rights Reserved

localhost:5175 says

✅ Order placed successfully!
Thank you for ordering with Gourmet Delight!

OK

Payment Method

Credit / Debit Card

Place Order

🍽️ Gourmet Delight

Home Menu About 🛒 Cart Register Login Profile

Checkout 🛍️

Fill in your details to complete the order.

🍴 Gourmet Delight

Fine Taste, Delivered Fresh ✨

👤 Customer Info

Name: suha nans

Address: MIT Art,Design & Technology Loni Kalbhor

Phone: 1234567890

Payment: Cash on Delivery

🧾 Ordered Dishes

No dishes found in your order.

Total: ₹0

💖 Thank you for ordering with Gourmet Delight!

📄 Download Receipt

© 2025 Gourmet Delight — All Rights Reserved 🍴

localhost:5175 says

Profile updated successfully!

OK

sd

p@gmail.com

Japanese 🍣

Save Changes 💾

🍜 Recent Orders

Sushi Platter - ₹899

Veg Ramen Bowl - ₹499

Spicy Korean Bibimbap - ₹599

💖 Preferences

You enjoy authentic Asian cuisines with vegetarian options.

Guest User

p@gmail.com

Favorite Cuisine: Japanese 🍣

Member Since: 2025

Edit ✏️ Logout 🚪

🍜 Recent Orders

- Sushi Platter - ₹899
- Veg Ramen Bowl - ₹499
- Spicy Korean Bibimbap - ₹599

💖 Preferences

You enjoy authentic Asian cuisines with vegetarian options.

© 2025 Gourmet Delight — All Rights Reserved 🍴

🍽️ Gourmet Delight Home Menu About 🛒 Cart Register Login Profile

Please log in to view your profile.

Login

© 2025 Gourmet Delight — All Rights Reserved 🍴

Follow us: Instagram | Facebook | Twitter

About Gourmet Delight

A cozy destination where vegetarian global flavors meet authentic taste and artful presentation.

Our Story

Gourmet Delight started with a passion to bring the **authentic flavors** of Asia and beyond to every vegetarian plate. Inspired by Korean, Japanese, Indian, and Italian cuisines, our chefs recreate traditional recipes with a comforting modern twist. Every meal is made with love, precision, and the finest ingredients.

Our Mission

Our mission is simple — to craft delicious vegetarian dishes that feel like **a warm hug on a plate.** We believe great food connects people, celebrates culture, and nourishes both body and soul. Every dish is thoughtfully curated to reflect our values of **authenticity, quality, and care.**

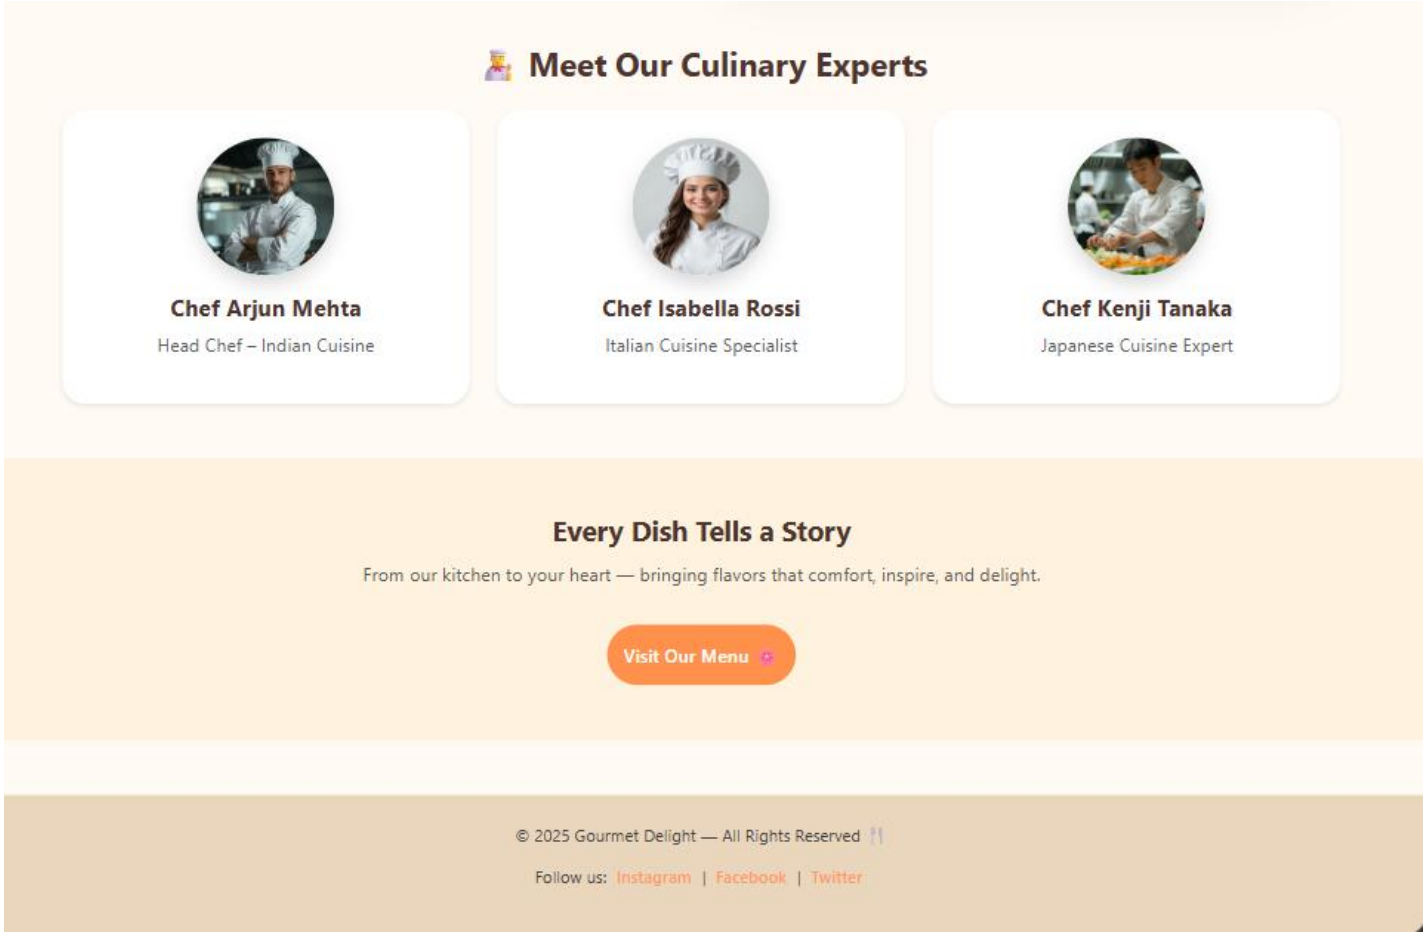

Conclusion

We successfully implemented a complete multi-page React web application for “Gourmet Delight”. It demonstrates routing, context-based state management, dynamic cart updates, checkout form handling, and receipt generation, fulfilling all assignment objectives.