
Atlas environment configuration report

Mission 1 -Enviroment scanner

Screenshot -1

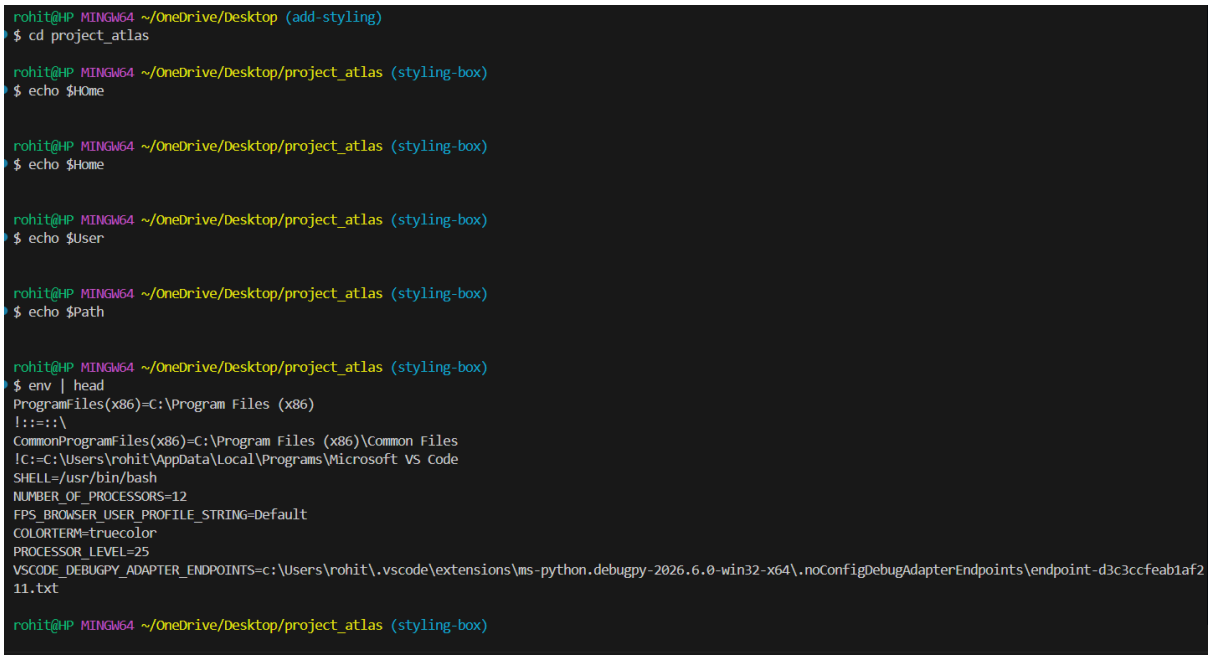

An environment variable is a named setting that stores information used by the shell and programs. HOME represents the user's home directory, while PATH contains the directories where the shell searches for commands.

Mission 2-Configuration builder

Screenshot -2

```
rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ export ATLAS_MODE=development

rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ export ATLAS_VERSION=1.0

rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ echo $ATLAS_MODE



rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ echo $ATLAS_MODE


rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ echo $ATLAS_VERSION
```

The export command creates an environment variable that can be accessed by programs started from the shell. Applications can use environment variables to receive configuration without putting those settings directly inside the source code.

Mission 3- Create atlas tools folder

Screenshot-3

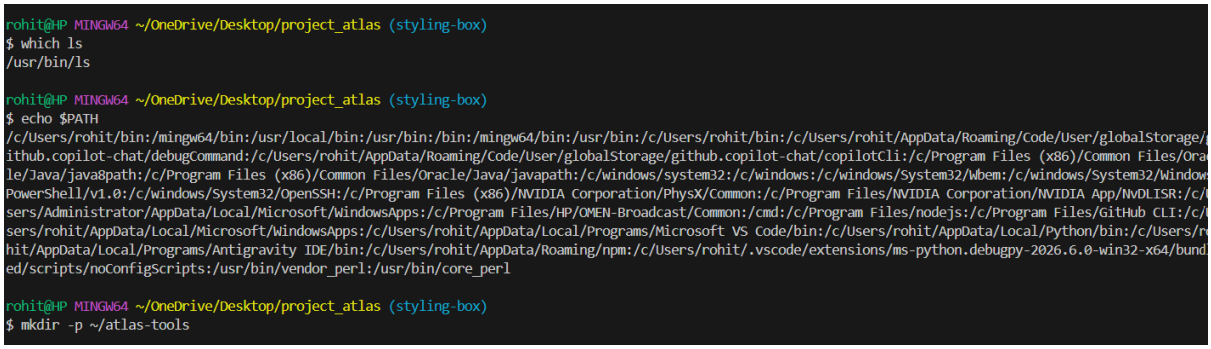


PATH tells the shell which directories to search when finding commands. Adding

a new directory with :$PATH keeps the existing command locations, while

replacing PATH coul

Mission 4-Shell architect

Screenshot-4

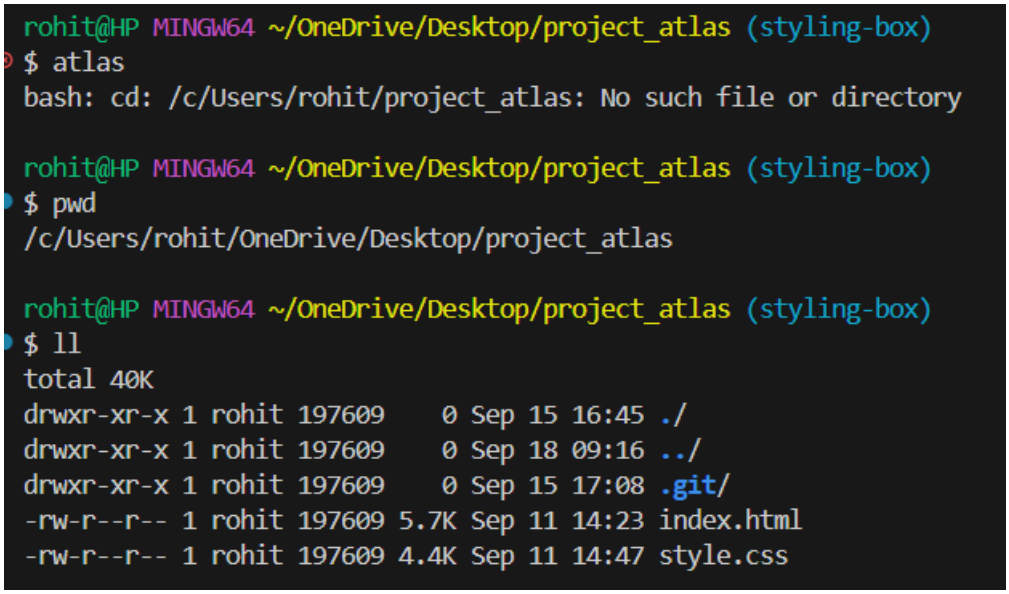

Aliases are useful because they provide short names for frequently used commands. The source command reloads the shell configuration file so the changes become available in the current terminal.

Mission 5-Atlas configuration vault

Screenshot-5

```
rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ nano config-demo.js

rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ export ATLAS_APP_NAME=ProjectAtlas

rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ export ATLAS_ENV=development

rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ export ATLAS_API_URL=http://localhost:3000

rohit@HP MINGW64 ~/OneDrive/Desktop/project_atlas (styling-box)
$ node config_demo.js
node:internal/modules/cjs/loader:1568
  throw err;
  ^

Error: Cannot find module 'C:\Users\rohit\OneDrive\Desktop\project_atlas\config_demo.js'
    at Module._resolveFilename (node:internal/modules/cjs/loader:1564:15)
    at wrapResolveFilename (node:internal/modules/cjs/loader:1118:27)
    at defaultResolveImplForCJSLoading (node:internal/modules/cjs/loader:1142:10)
    at resolveForCJSWithHooks (node:internal/modules/cjs/loader:1169:12)
    at Module._load (node:internal/modules/cjs/loader:1341:5)
    at wrapModuleLoad (node:internal/modules/cjs/loader:261:19)
    at Module.executeUserEntryPoint [as runMain] (node:internal/modules/run_main:154:5)
    at node:internal/main/run_main_module:33:47 {
  code: 'MODULE_NOT_FOUND',
  requireStack: []
}

Node.js v24.21.0
```

Configuration and secrets should be kept outside application source code so the same program can use different settings in different environments. The .env file is added to .gitignore so it is not accidentally committed and shared with the project repository.