
```
rohit@HP MINGW64 ~/OneDrive/Desktop (add-styling)
$ source ~/.bashrc

rohit@HP MINGW64 ~/OneDrive/Desktop (add-styling)
$ ll
 1DM.lnk*
 calculator/
'Dashboard - Kalvium (ROHITAKUMAR LAKKAPPA (kalvium.community)) (1).lnk'*
 desktop.ini
 error_report.txt
 foodies.pdf
 fu/
 git-practice/
 logs/
 Minecraftjava.bat
'new project'/
 personal-portfolio/
 portfolio.html
'Project Atlas Log Investigation Report.pdf'
 report.txt
'Screenshot 2026-07-11 192446.png'
'smart campus'/
 Telegram.lnk*
'web dev'/
 yenepoya/
```


```
rohit@HP MINGW64 ~/OneDrive/Desktop (add-styling)
$ logs

rohit@HP MINGW64 ~/Desktop (master)
```

An alias in Linux is a user-defined shortcut for a longer or more complex terminal command. When developers configure custom aliases in their .bashrc file, they streamline repetitive tasks, reduce typing errors, and save time during daily navigation and git operations. Saving these aliases in the .bashrc configuration file ensures that the customized environment persists across all terminal sessions. Running source ~/.bashrc reloads the configuration immediately so that your newly created short commands can be executed in the current session.

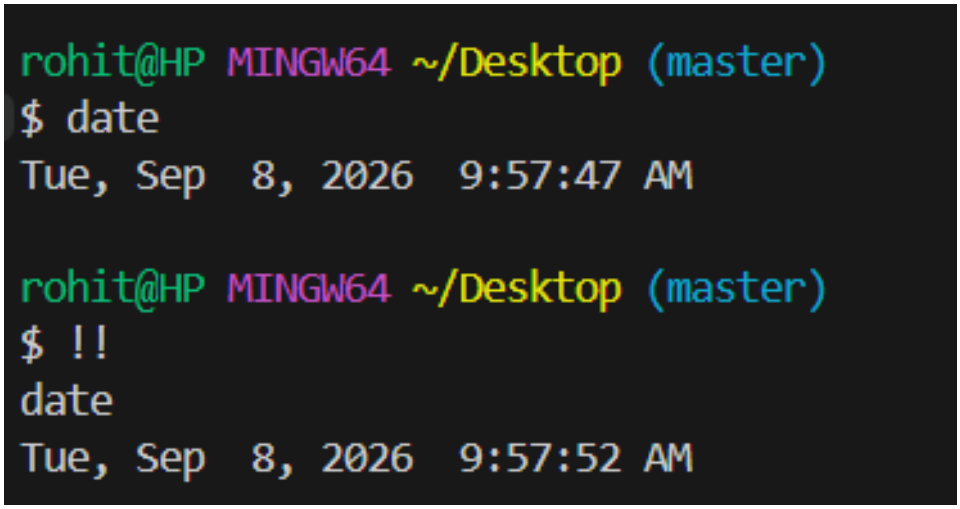

Terminal efficiency relies heavily on built-in productivity features like command history, reverse search, and auto-completion. The history command displays a chronological log of previously executed commands, while shortcuts like !! quickly re-run the most recent command without retyping it. Additionally, Ctrl + R activates reverse search, allowing you to search through past commands by typing a few matching characters, and the Tab key automatically completes file paths and directory names, reducing typing effort and preventing syntax mistakes.

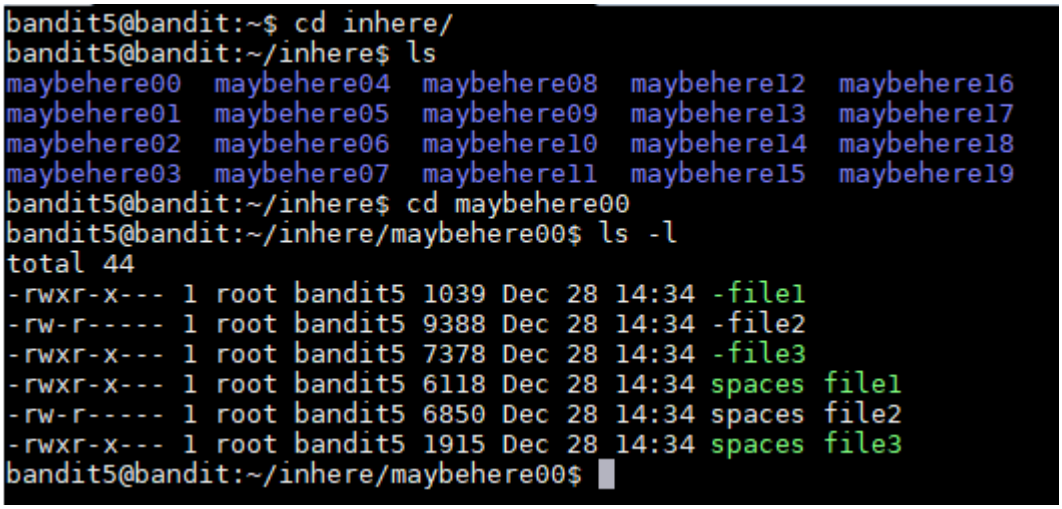

Levels 3 to 4: Level 3 focuses on finding hidden files, which start with a period (.) and remain unlisted under standard directory commands; using ls -a exposes all files within the directory. Level 4 involves searching through multiple files to identify human-readable content, which is achieved by using the file command to check each file's data type before inspecting its contents with cat

```
bandit23@melinda:~$ cd /etc/cron.d
bandit23@melinda:/etc/cron.d$ ls
behemoth4_cleanup  cronjob_bandit24_root  natas-stats       php5         sysstat
cron-apt           leviathan5_cleanup     natas25_cleanup   semtex0-32   vortex0
cronjob_bandit22   manpage3_resetpw_job   natas25_cleanup~  semtex0-64   vortex20
cronjob_bandit23   melinda-stats          natas26_cleanup   semtex0-ppc
cronjob_bandit24   natas-session-toucher  natas27_cleanup   semtex5
bandit23@melinda:/etc/cron.d$ cat cronjob_bandit24
* * * * * bandit24 /usr/bin/cronjob_bandit24.sh &> /dev/null
bandit23@melinda:/etc/cron.d$ cd /usr/bin/
bandit23@melinda:/usr/bin$ cat cronjob_bandit24
cronjob_bandit24.sh       cronjob_bandit24_root.sh
bandit23@melinda:/usr/bin$ cat cronjob_bandit24.sh
#!/bin/bash

myname=$(whoami)

cd /var/spool/$myname
echo "Executing and deleting all scripts in /var/spool/$myname:"
for i in * .*;
do
    if [ "$i" != "." -a "$i" != ".." ];
    then
        echo "Handling $i"
        timeout -s 9 60 "./$i"
        rm -f "./$i"
    fi
done
```

Level 5: Level 5 demonstrates searching for specific files based on criteria like file type, size, and permissions. The find command is used with flags such as -type f (regular file), -size 1033c (exact byte count), and ! -executable (non-executable file) to isolate the single matching file among many directories.