




- There were issues affecting this run of Lighthouse:
- **Chrome extensions negatively affected this page's load performance.** Try auditing the page in incognito mode or from a Chrome profile without extensions.
 - **There may be stored data affecting loading performance in this location: IndexedDB.** Audit this page in an incognito window to prevent those resources from affecting your scores.



Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49 ■ 50–89 ● 90–100




METRICS

[Expand view](#)

▲ First Contentful Paint 4.3 s	▲ Largest Contentful Paint 7.2 s
▲ Total Blocking Time 4,470 ms	● Cumulative Layout Shift 0.079

▲ Speed Index
8.8 s

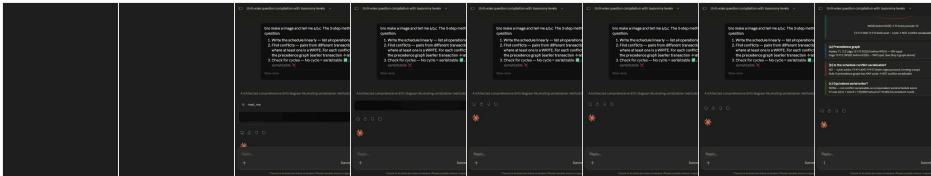

Show audits relevant to: [All](#) [FCP](#) [LCP](#) [TBT](#) [CLS](#)

INSIGHTS

▲ Forced reflow	
A forced reflow occurs when JavaScript queries geometric properties (such as <code>offsetWidth</code>) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about forced reflows and possible mitigations. Unscored	
Top function call	Total reflow time
vendor-BNxKmwN0.js:12	160 ms
Source	Total reflow time
[unattributed]	79 ms
index-wRctMB7g.js:23	24 ms
index-wRctMB7g.js:23	0 ms
index-wRctMB7g.js:23	7 ms
index-wRctMB7g.js:17	4 ms
vendor-BNxKmwN0.js:20	29 ms
index-wRctMB7g.js:21	124 ms
index-wRctMB7g.js:23	3 ms
index-wRctMB7g.js:23	0 ms
s.js:56	2 ms
index-wRctMB7g.js:21	0 ms
cc00a92fc-DivP2V85.js:1	4 ms
main.js:1	0 ms
content-all.js:222	0 ms
content-all.js:222	0 ms
▲ LCP breakdown	
Each subpart has specific improvement strategies . Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored	
Subpart	Duration
Time to first byte	110 ms
Element render delay	5,690 ms
li.whitespace-normal.break-words	
▲ Network dependency tree	
Avoid chaining critical requests by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored	

Maximum critical path latency: **20,165 ms**

Initial Navigation



...experiences/claude_web?locale=en-US (claude.ai)	- 7,068 ms, 1.27 KiB
...3be68fd1-430e-48c3-a362-084347e7300c/projects?... (claude.ai)	- 7,068 ms, 0.98 KiB
...gmail/auth (claude.ai)	- 7,068 ms, 0.54 KiB
...3be68fd1-430e-48c3-a362-084347e7300c/projects?... (claude.ai)	- 7,067 ms, 0.51 KiB
...gdrive/progress (claude.ai)	- 7,067 ms, 0.52 KiB
...notification/preferences (claude.ai)	- 7,067 ms, 0.86 KiB
...organizations/discoverable (claude.ai)	- 7,066 ms, 0.31 KiB
...referral/eligibility?campaign=... (claude.ai)	- 7,066 ms, 0.61 KiB
...3be68fd1-430e-48c3-a362-084347e7300c/projects?... (claude.ai)	- 7,066 ms, 0.51 KiB
...organizations/3be68fd1-430e-48c3-a362-084347e7300c (claude.ai)	- 7,065 ms, 1.38 KiB
...3be68fd1-430e-48c3-a362-084347e7300c/pending_domain_claim (claude.ai)	- 7,065 ms, 0.25 KiB
...account/domain_density (claude.ai)	- 7,065 ms, 0.25 KiB
...3be68fd1-430e-48c3-a362-084347e7300c/overage_spend_limit (claude.ai)	- 7,065 ms, 0.51 KiB
...3be68fd1-430e-48c3-a362-084347e7300c/cowork_settings (claude.ai)	- 7,064 ms, 0.68 KiB
...sync/settings (claude.ai)	- 7,064 ms, 0.64 KiB
/i18n/en-US.json (claude.ai)	- 7,047 ms, 318.76 KiB
...statsig/en-US.json (claude.ai)	- 7,030 ms, 2.41 KiB
...3be68fd1-430e-48c3-a362-084347e7300c/app_start?... (claude.ai)	- 6,606 ms, 93.42 KiB
...v1/c6a992d55-D5kpo8DQ.js (assets-proxy.anthropic.com)	- 6,559 ms, 51.32 KiB
...v1/c50152c30-DHqKsDm4.js (assets-proxy.anthropic.com)	- 6,400 ms, 1.47 KiB
...v1/cde7c3a92-Bbx9tZ3Z.js (assets-proxy.anthropic.com)	- 6,364 ms, 59.46 KiB
...v1/c6a992d55-Dl4PWQ1q.js (assets-proxy.anthropic.com)	- 6,358 ms, 3.31 KiB
...v1/c1d4c86a8-D5Wz-VR4.js (assets-proxy.anthropic.com)	- 6,342 ms, 3.45 KiB
...v1/c818056db-gKlJlRo.js (assets-proxy.anthropic.com)	- 6,342 ms, 3.81 KiB
...v1/cd2515372-B8qzte9H.js (assets-proxy.anthropic.com)	- 6,342 ms, 1.14 KiB
...v1/c35aea241-lq_PNnV-.js (assets-proxy.anthropic.com)	- 6,341 ms, 1.47 KiB
...v1/c1b9de416-CN7HrWKE.js (assets-proxy.anthropic.com)	- 6,341 ms, 1.37 KiB
...v1/cf1a02a1a-dlK9sQnC.js (assets-proxy.anthropic.com)	- 6,335 ms, 74.81 KiB
...v1/c32c0d97f-B1Hdl8t5.js (assets-proxy.anthropic.com)	- 3,872 ms, 5.17 KiB
...v1/ce1bfd762-B8w-J2E-.js (assets-proxy.anthropic.com)	- 3,871 ms, 3.67 KiB
...v1/c6a992d55-CtpufkCp.js (assets-proxy.anthropic.com)	- 3,871 ms, 4.38 KiB
...v1/c6a992d55-DoubWkHs.js (assets-proxy.anthropic.com)	- 3,870 ms, 2.90 KiB
...v2/bootstrap (claude.ai)	- 7,576 ms, 1.14 KiB
...v1/c6a992d55-DuDmXO-p.css (assets-proxy.anthropic.com)	- 702 ms, 75.01 KiB
...v1/cc410af59-DH94ugQz.woff2 (assets-proxy.anthropic.com)	- 6,303 ms, 151.47 KiB
...v1/tree-sitter-BfScwQVn.js (assets-proxy.anthropic.com)	- 3,396 ms, 18.43 KiB
/manifest.json (claude.ai)	- 1,969 ms, 1.71 KiB

Preconnected origins

[preconnect](#) hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

Origin	Source
https://assets-proxy.anthropic.com/	link
<u>Preconnect candidates</u>	
Add preconnect hints to your most important origins, but try to use no more than 4.	
Origin	Est LCP savings
https://a.claude.ai	170 ms

■ Use efficient cache lifetimes — Est savings of 290 KiB

^

A long cache lifetime can speed up repeat visits to your page. [Learn more about caching.](#) FCP LCP Unscored


☒ Show 3rd-party resources (7)


Request	Cache TTL	Transfer Size
Facebook Social		137 KiB
/en_US/fbevents.js (connect.facebook.net)	20m	97 KiB
...config/468...?v=... (connect.facebook.net)	20m	40 KiB
claude.ai 1st Party		141 KiB
/Fonts/AnthropicSans-Text-Medium-Static.otf (assets.claude.ai)	1h	60 KiB
/Fonts/AnthropicSans-Text-Regular-Static.otf (assets.claude.ai)	1h	60 KiB
...a80f1640690f/main.js (claude.ai)	4h	10 KiB
...a80f1640690f/main.js (a.claude.ai)	4h	10 KiB
anthropic.com		60 KiB
...LKJN8LsLE.../analytics.min.js (a-cdn.anthropic.com)	2m	29 KiB
/s.js (s-cdn.anthropic.com)	1h	20 KiB
...3962/1faa179...js (a-cdn.anthropic.com)	None	9 KiB
...amplitude-plugins/f12a434...js (a-cdn.anthropic.com)	None	2 KiB
Intercom Customer-Success		4 KiB
/widget/lupk&zyo (widget.intercom.io)	5m	4 KiB

■ Improve image delivery — Est savings of 35 KiB

^

Reducing the download time of images can improve the perceived load time of the page and LCP. [Learn more about optimizing image size](#) FCP LCP Unscored

URL		Resource Size	Est Savings
claude.ai 1st Party		37.2 KiB	35.0 KiB
img.w-full,h-full,object-cover,transition.duration-400.opacity-1		37.2 KiB	35.0 KiB
...019dc4c4-d362-70c9-a061-efda573bfc84/preview (claude.ai)			
This image file is larger than it needs to be (818x819) for its displayed dimensions (267x150). Use responsive images to reduce the image download size.			35.0 KiB
Render-blocking requests			
Requests are blocking the page's initial render, which may delay LCP. Deferring or inlining can move these network requests out of the critical path. FCP LCP Unscored			
URL	Transfer Size	Duration	
anthropic.com	75.0 KiB	530 ms	
...v1/c6a992d55-DuDmXO-p.css (assets-proxy.anthropic.com)	75.0 KiB	530 ms	
Layout shift culprits			
Layout shifts occur when elements move absent any user interaction. Investigate the causes of layout shifts , such as elements being added, removed, or their fonts changing as the page loads. CLS Unscored			
Element	Layout shift score		
Total	0.002		
 div.transition-all.duration-200.ease-out	0.002		
Element	Layout shift score		
Total	0.015		
 div	0.015		
Element	Layout shift score		
Total	0.036		
 div	0.019		

Element		Layout shift score												
	div	0.017												
Element		Layout shift score												
Total		0.079												
	div	0.041												
	div	0.031												
	div	0.005												
	div	0.001												
	div	0.001												
Optimize DOM size ^ A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. Learn how to avoid an excessive DOM size. Unscored <table><tr><th>Statistic</th><th>Element</th><th>Value</th></tr><tr><td>Total elements</td><td></td><td>861</td></tr><tr><td>DOM depth</td><td>path</td><td>29</td></tr><tr><td>Most children</td><td>ul.flex.flex-col.gap-px</td><td>21</td></tr></table>			Statistic	Element	Value	Total elements		861	DOM depth	path	29	Most children	ul.flex.flex-col.gap-px	21
Statistic	Element	Value												
Total elements		861												
DOM depth	path	29												
Most children	ul.flex.flex-col.gap-px	21												
3rd parties ^														

3rd party code can significantly impact load performance. [Reduce and defer loading of 3rd party code](#) to prioritize your page's content. (Unscored)

3rd party	Transfer size	Main thread time
difoiojjjoaoomphldepagpgbghkb	0 KiB	5,548 ms
chrome-extension://difoiojjjoaoomphldepagpgbghkb/content-all.js	0 KiB	3,160 ms
chrome-extension://difoiojjjoaoomphldepagpgbghkb/all-frames.js	0 KiB	2,388 ms
anthropic.com	3,889 KiB	2,740 ms
...v1/vendor-BNxKmwN0.js (assets-proxy.anthropic.com)	520 KiB	2,356 ms
...v1/index-wRctMB7g.js (assets-proxy.anthropic.com)	2,291 KiB	286 ms
/s.js (s-cdn.anthropic.com)	20 KiB	74 ms
...LKJN8LsLE.../analytics.min.js (a-cdn.anthropic.com)	29 KiB	11 ms
...vendor/commons.59560ac...js.gz (a-cdn.anthropic.com)	22 KiB	4 ms
...bundles/ajs-destination.bundle.8e6b895...js (a-cdn.anthropic.com)	3 KiB	3 ms
...v1/c806a392a-4i-GP6EZ.js (assets-proxy.anthropic.com)	10 KiB	2 ms
...amplitude-plugins/f12a434...js (a-cdn.anthropic.com)	2 KiB	2 ms
...3962/1faa179...js (a-cdn.anthropic.com)	9 KiB	2 ms
...v1/cc00a92fc-DivP2V85.js (assets-proxy.anthropic.com)	16 KiB	1 ms
...v1/c50152c30-JGtLW8TS.js (assets-proxy.anthropic.com)	8 KiB	1 ms
...2.11.5/facebook-pixel.dynamic.js.gz (a-cdn.anthropic.com)	3 KiB	0 ms
...bundles/schemaFilter.bundle.1b218d1...js (a-cdn.anthropic.com)	1 KiB	0 ms
...directory/servers?limit=... (api.anthropic.com)	193 KiB	0 ms
...v1/c66fc489e-C-BHYa_K.woff2 (assets-proxy.anthropic.com)	162 KiB	0 ms
...v1/cc410af59-DH94ugQz.woff2 (assets-proxy.anthropic.com)	151 KiB	0 ms
...v1/cc27851ad-CFwx3nG7.woff2 (assets-proxy.anthropic.com)	115 KiB	0 ms
...v1/c6a992d55-DuDmXQ-p.css (assets-proxy.anthropic.com)	75 KiB	0 ms
...v1/cf1a02a1a-dlK9sQnC.js (assets-proxy.anthropic.com)	75 KiB	0 ms
...v1/cde7c3a92-Bbx9tZ3Z.js (assets-proxy.anthropic.com)	59 KiB	0 ms
...v1/c6a992d55-D5kpo8DQ.js (assets-proxy.anthropic.com)	51 KiB	0 ms
...v1/tree-sitter-BfScwQVn.js (assets-proxy.anthropic.com)	18 KiB	0 ms
...v1/cf8dbbbdb-BoTHcEZV.js (assets-proxy.anthropic.com)	7 KiB	0 ms
...LKJN8LsLE.../settings (a-cdn.anthropic.com)	6 KiB	0 ms
...v1/c32c0d97f-B1Hdl8t5.js (assets-proxy.anthropic.com)	5 KiB	0 ms
...v1/c6a992d55-CtpufkCp.js (assets-proxy.anthropic.com)	4 KiB	0 ms
...v1/c818056db-gKlJlRo.js (assets-proxy.anthropic.com)	4 KiB	0 ms
...v1/c1f96d614-C9KKANZM.js (assets-proxy.anthropic.com)	4 KiB	0 ms

3rd party	Transfer size	Main thread time
...v1/ce1bfd762-B8w-J2E-.js (assets-proxy.anthropic.com)	4 KiB	0 ms
...v1/c6a992d55-C9CaycWs.js (assets-proxy.anthropic.com)	4 KiB	0 ms
...v1/c1d4c86a8-D5Wz-VR4.js (assets-proxy.anthropic.com)	3 KiB	0 ms
...v1/c6a992d55-Dl4PWQ1q.js (assets-proxy.anthropic.com)	3 KiB	0 ms
...v1/c6a992d55-DoubWkHs.js (assets-proxy.anthropic.com)	3 KiB	0 ms
...v1/c50152c30-DHqKsDm4.js (assets-proxy.anthropic.com)	1 KiB	0 ms
...v1/c35aea241-lq_PNNv-.js (assets-proxy.anthropic.com)	1 KiB	0 ms
...v1/c1b9de416-CN7HrWKE.js (assets-proxy.anthropic.com)	1 KiB	0 ms
...v1/cd2515372-B8qzte9H.js (assets-proxy.anthropic.com)	1 KiB	0 ms
/v1/b (a-api.anthropic.com)	1 KiB	0 ms
/images/445481.gif?bk=... (s-cdn.anthropic.com)	0 KiB	0 ms
Intercom Customer-Success	345 KiB	262 ms
/widget/lupk8zyo (widget.intercom.io)	4 KiB	134 ms
/vendor-modern.80eace52.js (js.intercomcdn.com)	144 KiB	113 ms
/frame-modern.7aecdc81.js (js.intercomcdn.com)	193 KiB	15 ms
...web/ping (api-iam.intercom.io)	4 KiB	0 ms
bgnkhnnamicpeenaelnjfhikgbkllg	0 KiB	236 ms
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	0 KiB	187 ms
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-end.js	0 KiB	27 ms
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/subscribe.js	0 KiB	21 ms
Google Tag Manager Tag-Manager	273 KiB	166 ms
/gtag/js?id=AW-166... (www.googletagmanager.com)	144 KiB	122 ms
/gtag/js?id=DC-15684265&cx=c>m=4e64m2 (www.googletagmanager.com)	129 KiB	44 ms
Facebook Social	137 KiB	50 ms
/en_US/fbevents.js (connect.facebook.net)	97 KiB	34 ms
...config/468...?v=... (connect.facebook.net)	40 KiB	16 ms
majdfhpaihoncoakbjgbdhglocklgno	0 KiB	14 ms
chrome-extension://majdfhpaihoncoakbjgbdhglocklgno/assets/client-BGloy6-K.js	0 KiB	9 ms
chrome-extension://majdfhpaihoncoakbjgbdhglocklgno/assets/main.tsx-loader-DEHbj6qy.js	0 KiB	2 ms
chrome-extension://majdfhpaihoncoakbjgbdhglocklgno/assets/webcomponents-bundle-Cazg7WE4.js	0 KiB	1 ms
chrome-extension://majdfhpaihoncoakbjgbdhglocklgno/assets/main.tsx-loader-B9XJvjXE.js	0 KiB	1 ms
fheoggkfdfchfpheeifdbepaoicaho	0 KiB	8 ms
chrome-extension://fheoggkfdfchfpheeifdbepaoicaho/scripts/iframe_form_check.js	0 KiB	5 ms

3rd party	Transfer size	Main thread time
chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/scripts/content_navigate_complete.js	0 KiB	3 ms
logpjaacgmcbpdkdchjiaagddngobkck	0 KiB	4 ms
chrome-extension://logpjaacgmcbpdkdchjiaagddngobkck/content-scripts/content.js	0 KiB	4 ms
gmimocjjppdelmhpcmpkhekmpoddgima	0 KiB	3 ms
chrome-extension://gmimocjjppdelmhpcmpkhekmpoddgima/scripts/content.js	0 KiB	2 ms
chrome-extension://gmimocjjppdelmhpcmpkhekmpoddgima/scripts/constants.js	0 KiB	1 ms
fcoeoabgfenejglbffodgkbbkcdhcgfn	0 KiB	3 ms
chrome-extension://fcoeoabgfenejglbffodgkbbkcdhcgfn/assets/agent-visual-indicator.js-Ct7LqXhp.js	0 KiB	1 ms
chrome-extension://fcoeoabgfenejglbffodgkbbkcdhcgfn/assets/accessibility-tree.js-D8KNCIW0.js	0 KiB	1 ms
chrome-extension://fcoeoabgfenejglbffodgkbbkcdhcgfn/assets/content-script.ts-Bwa5rY9t.js	0 KiB	1 ms
nkgllhigpcljnhoakjkgaeabnkmgdkb	0 KiB	1 ms
chrome-extension://nkgllhigpcljnhoakjkgaeabnkmgdkb/content.js	0 KiB	1 ms
browser-intake-us5-datadoghq.com	2 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
...v2/rum?ddsource=... (browser-intake-us5-datadoghq.com)	0 KiB	0 ms
Other Google APIs/SDKs Utility	0 KiB	0 ms
/ccm/collect?rcb=... (www.google.com)	0 KiB	0 ms
/ccm/collect?rcb=... (www.google.com)	0 KiB	0 ms
googleapis.com	1 KiB	0 ms
...proj-scandium-production-5zhm/registrations (fcmregistrations.googleapis.com)	1 KiB	0 ms
...registrations/fg0iXMBzs...:APA91bGno... (fcmregistrations.googleapis.com)	0 KiB	0 ms

DIAGNOSTICS

▲ Reduce JavaScript execution time — 10.3 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time](#) TBT Unscored

☒ Show 3rd-party resources (7)

URL	Total CPU Time	Script Evaluation	Script Parse
anthropic.com	4,368 ms	3,128 ms	260 ms
...v1/vendor-BNxKmwN0.js (assets-proxy.anthropic.com)	3,997 ms	2,858 ms	248 ms
...v1/index-wRctM87g.js (assets-proxy.anthropic.com)	284 ms	188 ms	10 ms
/s.js (s-cdn.anthropic.com)	88 ms	83 ms	1 ms
claude.ai 1st Party	3,544 ms	1,210 ms	1,756 ms
/chat/9d27acfa-c98e-4c27-a272-53a47e21170d (claude.ai)	1,585 ms	452 ms	626 ms
/isolated-segment.html?v=3cd50edb02 (a.claude.ai)	883 ms	296 ms	547 ms
...jsd/main.js (a.claude.ai)	542 ms	206 ms	311 ms
...jsd/main.js (claude.ai)	535 ms	256 ms	270 ms
Sider: Chat with all AI: GPT-5, Claude, DeepSeek, Gemini, Grok Chrome Extension	3,285 ms	1,112 ms	2,058 ms
chrome-extension://difoiojjjojoaoomphldepagpgbghkb/content-all.js	3,285 ms	1,112 ms	2,058 ms
Unattributable	2,919 ms	188 ms	0 ms
Unattributable	2,919 ms	188 ms	0 ms
Intercom Customer-Success	497 ms	246 ms	246 ms
/widget/lupk8zyo (widget.intercom.io)	375 ms	135 ms	236 ms
/vendor-modern.80eace52.js (js.intercomcdn.com)	121 ms	111 ms	10 ms
Google Tag Manager Tag-Manager	153 ms	112 ms	11 ms
/gtag/js?id=AW-166... (www.googletagmanager.com)	153 ms	112 ms	11 ms

▲ Minimize main-thread work — 15.3 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) (TBT) (Unscored)

Category	Time Spent
Script Evaluation	6,380 ms
Script Parsing & Compilation	4,406 ms
Other	3,663 ms
Style & Layout	395 ms
Garbage Collection	250 ms
Rendering	123 ms
Parse HTML & CSS	98 ms

▲ Reduce unused JavaScript — Est savings of 19,342 KiB ^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) (FCP) (LCP) (Unscored)

✔ Show 3rd-party resources (25)

URL	Transfer Size	Est Savings
Sider: Chat with all AI: GPT-5, Claude, DeepSeek, Gemini, Grok (Chrome Extension)	21,734.8 KiB	16,137.2 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/content-all.js	2,203.5 KiB	1,737.4 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/content-all.js	2,203.5 KiB	1,685.7 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/content-all.js	2,203.5 KiB	1,685.7 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/content-all.js	2,203.5 KiB	1,685.6 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/content-all.js	2,203.5 KiB	1,613.5 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/all-frames.js	1,339.6 KiB	968.1 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/all-frames.js	1,339.6 KiB	966.8 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/all-frames.js	1,339.6 KiB	966.8 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/all-frames.js	1,339.6 KiB	966.8 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/all-frames.js	1,339.6 KiB	965.6 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/all-frames.js	1,339.6 KiB	965.6 KiB

URL	Transfer Size	Est Savings
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/all-frames.js	1,339.6 KiB	965.2 KiB
chrome-extension://difoiojjjojoaoomphldepagpgbgkhkb/all-frames.js	1,339.6 KiB	964.3 KiB
anthropic.com	2,940.3 KiB	1,934.2 KiB
...v1/index-wRctMB7gjs (assets-proxy.anthropic.com)	2,289.6 KiB	1,716.6 KiB
...v1/vendor-BNxKmwN0.js (assets-proxy.anthropic.com)	519.0 KiB	160.8 KiB
...v1/cf1a02a1a-dlK9sQnC.js (assets-proxy.anthropic.com)	73.3 KiB	33.7 KiB
...v1/cde7c3a92-Bbx9tZ3Z.js (assets-proxy.anthropic.com)	58.5 KiB	23.1 KiB
Unattributable	1,260.0 KiB	669.9 KiB
chrome-extension://bgknhnnamicpeenaelnjfhikgbk1lg/pages/content-script-start.js	157.5 KiB	84.3 KiB
chrome-extension://bgknhnnamicpeenaelnjfhikgbk1lg/pages/content-script-start.js	157.5 KiB	84.3 KiB
chrome-extension://bgknhnnamicpeenaelnjfhikgbk1lg/pages/content-script-start.js	157.5 KiB	84.3 KiB
chrome-extension://bgknhnnamicpeenaelnjfhikgbk1lg/pages/content-script-start.js	157.5 KiB	83.6 KiB
chrome-extension://bgknhnnamicpeenaelnjfhikgbk1lg/pages/content-script-start.js	157.5 KiB	83.6 KiB
chrome-extension://bgknhnnamicpeenaelnjfhikgbk1lg/pages/content-script-start.js	157.5 KiB	83.6 KiB
chrome-extension://bgknhnnamicpeenaelnjfhikgbk1lg/pages/content-script-start.js	157.5 KiB	83.3 KiB
chrome-extension://bgknhnnamicpeenaelnjfhikgbk1lg/pages/content-script-start.js	157.5 KiB	82.7 KiB
Free VPN for Chrome - VPN Proxy VeePN Chrome Extension	415.8 KiB	257.1 KiB
chrome-extension://majdfhpaihoncoakbjgbdhg1ocklcnog/assets/client-BGloy6-K.js	188.3 KiB	110.4 KiB
chrome-extension://majdfhpaihoncoakbjgbdhg1ocklcnog/assets/webcomponents-bundle-Cazg7WE4.js	123.8 KiB	85.5 KiB
chrome-extension://majdfhpaihoncoakbjgbdhg1ocklcnog/assets/index-b-XrjRCK.js	103.6 KiB	61.2 KiB
Intercom Customer-Success	289.3 KiB	179.5 KiB
/frame-modern.7aecdc81.js (js.intercomcdn.com)	161.4 KiB	102.7 KiB
/vendor-modern.80eace52.js (js.intercomcdn.com)	127.9 KiB	76.8 KiB
Google Tag Manager Tag-Manager	272.4 KiB	121.6 KiB
/gtag/js?id=DC-15684265&cx=c>m=4e64m2 (www.googletagmanager.com)	128.6 KiB	62.1 KiB

URL	Transfer Size	Est Savings
/gtag/js?id=AW-166... (www.googletagmanager.com)	143.7 KiB	59.5 KiB
Facebook Social	96.6 KiB	42.8 KiB
/en_US/fbevents.js (connect.facebook.net)	96.6 KiB	42.8 KiB

▲ Reduce unused CSS — Est savings of 171 KiB

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS](#) FCP LCP Unscored

☑ Show 3rd-party resources (1)

URL	Transfer Size	Est Savings
Unattributable	103.6 KiB	103.6 KiB
@charset "UTF-8";*,:before,:after{--tw-border-spacing-x: 0;--tw-border-spacing-y: 0;--tw-translate-...	103.6 KiB	103.6 KiB
anthropic.com	74.3 KiB	67.8 KiB
...v1/c6a992d55-DuDmXO-p.css (assets-proxy.anthropic.com)	74.3 KiB	67.8 KiB

▲ Page prevented back/forward cache restoration — 6 failure reasons

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#) Unscored

Failure reason	Failure type
Pages with cache-control:no-store header cannot enter back/forward cache. /chat/9d27acfa-c98e-4c27-a272-53a47e21170d (claude.ai)	Actionable
Pages with WebSocket cannot enter back/forward cache. about:blank	Pending browser support
Pages whose main resource has cache-control:no-store cannot enter back/forward cache. /chat/9d27acfa-c98e-4c27-a272-53a47e21170d (claude.ai) about:blank	Not actionable
Back/forward cache is disabled because some JavaScript network request received resource with `Cache-Control: no-store` header. /chat/9d27acfa-c98e-4c27-a272-53a47e21170d (claude.ai)	Not actionable
Back/forward cache is disabled because WebSocket has been used.	Not actionable

Failure reason

Failure type

about:blank

Minify JavaScript

— Est savings of 751 KiB

^

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#)

FCP

LCP

Unscored

Show 3rd-party resources (2)

URL	Transfer Size	Est Savings
Unattributable	1,437.3 KiB	744.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	157.5 KiB	83.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	157.5 KiB	83.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	157.5 KiB	83.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	157.5 KiB	83.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	157.5 KiB	83.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	157.5 KiB	83.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	157.5 KiB	83.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-start.js	157.5 KiB	83.5 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/subscribe.js	37.9 KiB	17.2 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/subscribe.js	37.9 KiB	17.2 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-end.js	19.4 KiB	7.9 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-end.js	19.4 KiB	7.9 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-end.js	19.4 KiB	7.9 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-end.js	19.4 KiB	7.9 KiB
chrome-extension://bgnkhnnamicpeenaelnjfhikgbkllg/pages/content-script-end.js	19.4 KiB	7.9 KiB
inline: (function () { // Debug ...	4.4 KiB	2.3 KiB
anthropic.com	16.4 KiB	6.6 KiB
...v1/c50152c30-JGtLW8TSjs (assets-proxy.anthropic.com)	7.1 KiB	3.8 KiB

URL	Transfer Size	Est Savings
...v1/c806a392a-4i-GP6EZ.js (assets-proxy.anthropic.com)	9.3 KiB	2.8 KiB

Avoid enormous network payloads — Total size was 5,296 KiB

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#) Unscored

☒ Show 3rd-party resources (9)

URL	Transfer Size
anthropic.com	3,317.9 KiB
...v1/index-wRctMB7g.js (assets-proxy.anthropic.com)	2,291.4 KiB
...v1/vendor-BNxKmwN0.js (assets-proxy.anthropic.com)	520.3 KiB
...directory/servers?limit=... (api.anthropic.com)	193.1 KiB
...v1/c66fc489e-C-BHYa_K.woff2 (assets-proxy.anthropic.com)	161.7 KiB
...v1/cc410af59-DH94ugQz.woff2 (assets-proxy.anthropic.com)	151.5 KiB
Intercom Customer-Success	337.3 KiB
/frame-modern.7aecdc81.js (js.intercomcdn.com)	193.4 KiB
/vendor-modern.80eace52.js (js.intercomcdn.com)	143.9 KiB
claude.ai 1st Party	318.8 KiB
/i18n/en-US.json (claude.ai)	318.8 KiB
Google Tag Manager Tag-Manager	272.7 KiB
/gtag/js?id=AW-166... (www.googletagmanager.com)	144.1 KiB
/gtag/js?id=DC-15684265&cx=c>m=4e64m2 (www.googletagmanager.com)	128.7 KiB

Avoid long main-thread tasks — 20 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT Unscored

☒ Show 3rd-party resources (12)

URL	Start Time	Duration
claude.ai 1st Party		2,478 ms
/chat/9d27acfa-c98e-4c27-a272-53a47e21170d (claude.ai)	1,169 ms	555 ms
/chat/9d27acfa-c98e-4c27-a272-53a47e21170d (claude.ai)	637 ms	532 ms
/isolated-segment.html?v=3cd50edb02 (a.claude.ai)	3,494 ms	440 ms
/isolated-segment.html?v=3cd50edb02 (a.claude.ai)	3,058 ms	416 ms
...jsd/main.js (a.claude.ai)	8,432 ms	269 ms
...jsd/main.js (claude.ai)	6,753 ms	266 ms
Sider: Chat with all AI: GPT-5, Claude, DeepSeek, Gemini, Grok Chrome Extension		2,195 ms
chrome-extension://difoiojjjojoaomphldepagpgbgkhkb/content-all.js	4,077 ms	619 ms
chrome-extension://difoiojjjojoaomphldepagpgbgkhkb/content-all.js	7,625 ms	586 ms
chrome-extension://difoiojjjojoaomphldepagpgbgkhkb/content-all.js	1,762 ms	498 ms
chrome-extension://difoiojjjojoaomphldepagpgbgkhkb/content-all.js	10,635 ms	492 ms
anthropic.com		1,989 ms
...v1/vendor-BNxKmwN0.js (assets-proxy.anthropic.com)	4,930 ms	924 ms
...v1/vendor-BNxKmwN0.js (assets-proxy.anthropic.com)	5,865 ms	543 ms
...v1/vendor-BNxKmwN0.js (assets-proxy.anthropic.com)	4,696 ms	234 ms
...v1/vendor-BNxKmwN0.js (assets-proxy.anthropic.com)	8,701 ms	176 ms
...v1/index-wRctM87g.js (assets-proxy.anthropic.com)	6,554 ms	112 ms
Intercom Customer-Success		496 ms
/widget/lupk8zyo (widget.intercom.io)	11,162 ms	375 ms
/vendor-modern.80eace52.js (js.intercomcdn.com)	12,328 ms	121 ms
Unattributable		337 ms
Unattributable	2,622 ms	212 ms
Unattributable	9,273 ms	125 ms
Google Tag Manager Tag-Manager		117 ms

URL	Start Time	Duration
/gtag/js?id=AW-166... (www.googletagmanager.com)	9,398 ms	117 ms

User Timing marks and measures — 3 user timings

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks](#). Unscored

Name	Type	Start Time	Duration
rq_cache:sync_hydrate	Measure	0.00 ms	3,928.80 ms
rq_cache:preload_exec	Measure	683.17 ms	1.29 ms
rq_cache:preload_start	Mark	683.17 ms	

Avoid non-composited animations — 11 animated elements found

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#). CLS
Unscored

Element
svg.absolute.top-0.left-0.transition-all.opacity-0.scale-50
Unsupported CSS Property: scrollbar-color
svg.transition-all.opacity-100.scale-100
Unsupported CSS Property: scrollbar-color
Unsupported CSS Property: scrollbar-color
div.transition-all.opacity-100.scale-100
Unsupported CSS Property: scrollbar-color
div.absolute.top-0.left-0.transition-all.opacity-0.scale-50
Unsupported CSS Property: scrollbar-color
Unsupported CSS Property: scrollbar-color
button.inline-flex.items-center.justify-center.relative.isolate.shrink-0.can-focus.select-none.disabled.poi...
Unsupported CSS Property: color
div.group.relative.inline-flex.gap-2.bg-bg-300.rounded-xl.pl-2.5.py-2.5.break-words.text-text-100.trans...

Element	
Effect has unsupported timing parameters	
div.group	
Effect has unsupported timing parameters	
div.group.relative.inline-flex.gap-2.bg-bg-300.rounded-xl.pl-2.5.py-2.5.break-words.text-text-100.trans...	
Effect has unsupported timing parameters	
div.group	
Effect has unsupported timing parameters	
div.group.relative.inline-flex.gap-2.bg-bg-300.rounded-xl.pl-2.5.py-2.5.break-words.text-text-100.trans...	
Effect has unsupported timing parameters	
 div.group	
Effect has unsupported timing parameters	

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (10)

Hide

Document request latency ^ Your first network request is the most important. Reduce its latency, by avoiding redirects, ensuring a fast server response, and enabling text compression. FCP LCP Unscored Avoids redirects Server responds quickly (observed 100 ms) Applies text compression
Duplicated JavaScript ^ Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP Unscored
Font display ^ Consider setting font-display to swap or optional to ensure text is consistently visible. swap can be further optimized to mitigate layout shifts with font metric overrides. Unscored
INP breakdown ^ Start investigating how to improve INP by looking at the longest subpart. Unscored

○ LCP request discovery	^
Optimize LCP by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading (Unscored)	
● Legacy JavaScript	^
Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile Baseline features, unless you know you must support older browsers. Learn why most sites can deploy ES6+ code without transpiling (FCP) (LCP) (Unscored)	
● Modern HTTP	^
HTTP/2 and HTTP/3 offer many benefits over HTTP/1.1, such as multiplexing. Learn more about using modern HTTP . (FCP) (LCP) (Unscored)	
● Optimize viewport for mobile	^
Tap interactions may be delayed by up to 300 ms if the viewport is not optimized for mobile. (Unscored)	
meta	
● Minify CSS	^
Minifying CSS files can reduce network payload sizes. Learn how to minify CSS . (FCP) (LCP) (Unscored)	
● Image elements have explicit width and height	^
Set an explicit width and height on image elements to reduce layout shifts and improve CLS. Learn how to set image dimensions (CLS) (Unscored)	



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

NAMES AND LABELS

▲ Buttons do not have an accessible name	^
When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn how to make buttons more accessible .	

Failing Elements

button.inline-flex.items-center.justify-center.relative.isolate.shrink-0.can-focus.select-none.disabled.poi...

button.size-10.absolute.z-[-1].bottom-[10px].flex-center.p-0.outline-none.border-none.text-title.bg-bg...

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

NAVIGATION

▲ Some elements have a `tabindex` value greater than 0

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the `tabindex` attribute.](#)

Failing Elements



div.chat-gpt-query-model-wrapper.outline-none.active:outline-none.focus:outline-none


These are opportunities to improve keyboard navigation in your application.

BEST PRACTICES

▲ Document does not have a main landmark.

One main landmark helps screen reader users navigate a web page. [Learn more about landmarks.](#)

Failing Elements




html.h-screen.antialiased.scroll-smooth

○ Uses ARIA roles only on compatible elements

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. [Learn more about ARIA roles.](#) (Unscored)

Failing Elements



h2.text-text-500.pb-2.mt-1.text-xs.select-none.pl-2.pr-2.pointer-events-none.group/header.cursor-poi...

Failing Elements

These items highlight common accessibility best practices.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

☐ Interactive controls are keyboard focusable ^

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#) (Unscored)

☐ Interactive elements indicate their purpose and state ^

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#) (Unscored)

☐ The page has a logical tab order ^

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#) (Unscored)

☐ Visual order on the page follows DOM order ^

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#) (Unscored)

☐ User focus is not accidentally trapped in a region ^

A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#) (Unscored)

☐ The user's focus is directed to new content added to the page ^

If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#) (Unscored)

☐ HTML5 landmark elements are used to improve navigation ^

Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#) (Unscored)

☐ Offscreen content is hidden from assistive technology ^

Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#) (Unscored)

☐ Custom controls have associated labels ^

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#) (Unscored)

 Custom controls have ARIA roles	^
Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls. (Unscored)	

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (25)

Hide

 [aria-*] attributes match their roles	^
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Learn how to match ARIA attributes to their roles.	
 [aria-hidden="true"] is not present on the document <body>	^
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body.	
 [role]s have all required [aria-*] attributes	^
Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes.	
 [role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles.	
 [aria-*] attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.	
 [aria-*] attributes are valid and not misspelled	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	
 Image elements have [alt] attributes	^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.	
 [user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.	^
Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.	

● <code>button</code>, <code>link</code>, and <code>menuitem</code> elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible.	
● ARIA attributes are used as specified for the element's role	^
Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.	
● <code>[aria-hidden="true"]</code> elements do not contain focusable descendents	^
Focusable descendents within an <code>[aria-hidden="true"]</code> element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.	
● ARIA input fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels.	
● Elements use only permitted ARIA attributes	^
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.	
● Background and foreground colors have a sufficient contrast ratio	^
Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast.	
● Document has a <code><title></code> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.	
● <code><frame></code> or <code><iframe></code> elements have a title	^
Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles.	
● <code><html></code> element has a <code>[lang]</code> attribute	^
If a page doesn't specify a <code>lang</code> attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.	
● <code><html></code> element has a valid value for its <code>[lang]</code> attribute	^
Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.	
● Links have a discernible name	^

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible.	
● Lists contain only <code></code> elements and script supporting elements (<code><script></code> and <code><template></code>).	^
Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.	
● List items (<code></code>) are contained within <code></code>, <code></code> or <code><menu></code> parent elements	^
Screen readers require list items (<code></code>) to be contained within a parent <code></code>, <code></code> or <code><menu></code> to be announced properly. Learn more about proper list structure.	
● Touch targets have sufficient size and spacing.	^
Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.	
● Cells in a <code><table></code> element that use the <code>[headers]</code> attribute refer to table cells within the same table.	^
Screen readers have features to make navigating tables easier. Ensuring <code><td></code> cells using the <code>[headers]</code> attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the headers attribute.	
● Heading elements appear in a sequentially-descending order	^
Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.	
● Deprecated ARIA roles were not used	^
Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles.	

NOT APPLICABLE (31)

Hide

○ <code>[accesskey]</code> values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys. (Unscored)	
○ Elements with <code>role="dialog"</code> or <code>role="alertdialog"</code> have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible. (Unscored)	
○ ARIA <code>meter</code> elements have accessible names	^
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements. (Unscored)	

☐ ARIA <code>progressbar</code> elements have accessible names	^
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label progressbar elements. (Unscored)	
☐ Elements with an ARIA <code>[role]</code> that require children to contain a specific <code>[role]</code> have all required children.	^
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements. (Unscored)	
☐ <code>[role]</code> s are contained by their required parent element	^
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element. (Unscored)	
☐ Elements with the <code>role=text</code> attribute do not have focusable descendents.	^
Adding <code>role=text</code> around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. Learn more about the <code>role=text</code> attribute. (Unscored)	
☐ ARIA toggle fields have accessible names	^
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. (Unscored)	
☐ ARIA <code>tooltip</code> elements have accessible names	^
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. (Unscored)	
☐ ARIA <code>treeitem</code> elements have accessible names	^
When a <code>treeitem</code> element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. (Unscored)	
☐ The page contains a heading, skip link, or landmark region	^
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks. (Unscored)	
☐ <code><d1></code> 's contain only properly-ordered <code><dt></code> and <code><dd></code> groups, <code><script></code> , <code><template></code> or <code><div></code> elements.	^
When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly. (Unscored)	
☐ Definition list items are wrapped in <code><d1></code> elements	^
Definition list items (<code><dt></code> and <code><dd></code>) must be wrapped in a parent <code><d1></code> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly. (Unscored)	

☐ ARIA IDs are unique	^
The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs. (Unscored)	
☐ No form fields have multiple labels	^
Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels. (Unscored)	
☐ <code><html></code> element has an <code>[xml:lang]</code> attribute with the same base language as the <code>[lang]</code> attribute.	^
If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute. (Unscored)	
☐ Input buttons have discernible text.	^
Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons. (Unscored)	
☐ <code><input type="image"></code> elements have <code>[alt]</code> text	^
When an image is being used as an <code><input></code> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text. (Unscored)	
☐ Form elements have associated labels	^
Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more about form element labels. (Unscored)	
☐ Links are distinguishable without relying on color.	^
Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable. (Unscored)	
☐ The document does not use <code><meta http-equiv="refresh"></code>	^
Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag. (Unscored)	
☐ <code><object></code> elements have alternate text	^
Screen readers cannot translate non-text content. Adding alternate text to <code><object></code> elements helps screen readers convey meaning to users. Learn more about alt text for object elements. (Unscored)	
☐ Select elements have associated label elements.	^
Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the select element. (Unscored)	

☐ Skip links are focusable.	
Including a skip link can help users skip to the main content to save time. Learn more about skip links. (Unscored)	
☐ <code><th></code> elements and elements with <code>[role="columnheader"/"rowheader"]</code> have data cells they describe.	
Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers. (Unscored)	
☐ <code>[lang]</code> attributes have a valid value	
Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn how to use the lang attribute. (Unscored)	
☐ <code><video></code> elements contain a <code><track></code> element with <code>[kind="captions"]</code>	
When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more about video captions. (Unscored)	
☐ Tables have different content in the summary attribute and <code><caption></code> .	
The summary attribute should describe the table structure, while <code><caption></code> should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption. (Unscored)	
☐ All heading elements contain content.	
A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. Learn more about headings. (Unscored)	
☐ Image elements do not have <code>[alt]</code> attributes that are redundant text.	
Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the alt attribute. (Unscored)	
☐ Identical links have the same purpose.	
Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. Learn more about identical links. (Unscored)	

▲ Uses deprecated APIs — 3 warnings found

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Deprecation / Warning	Source
claud.ai 1st Party	
SharedStorage	/cdn-cgi/challenge-p... ripts/jsd/main.js:1
'StorageType.persistent' is deprecated. Please use standardized 'navigator.storage' instead.	/cdn-cgi/challenge-p... ripts/jsd/main.js:1
Fledge	/cdn-cgi/challenge-p... ripts/jsd/main.js:1

▲ Uses third-party cookies — 36 cookies found

Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions.](#)

[illegible]

Name	URL
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
COMPASS	/ccm/collect?rcb=... (www.google.com)
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
COMPASS	/ccm/collect?rcb=... (www.google.com)
__Host-3PLSID	/ccm/collect?rcb=... (www.google.com)
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
COMPASS	/ccm/collect?rcb=... (www.google.com)
LSOLH	/ccm/collect?rcb=... (www.google.com)
COMPASS	/ccm/collect?rcb=... (www.google.com)
COMPASS	/ccm/collect?rcb=... (www.google.com)
__Secure-OSID	/ccm/collect?rcb=... (www.google.com)
COMPASS	/ccm/collect?rcb=... (www.google.com)
COMPASS	/ccm/collect?rcb=... (www.google.com)
__Secure-3PSID	/ccm/collect?rcb=... (www.google.com)
__Secure-3PAPISID	/ccm/collect?rcb=... (www.google.com)
NID	/ccm/collect?rcb=... (www.google.com)
__Secure-3PSIDTS	/ccm/collect?rcb=... (www.google.com)
__Secure-3PSIDCC	/ccm/collect?rcb=... (www.google.com)

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

Source	Description
claude.ai 1st Party	
ai_for_science:1	Failed to load resource: the server responded with a status of 404 ()

▲ Issues were logged in the [Issues](#) panel in Chrome Devtools ^

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Issue type
Cookie
/ccm/collect?rcb=... (www.google.com)
/ccm/collect?rcb=... (www.google.com)
Content security policy

TRUST AND SAFETY

○ Ensure CSP is effective against XSS attacks ^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#) Unscored

Description	Directive	Severity
Consider adding "unsafe-inline" (ignored by browsers supporting nonces/hashes) to be backward compatible with older browsers.	script-src	Medium
Consider adding https: and http: URL schemes (ignored by browsers supporting "strict-dynamic") to be backward compatible with older browsers.	script-src	Medium

○ Mitigate DOM-based XSS with Trusted Types ^

The require-trusted-types-for directive in the Content-Security-Policy (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. [Learn more about mitigating DOM-based XSS with Trusted Types](#). Unscored

Description	Severity
No 'Content-Security-Policy' header with Trusted Types directive found	High

PASSED AUDITS (9)

Hide

● Uses HTTPS All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more about HTTPS.
● Allows users to paste into input fields Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields.
● Avoids requesting the geolocation permission on page load Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission.
● Avoids requesting the notification permission on page load Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications.
● Displays images with correct aspect ratio Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio.
● Serves images with appropriate resolution Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images.
● Page has the HTML doctype Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration.
● Properly defines charset A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding.
● Page has valid source maps Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn

URL	Map URL
Unattributable	
chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/scripts/iframe_form_check.js	chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/sourceMap/chrome/scripts/iframe_form_check.js.map
Error: Failed fetching source map (null)	
chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/scripts/iframe_form_check.js	chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/sourceMap/chrome/scripts/iframe_form_check.js.map
Error: Failed fetching source map (null)	
chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/scripts/content_navigate_complete.js	chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/sourceMap/chrome/scripts/content_navigate_complete.js.map
Error: Failed fetching source map (null)	
chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/scripts/content_navigate_complete.js	chrome-extension://fheoggkfdfchfphceeifdbepaooicaho/sourceMap/chrome/scripts/content_navigate_complete.js.map
Error: Failed fetching source map (null)	
anthropic.com	
...vendor/commons.59560ac....js.gz (a-cdn.anthropic.com)	...vendor/commons.59560ac....js.map (a-cdn.anthropic.com)
...2.11.5/facebook-pixel.dynamic.js.gz (a-cdn.anthropic.com)	...2.11.5/facebook-pixel.js.map (a-cdn.anthropic.com)
...amplitude-plugins/f12a434....js (a-cdn.anthropic.com)	...amplitude-plugins/f12a434....js.map (a-cdn.anthropic.com)
...3962/1faa179....js (a-cdn.anthropic.com)	...3962/1faa179....js.map (a-cdn.anthropic.com)
...LKJN8LsLE.../analytics.min.js (a-cdn.anthropic.com)	...LKJN8LsLE.../standalone.js.map (a-cdn.anthropic.com)
...bundles/schemaFilter.bundle.1b218d1....js (a-cdn.anthropic.com)	...bundles/schemaFilter.bundle.1b218d1....js.map (a-cdn.anthropic.com)
...bundles/ajs-destination.bundle.8e6b895....js (a-cdn.anthropic.com)	...bundles/ajs-destination.bundle.8e6b895....js.map (a-cdn.anthropic.com)

☐ Redirects HTTP traffic to HTTPS

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. Learn more. (Unscored)
☐ Use a strong HSTS policy ^
Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. Learn more about using a strong HSTS policy. (Unscored)
☐ Ensure proper origin isolation with COOP ^
The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. Learn more about deploying the COOP header. (Unscored)
☐ Mitigate clickjacking with XFO or CSP ^
The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. Learn more about mitigating clickjacking. (Unscored)
☐ Detected JavaScript libraries ^
All front-end JavaScript libraries detected on the page. Learn more about this JavaScript library detection diagnostic audit. (Unscored)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#), [Learn more about Google Search Essentials](#).

CRAWLING AND INDEXING

☐ Page is blocked from indexing ^
Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more about crawler directives.
Blocking Directive Source x-robots-tag: none /robots.txt:13

To appear in search results, crawlers need access to your app.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

 Structured data is valid	^
Run the Structured Data Testing Tool to validate structured data. Learn more about Structured Data . (Unscored)	

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)

Hide

 Document has a <title> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles .	
 Document has a meta description	^
Meta descriptions may be included in search results to concisely summarize page content. Learn more about the meta description .	
 Page has successful HTTP status code	^
Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes .	
 Links have descriptive text	^
Descriptive link text helps search engines understand your content. Learn how to make links more accessible .	
 Links are crawlable	^
Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable	
 robots.txt is valid	^
If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt .	
 Image elements have [alt] attributes	^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute .	
 Document has a valid hreflang	^
hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about hreflang .	

NOT APPLICABLE (1)

Hide

Document has a valid [rel=canonical](#)



Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#) (Unscored)

Captured at Apr 26, 2026, 1:11 PM GMT+5:30

Emulated Desktop with Lighthouse 13.0.2

Single page session

Initial page load

Custom throttling

Using Chromium 147.0.0.0 with devtools

Generated by **Lighthouse** 13.0.2 | [File an issue](#)