
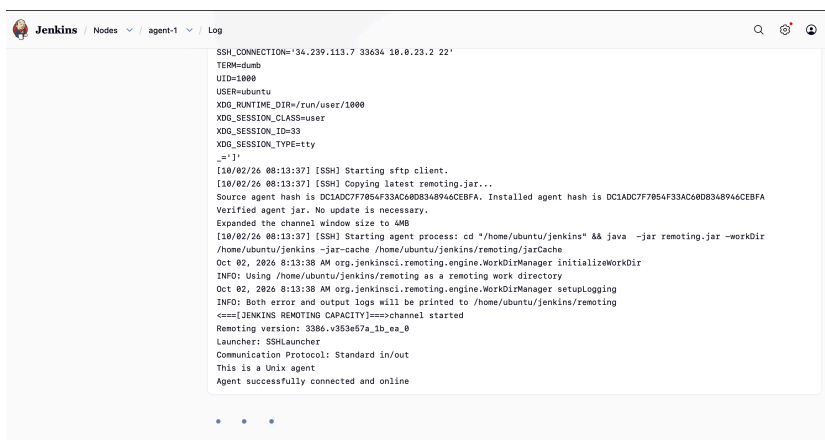
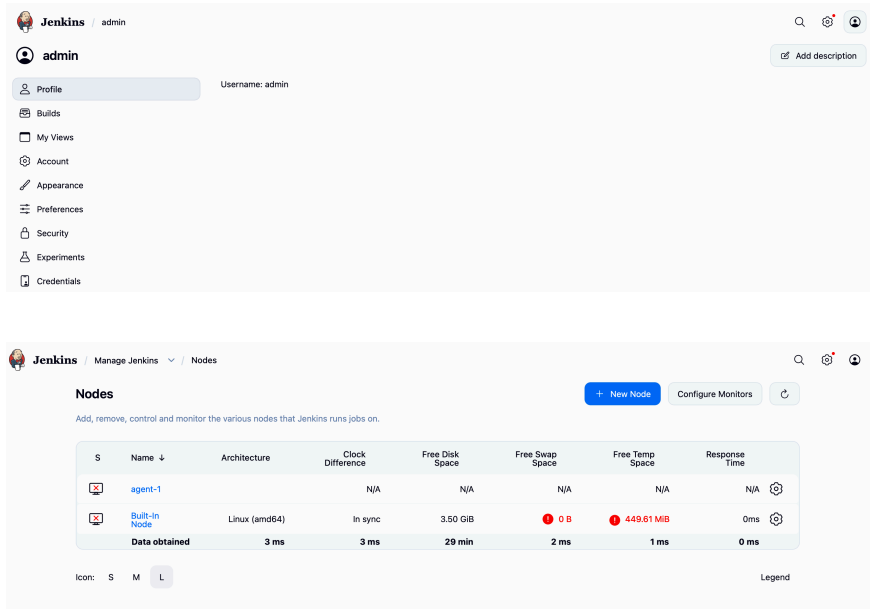
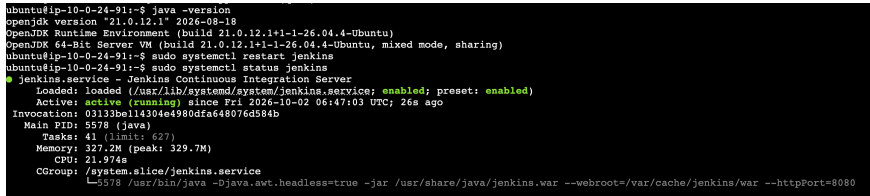


Jenkins-Task2

1. Configure 2 slave machines in the Jenkins master.

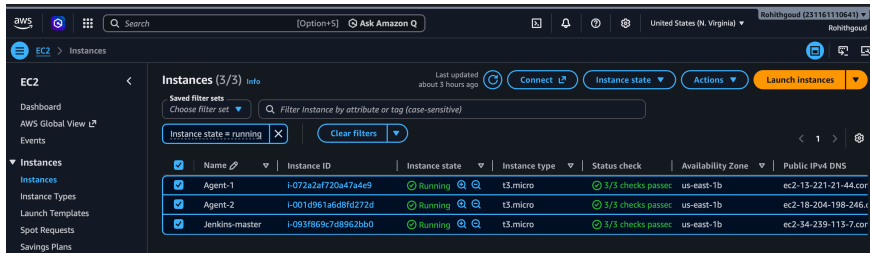

Jenkins-Task2

Status

Delete Agent

Configure

Build History

Load Statistics

Log

Build Executor Status

0 of 1 executor busy

agent-2

This node is being launched. [See log for more details](#)

Monitoring Data

Projects tied to agent-2

None

Add description

Relaunch agent

Mark this node temporarily offline

Nodes

New Node

Configure Monitors

Add, remove, control and monitor the various nodes that Jenkins runs jobs on.

S	Name	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	agent-1	Linux (amd64)	In sync	3.07 GiB	0 B	454.33 MiB	21ms
	agent-2	Linux (amd64)	In sync	3.18 GiB	0 B	454.33 MiB	79ms
	Built-in Node	Linux (amd64)	In sync	3.29 GiB	0 B	444.75 MiB	0ms
Data obtained		35 sec	35 sec	35 sec	35 sec	35 sec	35 sec

Icon: S M L

Legend

agent-2

Log

```
SSH_CLIENT=10.0.24.91 48210 22'
SSH_CONNECTION=10.0.24.91 48210 10.0.25.2 22'
TERM=dumb
UTD=1000
USER=ubuntu
XDG_RUNTIME_DIR=/run/user/1000
XDG_SESSION_CLASS=user
XDG_SESSION_ID=41
XDG_SESSION_TYPE=pty
_='}'
[10/02/26 11:48:19] [SSH] Starting sftp client.
[10/02/26 11:48:19] [SSH] Copying latest remoting.jar...
[10/02/26 11:48:19] [SSH] Copied 1,417,030 bytes.
Expanded the channel window size to 4MB
[10/02/26 11:48:19] [SSH] Starting agent process: cd "/home/ubuntu/jenkins-agent" && java -jar remoting.jar -workDir
/home/ubuntu/jenkins-agent -jar-cache /home/ubuntu/jenkins-agent/remoting/jarCache
Oct 02, 2026 11:48:20 AM org.jenkinsci.remoting.engine.WorkDirManager initializeWorkDir
INFO: Using /home/ubuntu/jenkins-agent/remoting as a remoting work directory
Oct 02, 2026 11:48:20 AM org.jenkinsci.remoting.engine.WorkDirManager setupLogging
INFO: Both error and output logs will be printed to /home/ubuntu/jenkins-agent/remoting
=====JENKINS REMOTING CAPACITY=====channel started
Remoting version: 3386.v935e57a_1b_ea_0
Launcher: SSHLauncher
Communication Protocol: Standard in/out
This is a Unix agent
Agent successfully connected and online
```

2. Configure webhooks to the Jenkins job.

New Item

Build History

Project Relationship

Check File Fingerprint

Build Queue

No builds in the queue.

Build Executor Status

built-in node + 2 agents (0 of 2 executors busy)




All

S	W	Name	Last Success	Last Failure	Last Duration
		GitHub-webhook-job	3 min 59 sec	N/A	6.7 sec



Icon: S M L

Add description

Jenkins-Task2

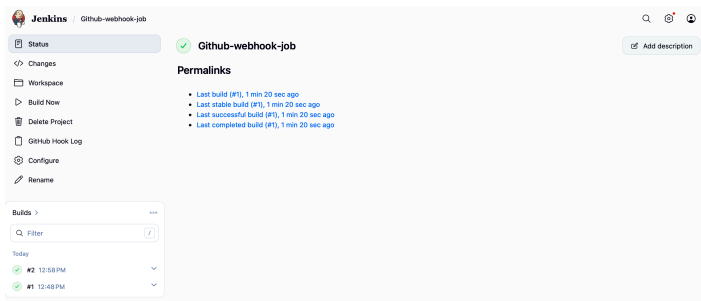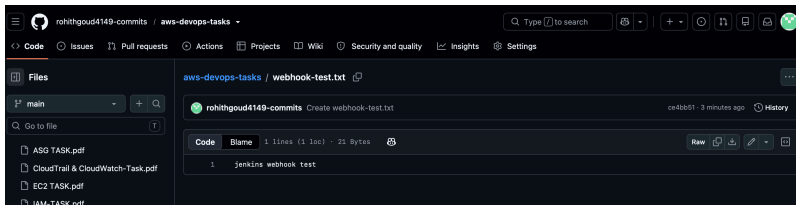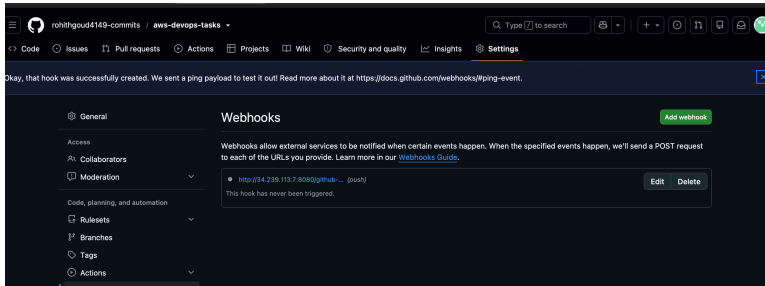

3. Configure **Poll SCM** and **Build Periodically** options in the Jenkins job.

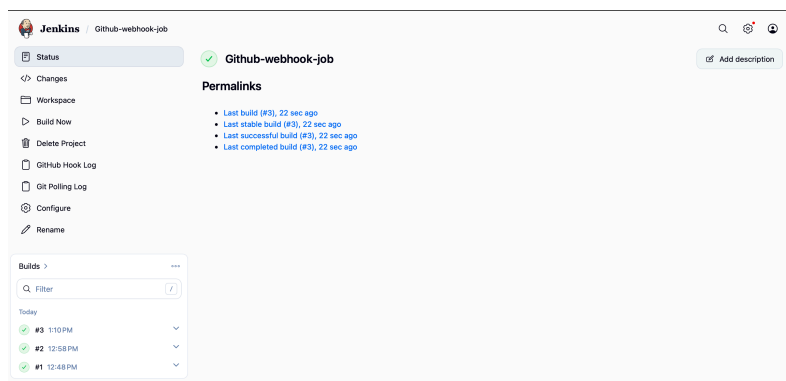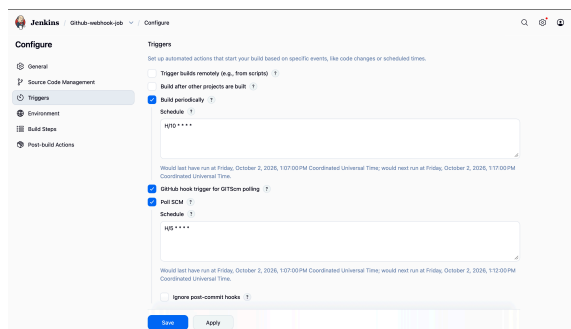

Jenkins-Task2

- Take a backup of the Jenkins server using a **bash-script**.

```

Welcome to Ubuntu 26.04 LTS (GNU/Linux 7.0.0-1006-aws x86_64)

 * Documentation:  https://docs.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Fri Oct  2 13:20:17 UTC 2026

System load:  0.18           Temperature:   -273.1 C
Usage of /:   50.0% of 6.61GB Processes:        120
Memory usage: 82%           Users logged in: 0
Swap usage:   0%            IPv4 address for ens5: 10.0.24.91

 * Ubuntu Pro delivers the most comprehensive open source security and
   compliance features.
   https://ubuntu.com/aws/pro



Expanded Security Maintenance for Applications is not enabled.

91 updates can be applied immediately.
40 of these updates are standard security updates.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

Last login: Fri Oct  2 11:41:23 2026 from 18.206.107.27
ubuntu@ip-10-0-24-91:~$ nano jenkins_backup.sh
ubuntu@ip-10-0-24-91:~$ chmod +x jenkins_backup.sh
ubuntu@ip-10-0-24-91:~$ ./jenkins_backup.sh
tar: Removing leading '/' from member names
jenkins backup completed successfully.
Backup location: /home/ubuntu/jenkins_backup
ubuntu@ip-10-0-24-91:~$ ls -lh /home/ubuntu/jenkins_backup/
total 145M
-rw-r--r-- 1 root root 145M Oct  2 13:21 jenkins_backup_2026-10-02_13-21-49.tar.gz
ubuntu@ip-10-0-24-91:~$
```

- Take a backup of Jenkins using the **ThinBackup** plugin.



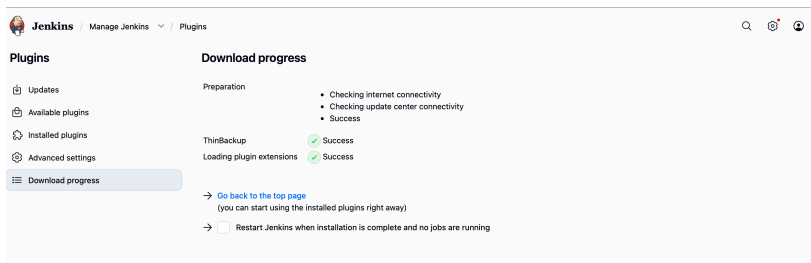
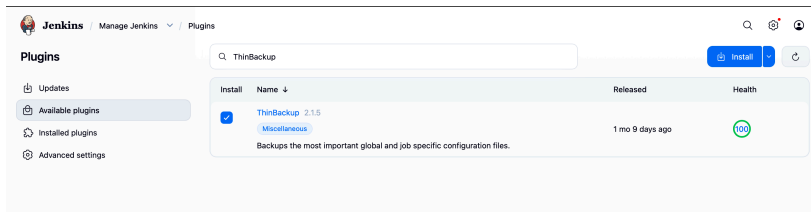


```

ubuntu@ip-10-0-24-91:~$ sudo ls -lah /var/lib/jenkins/thinbackup
total 16K
drwxr-xr-x  4 jenkins jenkins 4.0K Oct  2 13:32 .
drwxr-xr-x 16 jenkins jenkins 4.0K Oct  2 13:31 ..
drwxr-xr-x  5 jenkins jenkins 4.0K Oct  2 13:31 FULL-2026-10-02_13-31
drwxr-xr-x  5 jenkins jenkins 4.0K Oct  2 13:32 FULL-2026-10-02_13-32
ubuntu@ip-10-0-24-91:~$
```

Jenkins-Task2

6. Set up a new Jenkins server and restore the backup taken in task 4.

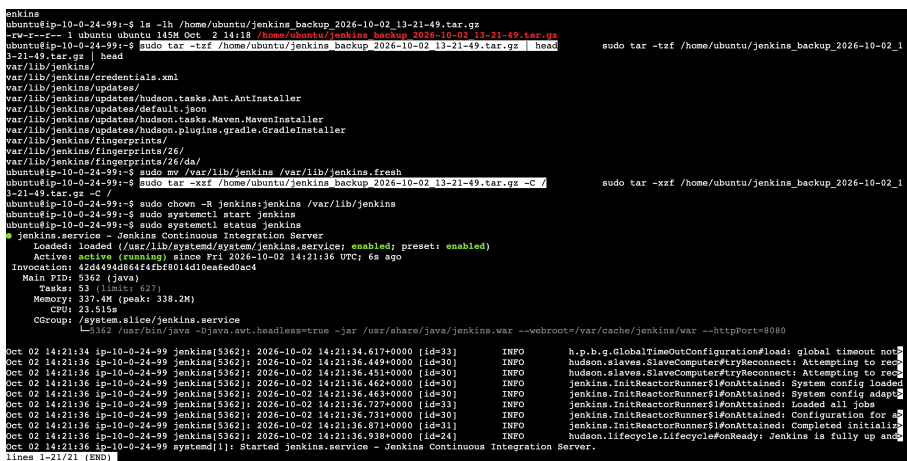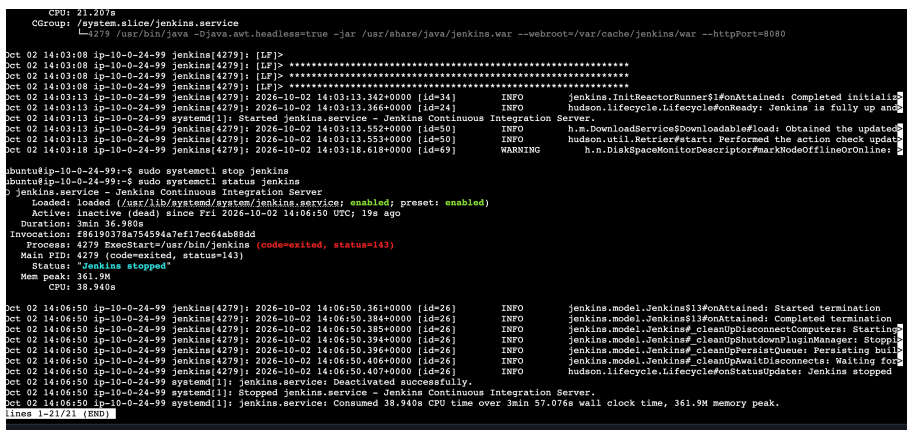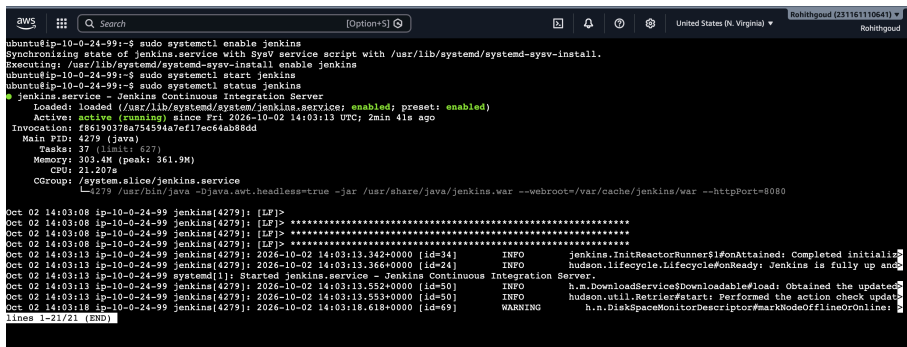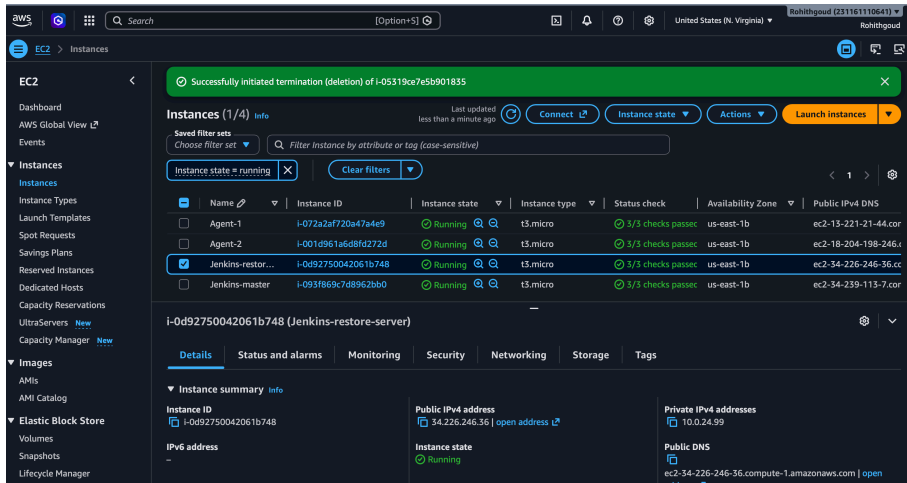

Jenkins-Task2

The screenshot shows the Jenkins dashboard. At the top, there's a navigation bar with various tabs like "devops...", "Google M...", "aws-devo...", "us-east-1", and several "Instance..." tabs. The main header area includes the Jenkins logo, the name "Jenkins", and search, settings, and user icons. Below this, there are two main sections:

- Build Queue:** A section titled "Build Queue" with a dropdown arrow. It contains the text "No builds in the queue."
- Build Executor Status:** A section titled "Build Executor Status" with an upward arrow. It displays "built-in node + 2 agents (0 of 2 executors busy)".

In the background, a table lists build jobs. The visible row is for "Github-webhook-job", which has a status of "S" (Success), a sun icon, a duration of "1 hr 6 min #4", and a last failure of "N/A".