



CloudTrail & CloudWatch-Task


1. Enable CloudTrail monitoring and store the events in S3 and CloudWatch log events.

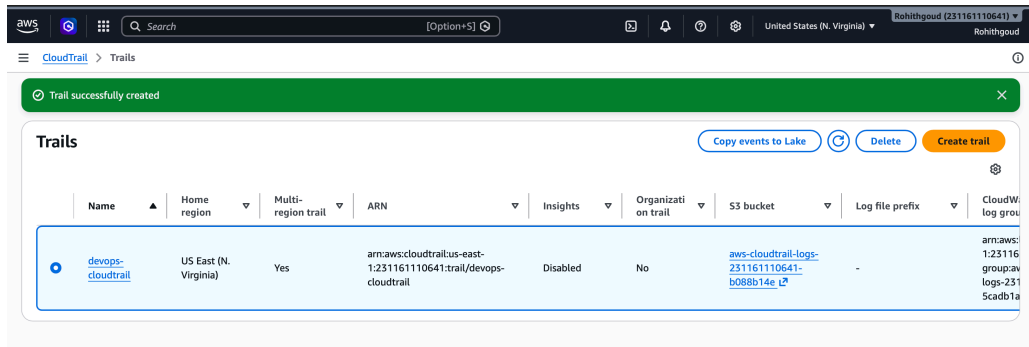

2. Enable SNS for CloudTrail to send alerts via email.

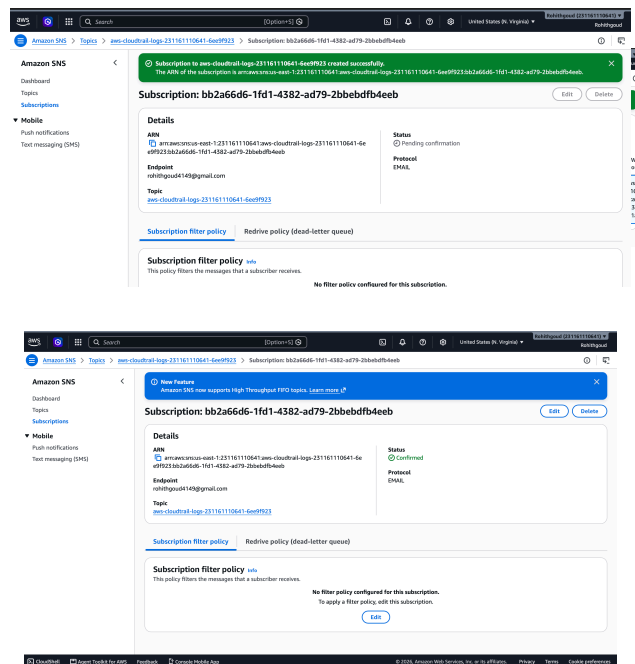


3. Configure CloudWatch monitoring and record the CPU utilization and other metrics of EC2.

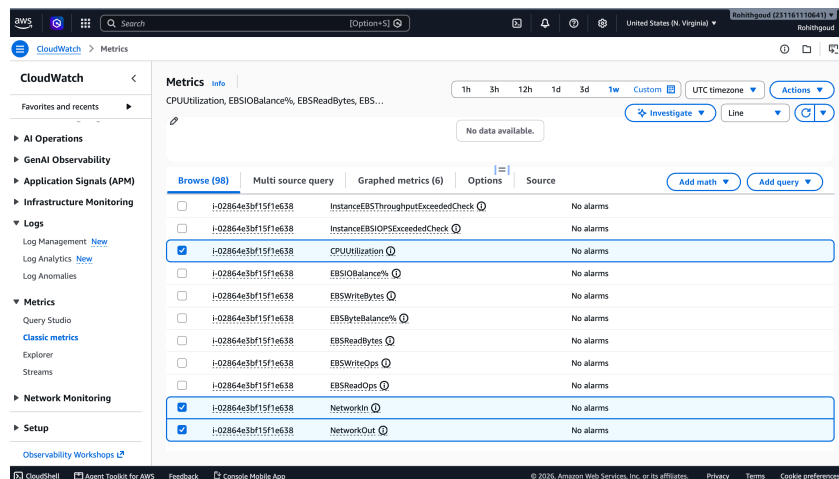


CloudTrail & CloudWatch-Task


4. Create one alarm to send an alert to email if the CPU utilization is more than 70 percent.

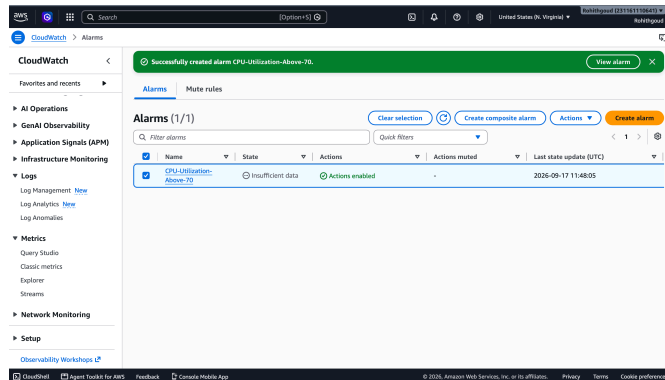

5. Create a Dashboard and monitor the Tomcat service whether it is running or not and send the alert.

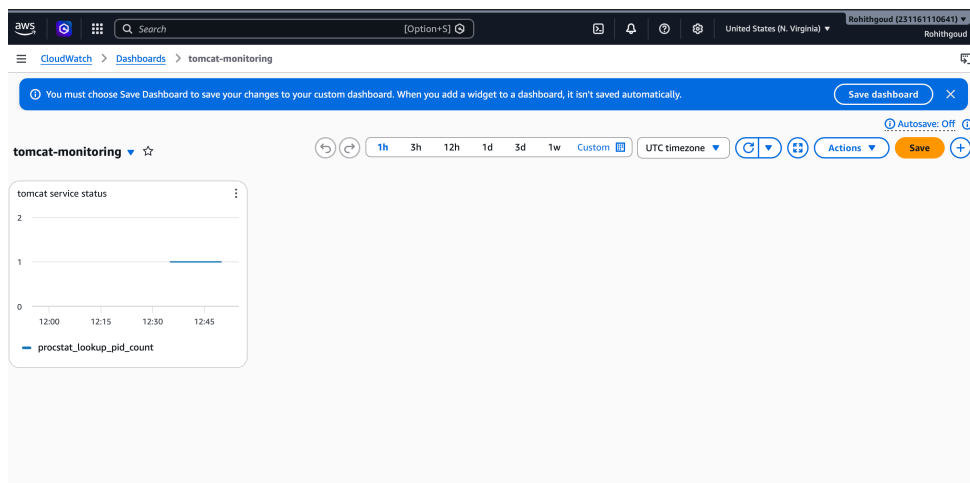

6. Create a Dashboard and monitor the Nginx service to send the alert if Nginx is not running.

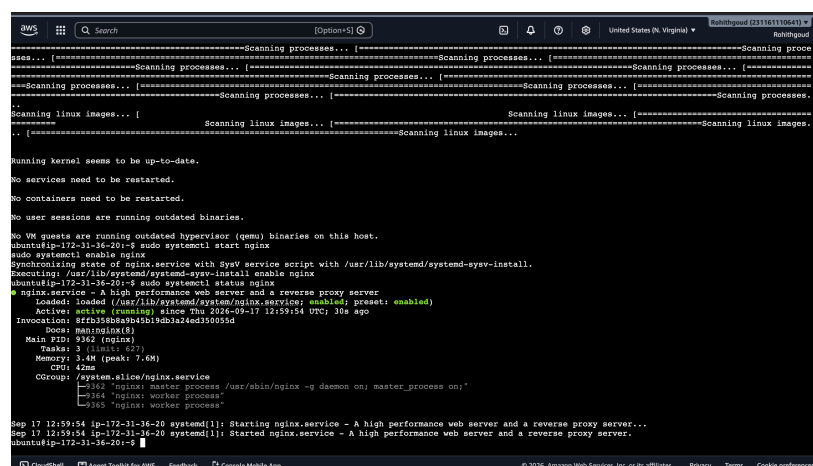

CloudTrail & CloudWatch-Task

The screenshot shows the AWS CloudWatch Alarms console. A green notification banner at the top states "Successfully created alarm nginx-service-down." with a "View alarm" link. The left sidebar shows the navigation menu with "Alarms" selected. The main content area displays a table of three alarms:

Name	State	Actions	Actions muted	Last state update (UTC)
nginx-service-down	Insufficient data	Actions enabled	-	2026-09-17 13:06:43
tomcat-service-down	OK	Actions enabled	-	2026-09-17 12:51:27
CPU-Utilization-Above-70	Insufficient data	Actions enabled	-	2026-09-17 11:48:05

The screenshot shows the AWS CloudWatch Alarms console after filtering for the "nginx-service-down" alarm. A green notification banner at the top states "1 new widget(s) have been added to your dashboard tomcat-monitoring" with a "View dashboard" link. The left sidebar shows the navigation menu with "Alarms" selected. The main content area displays a table with one alarm:

Name	State	Actions	Actions muted	Last state update (UTC)	Conditions
nginx-service-down	OK	Actions enabled	-	2026-09-17 13:07:56	procstat_lookup_pid_count < 1 for 1 d within 1 minute