Exp No:16

Experiment to understand EDA-Quantitative and Qualitative analysis.


Program:

```
import seaborn as sns
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
%matplotlib inline
tips=sns.load_dataset('tips')
tips.head()
```


Output:

	total_bill	tip	sex	smoker	day	time	size
0	16.99	1.01	Female	No	Sun	Dinner	2
1	10.34	1.66	Male	No	Sun	Dinner	3
2	21.01	3.50	Male	No	Sun	Dinner	3
3	23.68	3.31	Male	No	Sun	Dinner	2
4	24.59	3.61	Female	No	Sun	Dinner	4


sns.displot(tips.total_bill,kde=True)

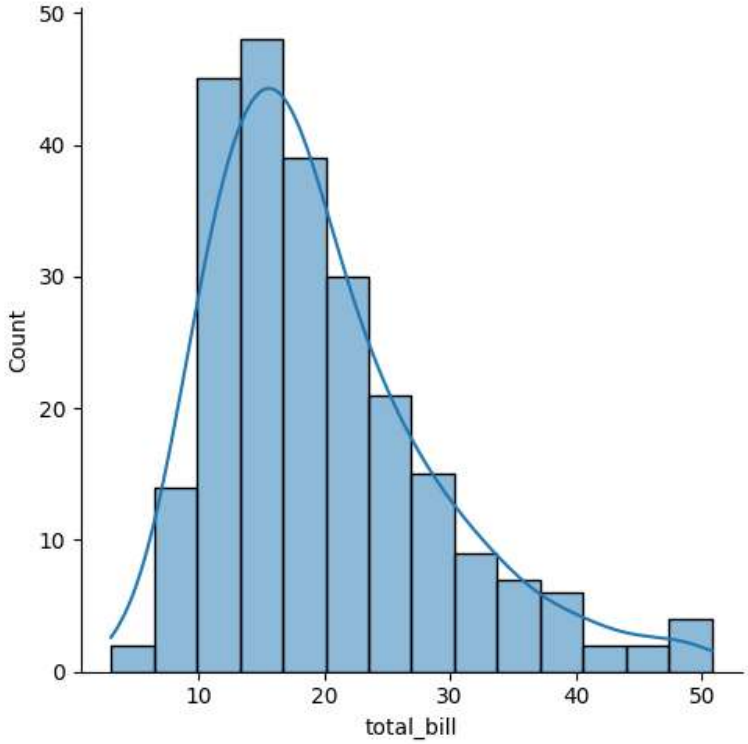

sns.jointplot(x=tips.tip,y=tips.total_bill,kind="hex")

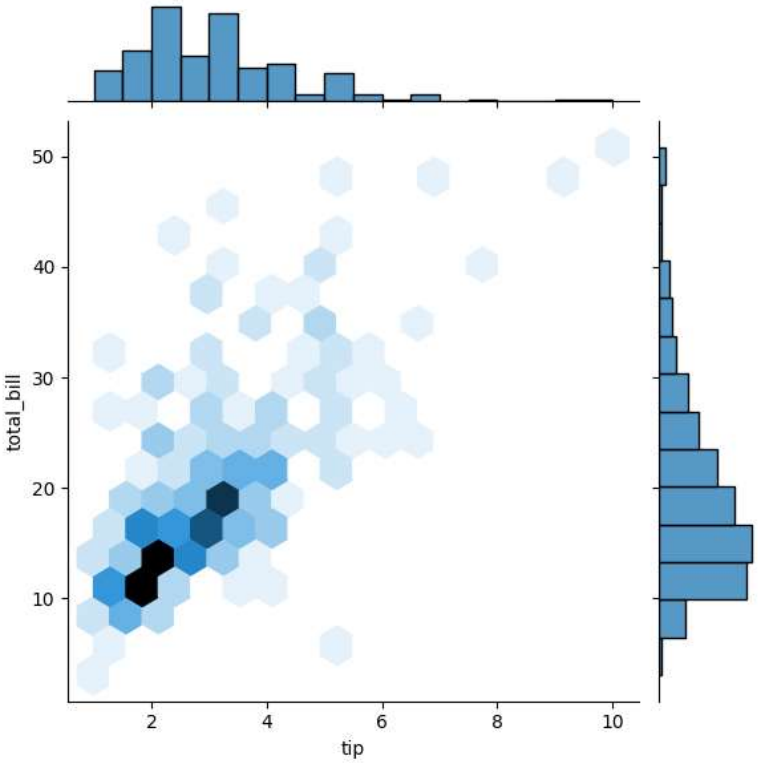

sns.pairplot(tips)

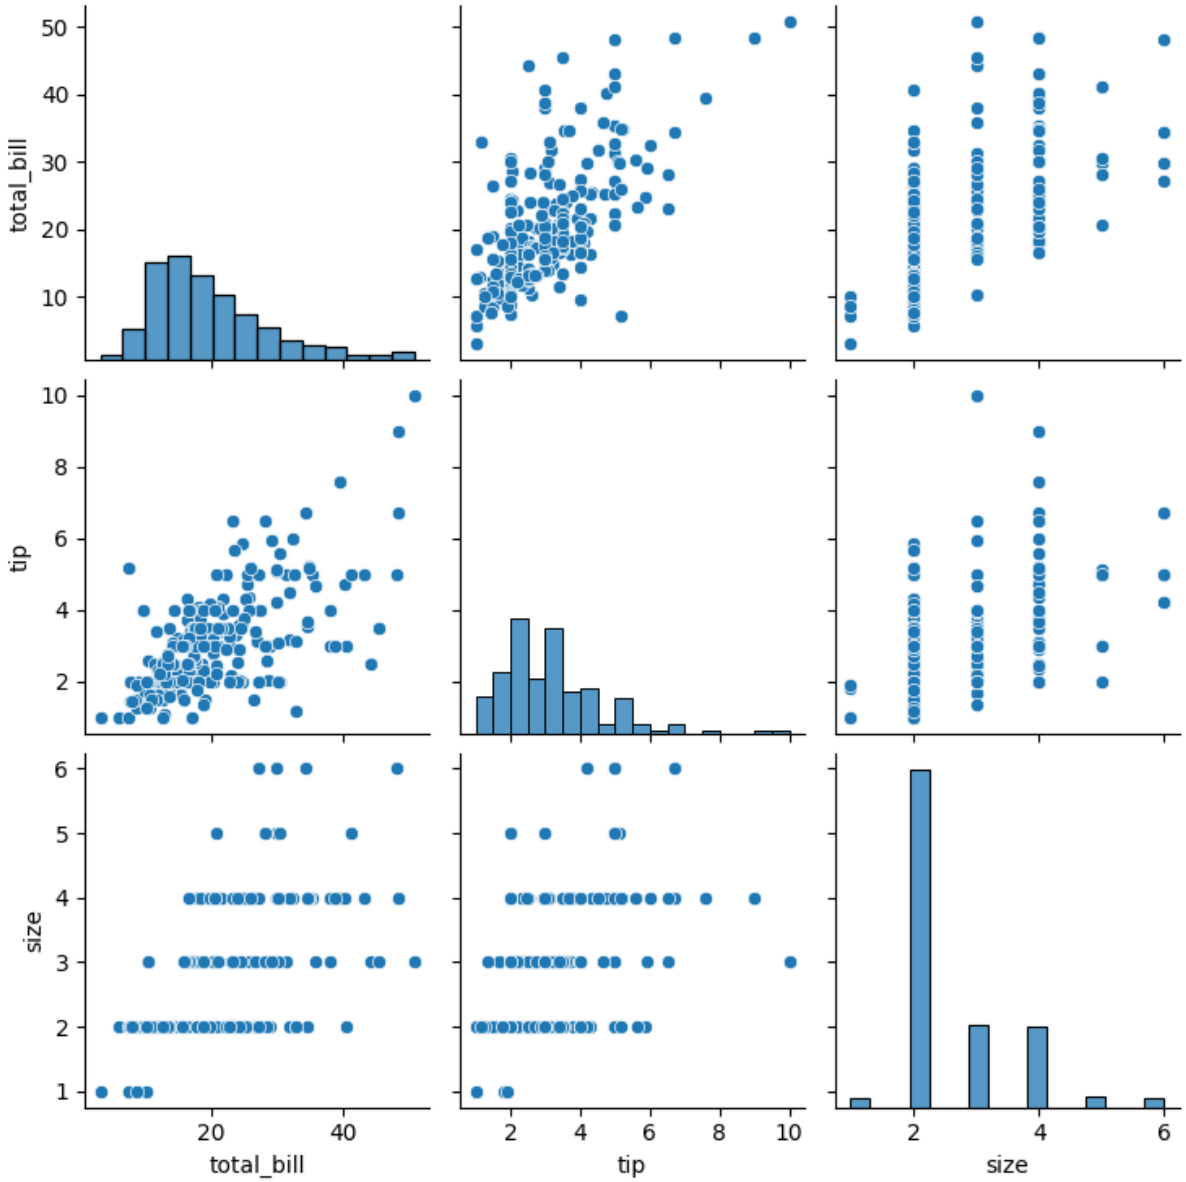


tips.time.value_counts()


time	count
Dinner	176
Lunch	68

dtype: int64


sns.pairplot(tips,hue='time')

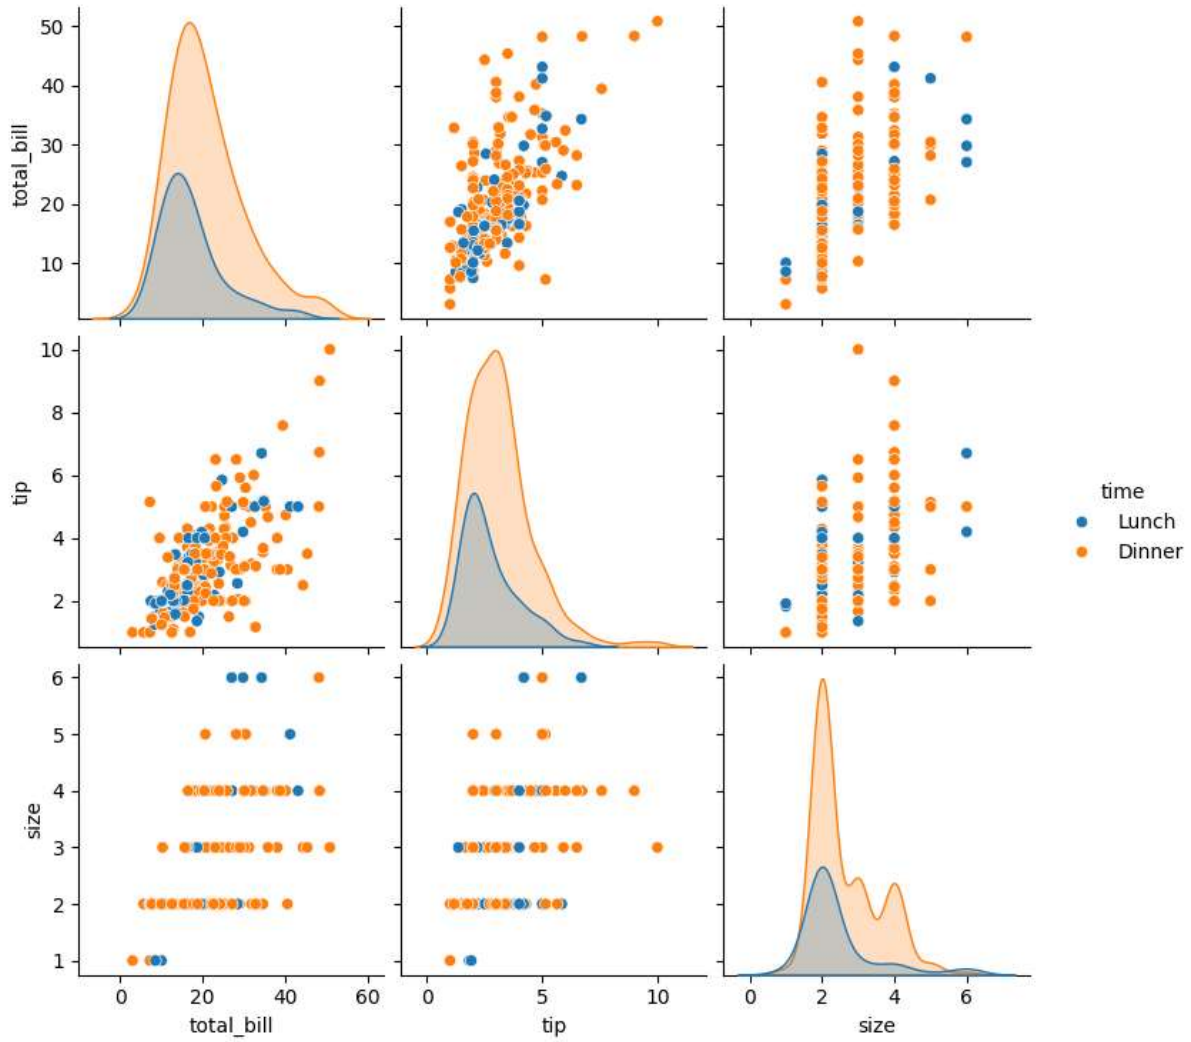


sns.pairplot(tips,hue='day')

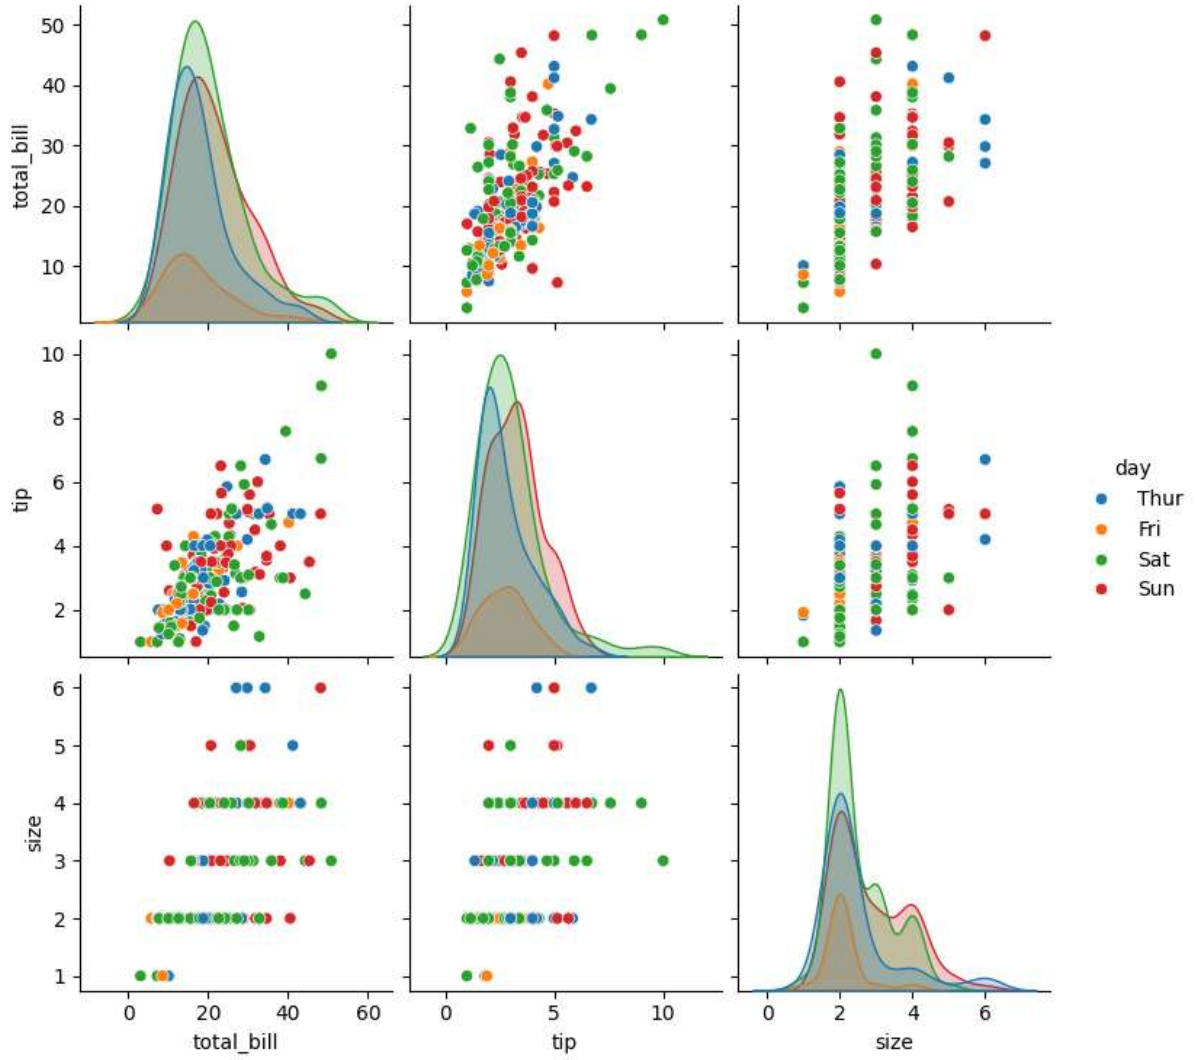


sns.heatmap(tips.corr(numeric_only=True),annot=True)

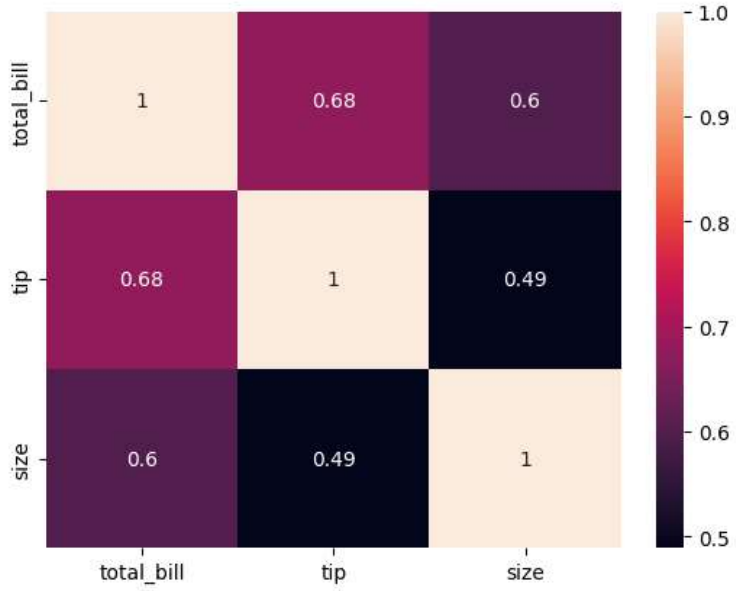


sns.boxplot(tips.total_bill)

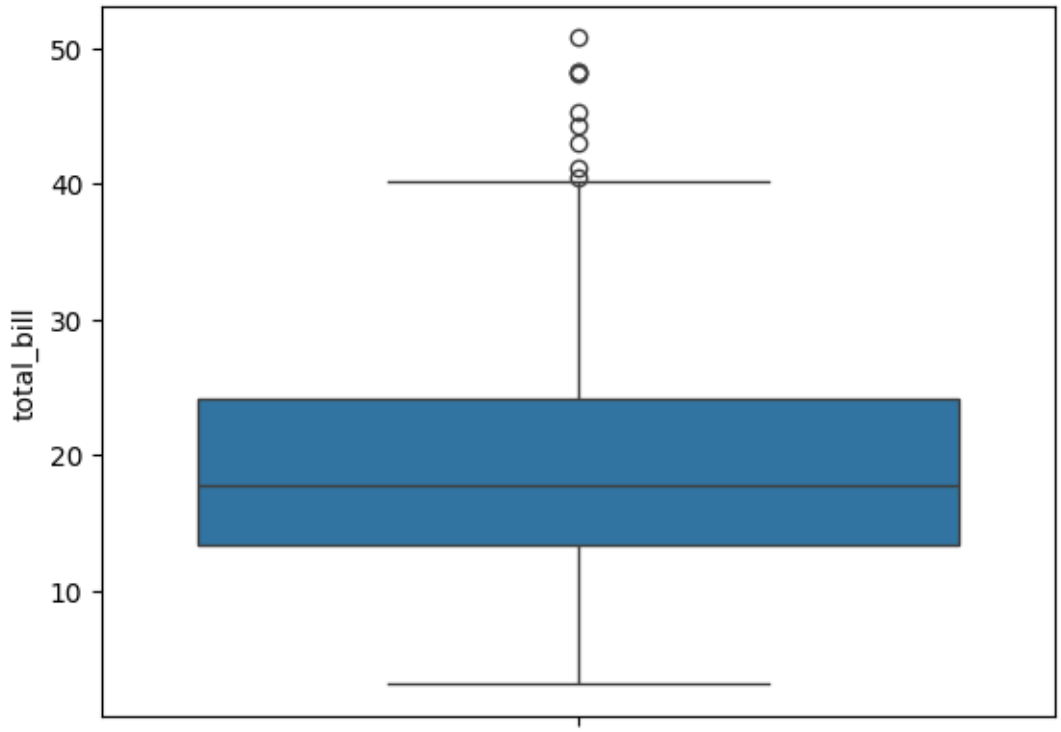


sns.boxplot(tips.tip)

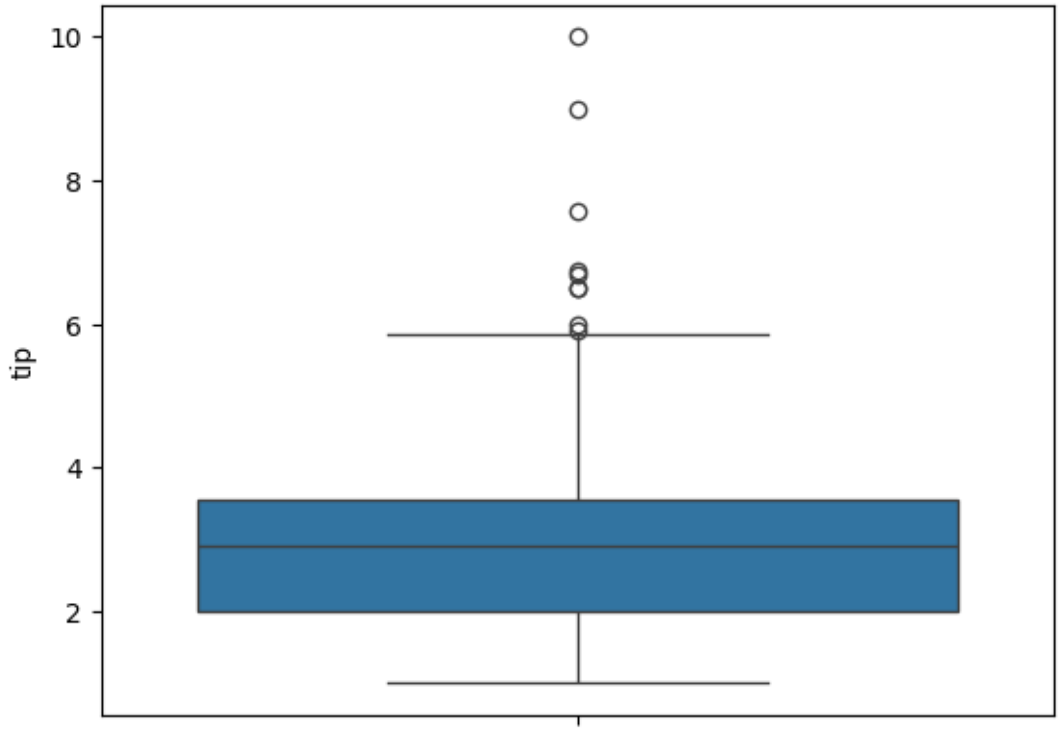


sns.countplot(tips.day)

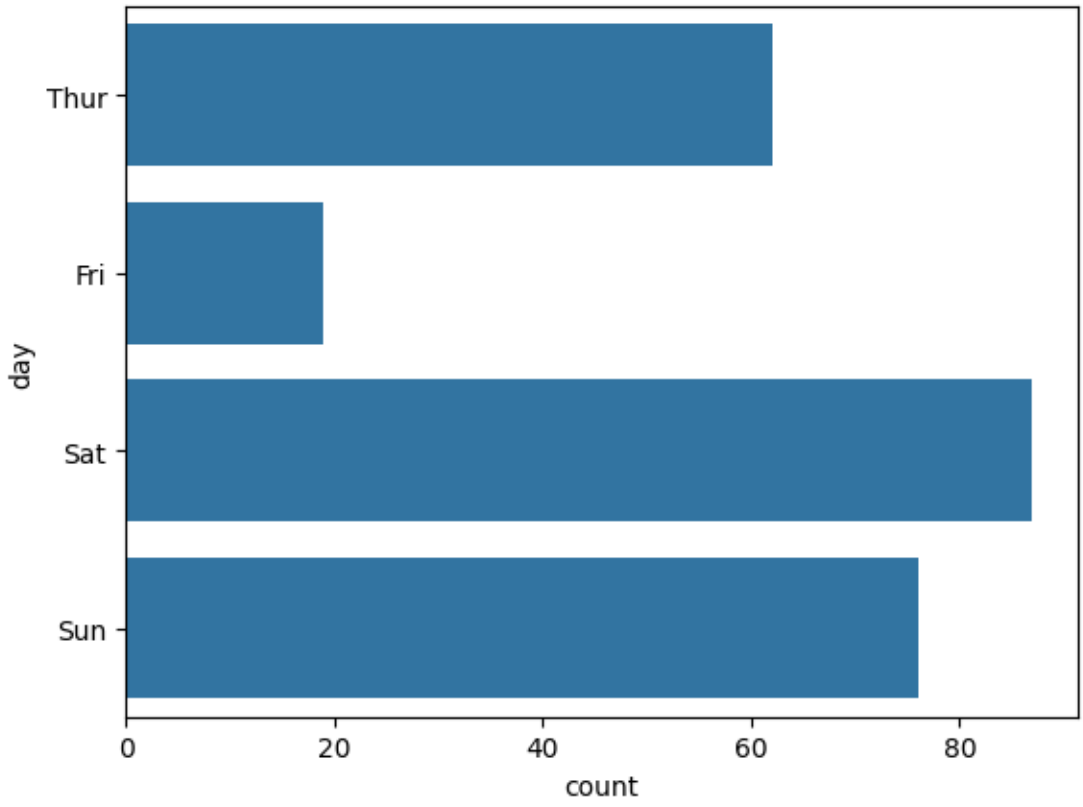


sns.countplot(tips.sex)

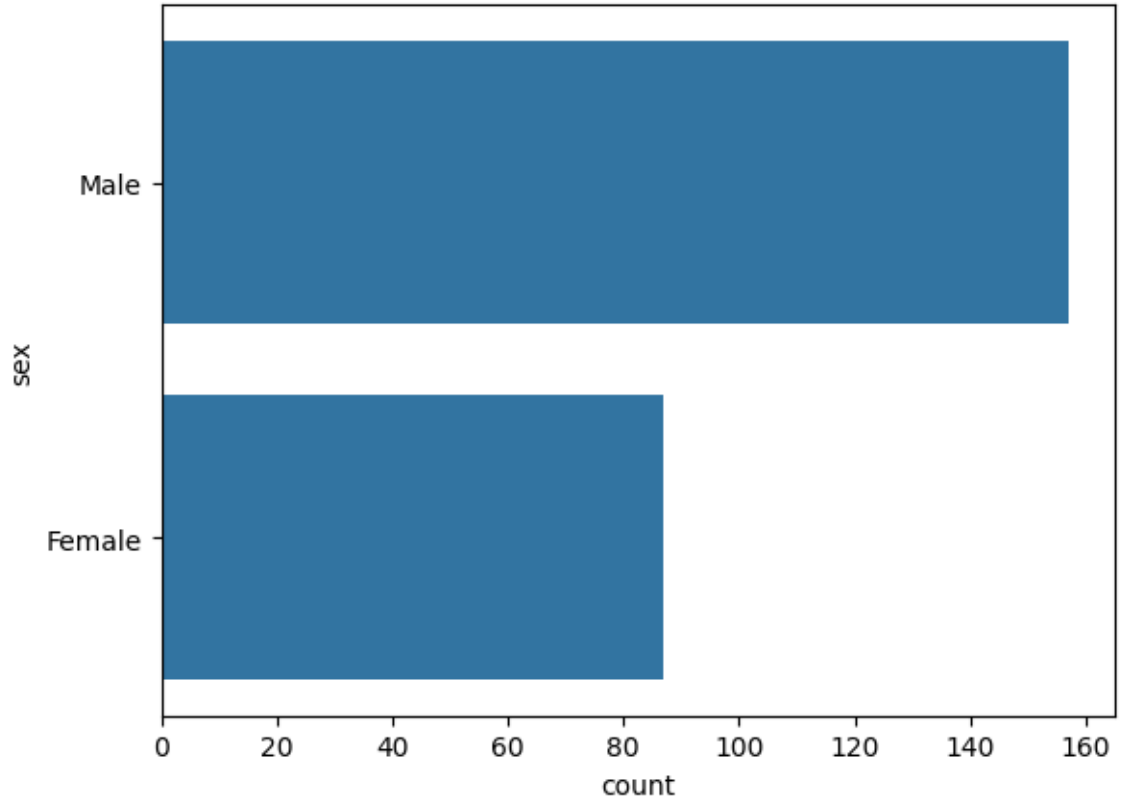

tips.sex.value_counts().plot(kind='pie')

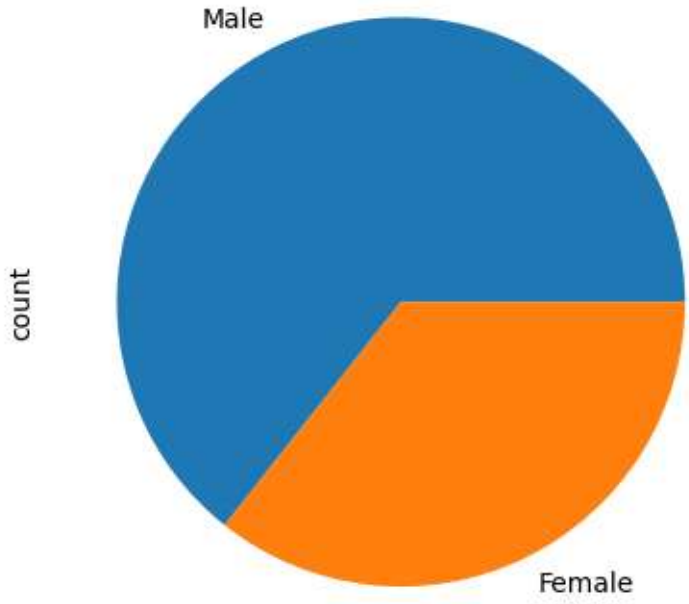

tips.sex.value_counts().plot(kind='bar')

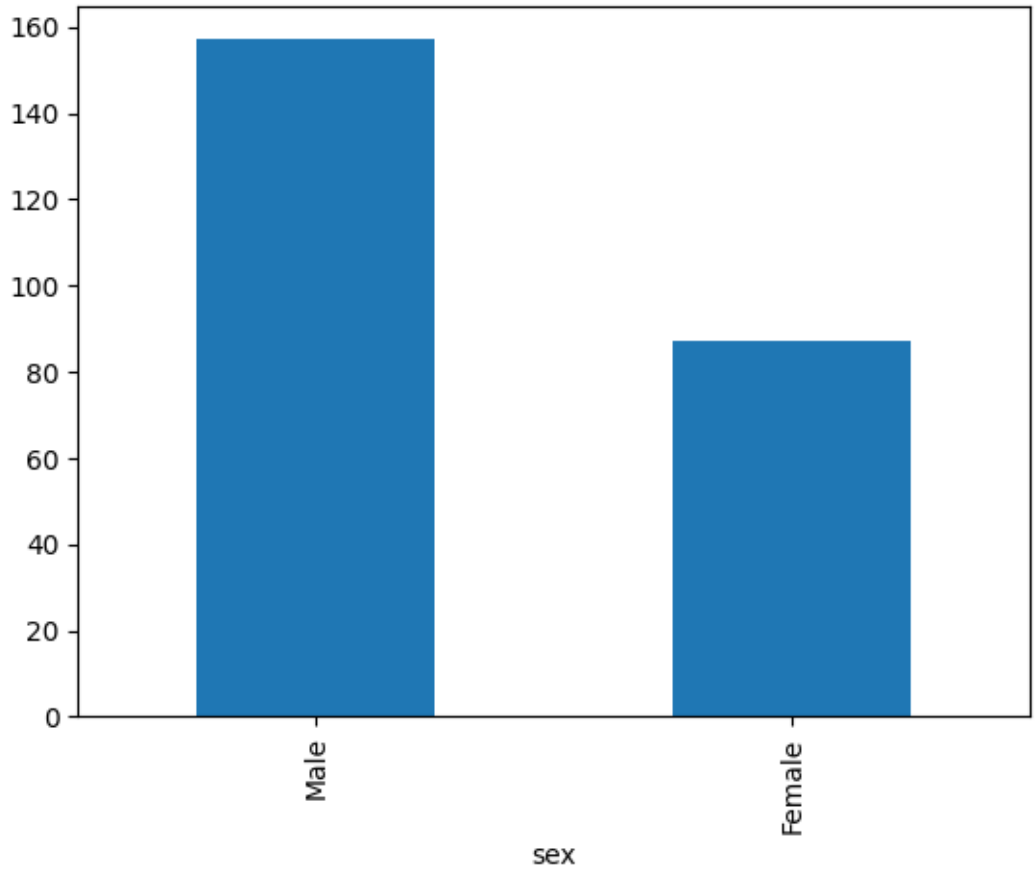

```
sns.countplot(tips[tips.time=='Dinner']['day'])
```

