


Q1. Slow Fasten approach:-





head = [1, 2, 3, 4, 5]

Do pointer honge (F & S).

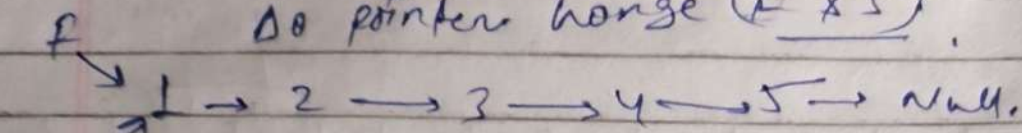

→ agr S 1st position par hai toh F, S ke (2x) position pe hoga..


i.e.

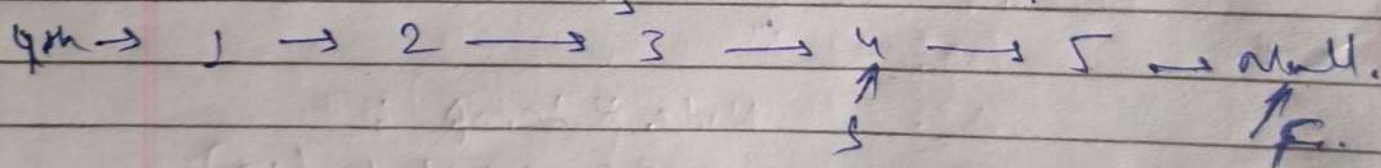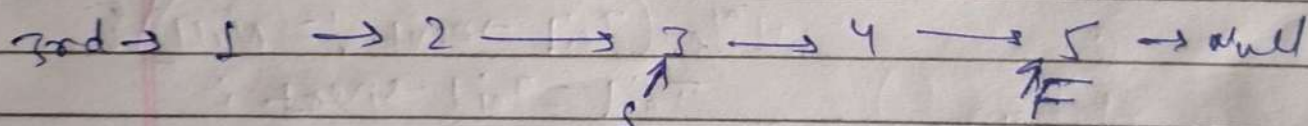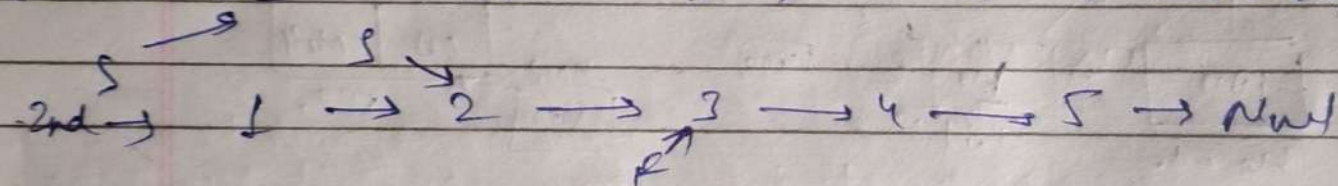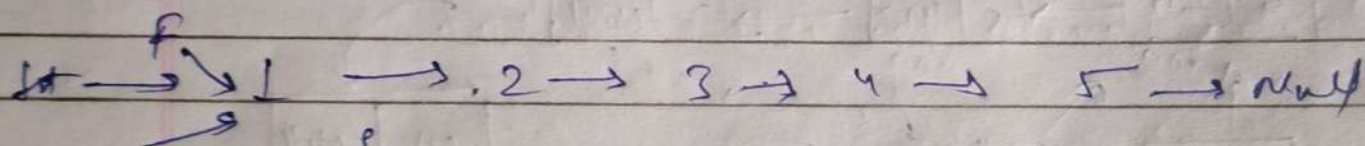

(head) me mid ~~ke~~ ~~ek~~ tha (3).
so 3rd round me S print kar sha tha.

toh hme 3 return kar na hai.

ex: 2

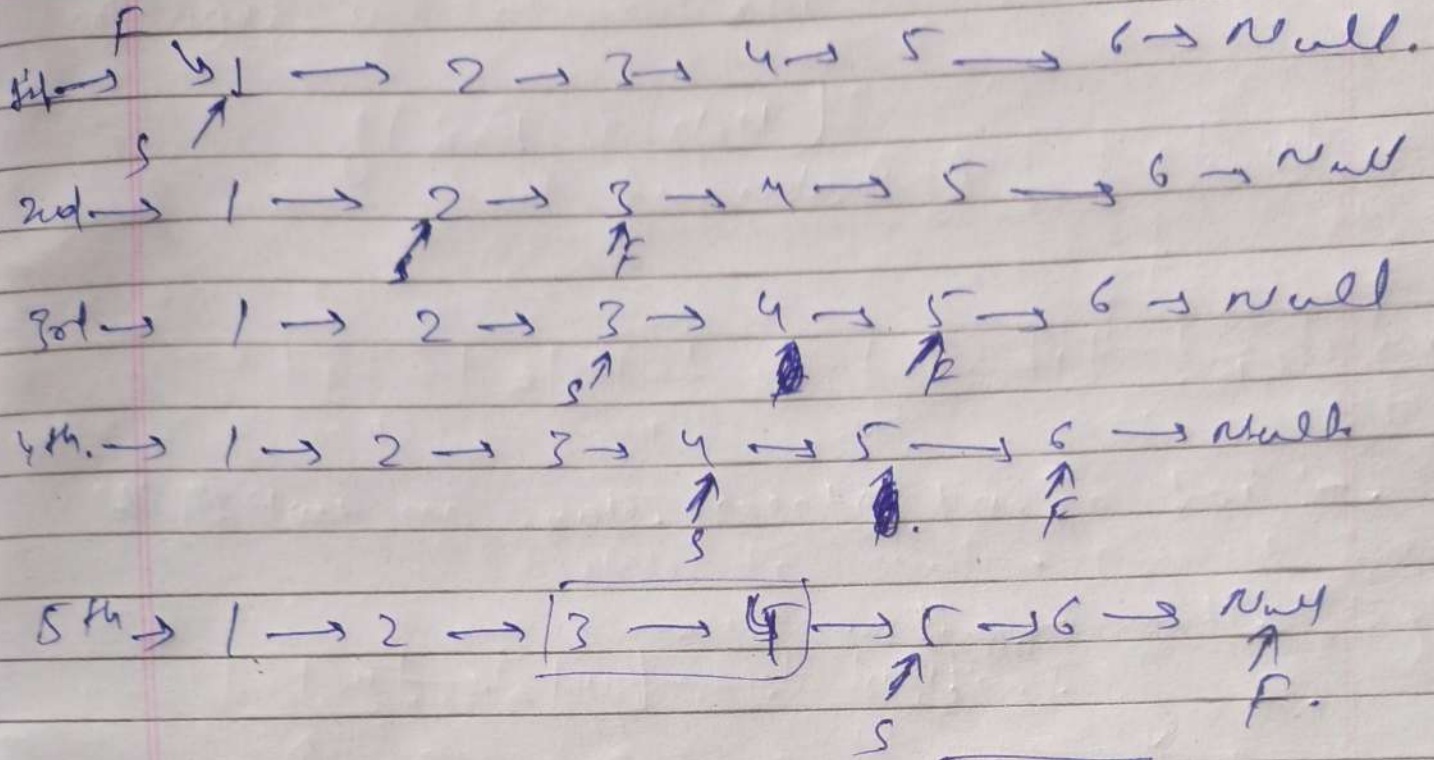

Isme do middle hai [3, 4] toh
hume 2nd middle return karna hai.

Coding

```
class soln:- {
```

```
    listNode = slow;
```

```
    listNode = fast;
```

```
    while (fast != null && fast.next != null) {
        slow = slow.next;
        fast = fast.next.next;
    }
```

```
    return slow;
```

★ Kyunki, slow middle ko point kar raha hai.
★ jab tak f & f.next null ko point nhi karte
jab tak slow ko aage bandana hai or
fast ko ~~slow~~ slow ke 2x times jage bandana hai.