



At the heart of many modern automations is a tool called n8n (short for “nodemation”). It’s like a smart assistant that can connect hundreds of apps — think Google Sheets, Gmail, Slack, HubSpot — and make them work together without you having to lift a finger. But to unlock its full potential, it needs secure access to the services you use.

That’s where Google Cloud comes in. When you want n8n to read or write data from your Google account — like updating a spreadsheet or sending an email — it needs a special kind of permission. This is set up through something called an OAuth connection, which involves creating a secure link between your Google account and your n8n workspace.

All the hyperlinks in the PDF are clickable.

Please make sure you use only one email ID for this


Step 1:

Header over to

<https://console.cloud.google.com/>


Step 2:

- Make sure you use the selected email ID for the entire process (1)
- Select the checkbox on the left side of “**I agree**” (2)
- Then click on “**Agree and Continue**” (3)

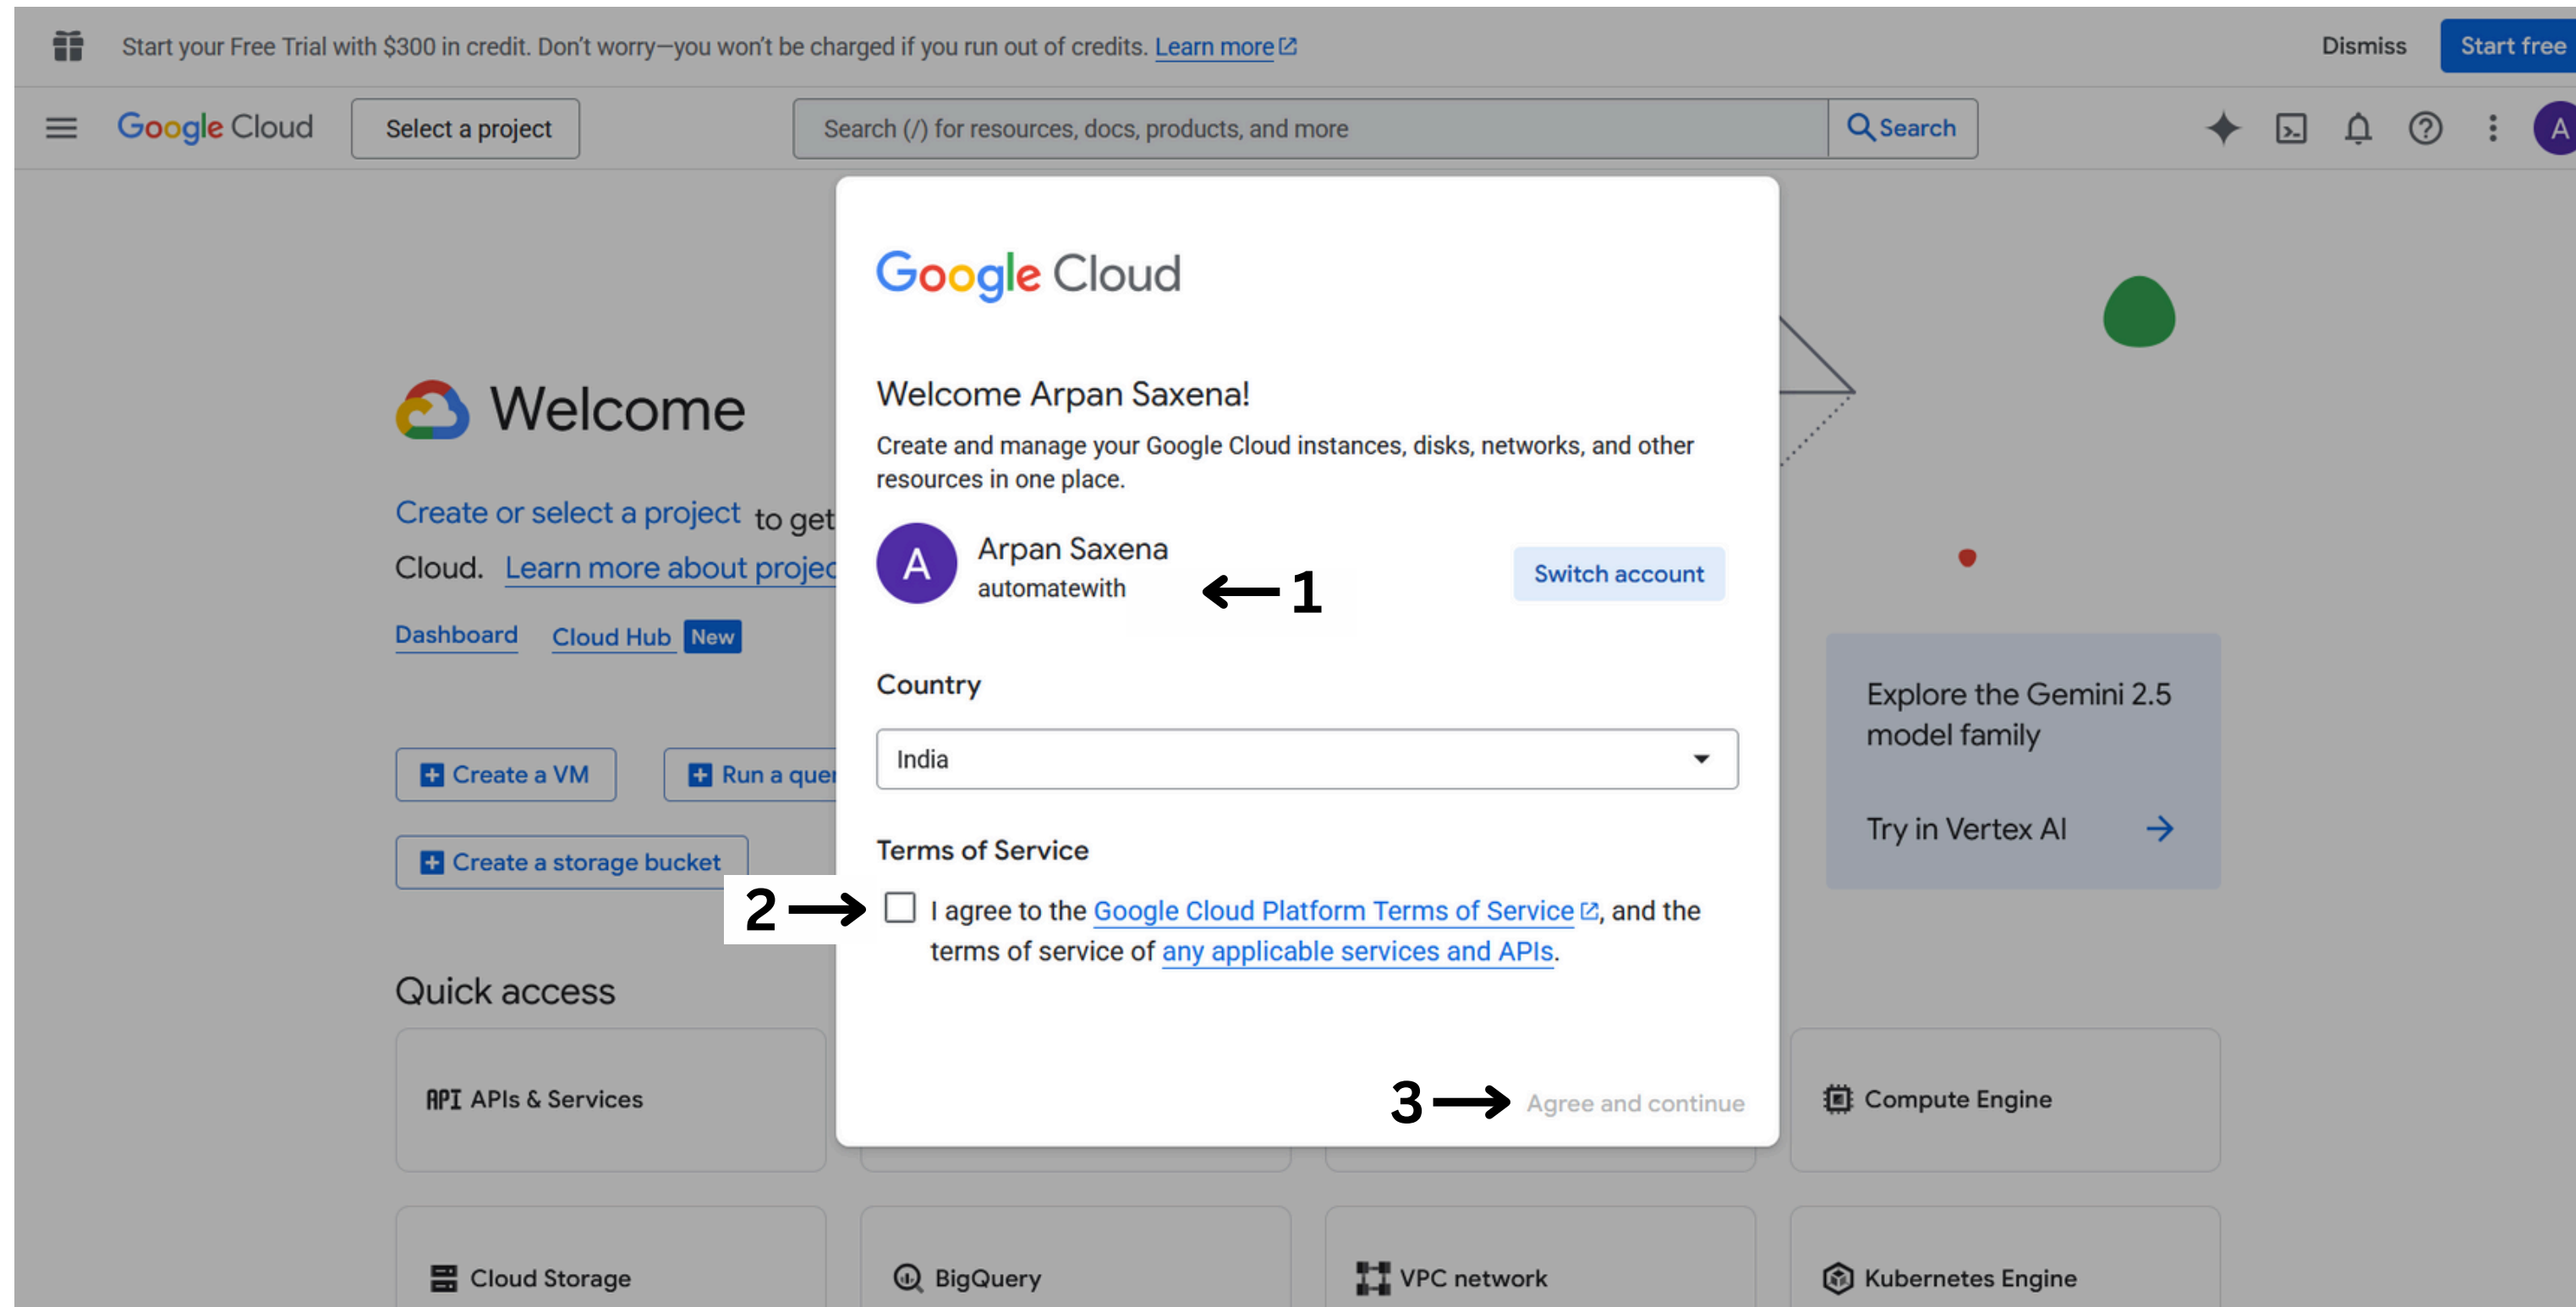

Step 3:

- Click on “**Select Project**” (1)

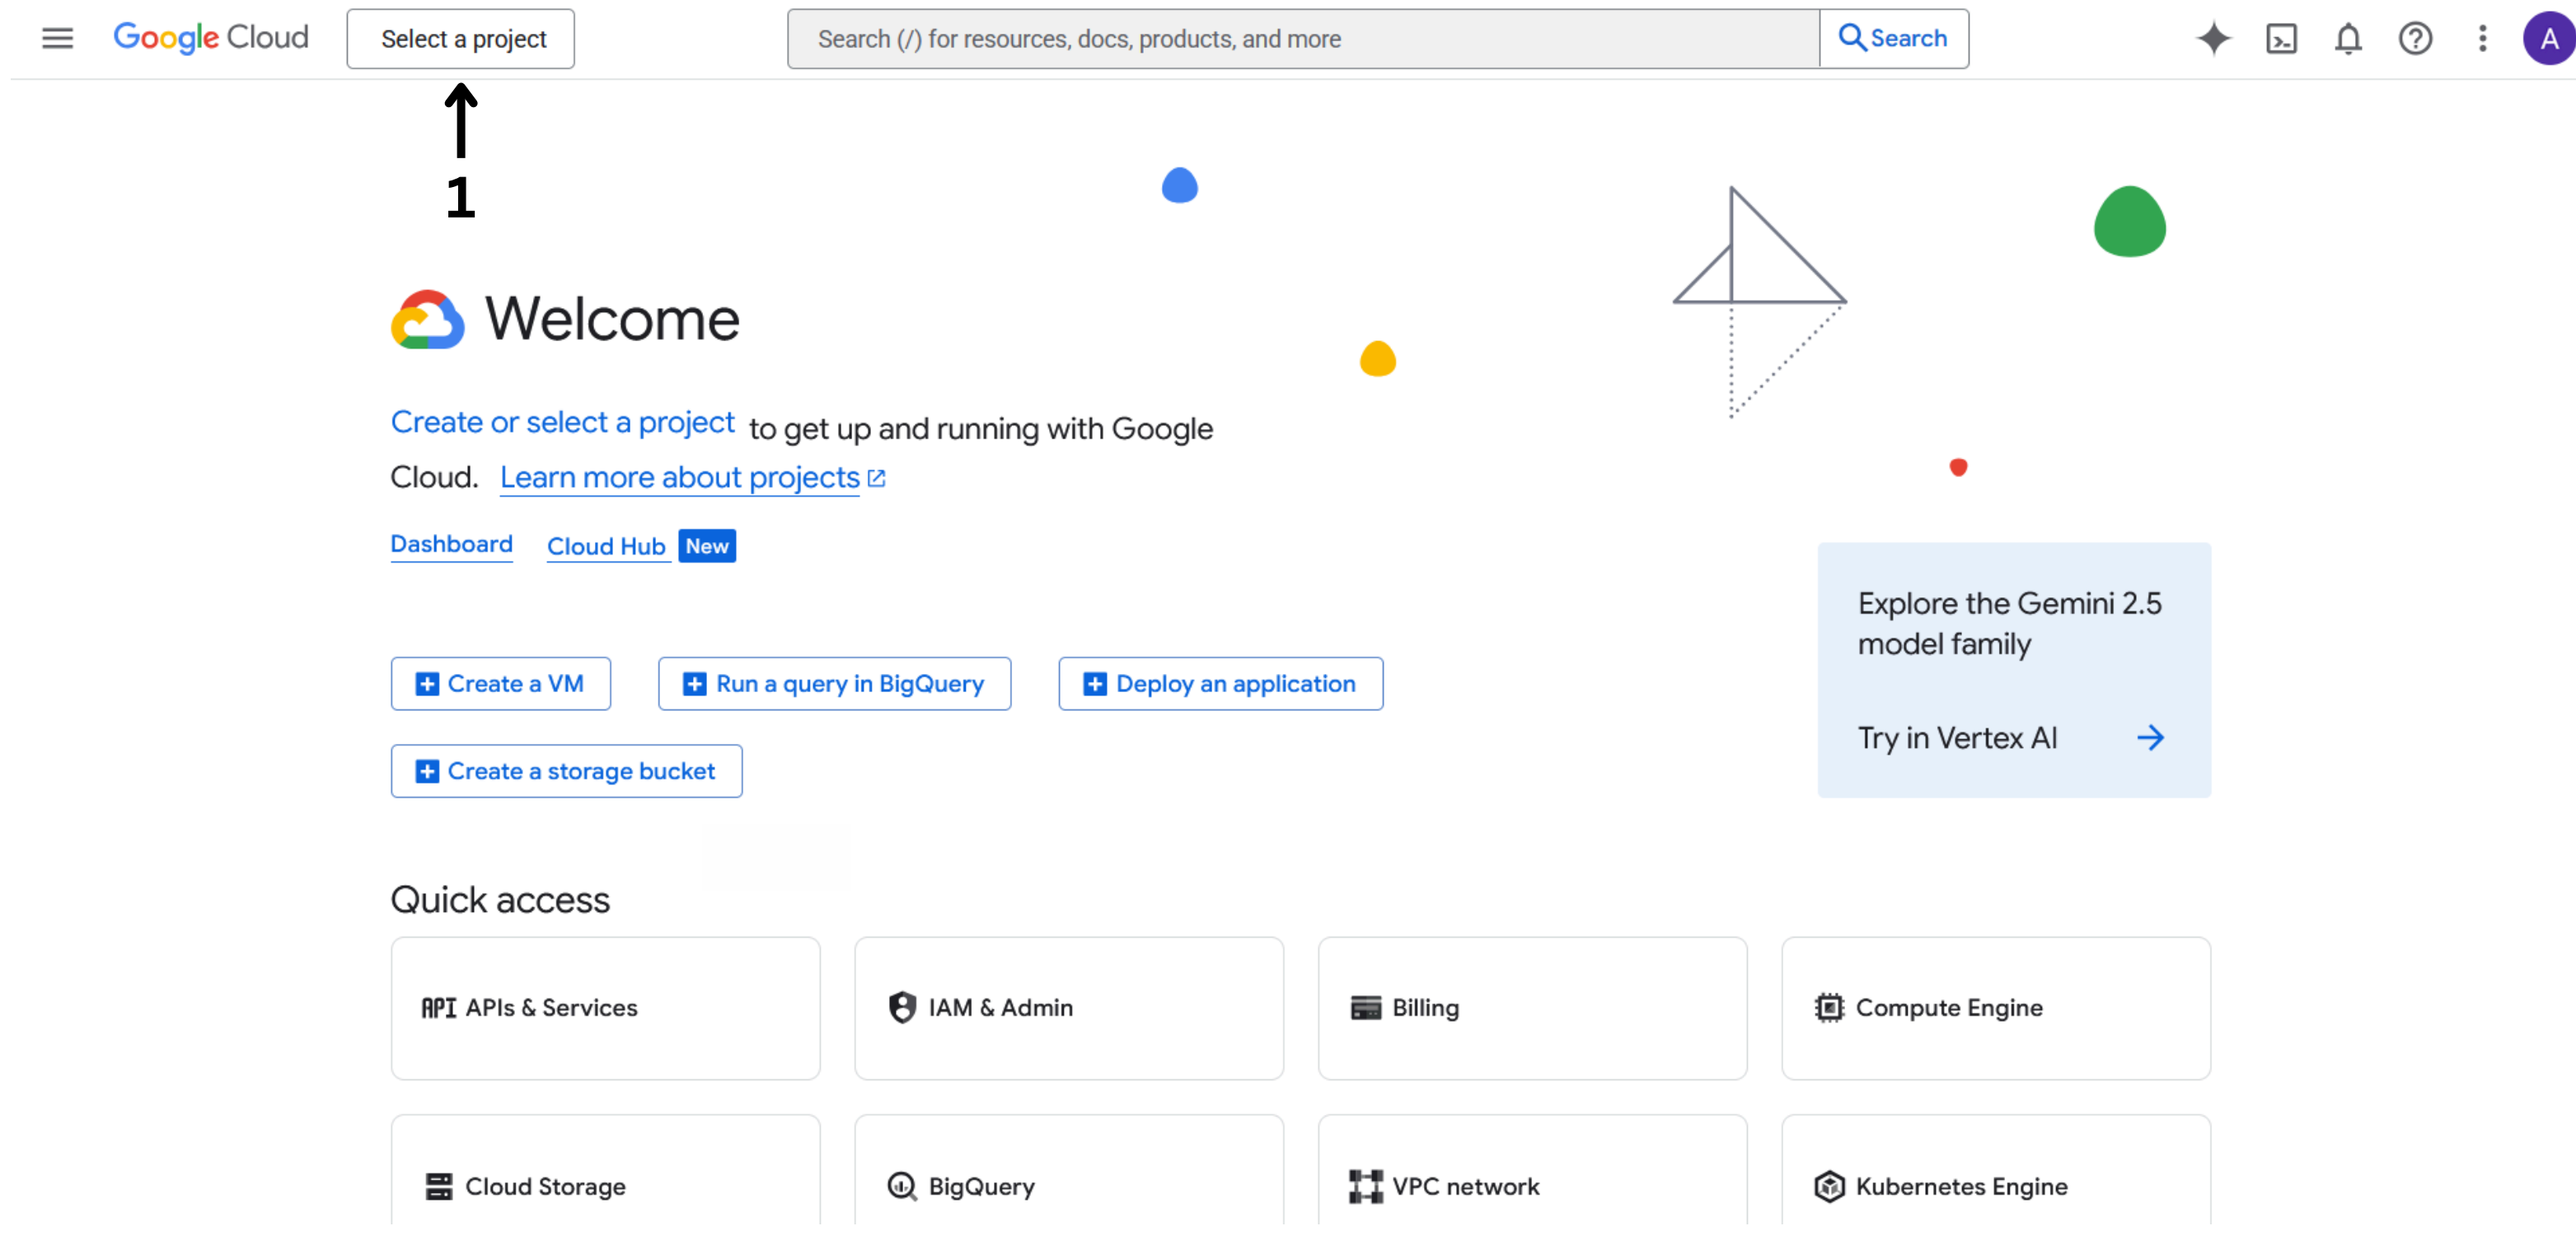

The screenshot shows the Google Cloud console dashboard. At the top, there is a navigation bar with the Google Cloud logo, a 'Select a project' button, a search bar, and user profile icons. A large black arrow with the number '1' points to the 'Select a project' button. Below the navigation bar, the main content area features a 'Welcome' message, a link to 'Create or select a project', and a 'Learn more about projects' link. There are also links for 'Dashboard', 'Cloud Hub', and a 'New' button. A row of four buttons is displayed: '+ Create a VM', '+ Run a query in BigQuery', '+ Deploy an application', and '+ Create a storage bucket'. To the right, a light blue box promotes the Gemini 2.5 model family with a 'Try in Vertex AI' link. At the bottom, a 'Quick access' section contains eight tiles for various services: APIs & Services, IAM & Admin, Billing, Compute Engine, Cloud Storage, BigQuery, VPC network, and Kubernetes Engine.

Google Cloud

Select a project

Search (/) for resources, docs, products, and more

Search

Welcome

Create or select a project to get up and running with Google Cloud. [Learn more about projects](#)

[Dashboard](#) [Cloud Hub](#) [New](#)

+ Create a VM

+ Run a query in BigQuery

+ Deploy an application

+ Create a storage bucket

Explore the Gemini 2.5 model family

Try in Vertex AI →

Quick access

APIs & Services

IAM & Admin

Billing

Compute Engine

Cloud Storage


BigQuery

VPC network

Kubernetes Engine

Step 4:

- Click on “New Project” (1)

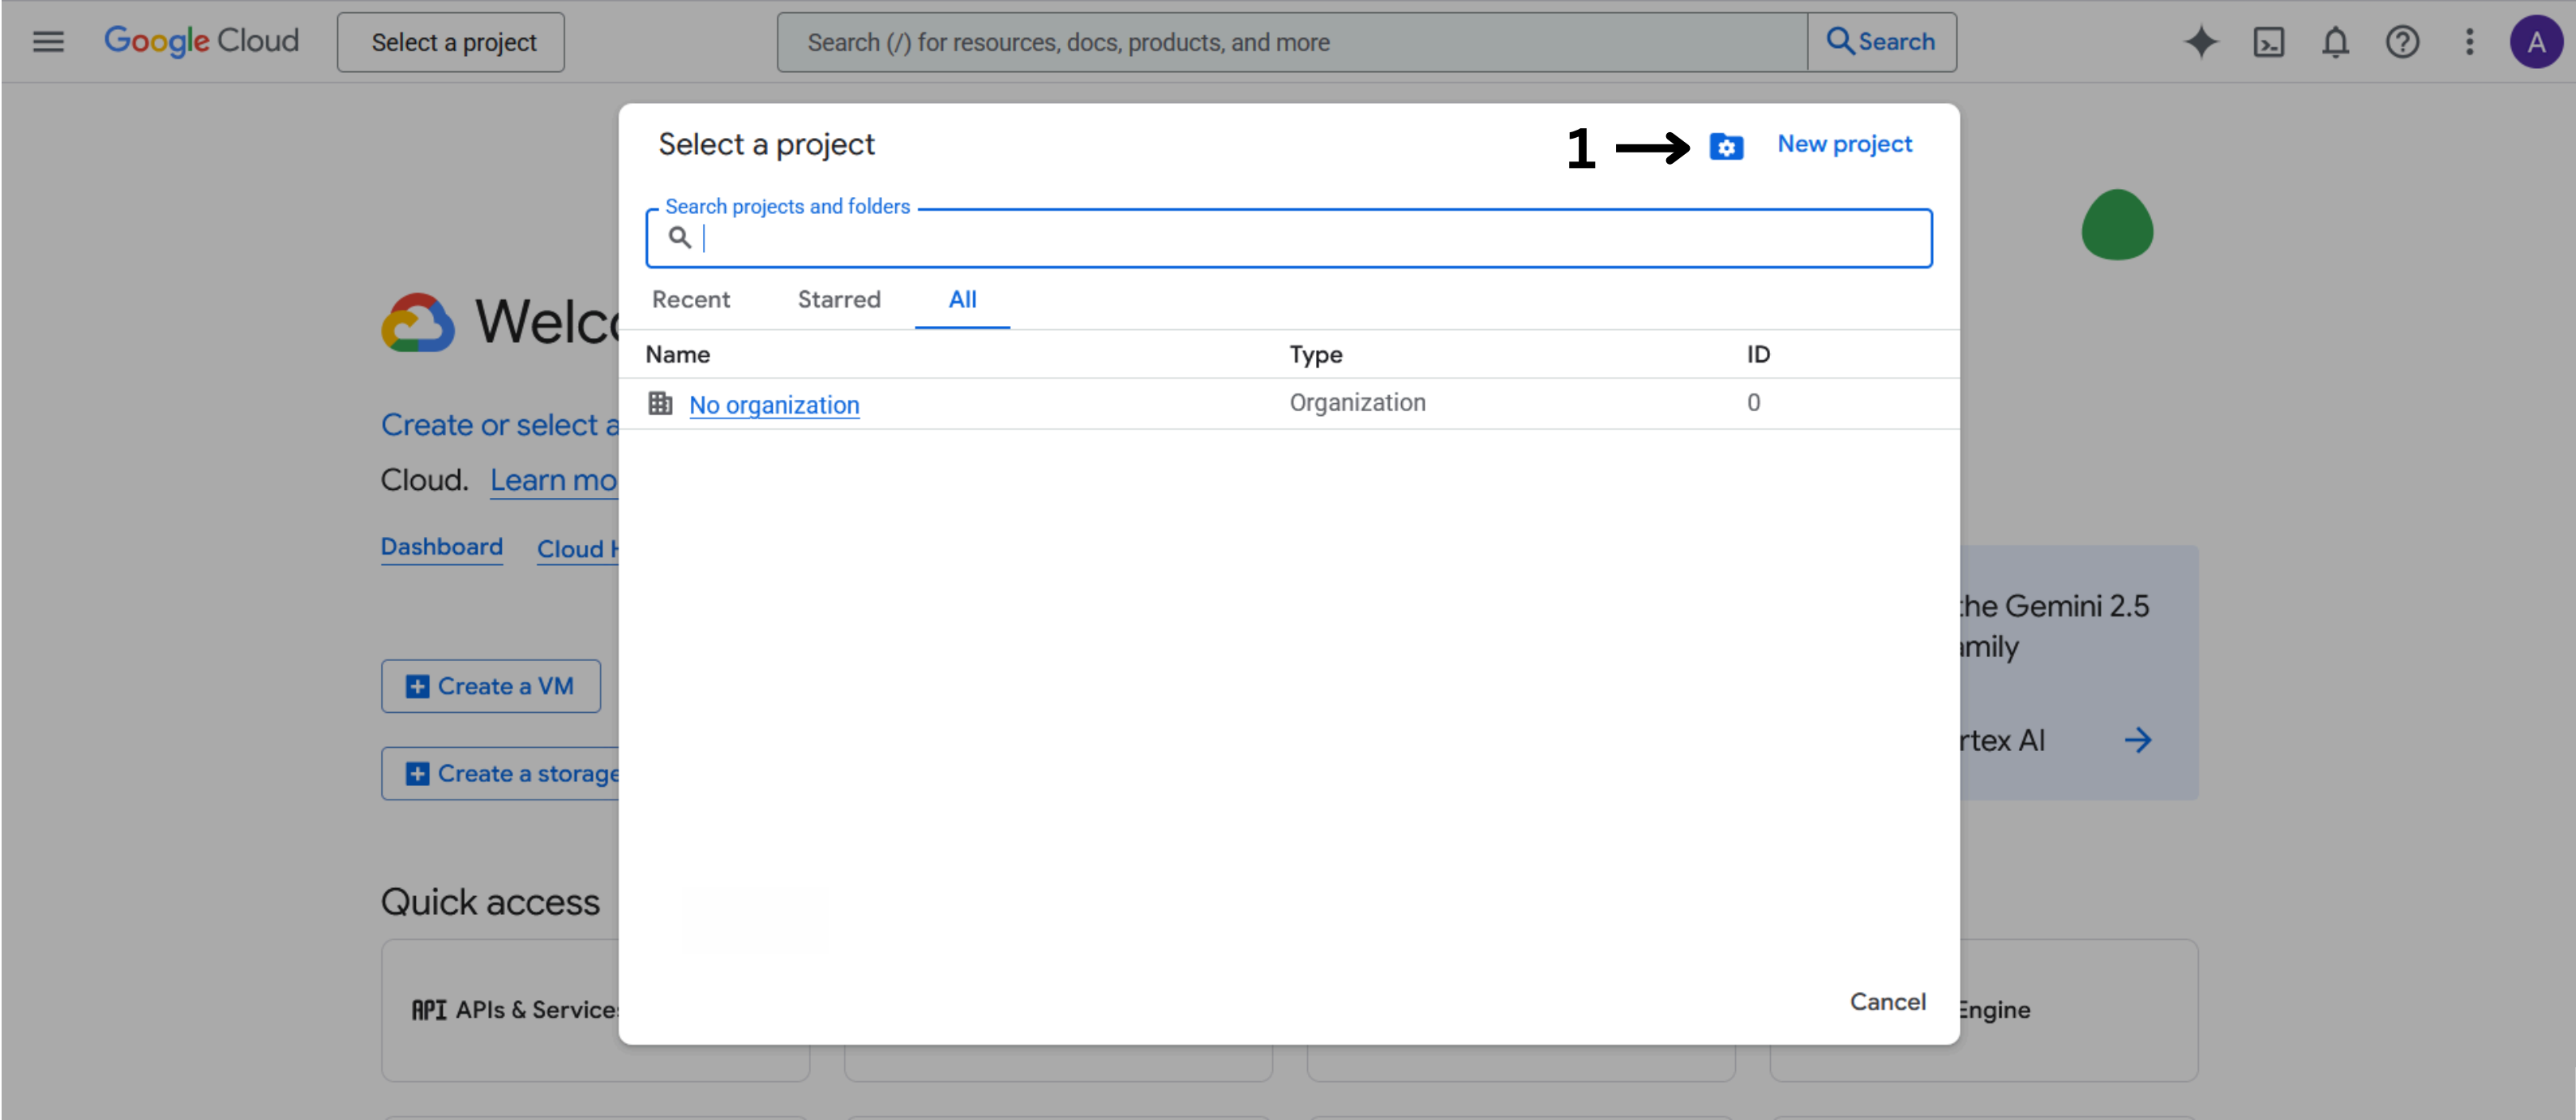

Step 5:

- Give a Project Title (1)
- Click on “**Create**” (2)

 Start your Free Trial with \$300 in credit. Don't worry—you won't be charged if you run out of credits. [Learn more](#)

Dismiss

Start free

 Google Cloud

Search (/) for resources, docs, products, and more

 Search











New Project



You have 12 projects remaining in your quota. Request an increase or delete projects. [Learn more](#)

[Manage Quotas](#)

Project name *

N8N-Project



← 1

Project ID: jovial-valve-466806-b7. It cannot be changed later. [Edit](#)

Location *

 No organization

[Browse](#)

Parent organization or folder

Create

Cancel

↑

2



Step 6:

- Click on the burger menu at the top (1)
- Hover over “APIs & Services” (2)
- Click on “OAuth consent Screen”

1→

Google Cloud

Select a project

Navigation menu (.)

Welcome

Create or select a project to get started with Google Cloud. [Learn more about projects](#)

[Dashboard](#) [Cloud Hub](#) [New](#)

+ Create a VM

+ Run

+ Create a storage bucket

2→

Google Cloud

Cloud Hub

Cloud overview

Solutions

Pinned products

Pin your top products here

Products

Billing

IAM & Admin

Marketplace

API APIs & Services

Vertex AI

Compute Engine

Kubernetes Engine

Enabled APIs & services

Library

Credentials

OAuth consent screen

Page usage agreements

3→

Enabled APIs & services

Library

Credentials

OAuth consent screen

Page usage agreements



Step 6.1:

If your project is not selected, you will see a screen like this

- Select the project (1)

Start your Free Trial with \$300 in credit. Don't worry—you won't be charged if you run out of credits. [Learn more](#)

Dismiss [Start free](#)

Google Cloud [Search](#)

Google Auth Platf... [Overview](#) [Branding](#) [Audience](#) [Clients](#) [Data Access](#) [Verification Center](#)

Overview

To view this page, select a project. [Create project](#)

Select a recent project

N8N-Project
 Project ID: jovial-valve-466806-b7
 Organization: No organization
 Accessed 1 minute ago

← 1



Step 7:

If your project is selected, you will see a screen like this

- Click on “**Get Started**” (1)

Start your Free Trial with \$300 in credit. Don't worry—you won't be charged if you run out of credits. [Learn more](#)

Dismiss

Start free

Google Cloud

N8N-Project

Search (/) for resources, docs, products, and more

Search

A

Google Auth Platform / Overview

Overview

Branding

Audience

Clients

Data Access

Verification Center

OAuth Overview

Google Auth Platform not configured yet

Get started to configure your application's identity and manage credentials for calling Google APIs and Sign-in with Google. [Learn more](#)

Get started ← 1

Step 8:

- Give an app name (1)
- Select **your** email ID (2)
- Click on “**Next**” (3)

 Google Auth Platform / Overview / Create branding

Overview

Branding

Audience

Clients

Data Access

Verification Center

Project configuration

1 App Information

App name *
N8N

The name of the app asking for consent

User support email *
automatewith

For users to contact you with questions about their consent. [Learn more](#)

Next

← 1

← 2

← 3



Step 9:

- Select “**External**” (1)
- Click on “**Next**” (2)

Google Auth Platform / Overview / Create branding

Overview

Branding

Audience

Clients

Data Access

Verification Center

Project configuration

App Information

Audience

☐ Internal

Only available to users within your organization. You will not need to submit your app for verification. [Learn more about user type](#)

☒ External

Available to any test user with a Google Account. Your app will start in testing mode and will only be available to users you add to the list of test users. Once your app is ready to push to production, you may need to verify your app. [Learn more about user type](#)

Next

Step 10:

- Type **your** email ID (1)
- Click on “**Next**” (2)

Google Auth Platform / Overview / Create branding

Overview

Branding

Audience

Clients

Data Access

Verification Center

Project configuration

✓ App Information

✓ Audience

3 Contact Information

Email addresses *

automatew ← 1

These email addresses are for Google to notify you about any changes to your project.

Next ← 2



Step 11:

- Select the checkbox (1)
- Click on “Continue” (2)
- Click on “Create” (3)

Google Auth Platform / Overview / Create branding

Overview

Branding

Audience

Clients

Data Access

Verification Center

Project configuration

✓ App Information

✓ Audience

✓ Contact Information

4 Finish

1 → ☒ I agree to the [Google API Services: User Data Policy](#)

Continue

← 2

3 →

Create

Cancel



Step 12:

- Click on “**Create OAuth client**” (1)

Google Auth Platform / Overview

Overview

Branding

Audience

Clients

Data Access

Verification Center

OAuth Overview

Metrics

You haven't configured any OAuth clients for this project yet.

1 → Create OAuth client

Project Checkup

No project health recommendations found for your project.

Learn more about OAuth 2.0 Policies

<|

OAuth configuration created!

×

Step 13:

- Click on the drop down option (1)
- Select “**Web Application**” (2)

Google Auth Platform / Clients / Create client

Overview

Branding

Audience

Clients

Data Access

Verification Center

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type *

↑
1

Google Auth Platform / Clients / Create client

Overview

Branding

Audience

Clients

Data Access

Verification Center

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type *

Web application ← 2

Android

Chrome Extension

iOS

TVs and Limited Input devices

Desktop app

Universal Windows Platform (UWP)

A stylized, grey, triangular icon representing Google Assistant, located in the bottom right corner of the image.

Step 14:

- Give an App Name

 Google Auth Platform / Clients / Create client

 Overview

 Branding

 Audience

 Clients

 Data Access

 Verification Center

 Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type *

Web application

Name *


N8N ← 1

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users



Step 15:

- Scroll down to “**Authorized redirect URL**” (1)
- Copy and paste the URL at the bottom of this page into the field. (2)
- Click on “Create” (3)

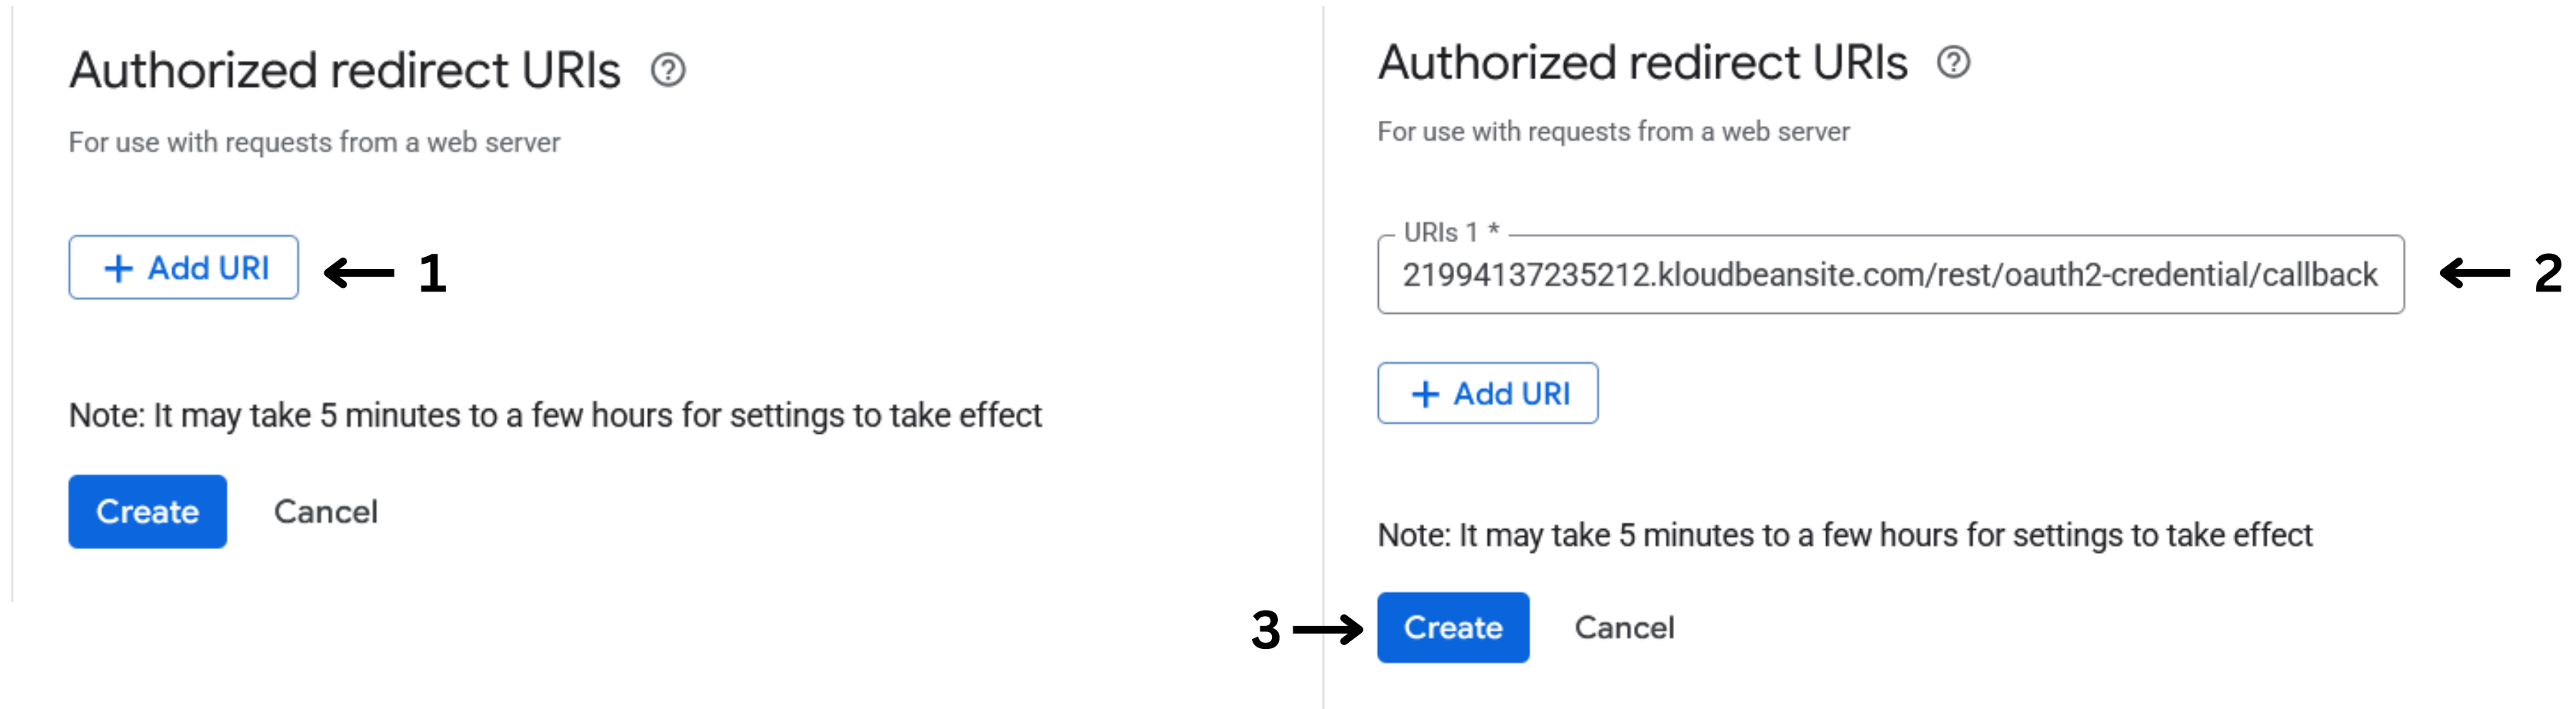

The image shows two side-by-side screenshots of the 'Authorized redirect URLs' form. The left screenshot shows the initial state with an empty list and an arrow labeled '1' pointing to the '+ Add URI' button. The right screenshot shows the form after a URL has been added to the list, with an arrow labeled '2' pointing to the input field containing the URL. Below the list, an arrow labeled '3' points to the 'Create' button.

Authorized redirect URLs ⓘ
For use with requests from a web server

[+ Add URI](#) ← 1

Note: It may take 5 minutes to a few hours for settings to take effect

[Create](#) [Cancel](#)

Authorized redirect URLs ⓘ
For use with requests from a web server

URIs 1 *
21994137235212.kloudbeansite.com/rest/oauth2-credential/callback ← 2

[+ Add URI](#)

Note: It may take 5 minutes to a few hours for settings to take effect

3 → [Create](#) [Cancel](#)

<https://aiaa1.datasciencemasterminds.com/rest/oauth2-credential/callback>



Copy and paste this URL



Step 16:

- **Copy and paste** the **Client ID** (1) and **Client Secret** (2) in a **notepad/word** file and keep it safe.
This page only appears once.
- **In case you do not see this page, follow steps from 16.1 to 16.4**
- **If you see this page, move to step 17**

OAuth client created

Auth Platform.

OAuth access is restricted to the [test users](#) listed on your [OAuth consent screen](#)

Client ID	314476311246-e6hdtsas9ogcfu9gj5fm	← 1
	s.googleusercontent.com	

Starting in June 2025, you will no longer be able to view or download the client secret once you close this dialog. Make sure you have copied or downloaded the information below and securely stored it.

Client secret	GOCSPX-fjpvw	← 2
Creation date	July 23, 2025 at 1:18:43 PM GMT+5	
Status	Enabled	

Download JSON

OK

Client

File Edit View H1 B ...

```
Client ID - 314476311246-e6hdtsas9ogcfu9gj5fm
Client Secret - GOCSPX-fjpvw
```

Ln 26, Col 1 | 160 character | Plain text | 100% | Windows (C) | UTF-8



Step 16.1:

- If you only this page, **copy your client ID (1)** and paste it in a notepad file
- click ok

OAuth client created

The client ID can always be accessed from Clients tab under Google Auth Platform.



OAuth access is restricted to the [test users](#) listed on your [OAuth consent screen](#)

Client ID	366410199162-
	ps.googleusercontent.com
	m65.ap

 ← 1

 Download JSON

OK ← 2



Step 16.2:

- Click on **your project name (1)** (the blue hyperlink)

Google Cloud

N8N-Project

Search (/) for resources, docs, products, and more

Search

2

?

A

APIs & Services

API Keys

OAuth 2.0 Client IDs

Service Accounts

Create credentials to access your enabled APIs. [Learn more](#)

☐	Name	Creation date ↓	Restrictions	Actions
☐	N8N	Jul 23, 2025	Generative Language API ...	Show key

No service accounts to display

Step 16.3:

- You will find your client secret again in the right-hand corner (1)
- You client secret can be copied from (2)

Google Cloud

N8n-p

Search (/) for resources, docs, products, and more

Search

◆

📄

1

?

⋮

A

Google Auth Platform / Clients / Client: 854473778443-vf9pnt113tsjgsrck28sedgf4g8sq3g1.apps.googleusercontent.com

Overview

Branding

Audience

Clients

Data Access

Verification Center

← Client ID for Web application

Delete

Name *

Web client 1

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

ⓘ

The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorized domains](#).

Authorized JavaScript origins ⓘ

For use with requests from a browser

+ Add URI

Authorized redirect URIs ⓘ

For use with requests from a web server

URIs 1 *

https://n8n-6421994137235212.kloudbeansite.com/rest/oauth2-cred

Additional information

Client ID	85447 vf9pnt113tsjgsrck28sedgf4g8sq3g1.apps.googleusercontent.com
Creation date	July 25, 2025 at 12:04:53 AM GMT+5
Last used date	July 24, 2025 (Note: this data could be delayed by a day or more.)

ⓘ

Inactive OAuth clients are subject to deletion if they are not used for 6 months. You will be notified of deletion due to inactivity, and can restore clients up to 30 days after deletion. [Learn more](#)

Client secrets

If you are in the process of changing client secrets, you can manually rotate them without downtime. [Learn more](#)


Client secret	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	📋 ⬇
Creation date	July 25, 2025 at 12:04:53 AM GMT+5	↑
Status	🟢 Enabled	2

← 1

↑ 2

Step 16.4:

- Copy and paste the Client ID and Client Secret in a notepad/word file and keep it safe

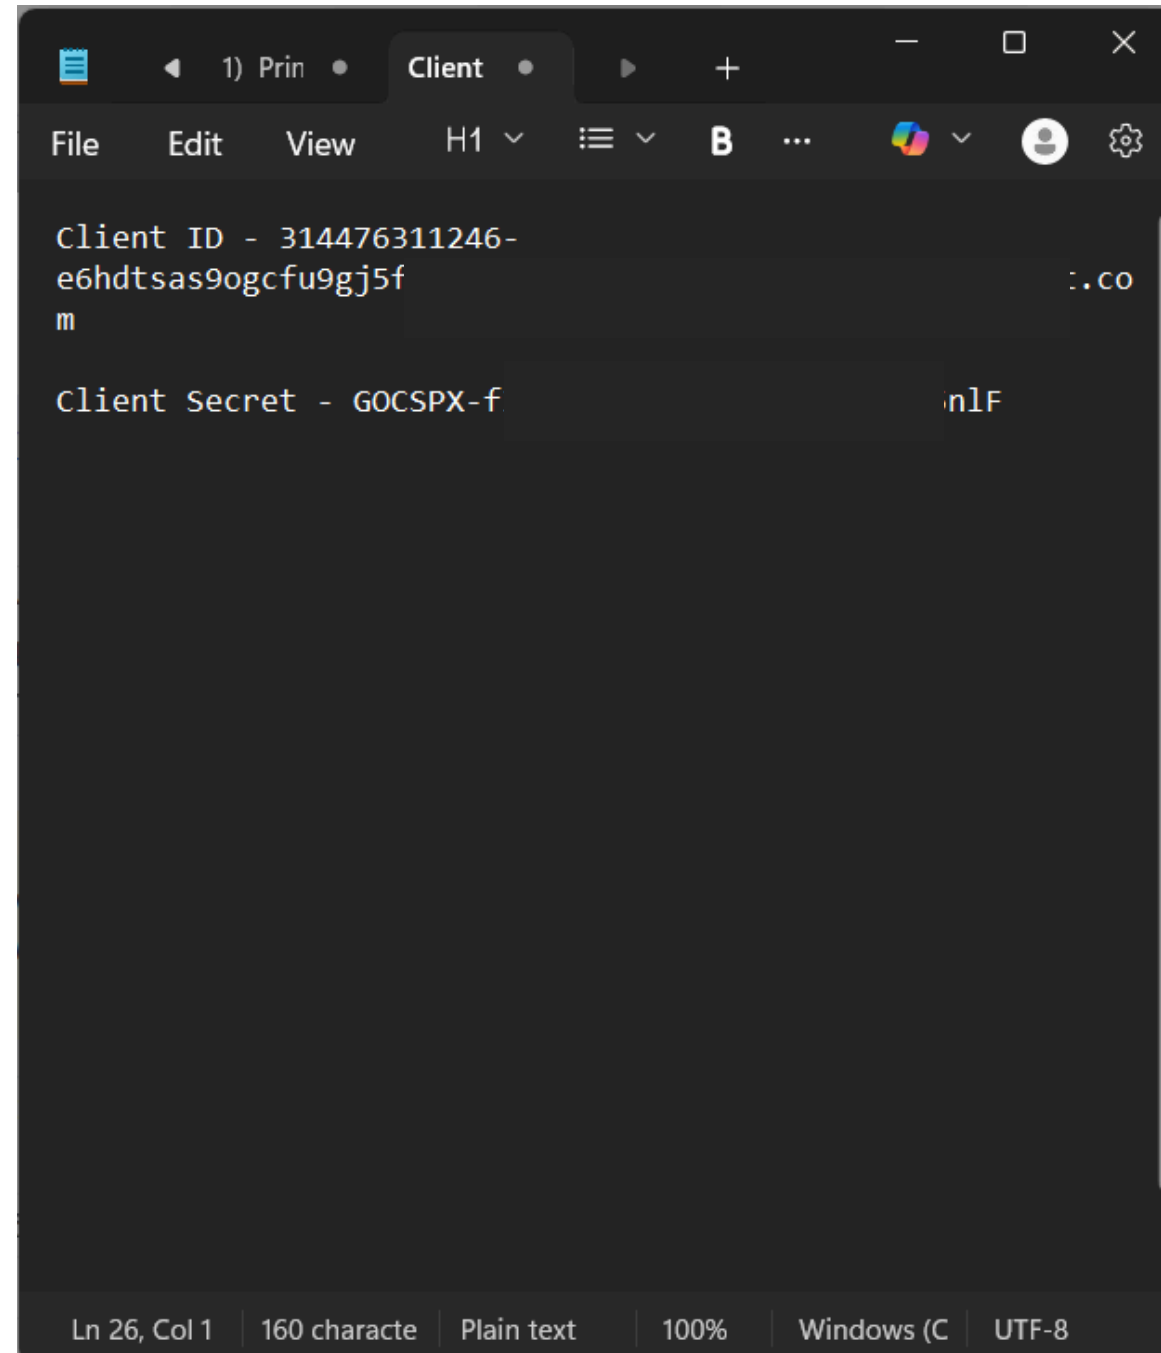

```
Client ID - 314476311246-
e6hdtsas9ogcfu9gj5f
m

Client Secret - GOCSPX-f
nlF
```

Ln 26, Col 1 | 160 character | Plain text | 100% | Windows (C | UTF-8

← 1

← 2



Step 17:

- Now select “Audience” (1)
- Scroll down to “Add users” under the “Test users” section

Google Cloud

N8

Google Auth Platform / Clients

Overview

Branding

Audience ← 1

Clients

Data Access

Verification Center

Google Auth Platform / Audience

Overview

Branding

Audience

Clients

Data Access

Verification Center

Audience

Make internal

OAuth user cap ⓘ

While publishing status is set to "Testing", only test users are able to access the app. Allowed user cap prior to app verification is 100, and is counted over the entire lifetime of the app. [Learn more](#)

0 users (0 test, 0 other) / 100 user cap ⓘ

Test users

+ Add users ← 1

Filter Enter property name or value ⓘ

User information

No rows to display

Show less



Step 18:

- Add your **complete email ID** (1) in this section. **Use the same email ID you have been using throughout the process**
- Click on **Save** (2)

 Add users



While publishing status is set to "Testing", only test users are able to access the app prior to app verification is 100, and is counted over the entire lifetime of the app.

[Learn more](#)

automate

← 1



0 / 100



Save

← 2





Step 19:

- Go to the burger menu at the top (1)
- Hover over “**APIs & Services**” (2)
- Click on Library (3)

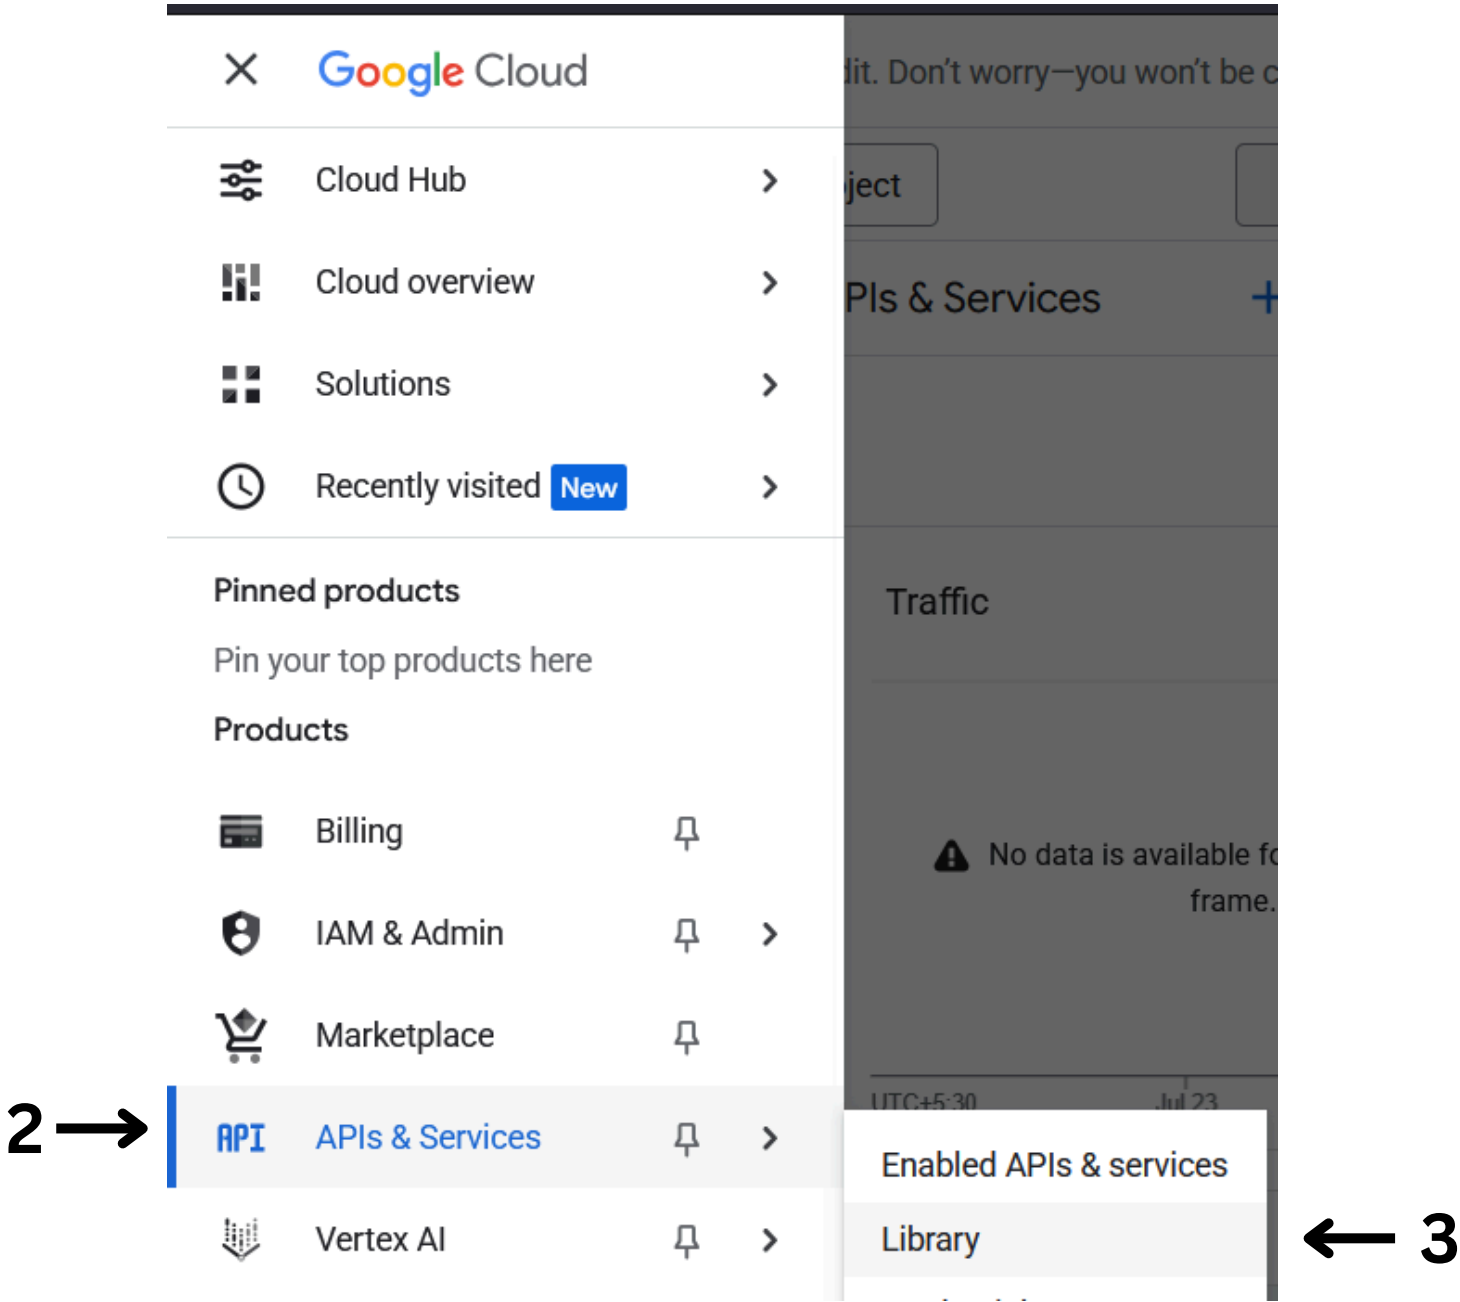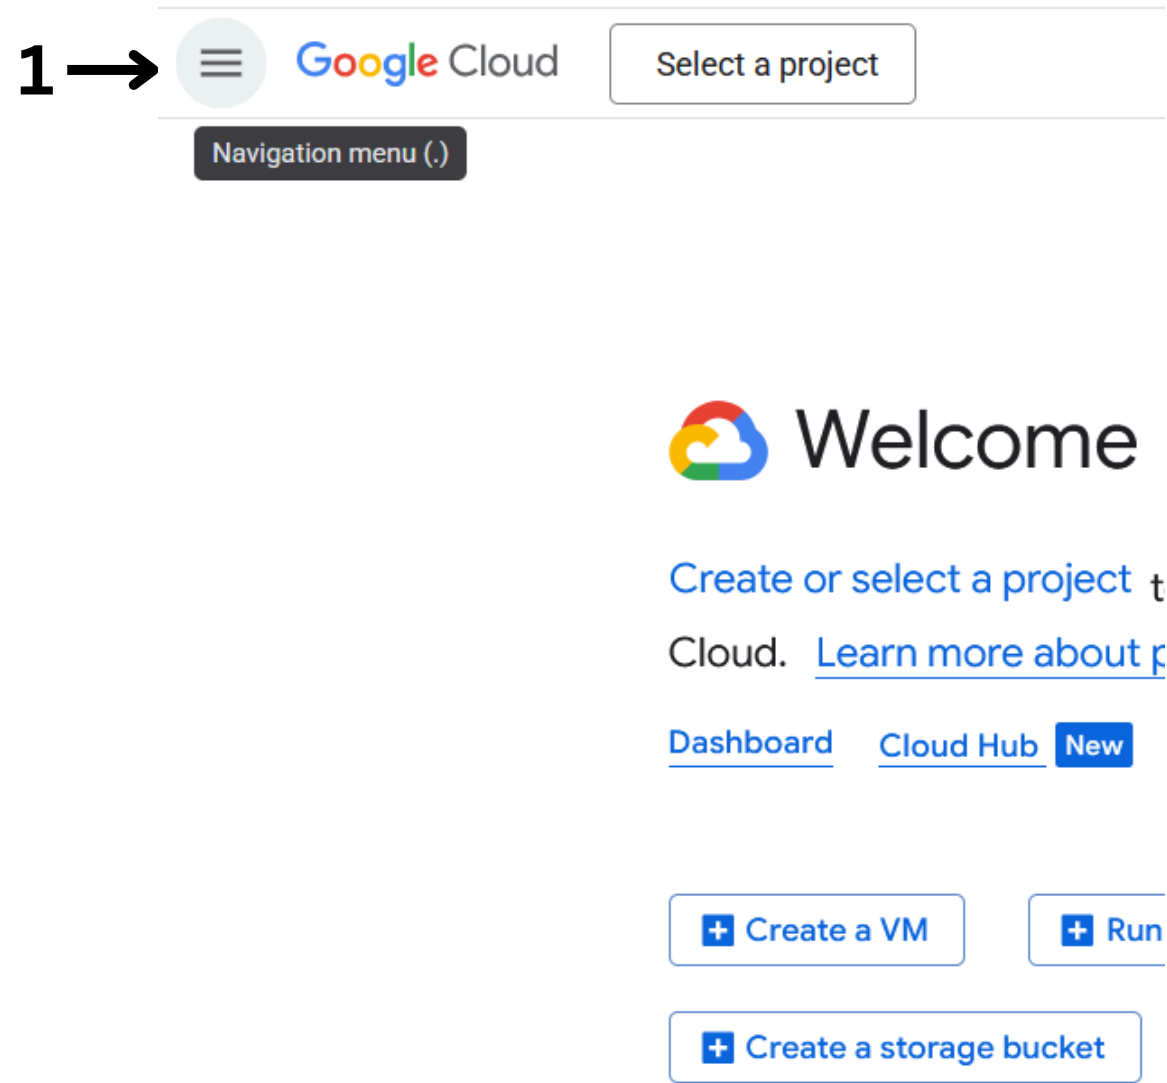



Step 20:

- Scroll down to “**Gmail API**” (1) and click on it
- Click on “**Enable**” (2)
- Also enable these APIs **Google Drive API, Google Sheets API, Google Calendar API, Google Tasks API, Google Docs API, Google Slides API and Google Contacts API**

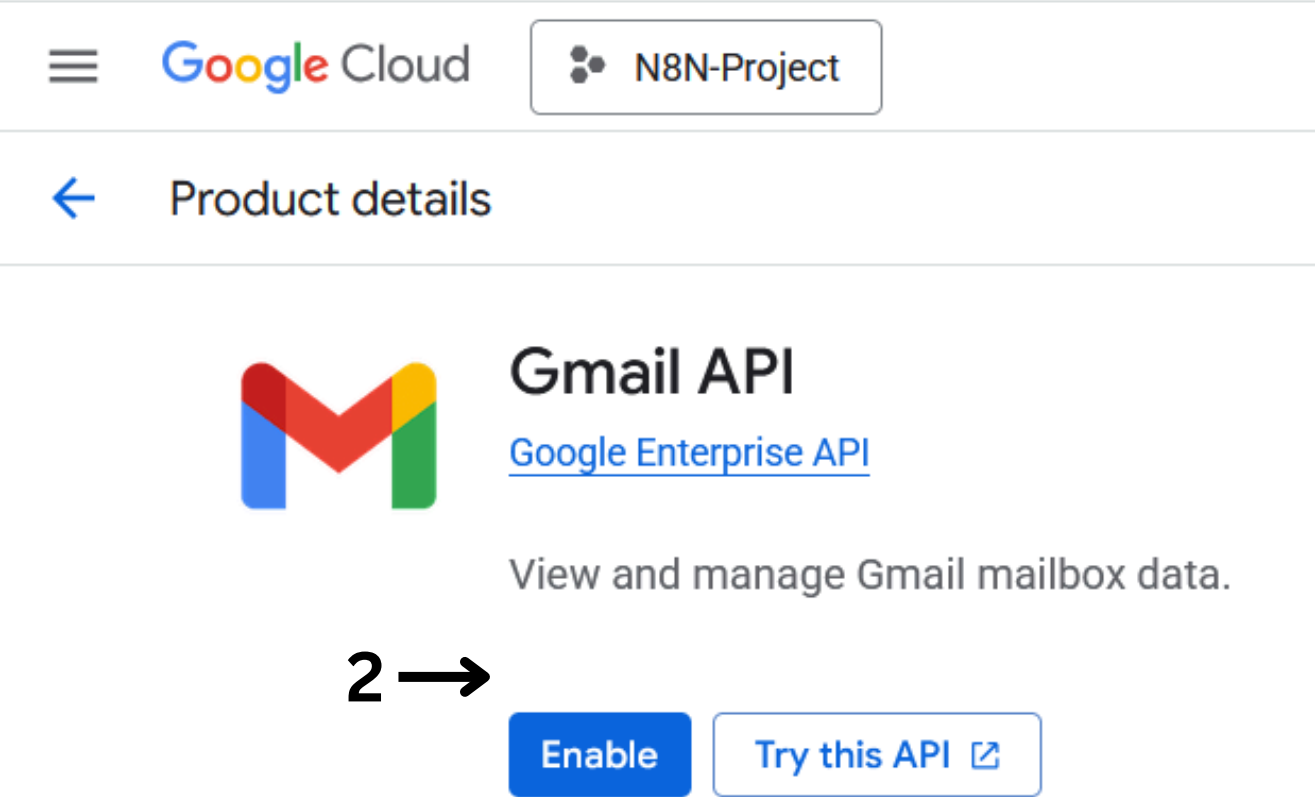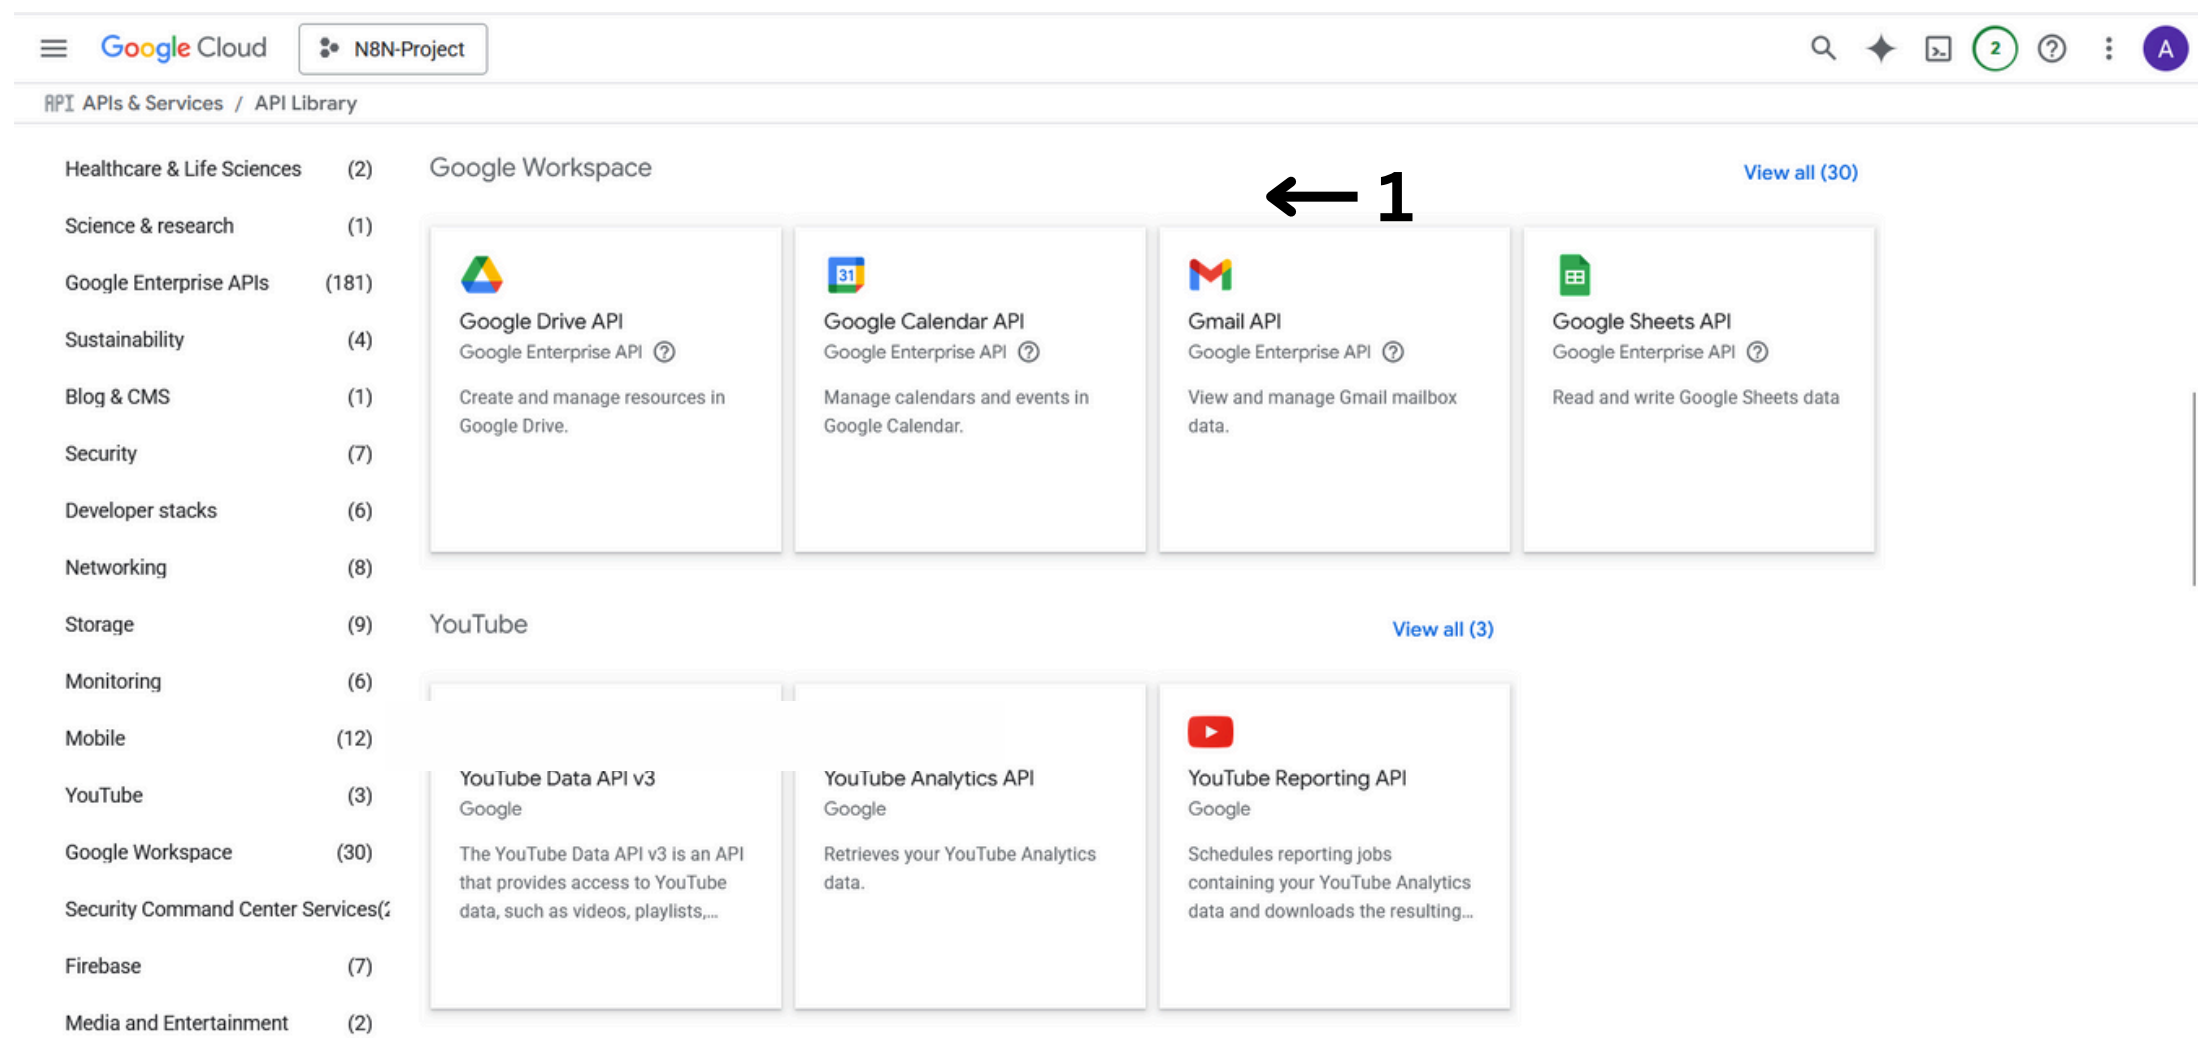

Step 21:

- Go to <https://n8n-6421994137235212.kloudbeansite.com/home/workflows>
- Click on the arrow on the right side of “**Create Workflow**”(1) and select “**Create Credential**” (2)
- Search for gmail and select “**Gmail OAuth2 API**” (3)

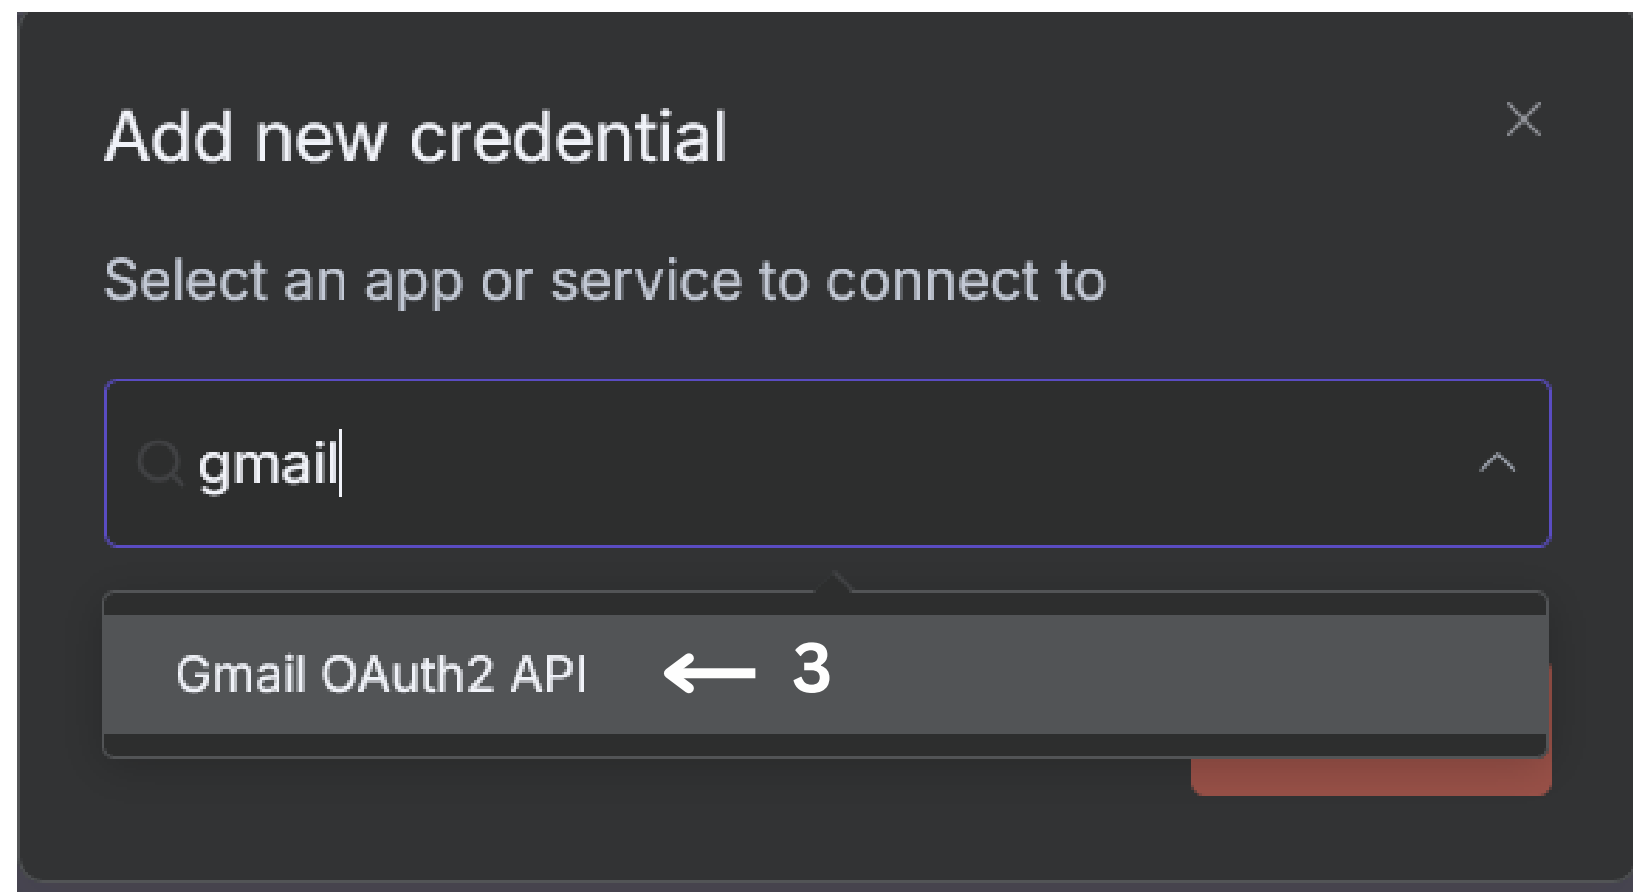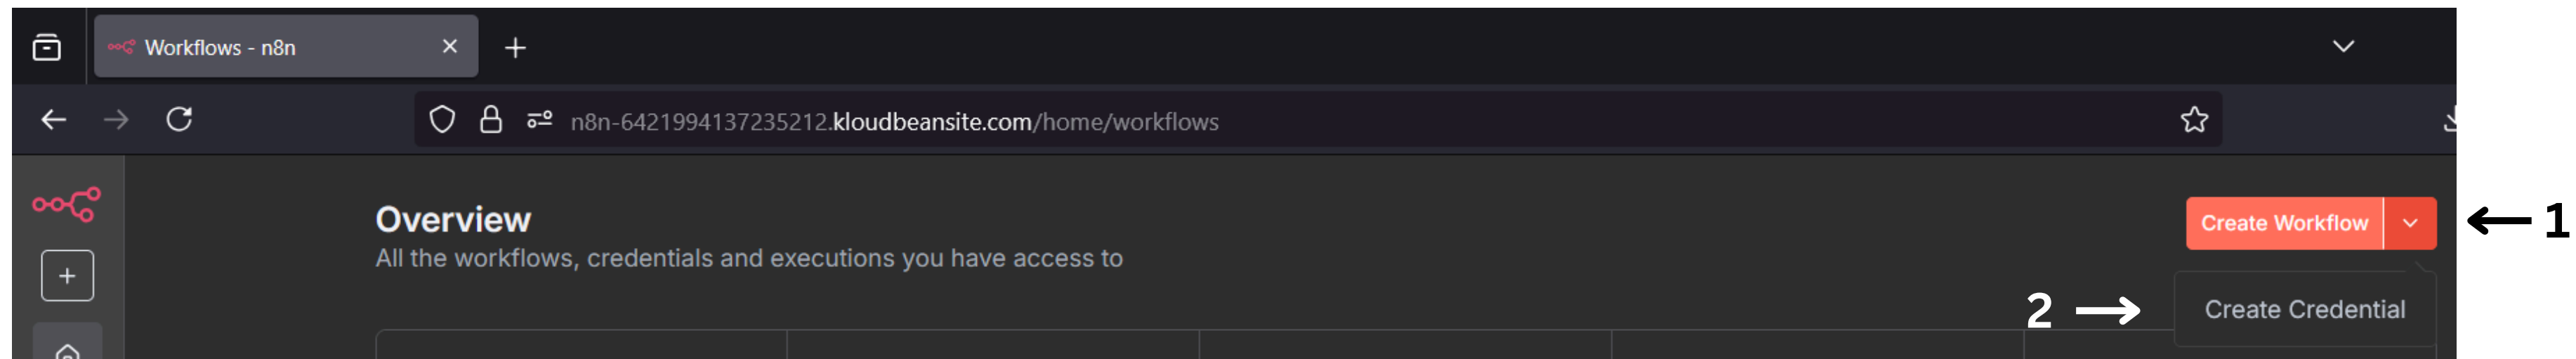

Step 22:

- Rename your credentials (1). Use the Initials of your name + gmail (or other app names) as the name for your credentials
- Copy your **Client ID** (2) and paste it (from step 17)
- Copy your **Client Secret** (3) and paste it (from step 17)

 Gmail account 63
Gmail OAuth2 API

← 1

Save

×

Connection

Sharing

Details

Need help filling out these fields? [Open docs](#)

OAuth Redirect URL

https://n8n-6421994137235212.kloudbeansite.com/rest/oauth2-credential/callback

In Gmail, use the URL above when prompted to enter an OAuth callback or redirect URL

Client ID *

← 2

Client Secret *

●●●●●●●●●●●●●●●●

← 3

ⓘ Enterprise plan users can pull in credentials from external vaults. [More info](#)



Step 23:

- Your screens should look like this
- Click on “Sign in with Google” (4)

AS_Gmail ← 1

Gmail OAuth2 API

Save

×

Connection

Sharing

Details

Need help filling out these fields? [Open docs](#)

OAuth Redirect URL

https://n8n-6421994137235212.kloudbeansite.com/rest/oauth2-credential/callback

In Gmail, use the URL above when prompted to enter an OAuth callback or redirect URL

Client ID *

314476311246-e6hdtsas9ogcfu9gj5fvu7qb9f4bivm2.ap ← 2 content.com

Client Secret *

•••~ ← 3

Sign in with Google





 ← 4

ⓘ Enterprise plan users can pull in credentials from external vaults. [More info](#)




Step 24:

- Select the email ID you have been using (1)
- Click on “Continue” (2)
- Click on “Select all” (3)
- Click on “Continue” (4)

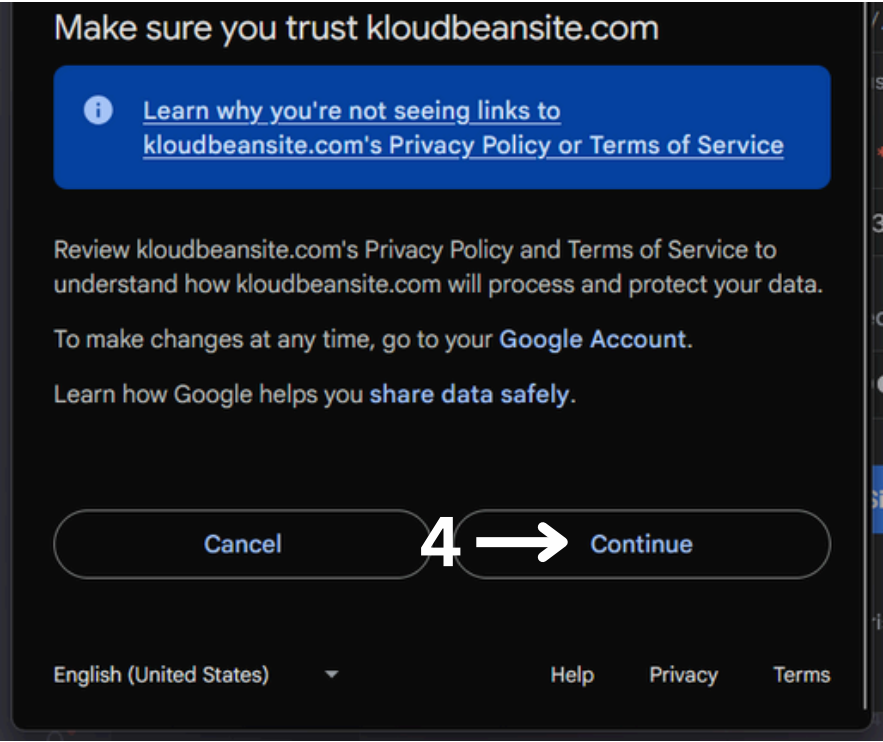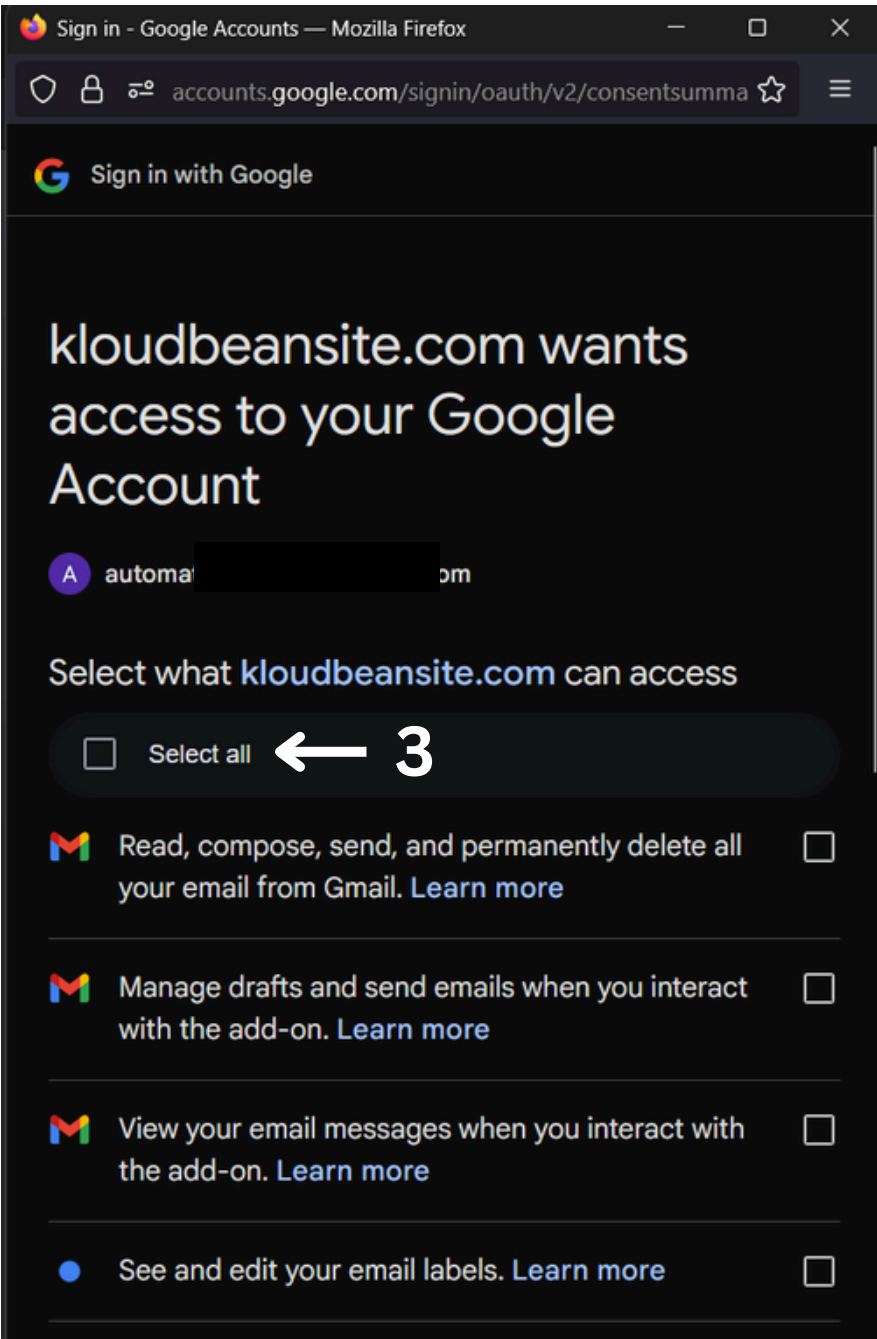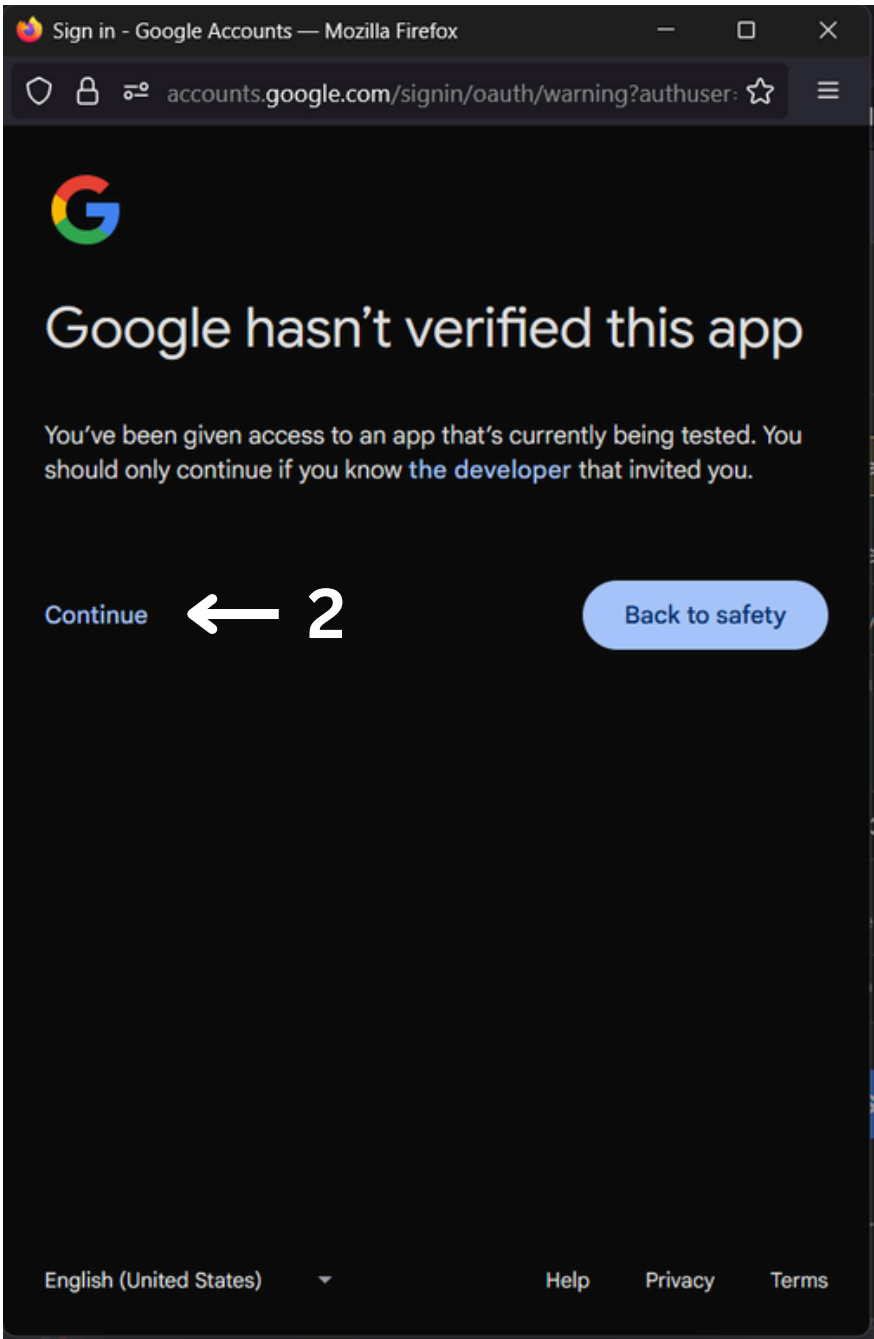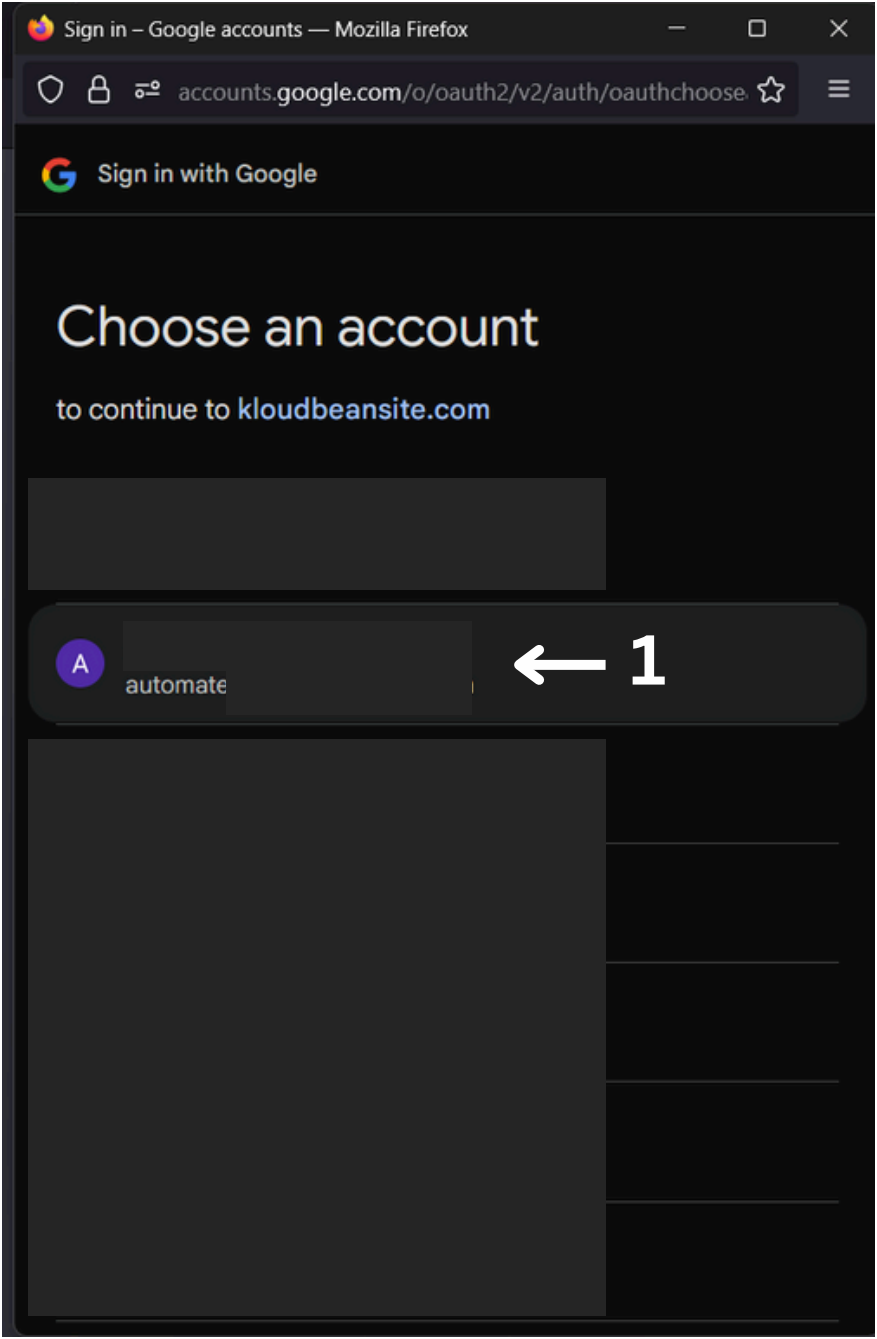

Step 25:

- Congratulations!

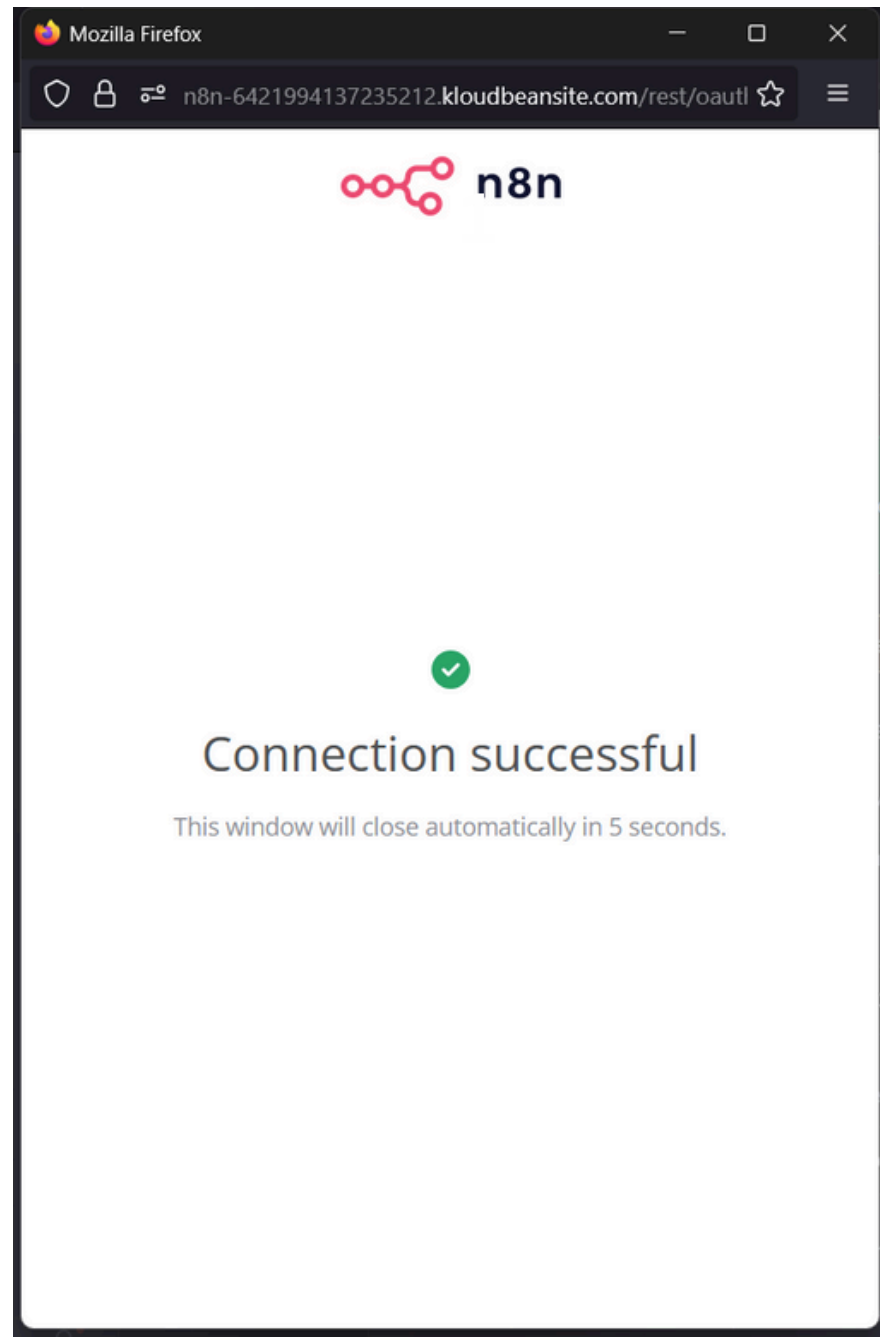

Step 26:

- Repeat **Steps 21-25** for following Google services you want to connect with n8n:
- Scroll down to “Gmail API” (1) and click on it
 - APIs Google Drive API, Google Sheets API, Google Calendar API, Google Tasks API, Google Docs API, Google Slides API and Google Contacts API
- The Client ID and secret will remain the same for all the other Google services you connect

After creating all the credentials please head over to:

<https://learn.datasciencemasterminds.com/web/courses/6870027bb6c6e65913508daf?chapter=687003f7c87c2c4e787f3ea7>

[Get started with your first course :\)](#)

