

# Photran 5.0 Developer's Guide

N. Chen  
J. Overbey

# Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	How To Read This Guide . . . . .	2
<b>2</b>	<b>Interactions with CDT</b>	<b>4</b>
2.1	Introduction . . . . .	4
2.2	CDT Terminology . . . . .	4
2.3	The Model . . . . .	5
2.4	Reusing UI Elements . . . . .	8
2.5	The CDT Debugger and <code>gdb</code> . . . . .	9
<b>3</b>	<b>Plug-in Decomposition</b>	<b>10</b>
3.1	Introduction . . . . .	10
3.2	Base Photran Feature: org.eclipse.photran-feature . . . . .	10
3.3	Virtual Program Graph (VPG) feature: org.eclipse.photran.vpg-feature . . . . .	11
3.4	XL Fortran Compiler Feature: org.eclipse.photran.xlf-feature . . . . .	13
3.5	Intel Fortran Compiler Feature: org.eclipse.photran.intel-feature . . . . .	13
3.6	Rephraser Engine . . . . .	13

3.7	Non-plug-in projects . . . . .	14
<b>4</b>	<b>Parsing and Program Analysis</b>	<b>15</b>
4.1	Parsing . . . . .	15
4.2	Virtual Program Graph . . . . .	15
4.2.1	Using the Photran VPG . . . . .	16
4.2.2	The Program Representation: IFortranAST . . . . .	17
4.3	AST Structure . . . . .	18
4.3.1	Ordinary AST Nodes . . . . .	19
4.3.2	Tokens . . . . .	24
4.3.3	Fortran Program AST Example . . . . .	24
4.4	AST Structure for DO-Loops . . . . .	24
4.5	Scope and Binding Analysis . . . . .	25
4.5.1	Examples of Binding Analysis . . . . .	27
4.6	How to Get Acquainted with the Program Representation . . . . .	28
4.6.1	Visualizing ASTs . . . . .	28
4.6.2	Visually Resolving Bindings . . . . .	28
4.6.3	Visualizing Enclosing Scopes . . . . .	29
4.6.4	Visualizing Definitions . . . . .	29
<b>5</b>	<b>Refactoring</b>	<b>30</b>
5.1	Introduction . . . . .	30
5.2	Structure of a Fortran Refactoring . . . . .	31
5.3	Creating Changes: AST Rewriting . . . . .	32
5.3.1	Common Methods for Manipulating the AST . . . . .	32
5.3.2	Committing Changes . . . . .	34

5.4	Caveats . . . . .	36
5.4.1	Token or TokenRef? . . . . .	36
5.5	Examples . . . . .	36
5.6	Common Tasks . . . . .	37
<b>6</b>	<b>Photran Editors</b>	<b>38</b>
6.1	Fortran Text Editors . . . . .	38
6.2	Contributed SourceViewerConfiguration . . . . .	39
6.3	Fortran Editor Tasks: VPG & AST Tasks . . . . .	40
<b>A</b>	<b>Getting the Photran 5.0 Sources from CVS</b>	<b>42</b>
<b>B</b>	<b>Running Photran’s Automated Test Suite</b>	<b>45</b>
B.1	Enabling Fortran Compilation & Run Comparison . . . . .	45
B.2	Enabling Closed-Source Parser Tests . . . . .	46
<b>C</b>	<b>Additional Information for UIUC Personnel</b>	<b>47</b>
C.1	Photran Subversion Repository at UIUC . . . . .	47
C.2	Photran Web Site at UIUC . . . . .	48
<b>D</b>	<b>Creating an Error Parser</b>	<b>49</b>
<b>E</b>	<b>Simple Fortran Refactoring Example</b>	<b>51</b>
E.1	Introduction . . . . .	51
E.2	Modifying the plugin.xml . . . . .	51
E.3	Creating an Action Delegate and a Refactoring Wizard . . . . .	52
E.4	Creating the Actual Refactoring . . . . .	54
<b>F</b>	<b>Creating Tests for the Rename Refactoring</b>	<b>55</b>

<b>G</b>	<b>Adding New Fortran Syntax</b>	<b>58</b>
<b>H</b>	<b>Release and Deployment Procedure</b>	<b>60</b>
H.1	Preparing for a Release Build . . . . .	60
H.2	After the Release Has Been Built . . . . .	61
<b>I</b>	<b>Release History</b>	<b>62</b>

# Chapter 1

## Introduction

Photran is an IDE for Fortran 77, 90, 95, and 2003 that is built on top of Eclipse. It is structured as an Eclipse feature, in other words, as a set of plug-ins that are designed to be used together. Starting with version 3.0, it is an extension of C/C++ Development Tools (CDT), the Eclipse IDE for C/C++. Previous versions of Photran were created by hacking a copy of CDT to support Fortran instead of C/C++, but now we have developed a mechanism for adding new languages into CDT, allowing the Fortran support code to be in its own set of plug-ins.

Our purpose in writing Photran was to create a refactoring tool for Fortran. Thus, Photran has a complete parser and program representation. Photran also adds a Fortran editor and several preference pages to the CDT user interface, as well as Fortran-specific project wizards and support for several Fortran compilers.

Photran is part of the Parallel Tools Platform (PTP) project at the Eclipse Foundation, which provides the Web site, CVS repository, and Bugzilla repository. The Web site is <http://www.eclipse.org/photran>, and bugs can be submitted at <https://bugs.eclipse.org> under Tools > PTP by selecting one of the “Photran” components.

### 1.1 How To Read This Guide

This document explains the design of Photran so that interested contributors could fix a bug or add a refactoring. Contributors should know how to use Photran; user’s guides and introductory tutorials are available from the *Documentation* section of Photran’s website. Contributors also need to understand how to build Eclipse plug-ins before they read this document. Two good books on Eclipse plug-in development are *Building Commercial-Quality Plug-ins* and *The Java Developer’s Guide to Eclipse*. Like almost all Eclipse plug-ins, Photran is written in Java, so knowing Java is also a prerequisite.

---

Last significant update: 09/16/09 (JO), 08/08/08 (NC)

This is a *duplex* guide. The main chapters provide general descriptions of the various components and how they interact. The appendix describes concrete examples from Photran so that contributors can familiarize themselves with actual code and implementation details. This guide complements the source code in the repository; it is not a substitute for reading the actual source code.

# Chapter 2

## Interactions with CDT

### 2.1 Introduction

The C/C++ Development Tools (CDT)<sup>1</sup> enables Eclipse to function as a first-class C/C++ IDE. CDT provides features that a programmer expects from an IDE such as project management, automated build, integrated debugging, etc. In addition, CDT also provides extension points for writing IDEs for other programming languages that follow the C/C++ edit-compile-debug-compile cycle closely; Fortran is one such language.

Photran builds upon the CDT by leveraging its extension points. As such, it needs to follow certain conventions and expectations of the CDT. In this chapter, we discuss those conventions and expectations.

### 2.2 CDT Terminology

The following are CDT terms that will be used extensively when discussing Photran.

- **Standard Make projects** are ordinary Eclipse projects, except that CDT and Photran recognize them as being “their own” type of project (as opposed to, say, projects for JDT, EMF, or another Eclipse-based tool). Users must supply their own

---

Last significant update: 08/08/08 (NC)

<sup>1</sup>See <http://www.eclipse.org/cdt/>



Makefile, typically with targets “clean” and “all.” CDT/Photran cleans and builds the project by running `make`.

- **Managed Make projects** are similar to standard make projects, except that CDT/Photran automatically generates a Makefile and edits the Makefile automatically when source files are added to or removed from the project. The **Managed Build System** is the part of CDT and Photran that handles all of this.
- **Binary parsers** are able to detect whether a file is a legal executable for a platform (and extract other information from it). CDT provides binary parsers for Windows (PE), Linux (ELF), Mac OS X (Mach), and others. Photran does not provide any additional binary parsers.
- **Error parsers** are provided for many compilers. CDT provides a gcc error parser, for example. Photran provides error parsers for Lahey Fortran, F, g95, and others. Essentially, error parsers scan the output of `make` for error messages for their associated compiler. When they see an error message that they recognize, they extract the filename, line number, and error message, and use it to populate the Problems View. See Appendix D for an example on how to create an error parser.
- CDT keeps a **model** of all of the files in a project. The model is essentially a tree of **elements**, which all derive from the (CDT Core) class `ICElement`. It is described in the next section.

## 2.3 The Model

*This section describes the CDT model in detail. Understanding the CDT model is useful for contributors who are interested in modifying the UI and how Fortran projects are managed in the Fortran perspective. Contributors who are interested in creating refactorings and program analysis tools should familiarize themselves with the Abstract Syntax Tree (AST) and Virtual Program Graph (VPG) described in Chapter 4.*

The Fortran Projects view in Photran is essentially a visualization of the CDT’s *model*, a tree data structure describing the contents of all Fortran Projects in the workspace as well as the high-level contents (functions, aggregate types, etc.) of source files.

Alain Magloire (CDT) describes the model, A.K.A. the `ICElement` hierarchy, in the thread “Patch to create `ICoreModel` interface” on the cdt-dev mailing list:

```
So I'll explain a little about the ICElement and what we get out of it for
C/C++.
```

```
The ICElement hierarchy can be separated in two:
```

- (1) - how the Model views the world/resources (all classes above ITranslationUnit)
- (2) - how the Model views the world/language (all classes below ITranslationUnit).

How we(C/C++) view the resources:

- IModel --> [root of the model]
- IProject --> [IProject with special attributes/natures]
- ISourceRoot --> [Folder with a special attribute]
- ITranslationUnit --> [IFile with special attributes, e.g. extensions \*.c]
- IBinary --> [IFile with special attributes, elf signature, coff etc]
- IArchive --> [IFile with special attributes, "<ar>" signature]
- IContainer --> [folder]

There are also some special helper classes

- ILibraryReference [external files use in linking ex:libsocket.so, libm.a, ...]
- IIncludeReference [external paths use in preprocessing i.e. /usr/include, ...]
- IBinaryContainer [virtual containers regrouping all the binaries found in the project]

This model of the resources gives advantages:

- navigation of the binaries,
  - navigation of the include files not part of the workspace (stdio.h, socket.h, etc)
  - adding breakpoints
  - search
  - contribution on the objects
- etc.....

[...]

(2) How we view the language.

Lets be clear this is only a simple/partial/incomplete view of the language. For example, we do not drill down in blocks, there are no statements(if/else conditions) etc .... For a complete interface/view of the language, clients should use the \_\_AST\_\_ interface.

From another of Alain's posts in that thread:

Lets make sure we are on the same length about the ICElement hierarchy.  
It was created for a few reasons:

- To provide a simpler layer to the AST. The AST interface is too complex to handle in most UI tasks.
- To provide objects for UI contributions/actions.
- The glue for the Working copies in the Editor(CEditor), IWorkingCopy class
- The interface for changed events.
- ...

Basically it was created for the UI needs: Outliner, Object action contributions, C/C++ Project view and more.

The CoreModel uses information taken from:

- the Binary Parser(Elf, Coff, ..)
- the source Parser(AST parser)
- the IPathEntry classes
- the workspace resource tree
- The ResolverModel (\*.c, \*.cc extensions), ...

to build the hierarchy.

The CDT model should **not** be confused with the Abstract Syntax Tree (AST) model that is discussed in Section 4.3. They are **not** identical. It is best to think of the CDT model as containing a *partial/simplified view* of the AST model to represent the *interesting* elements in the source code (program names, function names, subroutine names) **in addition** to a model of the current workspace resources (Fortran projects, Fortran source files, binary executables). *In other words, the CDT model knows about the language and the resources.* The AST, on the other hand, completely models *everything* in the source file (but nothing about the resources), including low-level elements that the user is unlikely to be interested in knowing about (assignment nodes, variable declarations). While low-level, these elements are useful for refactoring and program analysis.

By conforming to the CDT model, Photran is able to reuse various UI elements for *free*. For instance, the Outline View for Photran is managed by CDT; Photran just needs to provide a CDT-compatible model to represent its project and source files.

The `FortranLanguage` class is responsible for initializing concrete classes that will build up the model that CDT expects. For more information, refer to the `FortranLanguage.java` file in the `org.eclipse.photran.cdtinterface` plug-in project.

There are **two** options for creating suitable *model builders*:

1. The `org.eclipse.photran.cdtinterface` plug-in project defines the `org.eclipse.photran.cdtinterface.modelbuilder` extension point that other plug-ins can extend. Plug-ins extending that extension point are responsible for providing a suitable model builder. Using this option, it is possible to have multiple model builders. The model builder to use can be selected in the workspace preferences (under Fortran > CDT Interface).
2. If there are no plug-ins that extend the `org.eclipse.photran.cdtinterface.modelbuilder` extension point, then Photran falls back on a default implementation. The default implementation is provided by the `SimpleFortranModelBuilder` class. It relies on simple lexical analysis to build the model. This simple model builder might not be able to accurately handle the more complicated features of the Fortran language.

The Photran VPG (see Section 4.2) inside the `org.eclipse.photran.core.vpg` project uses the first option to contribute a model builder. The relevant classes are under the `org.eclipse.photran.internal.core.model` package i.e. `FortranModelBuilder`, `FortranModelBuildingVisitor` and `FortranParseTreeModelBuildingVisitor`.

As mentioned in the post by Alain, all model elements must implement the `ICElement` interface for CDT to recognize them. In Photran, the `FortranElement` class implements the `ICElement` interface and serves as the base class for all Fortran elements such as subroutines, functions, modules, variables, etc. Each subclass of `FortranElement` corresponds to an element that can be displayed in the Outline View.

## 2.4 Reusing UI Elements

Various UI elements in Photran are also reused from the CDT through subclassing. For instance, the `NewProjectDropDownAction` class shown in Listing 2.1 is a subclass of `AbstractWizardDropDownAction` declared in CDT. `AbstractWizardDropDownAction` provides most of the implementation and our subclass just provides the Photran-specific details such as the actual action that will be invoked.

Our `NewProjectDropDownAction` is invoked through the right-click menu by going to New... > Other > Fortran. It creates a new Fortran project in the current workspace.

In addition, we could also customize the icons for each UI element by modifying the appropriate attributes in the `plugin.xml` file in the `org.eclipse.photran.cdtinterface` project.

---

**Listing 2.1** NewProjectDropDownAction class

---

```
1 public class NewProjectDropDownAction extends AbstractWizardDropDownAction
2 {
3     public NewProjectDropDownAction()
4     {
5         super();
6         PlatformUI.getWorkbench().getHelpSystem().setHelp(this,
7             ICHelpContextIds.OPEN_PROJECT_WIZARD_ACTION);
8     }
9
10    protected IAction[] getWizardActions()
11    {
12        return FortranWizardRegistry.getProjectWizardActions();
13    }
14 }
```

---

## 2.5 The CDT Debugger and gdb

Currently, Photran re-uses the CDT debugger as-is and does not contribute any enhancements to it. Here is a brief summary of how the debugger works:

- The so-called CDT debugger is actually just a graphical interface to **gdb**, or more specifically to **gdb/mi**. So, if something doesn't appear to work, it is advisable to try it in **gdb** directly or to use another **gdb**-based tool such as **DDD**.
- The debugger UI “contributes” breakpoint markers and actions to the editor. The “set breakpoint” action, and the breakpoint markers that appear in the ruler of the CDT (and Photran) editors are handled **entirely** by the CDT debug UI; there is no code for this in Photran. The “set breakpoint” action is enabled by calling `setRulerContextMenuId("#CEditorRulerContext");` in the **AbstractFortranEditor** constructor.
- **gdb** reads debug symbols from the executable it is debugging. That is how it knows what line it's on, what file to open, etc. Photran has *nothing* to do with this: These symbols are written entirely by the compiler. Moreover, the compiler determines what shows up in the Variables View. If the debugger views seem to be a mess, it is the compiler's fault, not Photran's.

# Chapter 3

## Plug-in Decomposition

### 3.1 Introduction

This chapter presents a high-level overview of the different projects and plug-ins in Photran. It serves as a guide for developers reverse-engineering Photran to *guess-and-locate* where certain components are. It also serves as a guide for contributors on *where* to put their contributions.

The following sections are grouped by feature. A feature is a collection of related Eclipse plug-ins that the user can install as a whole.

### 3.2 Base Photran Feature: `org.eclipse.photran-feature`

The following projects comprise the “base” of Photran.

- **`org.eclipse.photran.cdtinterface`**

This contains most of the components (core and user interface) related to integration with the CDT. It includes:

---

Last significant update: 09/16/09 (JO), 08/08/08 (NC)

- The FortranLanguage class, which adds Fortran to the list of languages recognized by CDT
- Fortran model elements and icons for the Outline and Fortran Projects views
- An extension point for contributing Fortran model builders, and a simple lexical analyzer-based model builder (which, generally speaking, is not used)
- The Fortran perspective, Fortran Projects view, and other CDT-based parts of the user interface
- New Project wizards and Fortran project templates

For more information about CDT, see Chapter 2.

- **org.eclipse.photran.core**

This is the Photran Core plug-in. It contains much of the Fortran-specific “behind the scenes” functionality:

- Utility classes
- Error parsers for Fortran compilers
- Fortran 95 lexical analyzer
- Workspace preferences

- **org.eclipse.photran.managedbuilder.core,**  
**org.eclipse.photran.managedbuilder.gnu.ui,**  
**org.eclipse.photran.managedbuilder.ui**

Support for Managed Build projects using the GNU toolchain. Managed by Craig Rasmussen at LANL.

- **org.eclipse.photran.ui**

This contains the Fortran-specific components of the user interface:

- Fortran Editors
- Preference pages

### 3.3 Virtual Program Graph (VPG) feature: **org.eclipse.photran.vpg-feature**

The following projects support parsing, analysis, and refactoring of Fortran sources. They are written in Java 5. The Virtual Program Graph is described in more detail in Chapter 4.

- **org.eclipse.photran.core.vpg**

This contains the parsing, analysis, and refactoring infrastructure.

- Fortran parser and abstract syntax tree (AST)
- Fortran preprocessor (to handle INCLUDE lines)
- Parser-based model builder
- Virtual Program Graph library (vpg-eclipse.jar)
- Photran’s Virtual Program Graph (VPG)
- Utility classes (e.g., `SemanticError`, `LineCol`)
- Project property pages
- Binding analysis (equivalent to symbol tables)
- Refactoring/program transformation engine
- Refactorings

- **org.eclipse.photran.core.vpg.tests,**  
**org.eclipse.photran.core.vpg.tests.failing**

JUnit Plug-in tests for the VPG core plug-in.

All tests in `org.eclipse.photran.core.vpg.tests` should pass. Test suites and test cases are placed in the “failing” plug-in project until all of their tests pass.

These plug-ins *must* be run as a “JUnit Plug-in Test” (**not** a “JUnit Test”). In the launch configuration, the environment variable `TESTING` must be set to some non-empty value. (This ensures that the VPG will not try to run in the background and interfere with testing.)

- **org.eclipse.photran.ui.vpg**

UI contributions that depend on the `org.eclipse.photran.core.vpg` plug-in. Currently, this includes the Open Declaration action, a project property page where the user can customize the search path for Fortran modules and include files, Fortran Search support, and all of the actions in the Refactor menu.

- **org.eclipse.photran.cdtinterface.vpg**

This contributes the Fortran model builder which constructs the model seen in the Outline view and Fortran Projects view. It uses the Fortran parser contained in the `org.eclipse.photran.core.vpg` plug-in.



## 3.4 XL Fortran Compiler Feature: `org.eclipse.photran.xlf-feature`

The following are plug-ins to support the [XL Fortran compiler](#).

- `org.eclipse.photran.core.errorparsers.xlf`,  
`org.eclipse.photran.managedbuilder.xlf.ui`

Support for Managed Build projects using XL toolchains. Managed by Craig Rasmussen at LANL.

## 3.5 Intel Fortran Compiler Feature: `org.eclipse.photran.intel-feature`

The following are plug-ins to support the [Intel Fortran Compiler](#).

- `org.eclipse.photran.core.intel`,  
`org.eclipse.photran.managedbuilder.intel.ui`

Support for Managed Build projects using Intel toolchains. Maintained by Bill Hilliard at Intel.

## 3.6 Rephraser Engine

The following plug-ins comprise the Rephraser Engine, a language-independent indexing and refactoring infrastructure that serves as the basis for Photran's refactoring engine. The Rephraser Engine will contribute a Rephraser Engine Plug-in Developer Guide to the runtime workbench (sourced in `org.eclipse.rephraserengine.doc.isv`); this provides more information about these plug-ins. Starred plug-ins are not distributed to end users.

- `org.eclipse.rephraserengine-support*`
- `org.eclipse.rephraserengine.core`
- `org.eclipse.rephraserengine.core.refactoring`
- `org.eclipse.rephraserengine.core.vpg`
- `org.eclipse.rephraserengine.core.vpg.tests*`

- `org.eclipse.rephraserengine.doc.isv*`
- `org.eclipse.rephraserengine.examples.text*`
- `org.eclipse.rephraserengine.ui`
- `org.eclipse.rephraserengine.ui.refactoring`
- `org.eclipse.rephraserengine.ui.vpg`

## 3.7 Non-plug-in projects

The following projects are in CVS but are not distributed to users:

- **`org.eclipse.photran-dev-docs`**

Developer documentation, including this document (`dev-guide/*`), CVS instructions (`dev-guide/cvs-instructions.pdf`), the materials from our presentation at EclipseCon 2006 on adding a new language to the CDT, and a spreadsheet mapping features in the Fortran language to JUnit tests (`language-coverage/*`).

- **`org.eclipse.photran-samples`**

A Photran project containing an assortment of Fortran code.

# Chapter 4

## Parsing and Program Analysis

### 4.1 Parsing

Before any program analysis can be done, the source code of the Fortran program has to be parsed. Photran provides support for both fixed-form (Fortran 77) and free-form Fortran (Fortran 90 & 95) source code. The parser in Photran is generated using the Ludwig parser/AST generator by Jeff Overbey. It is based on the *fortran2003.bnf* grammar file.

Figure 4.1 shows the lexer & parser tool chain in Photran. Preliminary support for (INCLUDE directives) has also been implemented.

### 4.2 Virtual Program Graph

In Photran, it is *almost* never necessary to call the lexer, parser, or analysis components directly. Instead, Photran uses a **virtual program graph** (VPG), which provides the facade of a whole-program abstract syntax tree (AST) with embedded analysis information. In general, program analysis should be performed through the Photran VPG.

An overview of VPGs is available at the following link: <http://jeff.over.bz/software/vpg/doc/>. It provides the background necessary for the remaining sections of this chapter.


---

Last significant update: 09/16/09 (JO), 08/08/08 (NC)

---

**Figure 4.1** Photran preprocessor/lexer/parser chain

---

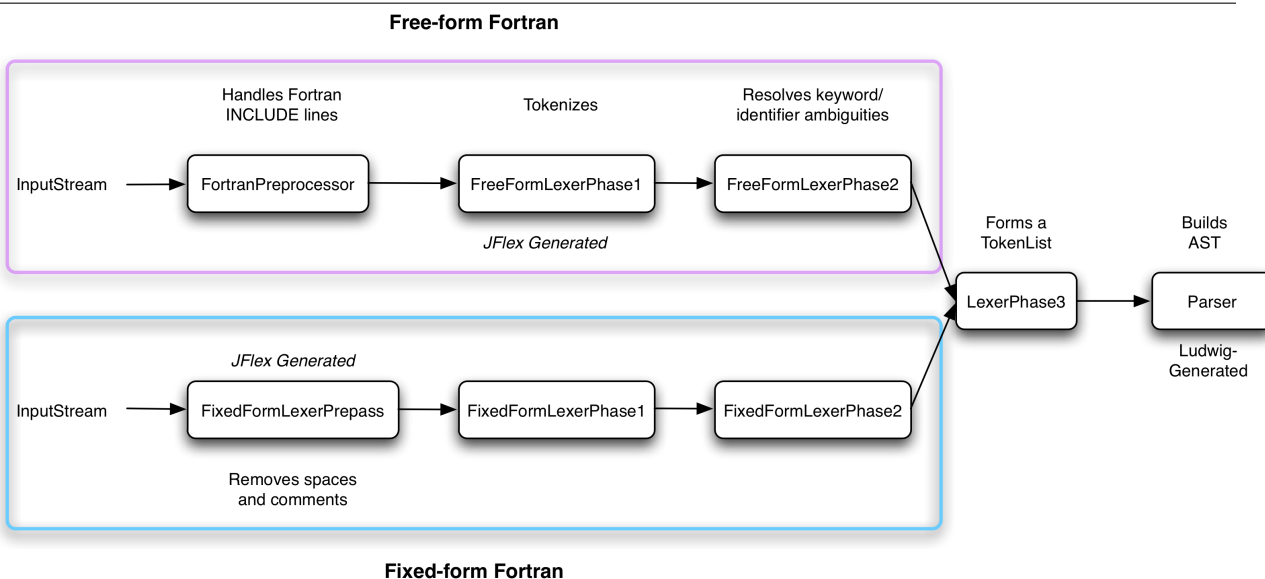

---

## 4.2.1 Using the Photran VPG

### Acquiring and Releasing Translation Units

PhotranVPG is a *singleton* object responsible for constructing ASTs for Fortran source code. ASTs are retrieved by invoking either of these methods:

---

**Listing 4.1** Acquiring the Fortran AST

---

```
public IFortranAST acquireTransientAST(IFile file)

public IFortranAST acquirePermanentAST(IFile file)
```

---

The returned object is an IFortranAST, an object which has a method for returning the root node of the AST as well as methods to quickly locate tokens in the AST by offset or line information. A *transient AST* can be garbage collected as soon as references to any of its nodes disappear. A *permanent AST* will be explicitly kept in memory until a call is made to either of the following methods:

---

**Listing 4.2** Releasing the Fortran AST

---

```
public void releaseAST(IFile file)

public void releaseAllASTs()
```

---

Often, it is better to acquire a transient AST and rely on the garbage collector to reclaim the memory once we are done using it. However, there are times when acquiring a permanent AST would be more beneficial performance-wise. For instance, if we will be using the same AST multiple times during a refactoring, it would be better to just acquire a permanent AST. This prevents the garbage collector from reclaiming the memory midway through the refactoring once all references to the AST have been invalidated. While it is always possible to reacquire the same AST, doing so can be an expensive operation since it requires *lexing*, *parsing* **and** finally *reconstructing* the AST from scratch.

Only one AST for a particular file is in memory at any particular point in time, so successive requests for the same `IFile` will return the same (pointer-identical) AST until the AST is released (permanent) or garbage collected (transient).

## Caveat

It is important to note that, because `PhotranVPG` is a singleton object, one must be careful about accessing it from multiple threads. Most of the time, when an AST is required, it will be from an action contributed to the Fortran editor; in this case, the action will usually be a descendant of `FortranEditorActionDelegate`, and synchronization will be handled automatically. For instance, all refactoring actions in Photran are descendants of `FortranEditorActionDelegate` and their accesses to `PhotranVPG` are being synchronized automatically.

Otherwise, the thread must either be scheduled using a `VPGSchedulingRule` or it must lock the entire workspace. See `EclipseVPG#queueJobToEnsureVPGIsUpToDate` as an example on how to use the `VPGSchedulingRule` and `FortranEditorActionDelegate#run` as an example of how to lock the entire workspace.

As a guideline, contributors who are interested in accessing the VPG should consider structuring their contributions as descendants of `FortranEditorActionDelegate` since that is the simplest mechanism (all synchronization is already taken care of automatically). However, if such an approach is not feasible, then they should consider using `VPGSchedulingRule` before resorting to locking the entire workspace.

## 4.2.2 The Program Representation: `IFortranAST`

The `acquireTransientAST` and `acquirePermanentAST` methods return an object implementing `IFortranAST`. Listing 4.3 shows the methods in `IFortranAST`.

The `getRoot` method returns the root of the AST, while the `find...` methods provide efficient means to search for tokens based on their lexical positioning in the source code.

---

**Listing 4.3** IFortranAST (see IFortranAST.java)

---

```
25 public interface IFortranAST extends Iterable<Token>
26 {
27     //////////////////////////////////////
28     // Visitor Support
29     //////////////////////////////////////
30
31     public void accept(IASVisitor visitor);
32
33     //////////////////////////////////////
34     // Other Methods
35     //////////////////////////////////////
36
37     public ASTExecutableProgramNode getRoot();
38
39     public Iterator<Token> iterator();
40     public Token findTokenByStreamOffsetLength(int offset, int length);
41     public Token findFirstTokenOnLine(int line);
42     public Token findTokenByFileOffsetLength(IFile file, int offset, int length);
43 }
```

---

The `accept` method allows an external visitor to traverse the AST. This method is usually used when it is necessary to “collect” information about certain nodes. For more information see Section 4.3 on what nodes can be visited.

Because `IFortranAST` extends the `Iterable` interface, it is possible to use the *foreach* loop to conveniently iterate through all the tokens in the AST e.g.

```
for (Token token : new IterableWrapper<Token>(ast))
```

## 4.3 AST Structure

Photran’s (rewritable) AST is generated along with the parser, so the structure of an AST is determined by the structure of the parsing grammar (see the *fortran2003.bnf* file). The generated classes are located in the `org.eclipse.photran.internal.core.parser` package in the `org.eclipse.photran.core.vpg` project. The easiest way to visualize the structure of a particular file’s AST is to view it in the Outline view (see Section 4.6). However determining all possible ASTs for a particular construct requires scrutinizing the parsing grammar file.

### 4.3.1 Ordinary AST Nodes

Generally speaking, there is one AST node for each nonterminal in the grammar and one accessor method for each symbol on its right-hand side (unless the symbol name is prefixed with a hyphen, in which case it is omitted). For example, the following specification<sup>1</sup>

```
# R533
<DataStmtSet> ::= <DataStmtObjectList> -:T_SLASH <DataStmtValueList> -:T_SLASH
```

generates the AST node class `ASTDataStmtSetNode` shown in Listing 4.4. Notice the *presence* of the `getDataStmtObjectList` and `getDataStmtValueList` getters methods and the *absence* of any method for accessing `T_SLASH`.

The convention is to generate a class with the name `AST<nonterminal name>Node` that extends `ASTNode`. For instance `# R533` will generate the `ASTDataStmtSetNode` class.

The following sections describe additional annotations that can be used to modify the standard convention when necessary. These annotations are not considered part of the standard BNF notation but they are supported by the underlying Ludwig parser generator.

---

**Listing 4.4** `ASTDataStmtSetNode` generated from `# R533`

---

```
1 public class ASTDataStmtSetNode extends ASTNode
2 {
3     public IASTListNode<IDataStmtObject> getDataStmtObjectList() {...}
4
5     public void setDataStmtObjectList(IASTListNode<IDataStmtObject> newValue) {...}
6
7     public IASTListNode<ASTDataStmtValueNode> getDataStmtValueList() {...}
8
9     public void setDataStmtValueList(IASTListNode<ASTDataStmtValueNode> newValue) {...}
10
11     ...
12 }
```

---

#### Annotation #1: (list)

Recursive productions are treated specially, since they are used frequently to express lists in the grammar. The recursive member is labeled in the grammar with the `(list)` annotation. For example, the following specification

---

<sup>1</sup>All grammar specifications are taken from the *fortran2003.bnf* file. The `# RXXX` number provides a reference to the actual specification in the grammar file.

```
# R538
(list):<DataStmtValueList> ::=
|                                     <DataStmtValue>
| <DataStmtValueList> -:T_COMMA <DataStmtValue>
```

means that the AST will contain an object of type `List<ASTDataStmtValueNode>` whenever a `<DataStmtValueList>` appears in the grammar. For instance, # R533 (just described in the previous section) uses the `DataStmtValueList` construct. Notice in Listing 4.4 that the return type of `getDataStmtValueList` is a `List`.

Putting an object that implements the `java.util.List` into the tree (rather than having a chain of nodes) makes it easier to iterate through the list, determine its size and insert new child nodes.

## Annotation #2: (superclass)

The `(superclass)` annotation is used to create an interface that is implemented by all symbols on the right-hand side of the specification will implement. For example, the following specifications

```
# R207
(superclass):<DeclarationConstruct> ::=
| <DerivedTypeDef>
| <InterfaceBlock>
| <TypeDeclarationStmt>
| <SpecificationStmt>
```

...

```
# R214
(superclass):<SpecificationStmt> ::=
| <AccessStmt>
| <AllocatableStmt>
| <CommonStmt>
| <DataStmt>
| <DimensionStmt>
| <EquivalenceStmt>
| <ExternalStmt>
| <IntentStmt>
| <IntrinsicStmt>
| <NamelistStmt>
| <OptionalStmt>
| <PointerStmt>
| <SaveStmt>
| <TargetStmt>
| <UnprocessedIncludeStmt>
```



mean that an **interface** – not a class – named `ISpecificationStmt` will be generated for # R214, and `ASTAccessStmtNode`, `ASTAllocatableStmtNode`, `ASTCommonStmtNode`, etc will implement that interface. In addition, because `<SpecificationStmt>` is used inside # R207 which also uses the `(superclass):` annotation, `ISpecificationStmt` also extends the `IDeclarationConstruct` interface from # R207 i.e.

```
public interface ISpecificationStmt extends IASTNode, IDeclarationConstruct
```

So, it is possible for an AST node to implement multiple interfaces based on the specifications in the grammar.

Using the `(superclass)` annotation gives those nonterminals in # R214 nodes a common type; most notably, a `Visitor` can override the `visit(ISpecificationStmt)` method to treat all three node types uniformly.

### Annotation #3: (bool)

The `(bool)` annotation indicates that an accessor method will return a **boolean** rather than an actual AST node. For example, the following specification

```
# R511
<AccessSpec> ::=
  | isPublic(bool):T_PUBLIC
  | isPrivate(bool):T_PRIVATE
```

will generate the `ASTAccessSpecNode` class as shown in Listing 4.5.

Notice on lines 8 & 12 that the methods return **boolean** values instead of `ASTNodes`. The **boolean** values are usually used to test the presence of that particular `ASTNode` in the source code.

### Annotation #4: Labels

Specification # R511 also illustrates the use of *labels* in the grammar file: `isPublic(bool):T_PUBLIC` results in a method called `isPublic` instead of `getT_PUBLIC`. The use of labels can greatly enhance the readability of the program by making its intent clearer.

### Annotation #5: (inline)

Consider the following specifications for a main program in Fortran:

---

**Listing 4.5** ASTAccessSpecNode generated from # R511

---

```
1 public class ASTAccessSpecNode extends ASTNode
2 {
3     // in ASTAccessSpecNode
4     Token isPrivate;
5     // in ASTAccessSpecNode
6     Token isPublic;
7
8     public boolean isPrivate() {...}
9
10    public void setIsPrivate(Token newValue) {...}
11
12    public boolean isPublic() {...}
13
14    public void setIsPublic(Token newValue) {...}
15
16    ...
17 }
```

---

```
# R1101
<MainProgram> ::=
|           <MainRange>
| <ProgramStmt> <MainRange>

<MainRange> ::=
| <Body>           <EndProgramStmt>
| <BodyPlusInternals> <EndProgramStmt>
|
```

From the standpoint of a typical Fortran programmer, a main program consists of a Program statement, a body (list of statements), perhaps some internal subprograms, and an End Program statement. This does not match the definition of a `<MainProgram>` in the parsing grammar above: `<Body>` and `<EndProgStmt>` are relegated to a separate `<MainRange>` nonterminal.

The solution is to label the `MainRange` nonterminal with the `(inline)` annotation, indicating that it is to be in-lined:

```
# R1101
(customersuperclass=ScopingNode):<MainProgram> ::=
|           (inline):<MainRange>
| <ProgramStmt> (inline):<MainRange>

<MainRange> ::=
| <Body>           <EndProgramStmt>
| (inline):<BodyPlusInternals> <EndProgramStmt>
|
```

This means that accessor methods that would otherwise be in a separate `ASTMainRangeNode` class will be placed in the `ASTMainProgramNode` class instead. Listing 4.6 shows that the accessors that were previously in `ASTMainRangeNode` have been in-lined to `ASTMainProgramNode`. Now there is no longer any need for a `ASTMainRangeNode` class.

---

**Listing 4.6** `ASTMainProgramNode` generated from # R1101

---

```

1 public class ASTMainProgramNode extends ScopingNode implements IProgramUnit
2 {
3     public ASTProgramStmtNode getProgramStmt()
4
5     public void setProgramStmt(ASTProgramStmtNode newValue)
6
7     public IASTListNode<IBodyConstruct> getBody()
8
9     public void setBody(IASTListNode<IBodyConstruct> newValue)
10
11    public ASTContainsStmtNode getContainsStmt()
12
13    public void setContainsStmt(ASTContainsStmtNode newValue)
14
15    public IASTListNode<IInternalSubprogram> getInternalSubprograms()
16
17    public void setInternalSubprograms(IASTListNode<IInternalSubprogram> newValue)
18
19    public ASTEndProgramStmtNode getEndProgramStmt()
20
21    public void setEndProgramStmt(ASTEndProgramStmtNode newValue)
22
23    ...
24 }
```

---

#### **Annotation #6: (`customsuperclass=*`)**

Specification # R1101 in the previous section also illustrates the use of the (`customsuperclass=ScopingNode`) annotation. This makes `ScopingNode` the parent of the `ASTMainProgramNode` class. Note that `ScopingNode` (or whichever custom super class is chosen) has to be a descendant of `ASTNode` because every node in the AST has to be of that type (either directly or as a descendant).

The (`customsuperclass=*`) annotation is a useful technique for delegating external methods that cannot be expressed through the grammar BNF file into a separate hand-coded class while still having the benefits of an auto-generated parser and AST.

### 4.3.2 Tokens

Tokens form the leaves of the AST. They record, among other things,

- The terminal symbol in the grammar that the token is an instance of (`getTerminal()`)
- The actual text of the token (`getText()`)
- The line, column, offset, and length of the token text in the source file (`getLine()`, `getCol()`, `getFileOffset()`, `getLength()`)

Most of the remaining fields are used internally for refactoring.

### 4.3.3 Fortran Program AST Example

The previous sections describe the conventions and additional annotations that are used to construct the AST nodes. While the conventions and annotations themselves are simple, the Fortran grammar is extremely complicated and contains hundreds of rules. Even the simplest Fortran program might contain a very complicated AST. For instance this simple Fortran program:

---

```
1 program main
2     integer a
3 end
```

---

generates the AST shown in Figure 4.2. As an exercise, the reader is encouraged to derive the structure of the AST from the grammar specifications in the *fortran2003.bnf* file beginning with `# R201, <ExecutableProgram>`.

Fortunately, it is not necessary to know every specification in the grammar. For most refactoring and program analysis tasks, it is sufficient to rely on the information that the VPG provides. If that is insufficient, then it is usually enough to construct a Visitor to visit *only* the nodes of interest and “collect” the information that is required.

## 4.4 AST Structure for DO-Loops

Due to a deficiency in the parser, DO-constructs are not recognized as a single construct; DO and END DO statements are recognized as ordinary statements alongside the statements comprising their body. There is a package in the core.vpg plug-in called

**Figure 4.2** AST for simple Fortran program as viewed through the Outline View



`org.eclipse.photran.internal.core.analysis.loops` which provides machinery to fix this, giving DO-loops a “proper” AST structure.

If you call `LoopReplacer.replaceAllLoopsIn(ast)`, it will identify all of the new-style DO-loops and change them to `ASTProperLoopConstructNodes`, which a more natural structure, with a loop header, body, and END DO statement. Once this is done, visitors must be implemented by subclassing one of the Visitor classes in the *org.eclipse.photran.internal.core.analysis.loops* package; these have a callback method to handle `ASTProperLoopConstructNodes`.

## 4.5 Scope and Binding Analysis

Currently, the only semantic analysis performed by Photran is binding analysis: mapping *identifiers* to their *declarations*. Compilers usually do this using symbol tables but Photran uses a more IDE/refactoring-based approach.

Certain nodes in a Fortran AST represent a lexical scope. All of these nodes are declared as subclasses of `ScopingNode`:

- `ASTBlockDataSubprogramNode`
- `ASTDerivedTypeDefNode`
- `ASTExecutableProgramNode`
- `ASTFunctionSubprogramNode`
- `ASTInterfaceBlockNode`<sup>2</sup>
- `ASTMainProgramNode`
- `ASTModuleNode`
- `ASTSubroutineSubprogramNode`

Each of the subclasses of `ScopingNode` represents a scoping unit in Fortran. The `ScopingNode` class has several public methods that provide information about a scope. For example, one can retrieve a list of all of the symbols declared in that scope; retrieve information about its `IMPLICIT` specification; find its header statement (e.g. a `FUNCTION` or `PROGRAM` statement); and so forth.

The enclosing scope of a `Token` can be retrieved by calling the following method on the `Token` object:

```
public ScopingNode getEnclosingScope()
```

Identifier tokens (Tokens for which `token.getTerminal() == Terminal.T_IDENT`), which represent functions, variables, etc. in the Fortran grammar, are *bound* to a declaration<sup>3</sup>. Although, ideally, every identifier will be bound to exactly one declaration, this is not always the case: the programmer may have written incorrect code, or Photran may not have enough information to resolve the binding uniquely). So the `resolveBinding` method returns a *list* of `Definition` objects:

```
public List<Definition> resolveBinding()
```

A `Definition` object contains many public methods which provide a wealth of information. From a `Definition` object, it is possible to get a list of all the references to a particular declaration (using `findAllReferences`) and where that particular declaration is located in the source code (using `getTokenRef`). Both of these methods return a `PhotranTokenRef` object. See Section 5.4.1 for a comparison between `Token` and `TokenRef`.

---

<sup>2</sup>An interface block defines a nested scope only if it is a named interface. Anonymous (unnamed) interfaces provide signatures for subprograms in their enclosing scope.

<sup>3</sup>The introduction to VPGs earlier in this chapter ([URL above](#)) provides an example visually.

## 4.5.1 Examples of Binding Analysis

### Obtaining the Definition of a variable

If you have a reference to the `Token` object of that variable (for instance through iterating over all `Tokens` in the current Fortran AST) then use:

---

```
// myToken is the reference to that variable
List<Definition> bindings = myToken.resolveBinding();

if(bindings.size() == 0)
    throw new Exception(myToken.getText() + " is not declared");
else if (bindings.size() > 1)
    throw new Exception(myToken.getText() + " is an ambiguous reference");

Definition definition = bindings.get(0);
```

---

If you do **not** have a reference to a `Token` but you know the name of the identifier, you can first construct a *hypothetical* `Token` representing an identifier and search for that in a *particular* `ScopingNode` (possibly obtained by calling the static method `ScopingNode.getEnclosingScope(IASTNode node)`).

---

```
Token myToken = new Token(Terminal.TIDENT, "myNameOfIdentifier");
List<PhotranTokenRef> definitions = myScopingNode.manuallyResolve(myToken);
```

---

If you want to search for the identifier in **all** `ScopingNodes` for the current source file, then retrieve all the `ScopingNodes` and manually iterate through each one. Remember that the root of the AST is a `ScopingNode` and you may obtain the root of the AST through the `getRoot` method declared in `IFortranAST`.

---

```
List<ScopingNode> scopes = myRoot.getAllContainedScopes();

for (ScopingNode scopingNode : scopes)
{
    // search through each ScopingNode
}
```

---

### Examples in FortranEditorASTActionDelegate subclasses

The following subclasses of `FortranEditorASTActionDelegate` all contain short working examples of how to use the binding analysis API in Photran:

- `DisplaySymbolTable`

- FindAllDeclarationsInScope
- OpenDeclaration
- SelectEnclosingScope

## 4.6 How to Get Acquainted with the Program Representation

*All these features work on **Fortran projects**. A new Fortran project can be created via File > New > Project... > Fortran > Fortran Project. These features do not work on individual Fortran source files.*

### 4.6.1 Visualizing ASTs

Photran can display ASTs in place of the ordinary Outline view. This behavior can be enabled from the Fortran workspace preferences:

- Click on Window > Preferences in Windows/Linux, or Eclipse > Preferences in Mac OS X.
- Select “Fortran” on the left hand side of the preference dialog (do not expand it).
- Select “(Debugging) Show entire parse tree rather than Outline view”

Clicking on an AST `nodeToken` in the Outline view will move the cursor to that construct’s position in the source file.

### 4.6.2 Visually Resolving Bindings

This feature is disabled by default since it requires performing an update on the VPG database each time the file is saved – an operation that could be expensive for larger files. To enable this feature, right-click on the current Fortran project folder (**not** the individual Fortran source file) in the Fortran Projects View and select “Properties”. In the dialog that pops-up, navigate to Fortran General > Analysis/Refactoring. Select the “Enable Fortran Declaration view” checkbox.

Then, in a Fortran editor, click on an identifier (position the cursor over it), and press F3 (or click Navigate > Open Declaration, or right-click and choose Open Declaration.) The



binding will be resolved and the declaration highlighted. If there are multiple bindings, a pop-up window will open and one can be selected. If the identifier is bound to a declaration in a module defined in a different file, an editor will be opened on that file.

### 4.6.3 Visualizing Enclosing Scopes

Click on any token in the Fortran editor, and click Refactor > (Debugging) > Select Enclosing Scope. The entire range of source text for that token's enclosing `ScopingNode` will be highlighted.

### 4.6.4 Visualizing Definitions

Open a file in the Fortran editor, and click Refactor > (Debugging) > Display Symbol Table for Current File. Indentation shows scope nesting, and each line summarizes the information in a `Definition` object.

# Chapter 5

## Refactoring

### 5.1 Introduction

A refactoring is a program transformation to improve the quality of the source code by making it easier to understand and modify. A refactoring is a special kind of transformation because it preserves the *observable behavior* of your program – it neither removes nor adds any functionality.<sup>1</sup>

As mentioned in Chapter 1, the purpose in writing Photran was to create a refactoring tool for Fortran. Because Photran is structured as a plug-in for Eclipse, we can take advantage and reuse many of the language-neutral support that Eclipse provides for refactoring. This makes it possible to create refactoring tools that *resemble* the Java Development Tools that most Eclipse programmers are already familiar with.

However, implementing first-class support for Fortran refactoring is not an easy task. It requires having an accurate representation of the underlying Fortran source files so that our tools can perform proper program analysis to construct our automated refactoring. The VPG (see Chapter 4) is our initial step in providing such a representation; the VPG will be improved in future versions of Photran to provide support for many different types of refactoring and program analysis.

In this chapter, we describe how to add automated refactorings for Fortran using the underlying infrastructure provided by Eclipse (and Photran) as well as the analysis tools

---

Last significant update: 09/16/09 (JO), 08/08/08 (NC)

<sup>1</sup>For more information see [Refactoring: Improving the Design of Existing Code](#)

provided by the VPG.

## 5.2 Structure of a Fortran Refactoring

Refactorings in Photran are subclassed from either `SingleFileFortranRefactoring` or `MultipleFileFortranRefactoring`. Both of these are subclasses of `AbstractFortranRefactoring`, which is in turn a subclass of the `Refactoring` class provided by the Eclipse Language ToolKit (LTK)<sup>2</sup>.

The LTK is a language-neutral API for supporting refactorings in the Eclipse environment. It provides a generic framework to support the following functionalities:

1. Invoking the refactoring from the user interface (UI).
2. Presenting the user with a wizard to step through the refactoring.
3. Presenting the user with a preview of the changes to be made.

In other words, the LTK provides a common UI for refactorings: This allows refactorings for Java, C/C++, and Fortran to all have the same look and feel.

A concrete Fortran refactoring must implement the following *four* methods:

---

### Listing 5.1 Abstract methods of `AbstractFortranRefactoring` class

---

```
public abstract String getName();

protected abstract void doCheckInitialConditions(RefactoringStatus status,
    IProgressMonitor pm) throws PreconditionFailure;

protected abstract void doCheckFinalConditions(RefactoringStatus status,
    IProgressMonitor pm) throws PreconditionFailure;

protected abstract void doCreateChange(IProgressMonitor pm) throws
    CoreException, OperationCanceledException;
```

---

`getName` simply returns the name of the refactoring: “Rename,” “Extract Subroutine,” “Introduce Implicit None,” or something similar. This name will be used in the title of the wizard that is displayed to the user.

---

<sup>2</sup>See [The Language Toolkit: An API for Automated Refactorings in Eclipse-based IDEs](#) for an introduction to the LTK.

Initial conditions are checked before any wizard is displayed to the user. An example would be making sure that the user has selected an identifier to rename. If the check fails, a `PreconditionFailure` should be thrown with a message describing the problem for the user.

Final conditions are checked after the user has provided any input. An example would be making sure that the new name that that user has provided is a legal identifier.

The actual transformation is done in the `doCreateChange` method, which will be called only after the final preconditions are checked. For more information, see Section 5.3.

The `AbstractFortranRefactoring` class provides a large number of `protected` utility methods common among refactorings, such as a method to determine if a token is a uniquely-bound identifier, a method to parse fragments of code that are not complete programs, and a `fail` method which is simply shorthand for throwing a `PreconditionFailure`. It is worth reading through the source code for `AbstractFortranRefactoring` before writing your own utility methods.

## 5.3 Creating Changes: AST Rewriting

After determining the files that are affected and the actual changes that are required for a particular refactoring, manipulating the source code in the `doCreateChange` method is conceptually straightforward.

Instead of manipulating the text in the files directly (by doing a textual find & replace) we use a more scalable approach: manipulating the Abstract Syntax Tree (AST) of the source code. This allows us to make changes based on the program's semantics and its syntactic structure. This section assumes some familiarity with the AST used in Photran. For more information about the AST, refer to Section 4.2.

### 5.3.1 Common Methods for Manipulating the AST

In the following paragraphs, we describe some of the approaches that are currently being used in Photran for manipulating the AST.

#### Changing the Text of Tokens

To change the text of a single token, simply call its `setText` method. This is used in `RenameRefactoring` to rename tokens while preserving the “shape” of the AST.

---

**Listing 5.2** Use of `setText` in `RenamingRefactoring` (see `RenameRefactoring.java`)

---

```
273 private void makeChangesTo(IFile file , IProgressMonitor pm) throws Error
274 {
275     try
276     {
277         vpg.acquirePermanentAST( file );
278
279         if (definitionToRename.getTokenRef().getFile().equals( file ))
280             definitionToRename.getTokenRef().findToken().setText(newName);
281
282         for (PhotranTokenRef ref : allReferences)
283             if (ref.getFile().equals( file ))
284                 ref.findToken().setText(newName);
285
286         addChangeFromModifiedAST( file , pm);
287
288         vpg.releaseAST( file );
289     }
290     catch (Exception e)
291     {
292         throw new Error(e);
293     }
294 }
```

---

## Removing/replacing AST Nodes

To remove or replace part of an AST, call `replaceChild`, `removeFromTree` or `replaceWith` on the node itself. These methods are defined in the `IASTNode` interface that all nodes implement. Line 107 of Listing 5.4 shows an example of the `removeFromTree` method.

---

**Listing 5.3** AST manipulation methods in `IASTNode` (see `Parser.java`) that all AST nodes implement

---

```
7236 public static interface IASTNode
7237 {
7238     void replaceChild(IASTNode node , IASTNode withNode);
7239     void removeFromTree();
7240     void replaceWith(IASTNode newNode);
7241     ...
7242 }
```

---

In addition, if the *specific* type of the AST is known, then it is possible to just call its *setter* method to directly replace particular nodes. For more information on the available setters for each node type, see Section 4.3.1.

## Inserting new AST Nodes

Some refactorings require inserting new AST nodes into the current program. For instance, the “Intro Implicit None Refactoring” inserts new declaration statements to make the type of each variable more explicit.

There are *three* steps involved in inserting a new AST node:

1. Constructing the new AST node.
2. Inserting the new AST node into the correct place.
3. Re-indenting the new AST node to fit within the current file.

**Constructing the new AST node** The `AbstractFortranRefactoring` class provides convenience methods for constructing new AST nodes. These methods should be treated as part of the API for Fortran refactorings. For instance, the `parseLiteralStatement` methods constructs a list of AST nodes for use in the “Intro Implicit None” refactoring.

**Inserting the new AST node** Inserting the new AST node can be accomplished using the approach discussed previously in *Removing/replacing AST Nodes*.

**Re-indenting the new AST node** It might be necessary to re-indent the newly inserted AST node so that it conforms with the indentation at its insertion point. The `Reindenter` utility class provides the static method `reindent` to perform this task. Refer to line 111 of Listing 5.4.

### 5.3.2 Committing Changes

After all of the changes have been made to a file’s AST, `addChangeFromModifiedAST` has to be invoked to actually commit the changes. This convenience function creates a new `TextFileChange` for the *entire* content of the file. The underlying Eclipse infrastructure performs a `diff` internally to determine what parts have actually changed and present those changes to the user in the preview dialog.

---

**Listing 5.4** Inserting new declarations into an existing scope (see IntroImplicitNoneRefactoring.java)

---

```
95 protected void doCreateChange(IProgressMonitor progressMonitor) throws
96 CoreException, OperationCanceledException
97 {
98     assert this.selectedScope != null;
99
100     for (ScopingNode scope : selectedScope.getAllContainedScopes())
101     {
102         if (!scope.isImplicitNone()
103             && !(scope instanceof ASTExecutableProgramNode)
104             && !(scope instanceof ASTDerivedTypeDefNode))
105         {
106             ASTImplicitStmtNode implicitStmt = findExistingImplicitStatement(scope);
107             if (implicitStmt != null) implicitStmt.removeFromTree();
108
109             IASTListNode<IBodyConstruct> newDeclarations = constructDeclarations(scope);
110             scope.getBody().addAll(0, newDeclarations);
111             Reindenter.reindent(newDeclarations, astOfFileInEditor);
112         }
113     }
114
115     this.addChangeFromModifiedAST(this.fileInEditor, progressMonitor);
116     vpg.releaseAllASTs();
117 }
```

---

## 5.4 Caveats

**CAUTION:** Internally, the AST is changed only enough to reproduce correct source code. After making changes to an AST, most of the accessor methods on `Tokens` (`getLine()`, `getOffset()`, etc.) will return *incorrect* or *null* values.

Therefore, *all program analysis should be done first*; pointers to all relevant **tokens** should be obtained (usually as `TokenRefs`) *prior* to making any modifications to the AST. In general, ensure that all analysis (and storing of important information from `Tokens`) should be done in the `doCheckInitialConditions` and `doCheckFinalConditions` methods of your refactoring before the `doCreateChange` method.

### 5.4.1 Token or TokenRef?

`Tokens` form the leaves of the AST – therefore they exist as part of the Fortran AST. Essentially this means that holding on to a reference to a `Token` object requires the entire AST to be present in memory.

`TokenRefs` are lightweight descriptions of tokens in an AST. They contain only three fields: filename, offset and length. These three fields uniquely identify a particular token in a file. Because they are not part of the AST, storing a `TokenRef` does not require the entire AST to be present in memory.

For most refactorings, using either `Tokens` or `TokenRefs` does not make much of a difference. However, in a refactoring like “Rename Refactoring” that could potentially modify hundreds of files, it is impractical to store all ASTs in memory at once. Because of the complexity of the Fortran language itself, its ASTs can be rather large and complex. Therefore storing references to `TokenRefs` would minimize the number of ASTs that must be in memory.

To retrieve an actual `Token` from a `TokenRef`, call the `findToken()` method in `PhotranTokenRef`, a subclass of `TokenRef`.

To create a `TokenRef` from an actual `Token`, call the `getTokenRef` method in `Token`.

## 5.5 Examples

The “Rename”, “Introduce Implicit None” and “Move COMMON To Module” refactorings found in the `org.eclipse.photran.internal.core.refactoring` package inside the `org.eclipse.photran.core.vpg` project are non-trivial but readable and should serve as a model for building future Fortran refactorings.

An example of a simpler but rather *useless* refactoring is presented in Appendix E. It should be taken as a guide on the actual steps that are involved in registering a new refactoring



with the UI and also how to actually construct a working Fortran refactoring.

## 5.6 Common Tasks

In this section, we briefly summarize some of the common tasks involved in writing a new Fortran refactoring.

### **In an AST, how do I find an ancestor node that is of a particular type?**

Sometimes it might be necessary to traverse the AST *upwards* to look for an ancestor node of a particular type. Instead of traversing the AST manually, you should call the `findNearestAncestor(TargetASTNode.class)` method on a `Token` and pass it the **class** of the `ASTNode` that you are looking for.

### **How would I create a new AST node from a string?**

Call the `parseLiteralStatement(String string)` or `parseLiteralStatementSequence(String string)` method in `AbstractFortranRefactoring`. The former takes a `String` that represents a single statement while the latter takes a `String` that represents a sequence of statements.

### **How do I print the text of an AST node and all its children nodes?**

Call the `SourcePrinter.getSourceCodeFromASTNode(IASTNode node)` method. This method returns a `String` representing the source code of its parameter; it includes the user's comments, capitalization and whitespace.

# Chapter 6

## Photran Editors

### 6.1 Fortran Text Editors

There are **two** different text editors in Photran. This is necessary to support both the fixed-form Fortran 77 standard and the free-form Fortran 90 & 95 standard.

Fortran 77 is known as fixed-form Fortran because it requires certain constructs to be *fixed* to particular columns. For instance, Fortran statements can only appear between columns 7 - 72; anything beyond column 72 is ignored completely. This requirement is an artifact of the days when punched cards were used for Fortran programming. However, Fortran 77 compilers still enforce this requirement. The fixed-form editor in Photran helps the programmer remember this requirement by displaying visual cues to denote the column partitions.

Fortran 90/95 adopted the free-form format that most programmers today are accustomed to. Nonetheless, because Fortran 77 is still considered a subset of Fortran 90/95, it is possible to write programs following the fixed-form format. As such, the free-form editor maintains some visual cues on column numbering (although using a more subtle UI).

The UML class diagram in Figure 6.1 shows the hierarchy of the editors in Photran.

Both the `FixedFormFortranEditor` and `FreeFormFortranEditor` concrete classes inherit from `AbstractFortranEditor`. Most of the actual work is done inside `AbstractFortranEditor`; its subclasses just specify how to decorate the UI.


---

Last significant update: 08/08/08 (NC)

---

**Figure 6.1** Photran editor class hierarchy

---

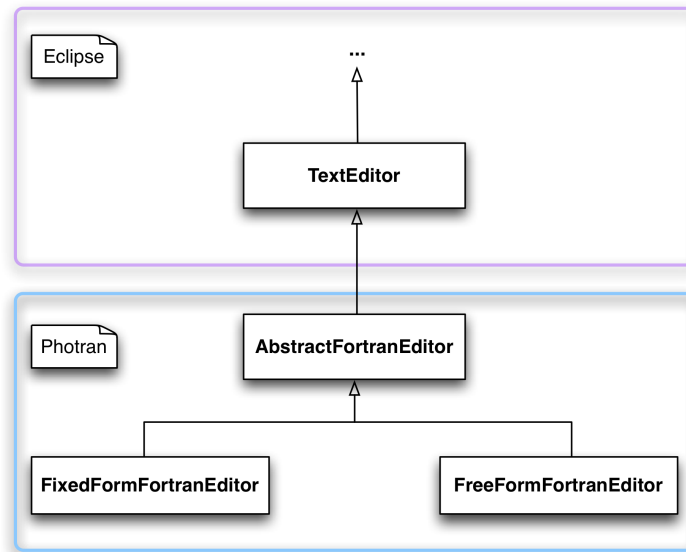

---

In general, the implementation of `AbstractFortranEditor` closely follows the standard implementation of text editors in Eclipse. The following section highlights some of the Photran-specific mechanisms of the text editor. For more information on how text editors work in Eclipse, please consult the Eclipse references mentioned in Chapter 1.

## 6.2 Contributed SourceViewerConfiguration

Text editors in Eclipse rely on a `SourceViewerConfiguration` to enhance the current editor with features such as auto indenting, syntax highlighting and formatting. By default, most of these features are already provided by the concrete `SourceViewerConfiguration` class. However, it is possible to provide a custom implementation of a `SourceViewerConfiguration`. This is done by calling the `setSourceViewerConfiguration(SourceViewerConfiguration sourceViewerConfiguration)` method in an Eclipse text editor.

Photran provides an additional layer of flexibility by allowing its `SourceViewerConfiguration` to be contributed from other plug-ins. A plug-in that is interested in contributing a `SourceViewerConfiguration` to the Photran editors must extend the `org.eclipse.photran.ui.sourceViewerConfig` extension point defined in the `org.eclipse.photran.ui.vpg` plug-in.

At run-time, Photran *dynamically* instantiates a suitable `SourceViewerConfiguration` by searching through the list of plug-ins that extend the `org.eclipse.photran.ui.sourceViewerConfig` extension.

Currently, there are **two** `SourceViewerConfigurations` in Photran: the contributed `FortranVPGSourceViewerConfigurationFactory` and the default (but less feature-full) `FortranModelReconcilingSourceViewerConfiguration`.

## 6.3 Fortran Editor Tasks: VPG & AST Tasks

Many actions that a user can invoke actually depend on the current text in the text editor. For instance, auto-completion depends on the text that has been entered so far to provide feasible completion choices. A good auto-completion strategy constantly augments and updates its database of feasible completion choices as the user enters or modifies text; it does not have to wait until the user saves the current file.

Another important feature of the text editor that requires constant updates is syntax highlighting. Syntax highlighting has to work almost instantaneously based on what the user has entered. It is not acceptable for the user to experience lengthy delays between typing a character and waiting for it to syntax highlight correctly.

Eclipse utilizes a *reconciler* to correctly and instantly perform syntax highlighting. The reconciler runs in a background thread in Eclipse, constantly monitoring the text that the user enters and updating the syntax highlighting as necessary. Every text editor in Eclipse – including Photran’s – has a corresponding reconciler.

Photran takes advantage of its existing reconciler (`FortranVPGReconcilingStrategy`) and adds additional Fortran editor tasks that should run each time its reconciler runs. The list of tasks to run is stored in the singleton `FortranEditorTasks` object.

Currently, there are two kinds of tasks that can be run: Abstract Syntax Tree (AST) editor tasks and Virtual Program Graph(VPG) editor tasks. AST editor tasks depend on information from the AST of the current source file; and VPG editor tasks depend on information from the VPG of the current source file. `FortranEditorTasks` automatically schedules the VPG editor tasks using an instance of `VPGSchedulingRule` to synchronize access to the `PhotranVPG` singleton object. The AST of the current file is computed on-the-fly as the user modifies the source file. The VPG of the current file is based off its previous saved version (so it is less up-to-date). For more information about the AST and VPG, see Chapter 4.

AST editor tasks must implement the `IFortranEditorASTTask` interface and VPG editor tasks must implement the `IFortranEditorVPGTask` interface. Additionally, each task has to register itself with the `FortranEditorTasks` object. A task that no longer needs to run should also be unregistered. Since these tasks run asynchronously, it is important to use proper Java concurrency practices i.e. **synchronized** methods and statements.

Below is the API of the `FortranEditorTasks` class:

---

**Listing 6.1** API of `FortranEditorTasks` (see `FortranEditorTasks.java`)

---

```
1 public class FortranEditorTasks
2 {
3     public static FortranEditorTasks instance( AbstractFortranEditor editor )
4
5     public synchronized void addASTTask( IFortranEditorASTTask task )
6
7     public synchronized void addVPGTask( IFortranEditorVPGTask task )
8
9     public synchronized void removeASTTask( IFortranEditorASTTask task )
10
11    public synchronized void removeVPGTask( IFortranEditorVPGTask task )
12
13    public Runner getRunner()
14
15    ...
16 }
```

---

It is possible for a class to implement both the `IFortranEditorASTTask` and `IFortranEditorVPGTask` interfaces. For example, the `DeclarationView` class registers itself for both kinds of editor tasks and makes use of the information from both as it attempts to present the declaration for the currently selected token of the text editor.

For more information on implementation details, please refer to the following classes:

- `DeclarationView`
- `FortranCompletionProcessorASTTask`
- `FortranCompletionProcessorVPGTask`
- `OpenDeclarationASTTask`

# Appendix A

## Getting the Photran 5.0 Sources from CVS

*BEFORE YOU BEGIN: Make sure you are running **Eclipse 3.5** (Galileo) and a **Java 5** or later JVM. We recommend the [Eclipse for RCP/Plug-in Developers Package](#).*

### Part I. Check out the CDT 6.0 sources from CVS

1. In Eclipse, switch to the CVS Repository Exploring perspective.
2. Right-click the CVS Repositories view; choose New, Repository Location
3. In the dialog box, enter the following information, then click Finish.

Host name:	dev.eclipse.org
Repository path:	/cvsroot/tools
Username:	anonymous
Password:	(no password)
Connection type:	pserver
4. In the CVS Repositories view
  - Expand “:pserver:anonymous@dev.eclipse.org:/cvsroot/tools”
  - Then expand “HEAD”
5. Right-click on “org.eclipse.cdt”
6. Select “Configure Branches and Versions...”

---

Last significant update: 12/02/09

7. Under “Browse files for tags”, expand “all”, then expand “org.eclipse.cdt”, then click on the .project file
8. Under “New tags found in the selected files”, click on the Deselect All button, then check cdt\_6\_0 in the list above it
9. Click Add Checked Tags
10. Click OK
11. Now, in the CVS Repositories view
  - Expand “:pserver:anonymous@dev.eclipse.org:/cvsroot/tools”
  - Then expand “Branches”
  - Then expand “cdt\_6\_0”
  - Then expand “org.eclipse.cdt cdt\_6\_0”
  - Then expand “all”
12. Click on the first entry under “all” (it should be org.eclipse.cdt), then shift-click on the last entry under “all” (it should be org.eclipse.cdt.ui.tests). All of the intervening plug-ins should now be selected. Right-click on any of the selected plug-ins, and select Check Out from the pop-up menu. (Check out will take several minutes.)
13. You now have the CDT source code. Make sure it compiles successfully (lots of warnings, but no errors).

## Part II. Check out the Photran sources from CVS

14. Under “:pserver:anonymous@dev.eclipse.org:/cvsroot/tools,” expand HEAD, then expand org.eclipse.ptp, then expand photran
15. Click on the first entry under “photran” (it should be org.eclipse.photran-dev-docs), then shift-click on the last entry under “photran” (it should be org.eclipse.rephraserengine.ui.vpg). All of the intervening plug-ins should now be selected. Right-click on any of the selected plug-ins, and select Check Out from the pop-up menu. (Check out will take several minutes.)

The sources should all compile (albeit with lots of warnings).

## Part III. Running the test cases

16. In Package Explorer view, select the `org.eclipse.photran.core.vpg.tests` project.

17. Right-click on that project and select Run As > Run Configurations. . . . A dialog will appear.
18. In that dialog, create a new **JUnit Plug-in Test** launch configuration. Call it “Photran-Tests”.
19. For the configuration that you have just created, switch to the “Arguments” tab. Change the “VM arguments” field to `-ea -Xms40m -Xmx512m`
20. Then switch to the “Environment” tab and create a new environment variable called “TESTING” with a value of 1.
21. Select “Run” to run the tests. To run the tests again, just launch the “Photran-Tests” configuration from the Eclipse Run menu.

***Note.** If you will be developing refactorings or modifying the parser, please read the appendix “Running Photran’s Automated Test Suite” in the Photran Developer’s Guide. Also note that some parser tests will attempt to look for closed-source code that you did not check out as part of this procedure; a warning will appear in the JUnit runner if this code is not available.*



# Appendix B

## Running Photran's Automated Test Suite

The basic procedure for running Photran's automated test suite is described in the previous appendix as part of the procedure for checking out Photran's source code from CVS. In particular,

- the test suite is run as a JUnit 3 plug-in test,
- assertions are enabled, and
- a TESTING environment variable is set, which (among other things) places the VPG in a testing mode.

This appendix explains some of the additional options that are available when running the test suite.

### B.1 Enabling Fortran Compilation & Run Comparison

Some of Photran's refactoring unit tests can attempt to compile and run the Fortran test programs before and after the refactoring in order to ensure that the refactoring actually preserves behavior (and produces code that compiles).

To enable this behavior,

---

Last significant update: 12/02/09

- Open the run configuration for the test suite, and switch to the Environment tab.
- Add environment variables similar to the following:  
COMPILER     /usr/local/bin/gfortran  
EXECUTABLE   /Users/joverbey/a.out

The COMPILER environment variable should give the path to gfortran. When gfortran is run, the compiled Fortran program will be written to the file specified by the EXECUTABLE environment variable.

When both of these environment variables are set, you will be able to see the output from the compiler and the Fortran program in the Console view. If compilation fails, or if the Fortran program exits with a nonzero status code, or if the Fortran program does not produce the same output before and after refactoring, the JUnit test will fail.

See the JavaDoc for the method `RefactoringTestCase#compileAndRunFortranProgram` for more details.

## B.2 Enabling Closed-Source Parser Tests

UIUC personnel may check out additional projects from a private Subversion repository at UIUC to enable additional parser and source reproduction tests. This is described in more detail in the appendix *Additional Information for UIUC Personnel*.

# Appendix C

## Additional Information for UIUC Personnel

*The following information is only of interest to developers in the Department of Computer Science at the University of Illinois at Urbana-Champaign.*

### C.1 Photran Subversion Repository at UIUC

A private Subversion repository for internal testing and research work is provided by TSG at the following URL. *You will only be able to access this repository if you have specifically been granted access.* The repository requires authentication using your NetID and Kerberos password. To access a Subversion repository from Eclipse, you must install an additional Eclipse plug-in (either Subclipse or Subversive).

`https://subversion.cs.uiuc.edu/svn/Photran/`

Currently, this repository contains the following.

- **Lua refactoring tool (lua-refactoring).** A small, prototype, Eclipse-based refactoring tool for the Lua scripting language, based on Photran's refactoring infrastructure.

---

Last significant update: 10/02/09

- **Large Fortran test codes (photran-projects).** Checking these out into your workspace will enable about 6,000 additional test cases in the JUnit test suite. *These applications are PRIVATE. They may NOT be distributed and are intended only for testing Photran.*
- **Sample Obfuscation refactoring (sample-refactoring).** The sample refactoring described in Appendix E.
- **C preprocessor support (c-preprocessor).** C preprocessor support, based on the C preprocessor in CDT 5. This will eventually be moved into the public CVS repository.

## C.2 Photran Web Site at UIUC

TSG provides a Web hosting infrastructure based on the popular CPanel system and has set up a web hosting account for Photran. This hosting environment supports PHP, MySQL databases, CGI scripts, and a number of other popular web technologies. Documentation for these features is provided in the control panel. You can access your web content via the control panel, SSH, or WebDAV. Here are the account details:

```
web URL: http://photran.cs.illinois.edu/
control panel: https://cpanel.cs.illinois.edu:2083/
SSH access: cpanel.cs.illinois.edu
web root: ~/public_html
```

# Appendix D

## Creating an Error Parser

Error parsers scan the output of `make` for error messages for a particular compiler. When they see an error message they can recognize, they extract the filename, line number, and error message, and use it to populate the Problems view.

For an example, see `IntelFortranErrorParser`. (It's a mere 60 lines.)

To create a new error parser, do the following.

- We will assume that your error parser class will be in the `errorparsers` folder in the `org.eclipse.photran.core` plug-in and added to the `org.eclipse.photran.internal.errorparsers` package.
- Define a class implementing `IErrorParser`
- Implement `public boolean processLine(String line, ErrorParserManager eoParser)` which should always return false because `ErrorParserManager` appears not to use the result in a rational way
- In `org.eclipse.photran.core`'s `plugin.xml`, find the place where we define all of the Fortran error parsers. Basically, copy an existing one. Your addition will look something like this:

---

Last significant update: 08/08/08

---

```
1 <extension
2     id="IntelFortranErrorParser"
3     name="Photran Error Parser for Some New Fortran Compiler"
4     point="org.eclipse.cdt.core.ErrorParser">
5     <errorparser
6         class="org.eclipse.photran.internal.errorparsers.MyErrorParser">
7     </errorparser>
8 </extension>
```

---

- Your new error parser will appear in the error parser list in the Preferences automatically, and it will be automatically added to new projects. For existing projects, you will need to open the project properties dialog and add the new error parser to the project manually.

**Note.** Error parsers do not have to be implemented in the Photran Core plug-in. In fact, they do not have to be implemented as part of Photran at all. If you create a brand new plug-in, you can specify `org.eclipse.cdt.core` as a dependency, include the above XML snippet in your plug-in's `plugin.xml`, and include your custom error parser class in that plug-in. The plug-in system for Eclipse will recognize your plug-in, detect that it extends the `org.eclipse.cdt.core.ErrorParser` extension point, and add it to the list of implemented error parsers automatically.

# Appendix E

## Simple Fortran Refactoring Example

### E.1 Introduction

Contributing a new refactoring to Photran is best done by following a working example.

This paragraph describes the general approach: First, an action must be added to both the editor popup menu **and** the Refactor menu in the menu bar by modifying the plugin.xml file. Then, the action delegate and its accompanying refactoring wizard have to be coded; these two classes are responsible for populating the user interface of the refactoring wizard dialog. Finally, the actual Fortran refactoring itself has to be coded.

The remaining sections go into the details of each of those steps based on a simple (but not useful) refactoring example: obfuscating Fortran by removing the comments and adding redundant comments to the header. The source code is available from <http://photran.cs.illinois.edu/samples/obfuscator-photran5.zip> (UIUC personnel can find it in the Subversion repository described in the appendix).

### E.2 Modifying the plugin.xml

There are **four** extensions points (from the Eclipse core) that our plug-in needs to extend:

`org.eclipse.ui.commands` Creates a new command *category* to represent our refactoring.

---

Last significant update: 08/08/08

This category will be referenced by the other extensions in the plugin.xml file.

`org.eclipse.ui.actionSets` This extension point is used to add menus and menu items to the Fortran perspective.

`org.eclipse.ui.actionSetPartAssociations` Allows our refactoring to be visible/enabled in the context of the Fortran editor.

`org.eclipse.ui.popupMenus` Displays our refactoring in the pop-up menu that appears during a right-click.

`org.eclipse.ui.bindings` (Optional) Allows our refactoring to be invoked via keyboard shortcuts. For instance the Fortran Rename Refactoring is bound to the Alt + Shift + R keyboard shortcut, which is the same as the one for the Java Rename Refactoring.

Please refer to the documentation and schema description for each extension point; the documentation is available from Help > Help Contents in Eclipse.

Fortran currently does **not** use the newer `org.eclipse.ui.menus` extension points (introduced in Eclipse 3.3) for adding menus, menu items and pop-up menus.

It is possible to use the newer `org.eclipse.ui.menus` extension point if desired, but this chapter uses the older extension points to remain consistent with how Photran is doing it.

For more information, see the plugin.xml file of our refactoring example.

## E.3 Creating an Action Delegate and a Refactoring Wizard

The `org.eclipse.ui.actionSets` and `org.eclipse.ui.popupMenus` extension points that were extended in our plugin.xml file require a reference to action delegate class that we need to provide.

For a Fortran refactoring, our action delegate should extend the `AbstractFortranRefactoringActionDelegate` class **and** implement the `IWorkbenchWindowActionDelegate` and `IEditorActionDelegate` interfaces.

The most important method in our action delegate class is the **constructor**. The constructor has to be done in a particular way so that everything is setup correctly. Listing E.1 shows how the constructor needs to be setup.

Inside our constructor, we need to call the parent constructor that takes **two** parameters: the class of the actual refactoring object (e.g. `ObfuscateRefactoring`) and the class of the actual



---

**Listing E.1** ObfuscateAction for our simple refactoring example

---

```
1 public class ObfuscateAction extends AbstractFortranRefactoringActionDelegate
2 implements IWorkbenchWindowActionDelegate, IEditorActionDelegate {
3
4     public ObfuscateAction() {
5         super(ObfuscateRefactoring.class, ObfuscateRefactoringWizard.class);
6     }
7
8     ...
9 }
```

---

refactoring wizard (e.g. ObfuscateRefactoringWizard). The parent class will dynamically create the refactoring object and refactoring wizard using Java reflection.

Our refactoring wizard needs to be a subclass of AbstractFortranRefactoringWizard. The only method that we are required to implement is the doAddUserInputPages method. This page is responsible for creating a page for the wizard. For instance, a refactoring such as rename refactoring requires the user to provide a new name. So the doAddUserInputPages is responsible for creating the interface for that.

Ideally, if our refactoring does not require the user to provide any input, it should just have an empty doAddUserInputPages method. However, because of a bug in the Mac OS X version of Eclipse, it is necessary to add a *dummy* page. Without this dummy page the refactoring will cause the entire Eclipse UI to lock up on Mac OS X. Listing E.2 shows how to add a dummy input page.

---

**Listing E.2** Adding a dummy wizard input page

---

```
1 protected void doAddUserInputPages() {
2     addPage(new UserInputWizardPage(refactoring.getName())) {
3
4         public void createControl(Composite parent) {
5             Composite top = new Composite(parent, SWT.NONE);
6             initializeDialogUnits(top);
7             setControl(top);
8
9             top.setLayout(new GridLayout(1, false));
10
11             Label lbl = new Label(top, SWT.NONE);
12             lbl.setText("Click OK to obfuscate the current Fortran file .
13             To see what changes will be made, click Preview.");
14
15         }
16     });
17 }
```

---

## E.4 Creating the Actual Refactoring

Section 5.2 gives a good overview of the **four** methods that a Fortran refactoring needs to implement. And Section 5.4 gives an overview of things to avoid while performing a refactoring. Our example refactoring conforms to the lessons in both those sections.

Here we briefly describe the four methods in our example:

**getName** This just returns the text “Obfuscate Fortran Code” describing our refactoring. This text will be used as the title of the refactoring wizard dialog.

**doCheckInitialConditions** Our simple refactoring does not have any *real* initial conditions. Our refactoring can proceed as long as the current file can be parsed as valid Fortran source code. This is automatically checked by the **FortranRefactoring** parent class.

Instead we use this method as a hook to perform some simple program analysis – acquiring the names of all the functions and subroutines in the current file. We will print these names later as part of the header comment.

**doCheckFinalConditions** Since we do not require the user to provide any additional input, there are no final conditions to check.

**doCreateChange** The actual refactoring changes are constructed in this method.

We iterate through every token in the current file to check if it has a comment string. Comment strings are acquired by calling **Token#getWhiteBefore()** and **Token#getWhiteAfter()**. Following the advice of Section 5.4, we store a list of all the tokens (call this list **TokensWithComments**) that contain comment strings. Once we have iterated through all the tokens, we proceed to remove the comments for tokens in our **TokensWithComments** list. Removing comments is done by calling **Token#setWhiteBefore()** and **Token#setWhiteAfter()** with blank strings as parameters.

Finally, we create a header comment that just lists all the functions and subroutines in the current source file and add that to the preamble of the main program.

For more information, please consult the source code for our example.

# Appendix F

## Creating Tests for the Rename Refactoring

JUnit tests for the Rename refactoring are located in the `org.eclipse.photran.refactoring.tests` plug-in project. A Rename test has two components:

1. one or more Fortran files, which contain the code to be refactored, and
2. a JUnit test suite class, which creates tests attempting to rename the identifiers in that file.

The Fortran files are stored as `.f90` files in the *rename-test-code* folder. The JUnit tests are similarly-named Java classes in the `org.eclipse.photran.refactoring.tests.rename` package.

A sample JUnit test suite is the following. The more complex tests follow a similar structure. Here, the `vars` array records all of the identifiers and the line/column positions on which they occur. The test suite constructor attempts to rename each identifier to `z` and also to `a_really_really_long_name`.

---

Last significant update: 08/08/08

Because our strategy for testing requires the *exact* line and column position, using tabs instead of spaces for indenting could interfere with the positioning. Therefore, for testing purposes, test cases (the Fortran test files) should be indented with **spaces only**. However, when an actual Fortran programmer invokes a refactoring through the Eclipse UI, the indentation with tabs or spaces is not a problem because the Eclipse editor is smart enough to provide the correct position (based on expanding tabs into spaces internally).

```

1 public class Rename2 extends RenameTestSuite
2 {
3     ///////////////////////////////////////////////////////////////////
4     //
5     // RECORD POSITIONS OF ALL IDENTIFIERS IN RENAME2.F90, AND
6     // GROUP THEM ACCORDING TO WHICH ONES SHOULD BE RENAMED TOGETHER
7     //
8     ///////////////////////////////////////////////////////////////////
9
10    private String filename = "rename2.f90";
11
12    private Ident [] vars = new Ident []
13    {
14        var(filename, "Main", new LineCol [] { lc(2,9), lc(27,13) }),
15        var(filename, "one", new LineCol [] { lc(4,16), lc(12,14),
16                                              lc(16,11), lc(20,11) }),
17        var(filename, "two", new LineCol [] { lc(5,27), lc(10,13),
18                                              lc(13,14), lc(17,14) }),
19        var(filename, "three", new LineCol [] { lc(6,16), lc(14,9),
20                                              lc(18,9) }),
21        var(filename, "four", new LineCol [] { lc(10,21), lc(15,14),
22                                              lc(19,14) })
23    };
24
25    ///////////////////////////////////////////////////////////////////
26    //
27    // TEST CASES
28    //
29    ///////////////////////////////////////////////////////////////////
30
31    public static Test suite() throws Exception
32    {
33        return new Rename2();
34    }
35
36    public Rename2() throws Exception
37    {
38        startTests("Renaming program with comments and line continuations");
39        for (String name : new String [] { "z", "a_really_really_long_name" })
40            for (Ident var : vars)

```

```

41         addSuccessTests(var, name);
42     endTests();
43 }
44 }

```

---

The `addSuccessTests` method adds several test cases to the suite: it simulates the user clicking on each occurrence of the identifier and asking to rename that instance. (Of course, no matter which occurrence is clicked on, all instances should be renamed...but this has occasionally not happened.)

If the rename should not have succeeded—that is, a precondition would not be met—`addPreconditionTests` should have been called rather than `addSuccessTests`. A good testing strategy ensures that a program behaves correctly: it should do **only** what it is supposed to do and nothing more. In our case, it should rename only the identifiers that are affected and ensure that the other identifiers are left untouched.

`Rename3` is a slightly more complicated example, which renames identifiers spanning multiple files. In this case, a large boolean matrix is used to record which identifiers should be renamable to which other identifiers:

---

**Listing F.1** Partial representation of the boolean matrix in `Rename3`

---

```

1 private boolean [][] expectSuccess = new boolean [][]
2 {
3
4 /* vvv can be renamed to >>>      myProgram, aRenamed3, bRenamed3, contained,
5 /* myProgram */ new boolean [] { false,      true,      true,      true,      ...
6 /* aRenamed3 */ new boolean [] { true,        false,     false,     false,     ...
7 /* bRenamed3 */ new boolean [] { true,        false,     false,     false,     ...
8 /* contained */ new boolean [] { true,        false,     false,     false,     ...
9 /* external  */ new boolean [] { false,       false,     false,     false,     ...
10 /* moduleA   */ new boolean [] { false,       false,     false,     false,     ...
11 /* aSub1of3  */ new boolean [] { true,        false,     false,     false,     ...
12 /* aSub2of3  */ new boolean [] { true,        false,     false,     false,     ...
13 /* aSub3of3  */ new boolean [] { true,        true,       true,      true,      ...
14 /* moduleB   */ new boolean [] { false,       false,     false,     false,     ...
15 /* bSub1of3  */ new boolean [] { true,        true,       true,      true,      ...
16 /* bSub2of3  */ new boolean [] { true,        false,     false,     false,     ...
17 /* bSub3of3  */ new boolean [] { true,        true,       true,      true,      ...
18 /* moduleC   */ new boolean [] { false,       false,     false,     false,     ...
19 /* cSub      */ new boolean [] { true,        true,       true,      true,      ...
20 };

```

---

# Appendix G

## Adding New Fortran Syntax

The process of adding new syntax to Photran is as follows.<sup>1</sup>

1. Modify the lexers and parser:
  - (a) Modify the grammar (fortran2008.bnf) to recognize new syntactic constructs, and modify the phase 1 lexers (FreeFormLexerPhase1.flex and FixedFormLexerPhase1.flex) to recognize new keywords
  - (b) Add new terminal symbols to Terminal.java
  - (c) Run the build-lexer and build-parser scripts to regenerate the lexers and parser
  - (d) Modify the phase 2 lexer (FreeFormLexerPhase2.java) to correctly resolve any new keywords as identifiers
2. Modify the syntax highlighting for the Fortran editor:
  - (a) Modify the list of keywords in FortranKeywordRuleBasedScanner
  - (b) Modify the keyword/identifier resolution rules in SalesScanKeywordRule
3. Modify the model builder (Outline view), if necessary:
  - (a) Add new model elements to FortranElement.java, if necessary, and place their Outline view icons in the org.eclipse.photran.cdtinterface/icons/model folder

---

Last significant update: 10/08/08

<sup>1</sup>Note that Photran originally handled Fortran 95, and it was later extended to work with Fortran 2003 and then Fortran 2008; the requisite changes to the lexer, parser, and syntax highlighting code are fairly clearly marked.

- (b) Modify FortranModelBuildingVisitor.java to visit the new constructs and add them to the model
4. Modify the name binding analysis, if necessary:
- (a) *IMPORTANT*: If you change any classes that implement IPhotranSerializable, or if you change the ScopingNode class, then be sure to change the VPG database filename in PhotranVPGDB. This will ensure that end users' code is completely reindexed using the new versions of the serialized classes.
  - (b) If any new syntactic constructs are subclasses of ScopingNode, there are several methods in the ScopingNode class that will need to be modified to handle the new node type. Currently, these are easy to identify because they all contain large numbers of "instanceof" tests (which is ugly; we will eventually do this the "right" way and dispatch dynamically to the subclasses after the parser generator allows custom subclasses)
  - (c) If the new syntax contains identifiers, modify the ReferenceCollector to bind any identifiers in new syntactic constructs to their declarations
  - (d) Similarly, if necessary, modify the DefinitionCollector to add any new declarations to the VPG database
  - (e) Modify the other collector classes in the same package if necessary

# Appendix H

## Release and Deployment Procedure

*Most contributors/committers do not need to read this. This explains our entire release and deployment procedure: setting the Photran version number, building the feature, uploading it to the download site, etc.*

### H.1 Preparing for a Release Build

1. Proofread the documentation on the wiki.
2. Update the plug-in version numbers in all projects.
3. Update the feature.xml and feature.properties files for

- org.eclipse.photran-feature
- org.eclipse.photran.intel-feature
- org.eclipse.photran.xlf-feature
- org.eclipse.rephraserengine-feature

and change

- (a) the feature version
- (b) the versions of other features/plug-ins it depends on (e.g., Photran depends on the Rephraser Engine and CDT, and Intel Compiler Support depends on Photran).
- (c) the copyright year

---

Last significant update: 01/15/10



- (d) the update site URL
  - 4. If the VPG database structure (or any of the serialized classes) have changed, update
    - the VPG database filename in the PhotranVPGDB class constructor and
    - the VPG log filename in the PhotranVPGLog class constructor.
- For example, in Photran 4.0 beta 5, the database filename was “photran40b5vpg”.
- 5. Make sure the org.eclipse.ptp.releng scripts have the correct versions.
  - 6. Greg Watson will initiate a PTP build at build.eclipse.org.

## H.2 After the Release Has Been Built

- 1. Update the timeline in this guide’s Release History appendix (org.eclipse.photran-dev-docs/dev-guide/app-history.ltx-inc)
- 2. Create a maintenance branch for the org.eclipse.photran module in CVS. For example, a photran\_5.0 branch was created after the Photran 5.0.0 release and was subsequently used to build Photran 5.0.1, etc.
- 3. Add a Bugzilla version for the release and a target for the next expected release
- 4. Update the Web site:
  - (a) Update the home page to mention the release
  - (b) Change the update site URL and archived update site link on the Downloads page
  - (c) Update the Report a Bug URL in the nav bar to default to the new release version
- 5. Announce the release, e-mailing the photran, photran-dev, and ptp-announce mailing lists
- 6. Copy the Documentation pages on the wiki and update the version numbers for the next expected release

# Appendix I

## Release History

Photran	Date	Platform	CDT	Notes
1.2	Jan 2005	2.1	1.2	First public version; hacked CDT clone
2.1	Feb 2005	3.0	2.1	First version available at eclipse.org
3.0b1	Aug 2005			
3.0b2	Nov 2005			
3.0	Jan 2006	3.1	3.0	CDT extension; required modified CDT
3.1b1	Jul 2006			
3.1b2	Apr 2007	3.1	3.1.1	Extension of stock CDT
4.0b1	Jun 2007	3.2.2	3.1.2	<i>Rename, intro implicit none</i>
4.0b2	Oct 2007	3.3.1	4.0.1	
4.0b3	Nov 2007	3.3.1.1	4.0.1	
4.0b4		3.4	5.0	First version release via an update site
4.0b5	Feb 2009	3.4	5.0.1	<i>Move saved vars to common</i>
	Mar 2009	3.4	5.0.1	First automated integration build under PTP
	Sep 2009	3.5	6.0.0	
5.0.0	Dec 2009	3.5	6.0.1	First official release at eclipse.org
6.0.0	Jun 2010	3.6	7.0.0	Part of the Helios release train (TENTATIVE)