

# Estructura de datos y algoritmos

Rodrigo Alvarez

[rodrigo.alvarez2@mail.udp.cl](mailto:rodrigo.alvarez2@mail.udp.cl)

# Laboratorio 1


# Pilas y colas

- **pila:** El único elemento accesible es el ultimo añadido.
- **cola:** El único elemento accesible es el que se añadió más temprano.
- Menos posibilidades de operaciones que una lista pero más eficientes.

**Stack:**



**Queue:**

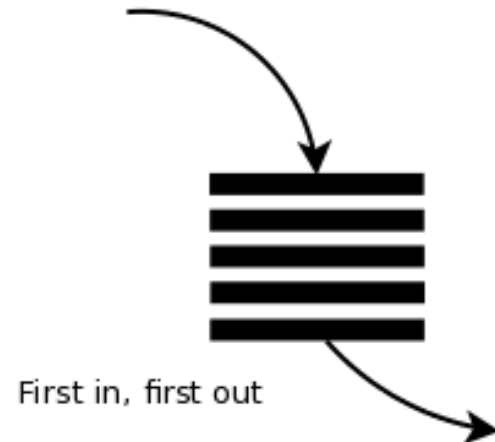

## Recordatorio: TDA

- **Tipo de dato abstracto (TDA):** Una especificación de un conjunto de datos y las operaciones que pueden ser realizadas sobre esos datos.
  - Describe qué hace, no cómo lo hace.
- No sabemos exactamente cómo se implementa, solo qué hace y qué operaciones podemos hacer.
  - Solo necesitamos entender la idea de la colección de datos y las operaciones que puede realizar.



las pilas y colas usualmente se implementan con listas enlazadas

# Pila (stack)

- **LIFO**: Last In First Out
  - Los elementos son guardados en el orden de inserción
    - No solemos pensar en la posición de los elementos, solo en el último añadido.
  - El "cliente" solo puede acceder al último elemento añadido.
- 
- Operaciones básicas:
    - push: añadir un elemento
    - pop: quitar el último elemento añadido
    - peek (o top): ver el último elemento añadido



# Pila (stack)

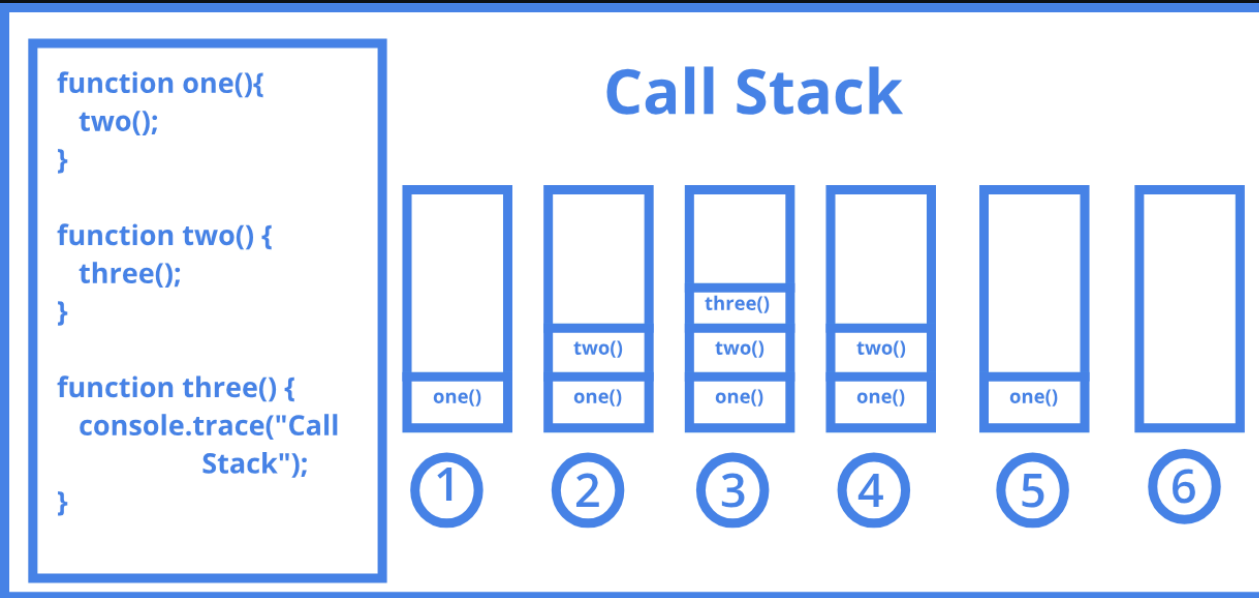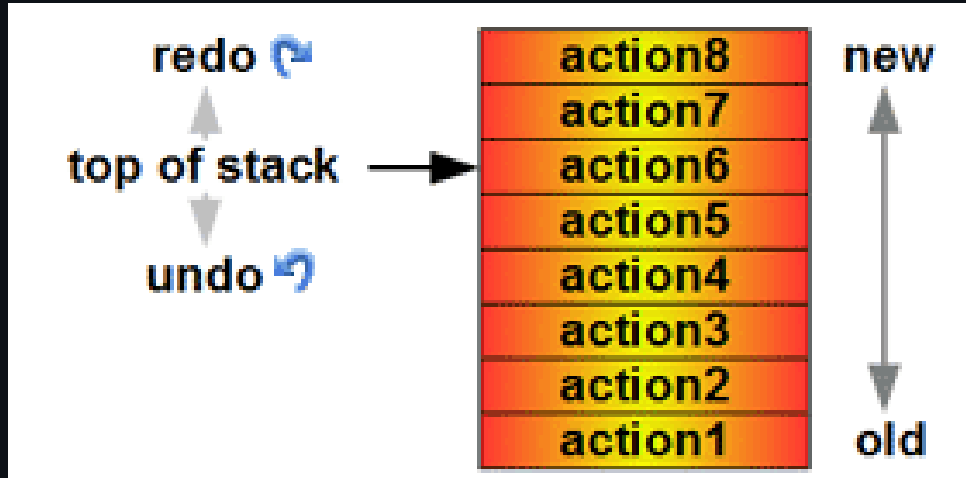

# Class Stack

java.util.Stack

## Constructor Summary

Constructors
Constructor and Description
<b>Stack()</b> Creates an empty Stack.

## Method Summary

All Methods	Instance Methods	Concrete Methods
Modifier and Type		Method and Description
boolean		<b>empty()</b> Tests if this stack is empty.
E		<b>peek()</b> Looks at the object at the top of this stack without removing it from the stack.
E		<b>pop()</b> Removes the object at the top of this stack and returns that object as the value of this function.
E		<b>push(E item)</b> Pushes an item onto the top of this stack.
int		<b>search(Object o)</b> Returns the 1-based position where an object is on this stack.

# Class stack

Main.java

+

428jybu4h

NEW

JAVA ▾

RUN ▶

⋮

1

STDIN

Input for the program ( Optional )

Output:

[]



- No se suele iterar sobre una pila.
- Se usa un bucle `while` para vaciar la pila.

```
while (!stack.isEmpty()) {  
    System.out.println(stack.pop());  
}
```

https://visualgo.net/en/stack

7 VISUALGO.NET / en /list LL **STACK** QUEUE DLL DEQUE

Exploration Mode ▾ LOGIN

<

Create(A)  
Peek  
Push  
Pop

<

1x

AboutTeamTerms of usePrivacy Policy

```
class Stack {  
    class Node {  
        int data;  
        Node next;  
        public Node(int data) {  
            this.data = data;  
            this.next = null;  
        }  
    }  
    Node head;  
    public Stack() {  
        this.head = null;  
    }  
    public void push(int e) {  
        Node newNode = new Node(e);  
        if (head != null) {  
            newNode.next = head;  
        }  
        head = newNode;  
    }  
    public int pop() {  
        int e = head.data;  
        head = head.next;  
        return e;  
    }  
    public int peek() {  
        return head.data;  
    }  
}
```

## Complejidad de las operaciones de una pila:


- `push` :  $O(1)$
- `pop` :  $O(1)$
- `peek` :  $O(1)$

# Cola (queue)

- **FIFO**: First In First Out
- Los elementos son guardados en el orden de inserción y no suelen tener índices.
- El "cliente" puede añadir elementos al final y examinar/quitar elementos del principio.



- Operaciones básicas:
  - enqueue: añadir un elemento al final
  - dequeue: quitar el elemento del principio
  - peek: ver el elemento del principio

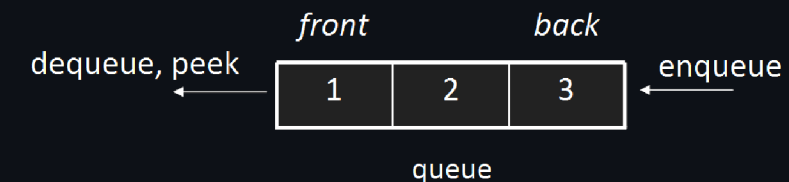

# Cola (queue)



www.datainfinities.com

# Interface Queue

java.util.Queue

## Method Summary

All Methods	Instance Methods	Abstract Methods
Modifier and Type	Method and Description	
boolean	<b>add(E e)</b>	Inserts the specified element into this queue if it is possible to do so immediately without violating capacity restrictions, returning true upon success and throwing an <code>IllegalStateException</code> if no space is currently available.
E	<b>element()</b>	Retrieves, but does not remove, the head of this queue.
boolean	<b>offer(E e)</b>	Inserts the specified element into this queue if it is possible to do so immediately without violating capacity restrictions.
E	<b>peek()</b>	Retrieves, but does not remove, the head of this queue, or returns null if this queue is empty.
E	<b>poll()</b>	Retrieves and removes the head of this queue, or returns null if this queue is empty.
E	<b>remove()</b>	Retrieves and removes the head of this queue.

https://visualgo.net/en/queue

7 VISUALGO.NET / en /list LL STACK **QUEUE** DLL DEQUE

Exploration Mode ▾ LOGIN

<

Create(A)  
Peek  
Enqueue  
Dequeue

<

1x

AboutTeamTerms of usePrivacy Policy



```

class Queue {
    class Node {
        int data;
        Node next;
        public Node(int data) {
            this.data = data;
            this.next = null;
        }
    }
    Node head, tail;
    public Queue() {
        this.head = this.tail = null;
    }
    public void enqueue(int e) {
        Node newNode = new Node(e);
        if (head == null) {
            head = tail = newNode;
        } else {
            tail.next = newNode;
            tail = newNode;
        }
    }
    public int dequeue() {
        int e = head.data;
        head = head.next;
        return e;
    }
    public int peek() {
        return head.data;
    }
}

```

## Complejidad de las operaciones de una cola:

- enqueue :  $O(1)$
- dequeue :  $O(1)$
- peek :  $O(1)$

# Ejercicios

- List
  - Reverse a doubly linked list (easy)
  - Cycle Detection (medium)
  - Get Node Value (easy)
- Stack
  - Equal stacks (easy)
  - Balanced brackets (medium)
- Queue
  - Queue using two stacks (medium)
-