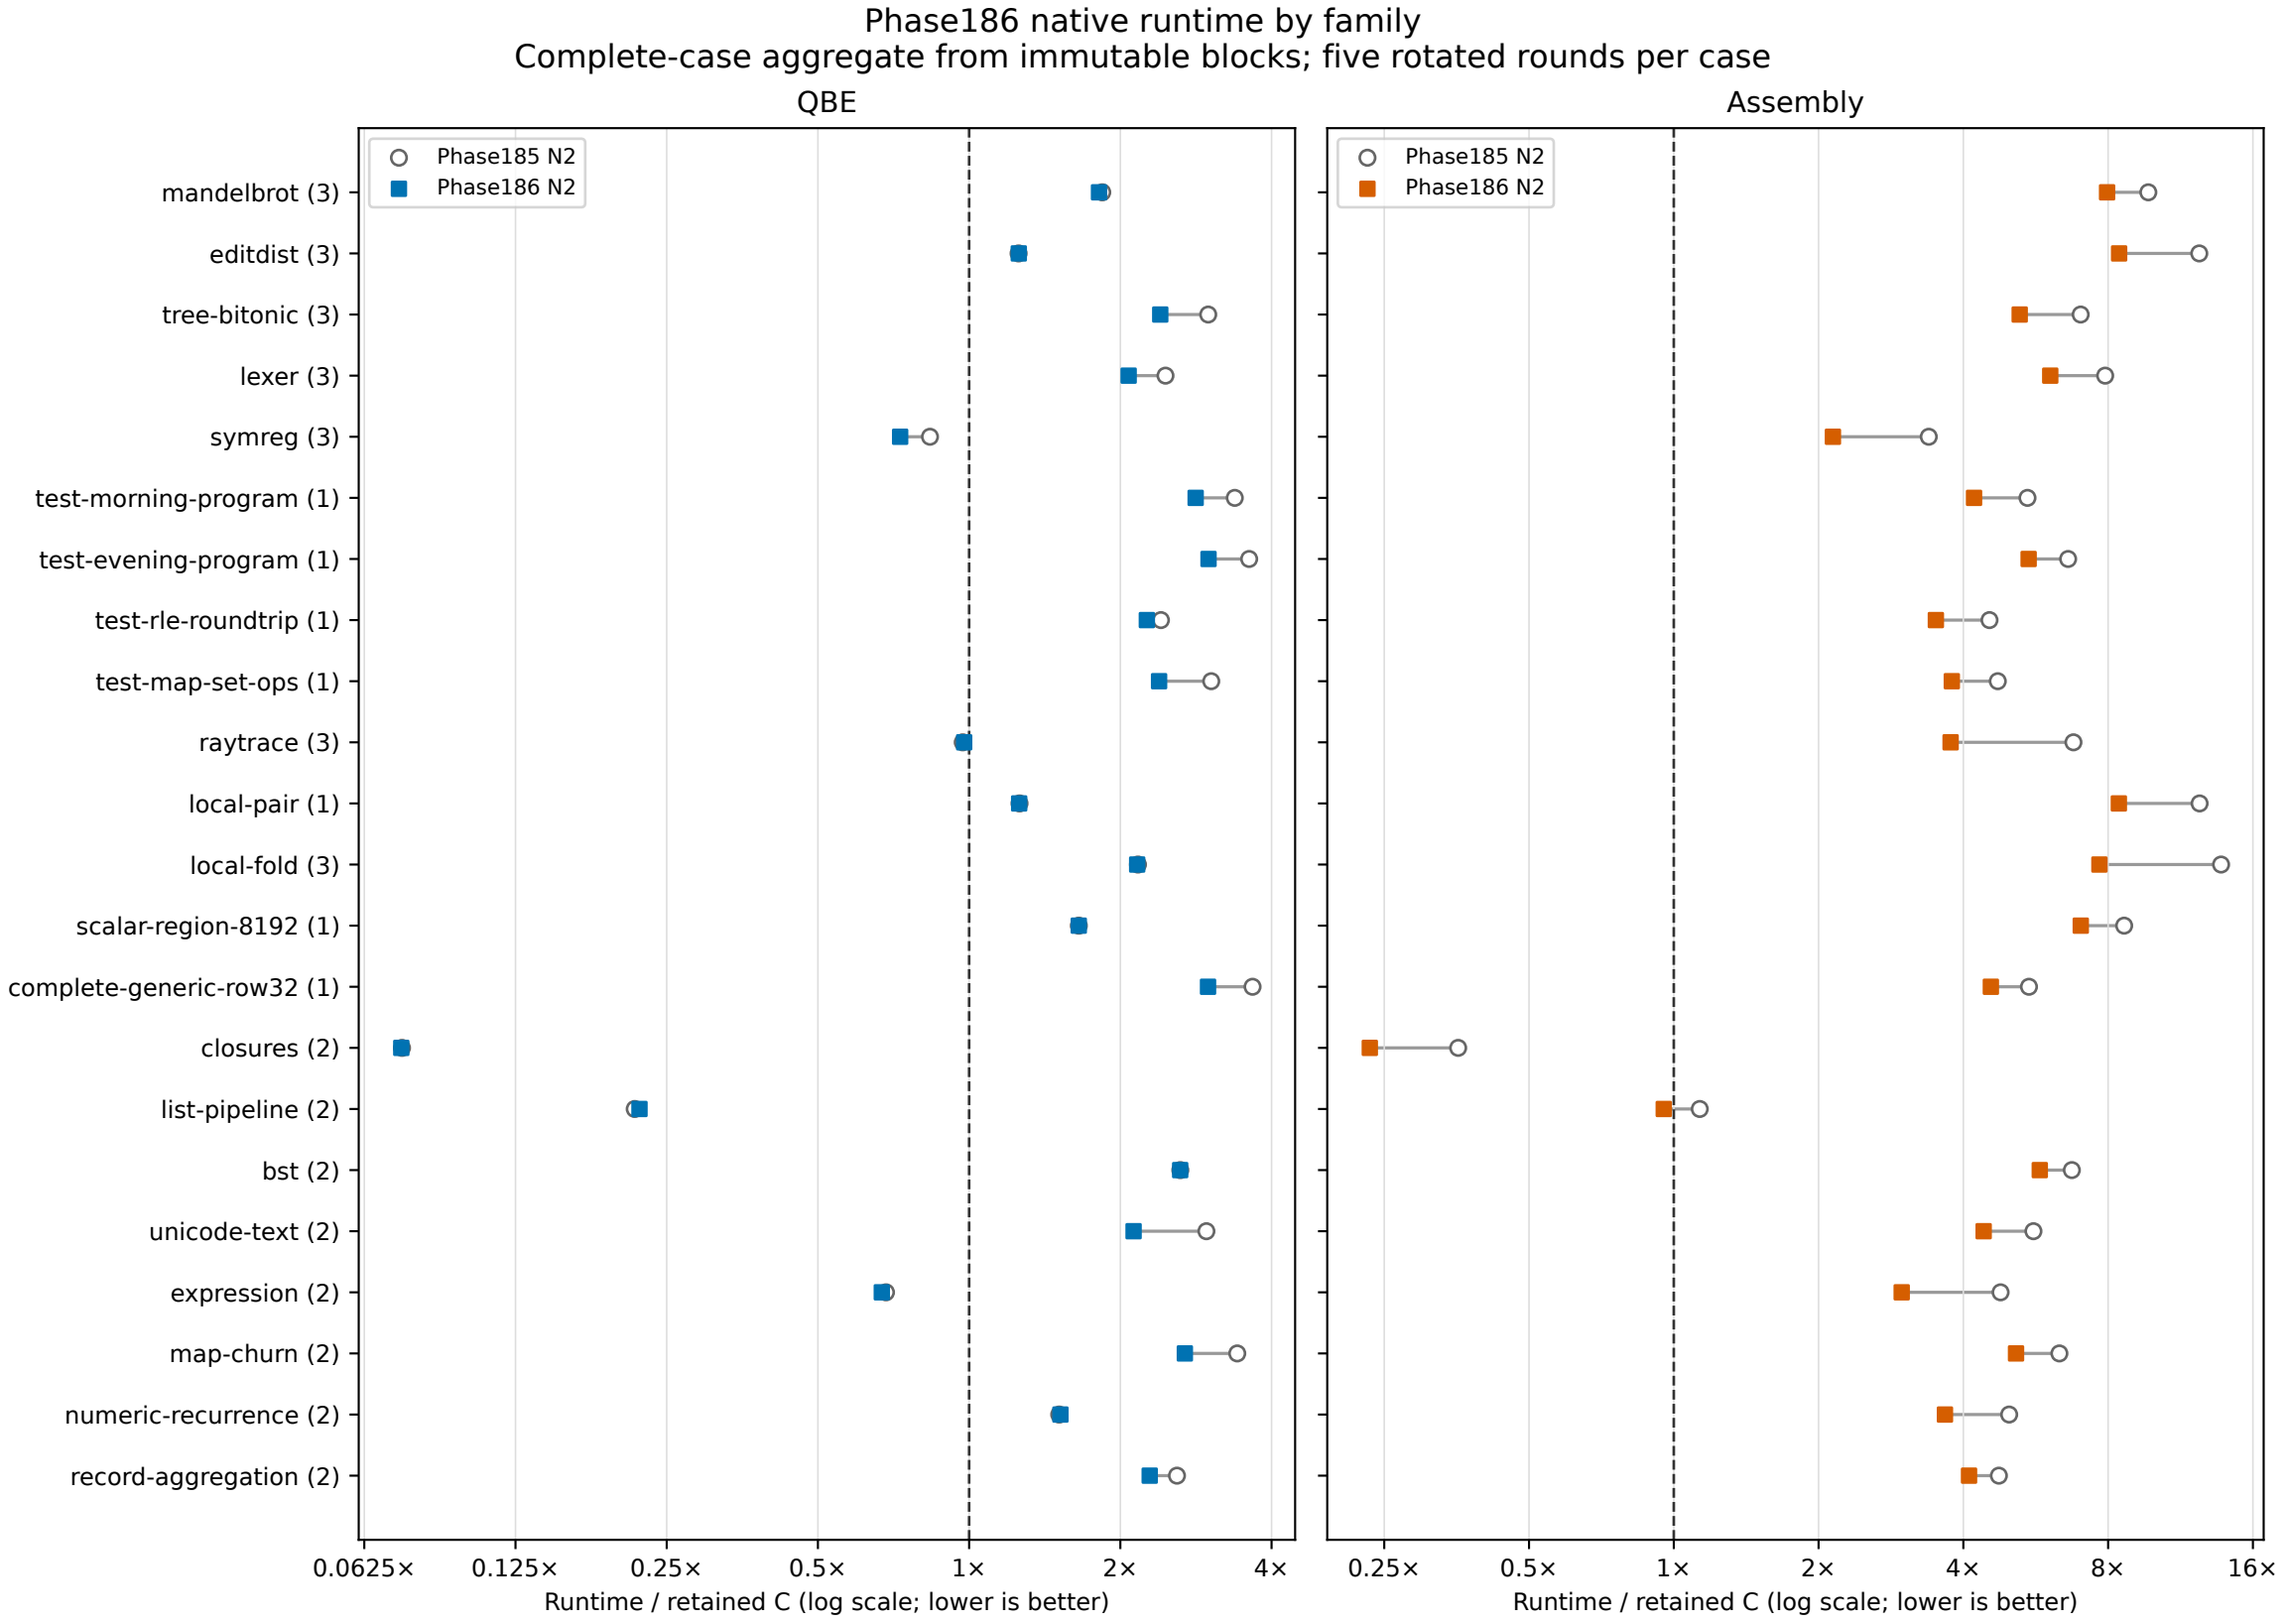
Phase186 native runtime by family
Complete-case aggregate from immutable blocks; five rotated rounds per case
QBE
Assembly
Phase185 N2
Phase186 N2
mandelbrot (3)
editdist (3)
tree-bitonic (3)
lexer (3)
symreg (3)
test-morning-program (1)
test-evening-program (1)
test-rle-roundtrip (1)
test-map-set-ops (1)
raytrace (3)
local-pair (1)
local-fold (3)
scalar-region-8192 (1)
complete-generic-row32 (1)
closures (2)
list-pipeline (2)
bst (2)
unicode-text (2)
expression (2)
map-churn (2)
numeric-recurrence (2)
record-aggregation (2)
0.0625×
0.125×
0.25×
0.5×
1×
2×
4×
8×
16×
Runtime / retained C (log scale; lower is better)