


Bend compiler implemented in Bend: the measured history

Selected checkpoints, 21–29 September 2026 · PR #1207 · head 5350b2f
Agent-generated research report. Milestones are equally spaced, not an elapsed-time axis.


1 Compiler checking cost: progressively less work

Filled = release; hollow = predecessor on the same input. Separate checking-only windows; sources evolve.

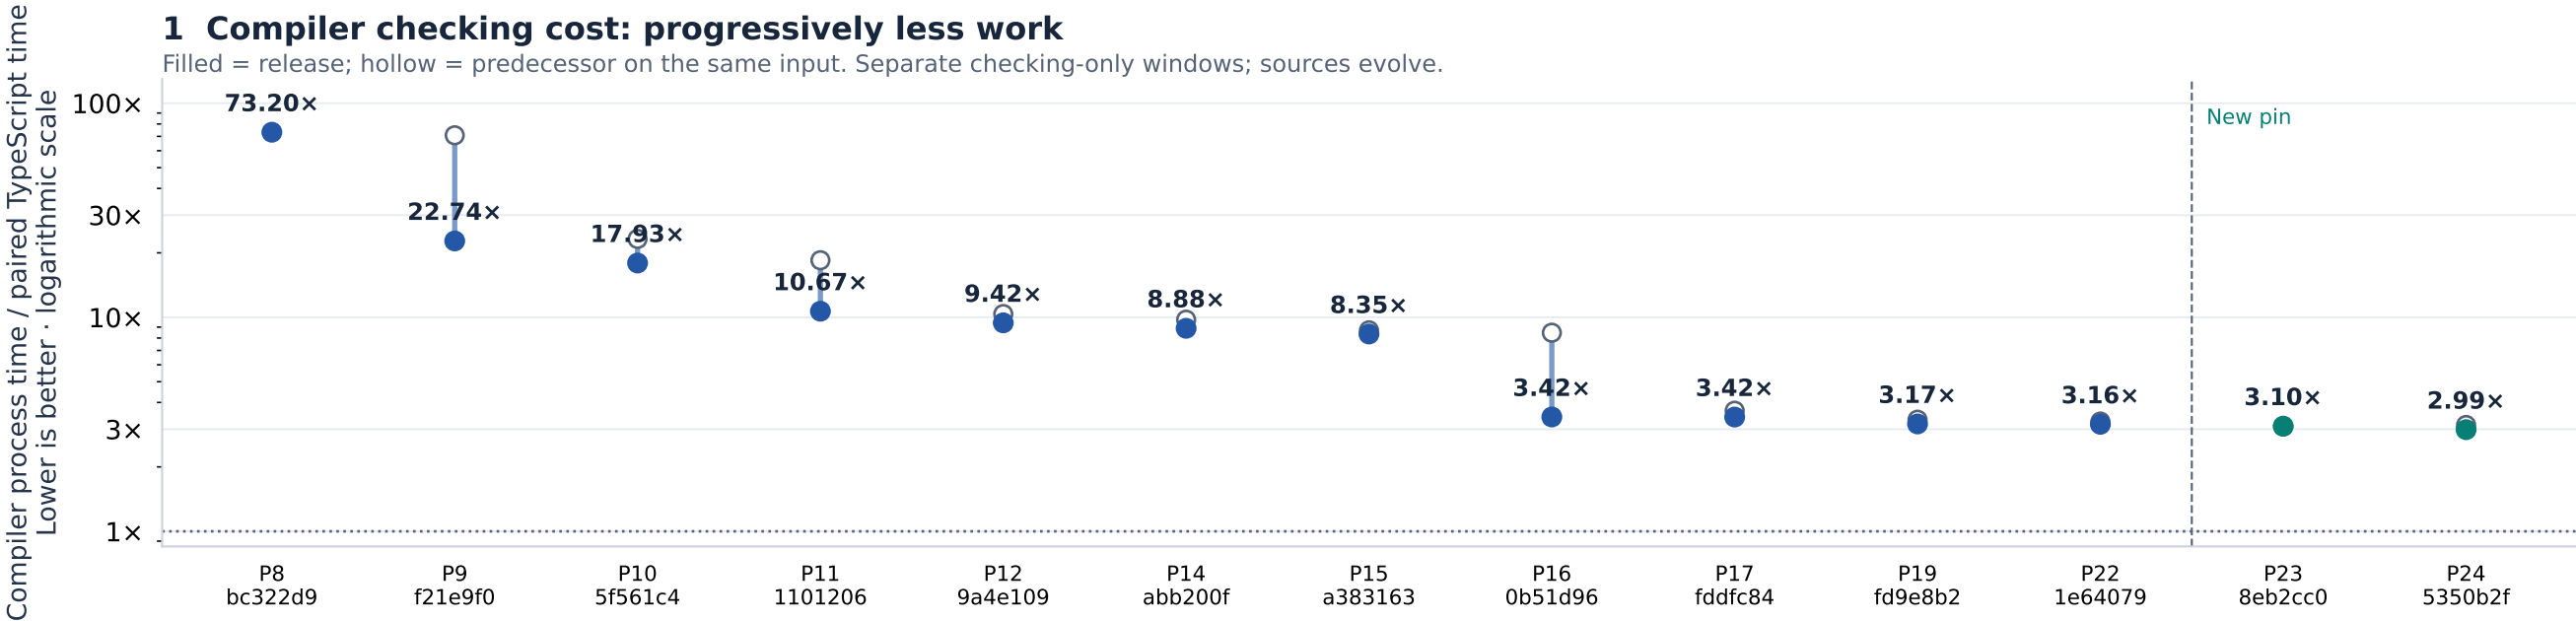


2 Conformance: exact agreement within each pinned frontend suite

Pin/suite changes break the line. Zero differences is finite tested agreement, not universal conformance.

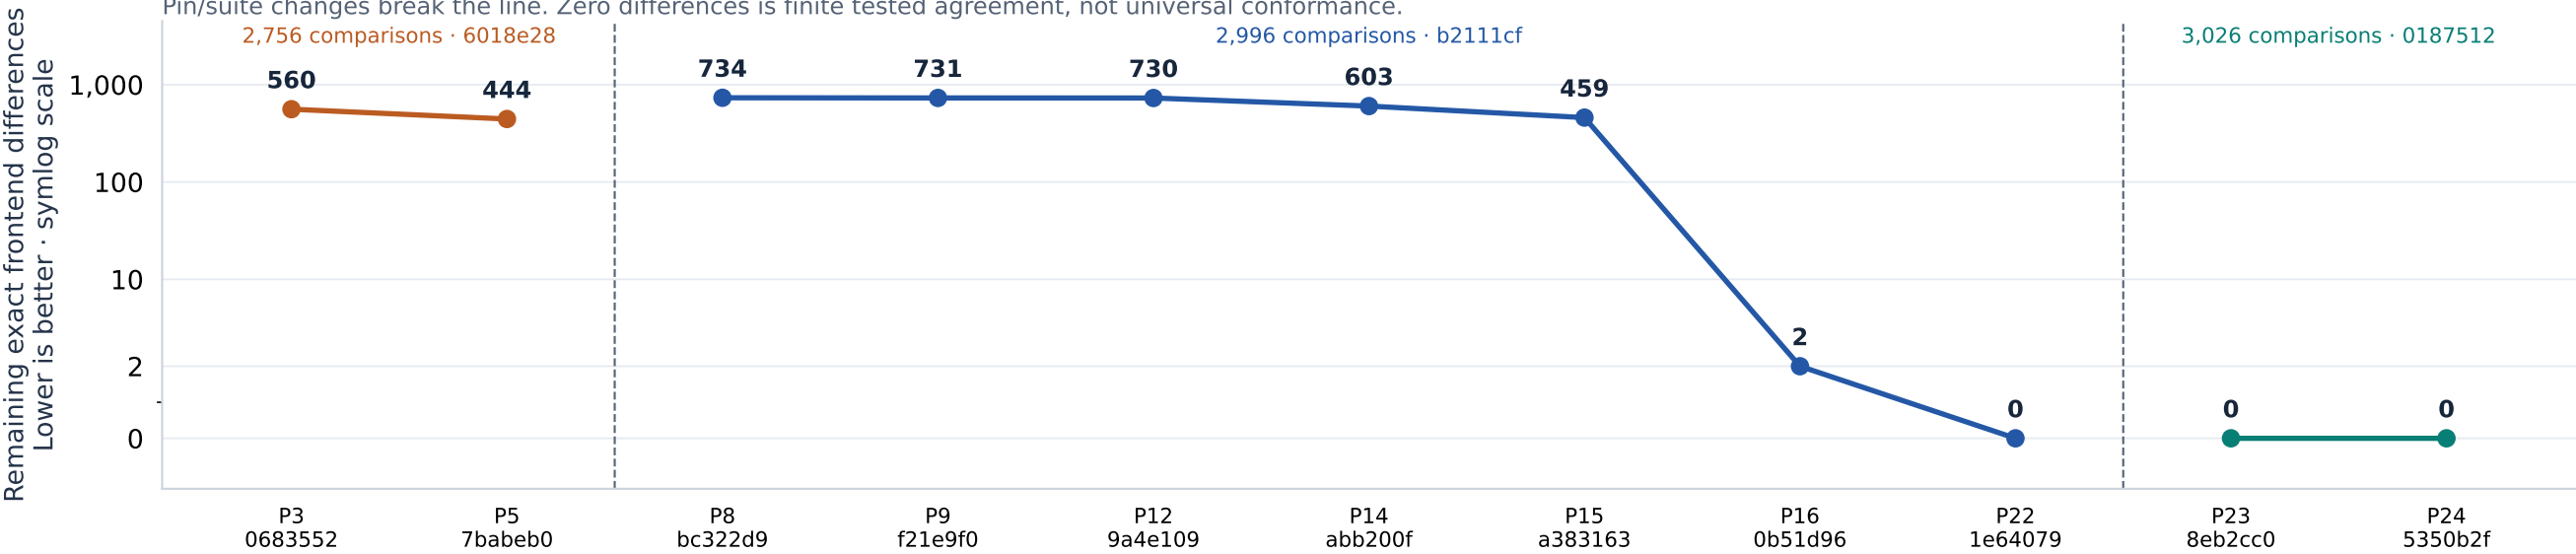

3 Simplicity: meaningful consolidation, with later growth for correctness

Canonical compiler Bend modules: includes backends/driver; excludes host/runtime, generated files and tests.

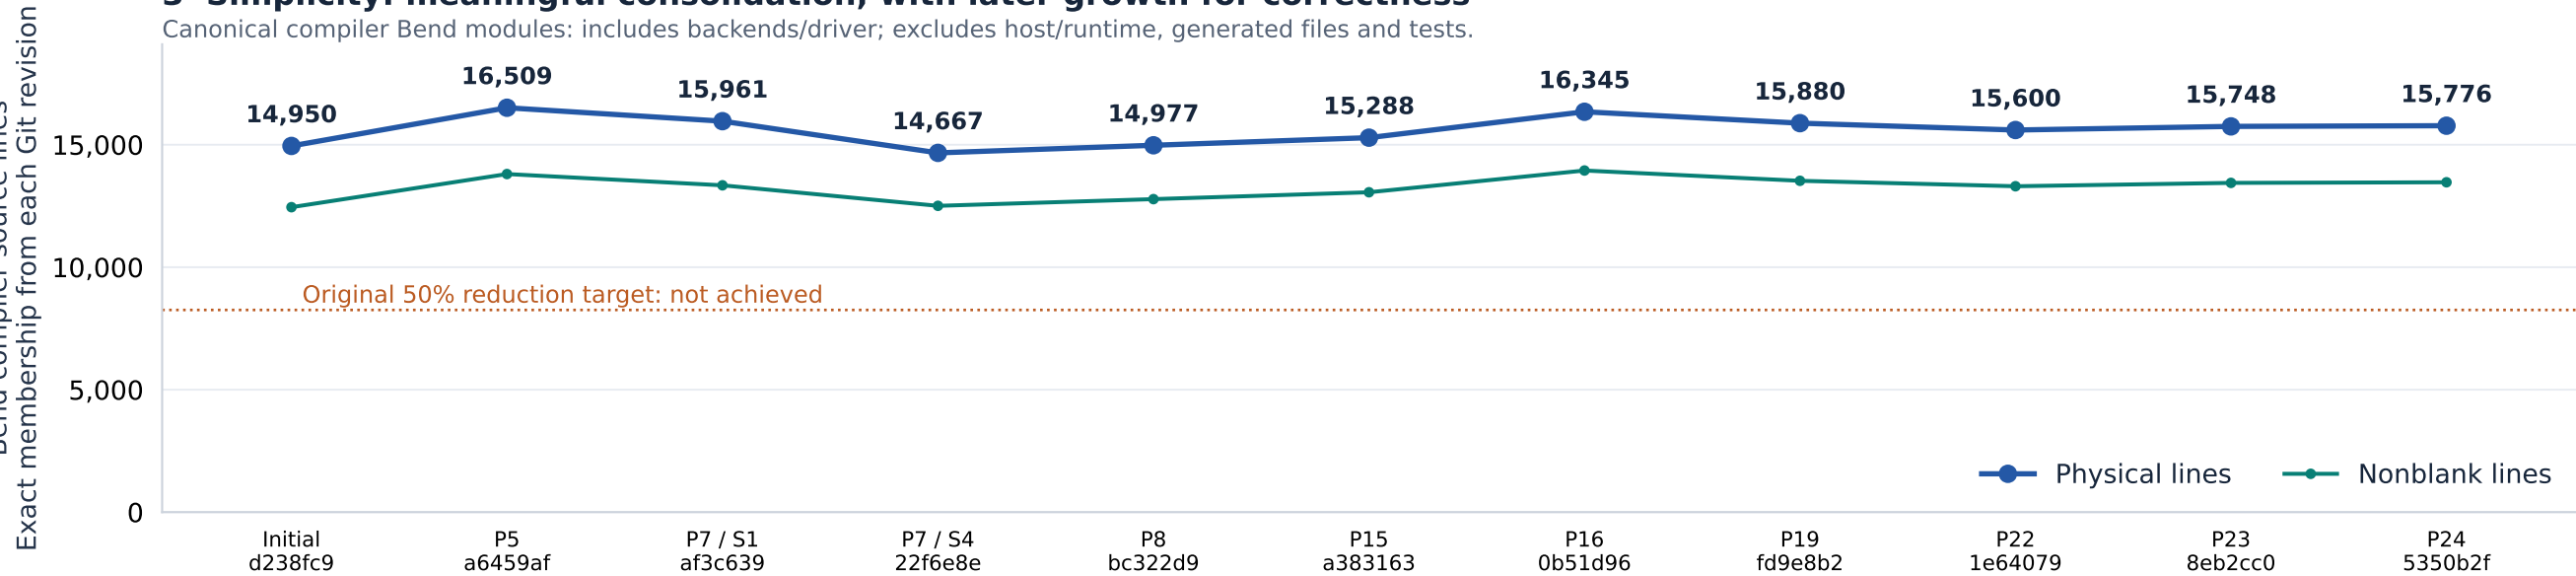

Sources, full commits, commands and scope: chart-data.json, history tables and report.md.
Checking: 2–3 samples/image; Bend uses validated Base caches, TypeScript checks Base.
Earlier $\approx 40\times$ self-emission has a different compiler generation and timing boundary; it is not joined to the checking series.