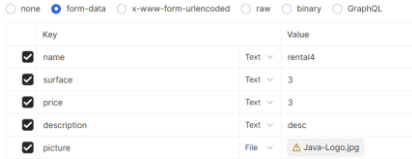


Définition d'API

URL	Méthode	Description	Params (path/query)	Body (JSON)	Status	Exemple de réponse
/api/auth/register	POST	Créer un compte utilisateur	-	{ "name": "", "email": "", "password": "" }	200, 400	{ "token": "jwt" }
/api/auth/login	POST	Se connecter à un compte utilisateur	-	{ "email": "test@test.com", "password": "test" }	200, 401	{ "token": "jwt" }
/api/rentals	GET	Récupérer les locations	-	-	200, 404, 401	{ "rentals": [{ "id": 4, "name": "rental4", "surface": 3, "price": 3, "picture": "http://localhost:3001/images/1779484029724_Java-

						Logo.jpg", "description": "desc", "owner_id": 1, "createdAt": "2026-05-22T23:07:10", "updatedAt": "2026-05-22T23:07:10" }] }
/api/user/:id	GET	Récupérer les informations de l'utilisateur spécifié	id	-	200, 401, 404	{ "created_at": "2026/05/20", "email": "test@test.com", "id": 1, "name": "test", "updated_at": "2026/05/20"

						}
/api/auth/me	GET	Récupérer les informations de l'utilisateur connecté	-	-	200, 401, 404	{ "created_at": "2026/05/20", "email": "test@test.com", "id": 1, "name": "test", "updated_at": "2026/05/20" }
/api/rentals/:id	GET	Récupérer le détail d'une location	id	-	200, 401, 404	{ "id": 4, "name": "rental4", "surface": 3, "price": 3, "picture": "http://localhost:3001/images/1779484029724_Java-" }

						Logo.jpg", "description": "desc", "owner_id": 1, "createdAt": "2026-05-22T23:07:10", "updatedAt": "2026-05-22T23:07:10" }
/api/rentals	POST	Créer une nouvelle location	-		200, 400, 401	{ "message": "Rental created !" }
/api/rentals/:id	PUT	Mettre à jour une location existante	id	{ "name": "rental3_u", "surface": 20, "price": 20, "description": "desc_u"	200, 400, 401, 404	{ "message": "Rental updated !" }

				}		
/api/messages	POST	Créer un message pour une location	-	{ "rental_id":1, "owner_id":1, "message": "test message" }	200, 400, 401, 404	{ "message": "Message send with success" }