

DEAKIN UNIVERSITY

FULL STACK DEVELOPMENT: SECURE FRONTEND APPLICATIONS

ONTRACK SUBMISSION

New Post Page

Submitted By:

Romil BIJARNIA

s222528574

2026/09/14 17:06

Tutor:

Nisha KUMARI

Task Outcomes		Supports
TLO1	Demonstrate engagement with the following unit learning outcomes (legacy)	ULO Unit Learning Outcome 1

September 14, 2026



New Post Page

Romil Bijarnia | 222528574 | 14 September 2026

C1 extends the shared DEV@Deakin layout with a Post route for either a Question or an Article. The page follows the supplied structure: New Post bar, inline post-type selection, the ask-or-share section, relevant content fields, tags and a right-aligned Post button.

Conditional rendering with React state

React state holds the selected type, field values, validation errors and received status. Question renders a title and problem description. Article renders a title, abstract and article text. Both use the same tags control. Separate type-specific drafts are retained when switching between the radio options.

Only the active type is validated. Changing a field or switching type clears an earlier success message. Valid content remains visible for review, but refreshing clears the local post draft.

Selected type	Visible content fields
Question	Title, Describe your problem and Tags.
Article	Title, Abstract, Article Text and Tags.

What Post Received means

A valid C1 submission displays **Post Received**. It is a frontend acknowledgement, not a Firestore write or a claim that the content is published. Persistence is deliberately deferred, as the C1 task specifies.

Input feedback

Whitespace-only content is rejected. Up to three optional tags are allowed; duplicate tags, empty comma-separated items and oversized tags produce field feedback. Errors retain entered content and move focus to the first invalid field. Code-like input is rendered as text rather than executable HTML.

Field limits: title 160 characters, problem 10,000, abstract 1,000, article text 20,000 and each tag 30.

Verification on 6 September 2026: 62 automated tests passed (38 authentication/adapter/validation and 24 interface tests), including conditional fields, tags, acknowledgement and the absence of a post write. Figures 1-4 show browser and Firebase-console checks from the same date.

Question submission

The Question option presents a title, problem description and tags. This browser example supplies all required content and three tags, then submits the form.

New Post

Select Post Type: ☒ Question ☐ Article

What do you want to ask or share

Title
Up to 160 characters.

Describe your problem

Up to 10,000 characters.

Tags
Optional: add up to 3 tags, separated by commas. Each tag can contain up to 30 characters.

Post

Post Received

Figure 1. Valid Question and Post Received in the actual browser. Content remains available for review; C1 does not save this post to a database.

The acknowledgement belongs to the current values. Editing them or changing the selected type clears it, preventing an older success state from being mistaken for a new submission.

Article submission

Selecting Article replaces the problem description with two distinct fields: Abstract and Article Text. Validation applies to the selected Article, not a previously completed Question.

New Post

Select Post Type: ☐ Question ☒ Article

What do you want to ask or share

Title
Up to 160 characters.

Abstract

Up to 1,000 characters.

Article Text

Up to 20,000 characters.

Tags
Optional: add up to 3 tags, separated by commas. Each tag can contain up to 30 characters.

Post

Post Received

Figure 2. Article-specific fields, three tags and Post Received. The text is a synthetic test example entered for this check.

Validation and supporting links

Tags

react, validation, usability, testing

Optional: add up to 3 tags, separated by commas. Each tag can contain up to 30 characters.

Use no more than 3 tags.

Please check the highlighted fields.

Post

Figure 3. Browser detail: a fourth tag produces a field error and summary; the input remains focused for correction.

Inherited registration, login, reload restoration and logout were also checked against real Cloud Firestore. The local application ran at 127.0.0.1:5176; its account storage was cloud-backed, while its C1 post form remained deliberately non-persistent.

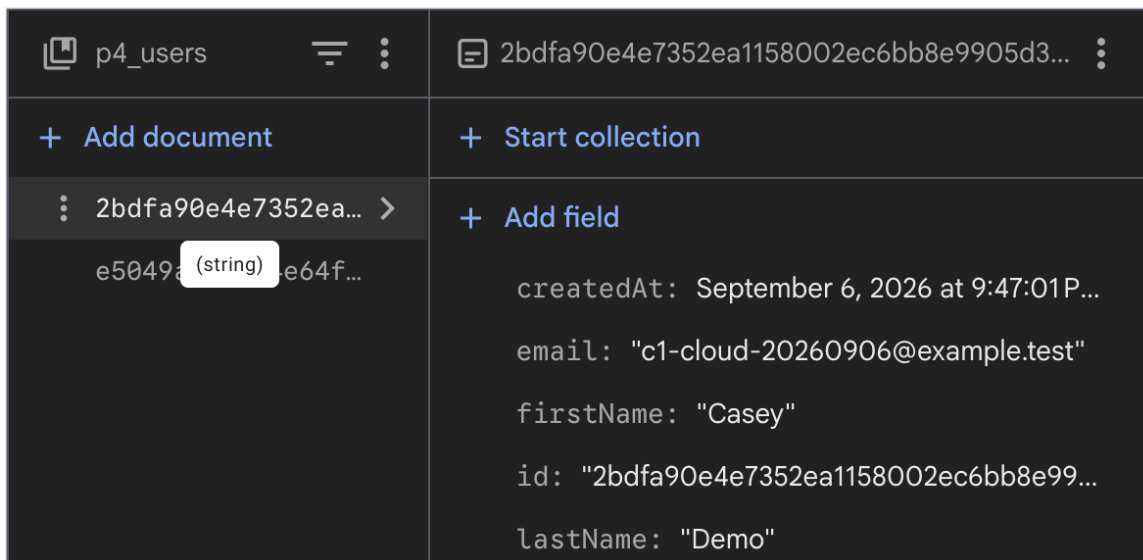


Figure 4. Firebase console detail of the C1 test account. A separate SDK read confirmed bcrypt cost 12, expected identity, a server timestamp and no plaintext-password fields.

Source code and walkthrough

GitLab repository - C1 source files

<https://gitlab.deakin.edu.au/s22528574/task-c/-/tree/review-c1-20260906/reviewed-app>

Panopto walkthrough - recorded 14 September 2026 (4:21)

<https://deakin.au.panopto.com/Panopto/Pages/Viewer.aspx?id=27487171-503d-48aa-9f28-b4c5004fe06f>