
The application owns the job; policies govern execution

Follow one supplied operation, then distinguish reusable policy state from one call's progress.

APPLICATION

Owns the business lifecycle



Identity

Prepare
Acknowledge
Store outcome


Creates and retains policies.
Chooses which operations share each instance.

No automatic grouping by the service contacted.

Value or error returns here

POLICY-CONTROLLED EXECUTION

Application supplies the work; Cockatiel need not know its business meaning.

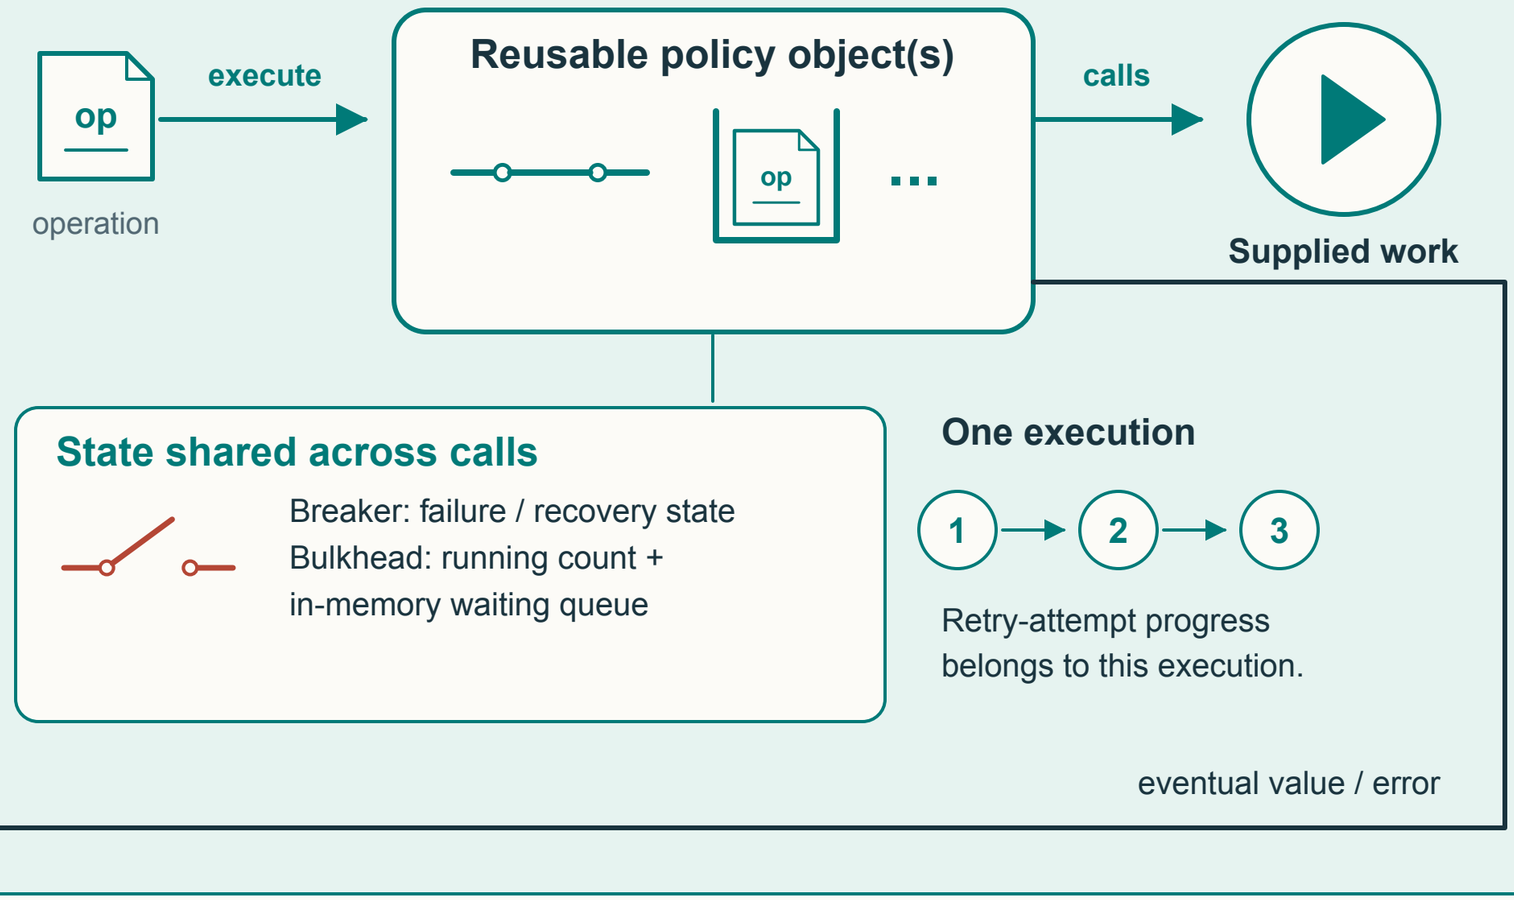

Read this as a division of responsibilities, not a deployment diagram.
The operation ticket is an invocation, not a durable submitted job. Symbols recur in the next views.

Starting, waiting and succeeding are different

Illustrative states, not execution traces. Repeated tickets along arrows show the same call at successive positions.

BULKHEAD / CAPACITY

Example only: 1 execution slot + 1 queue slot



START

Capacity available.
Outcome still pending.



WAIT

Execution full; queue has room.
Result remains pending.



REFUSE

Both capacities exhausted.
Admission error.

BREAKER / PERMISSION

Default single-trial example for half-open



CLOSED

Normally allows work



OPEN

Withholds attempts




HALF-OPEN

Allows limited recovery work



While one trial runs, others wait.
Then they face the new decision;
they can still be refused.

Manual isolation can also hold the breaker open.

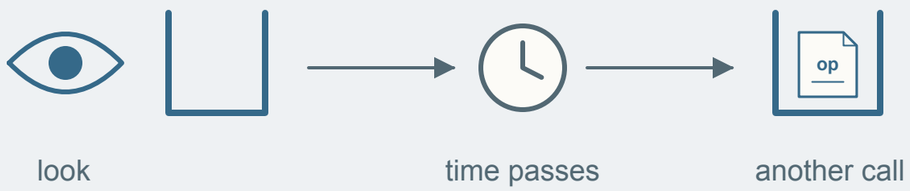

A snapshot reserves nothing.


Capacity or state can change before execution.
Waiting is not failure; trial eligibility is not proof of health.

The outside policy controls calls into the inside

Wrapping retains the component instances and their separate states. Order changes where work can wait.

ILLUSTRATIVE SITUATIONS Repeated tickets along arrows show successive positions of the same call.


A

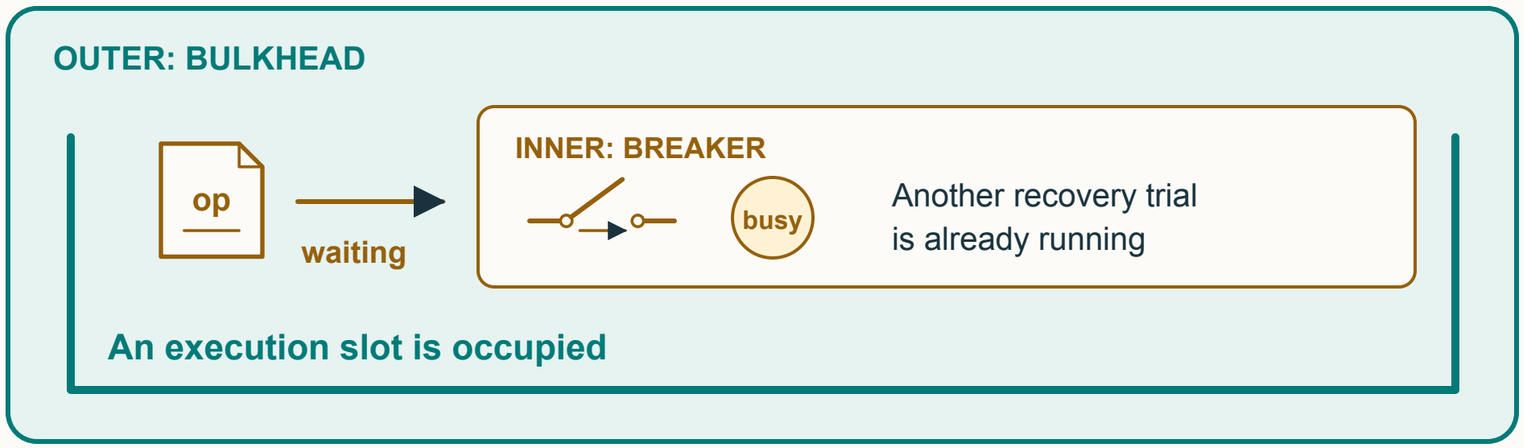

Capacity can be held while waiting for the breaker.

Occupied capacity need not mean the supplied work has started.

B

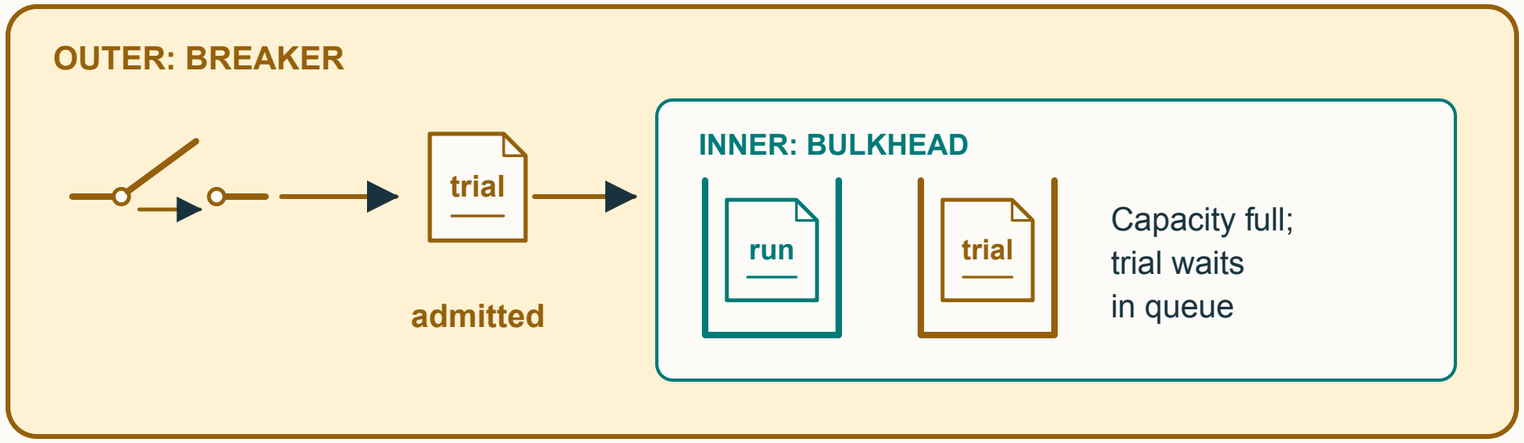

A recovery attempt can be admitted, then wait for capacity.

Admission by one policy does not settle the whole composition.

RETRY OUTSIDE A BREAKER




Selected failure? Another attempt calls through the breaker again.
Policy events describe local activity, not one whole-composition verdict.
An outer retry or fallback can handle an inner failure before the caller sees it.

Source: 14 Oct 2026 working account, first extraction. Static inspection; no runtime verification.


Move the transition, not the work

Reported need: avoid expensive job preparation while the breaker blocks work. Scenario not reproduced.

REPORTED APPLICATION LOOP

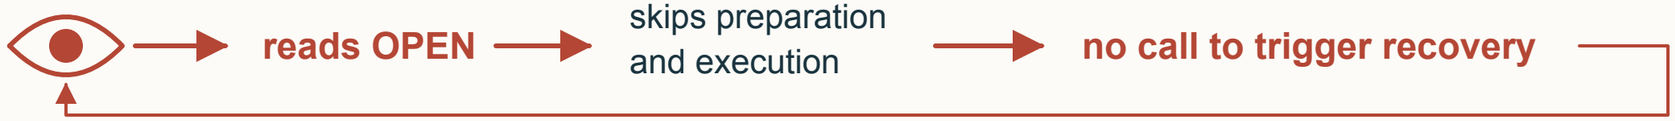

This can keep stored state OPEN even after the delay has elapsed.

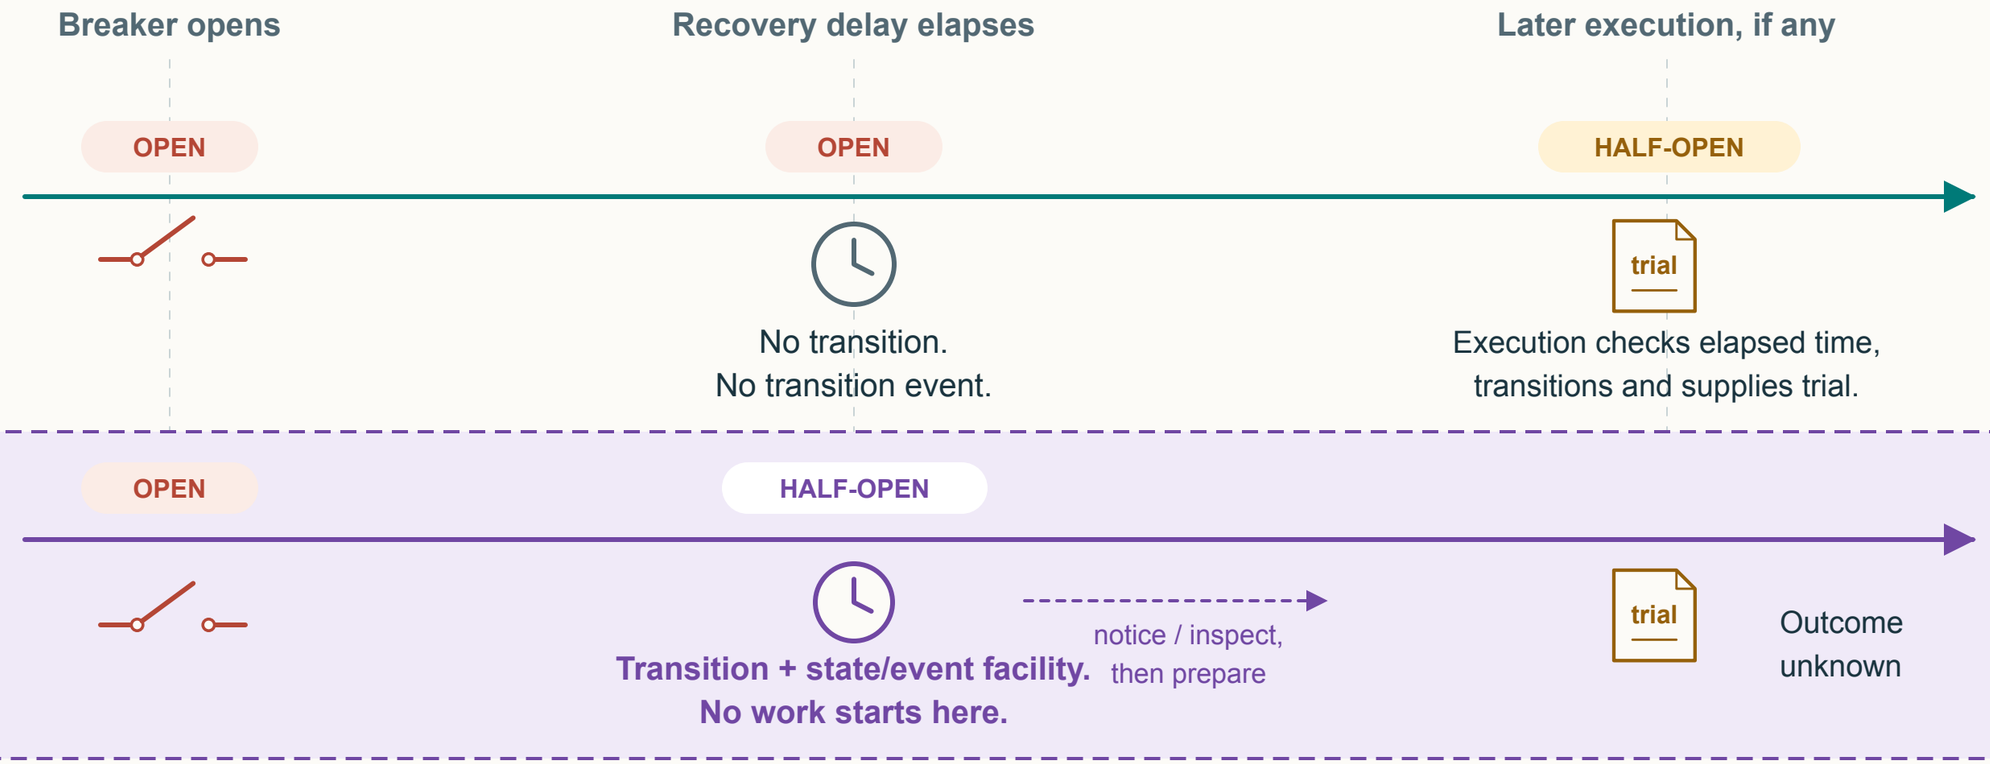

HUMAN PREFERENCE Solve the immediate need; fit existing facilities; avoid speculative expansion.

? Still to settle: event order + duplicate transitions; obsolete timers after isolation or reopening; state restoration; timer lifetime + process liveness; compatibility; scenario reproduction.

Eligibility is not reserved permission or demonstrated health. No implementation or maintainer acceptance is claimed.

Source: 14 Oct 2026 working account, first extraction. Static inspection; no runtime verification.