

UNIVERSITAT DE BARCELONA

COMPUTER VISION

LAB 11 REPORT

JORGE ALEXANDER & EMER RODRIGUEZ FORMISANO

VLFeat configuration:

```
clear all;  
VLFEAT_DIR = 'VLFEATROOT';  
run(fullfile(VLFEAT_DIR, '/toolbox/vl_setup'));  
vl_version;
```


0.9.20

a)

First, train the model with a subset of categories and load it:

```
categorySubset = { 'Leopards', 'accordion', 'pizza', 'Faces', 'laptop', 'tick'};  
modified_phow_caltech101(categorySubset);
```


```
Training model for class tick  
Training model for class laptop  
Training model for class Faces  
Training model for class pizza  
Training model for class accordion  
Training model for class Leopards
```

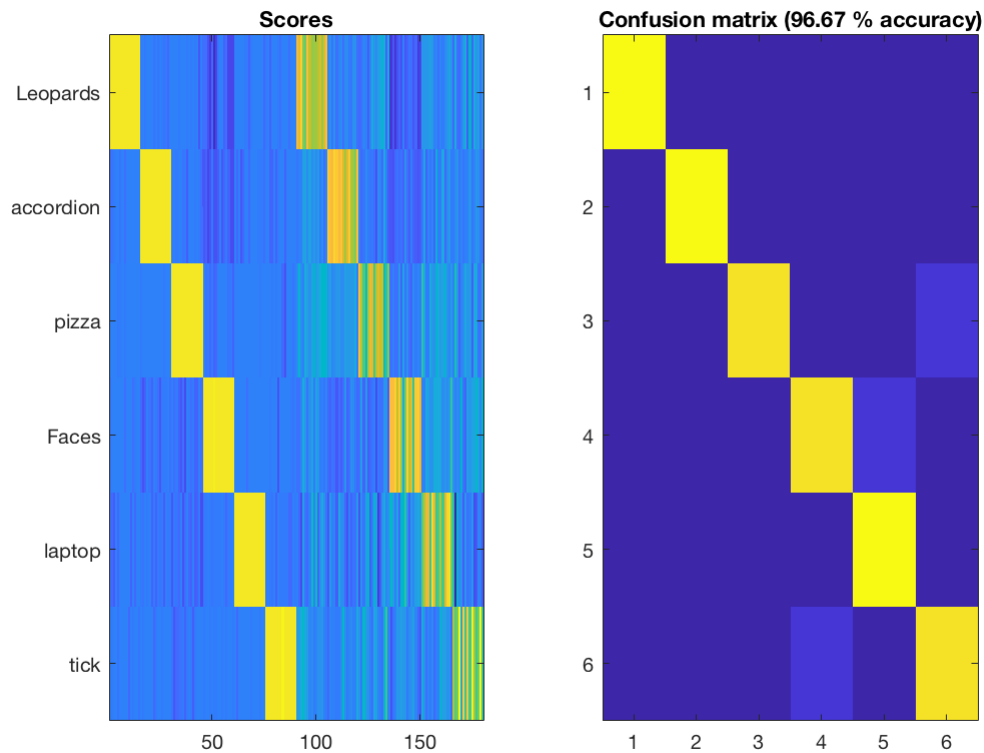

```
modelPath = fullfile('data','baseline-model.mat');
load(modelPath);
```

Add a function to train visualize the images in a green framework if the classification is correct and in a red framework if it does not:

```
%
% Choose imageCount random images to classify and draw border around
%
imageCount = 25;
imageBaseDir = fullfile('data','caltech-101','101_ObjectCategories');
imagePaths = buildImagePaths(imageBaseDir, categorySubset, imageCount);
visualizeImgClass(imagePaths, model);
```

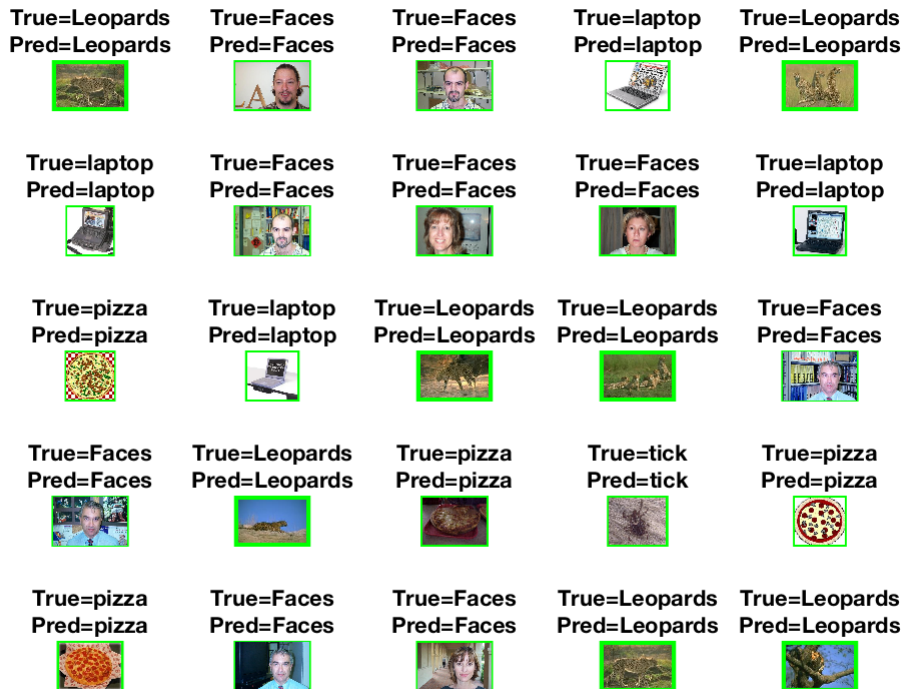

b)

What are the PHOW descriptors?

They represent the Pyramid Histogram Of visual Words.

The function to obtain them is

```
%[FRAMES, DESCRS] = vl_phow(IMG)
```

DESCRS, Each column of DESCRS is the descriptor of the corresponding frame in FRAMES. A descriptor is a 128-dimensional vector of class UINT8.

It represents a 4x4 spatial histogram of gradient orientations, each with 8 different directions, leading to a 4x4x8=128 dimensional vector.

FRAMES(1:2,:) are the x,y coordinates of the center of each descriptor, FRAMES(3,:) is the contrast of the descriptor, as returned by VL_DSIFT() (for colour variant, contrast is computed on the intensity channel). FRAMES(4,:) is the size of the bin of the descriptor.

What does the Sizes parameter mean?

It's the scales at which the dense SIFT features are extracted. Each value is used as the spatial bin size in pixels when extracting a dense set of SIFT features from the image.

What does happen if the Sizes parameter is augmented?

From the lectures, the code to calculate the phow descriptors:

```

% step = 5;
% for size=[5,7,10,12]
%     [x,y]=meshgrid(1:step:width, 1:step:height);
%     frames = [x(:)'; y(:)'];
%     frames(3,:) = size/3;
%     frames(4,:) = 0;
%     [frames, descrs] = vl_sift(im, 'Frames', frames);
% end

```

It can be observed that if the size is increased the size of the bin of the descriptor is increased.

What does the Step parameter mean?

Step (in pixels) of the grid at which the dense SIFT features are extracted.

What does happen if the Step parameter is augmented?

If the step parameter is augmented, then a grid with a lower resolution is created, and less features are extracted.

c)

What are the words in the algorithm?

How are they extracted?

What is their dimension?

How their number does affect the accuracy of the results?

```

vocabPath = fullfile('data','baseline-vocab.mat'); load(vocabPath); vocab

```

```

vocab =
128x600 single matrix
    0    62.1761    10.1183    14.7342    17.2441     2.5616     6.6848    17.7059 ...
    0    15.1479    19.9462     9.0127     6.3146     4.2603     3.7772    13.5163
    0    10.7887    70.7097    12.1835     5.5540    71.5274     5.2609    14.8039
    0     9.4437    54.0645     5.4241     6.4413   124.5890     3.5707     8.8758
    0     9.0915    10.0645     4.5949     5.0376     8.9863    11.1304     9.4444
    0     5.1761     5.7419     4.2911     7.3099     2.5616     4.6685     7.3856
    0     9.3944     7.7312    15.7025    34.1127     4.9247     5.2065     6.6667
    0    49.3521     6.9785    13.6139    46.2723     3.8356     4.8913     4.4641
    0    21.8169     7.0968    12.9684    16.1737     4.5685     8.8859     8.3137
    0    15.0000    20.3333    12.8038     8.6103     5.3014     5.2880    11.2745
    :
    :

```

We observe that the vocab consists of 128x600. The 128 represents the 128 dimensions of the sift descriptors generated by `vl_pchow`, as explained before. The 600 columns represent one word each. To extract the vocab, k-means is applied to the sift descriptors. Each word of the vocab represents the centre of the k-means clusters found. Observe the classification of 16 Pizzas images below:

```

imageCount = 16;
imagePaths = buildImagePaths(imageBaseDir, {'pizza'}, imageCount);
visualizeImgClass(imagePaths, model);

```

True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=tick



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza



True=pizza
Pred=pizza




True=pizza
Pred=pizza



Now we attempt to classify the same pizzas with a reduced number of words.

```
words = length(categorySubset);  
modified_phow_caltech101(categorySubset, 'reduced-vocab', words);
```

```
Training model for class tick  
Training model for class laptop  
Training model for class Faces  
Training model for class pizza  
Training model for class accordion  
Training model for class Leopards
```

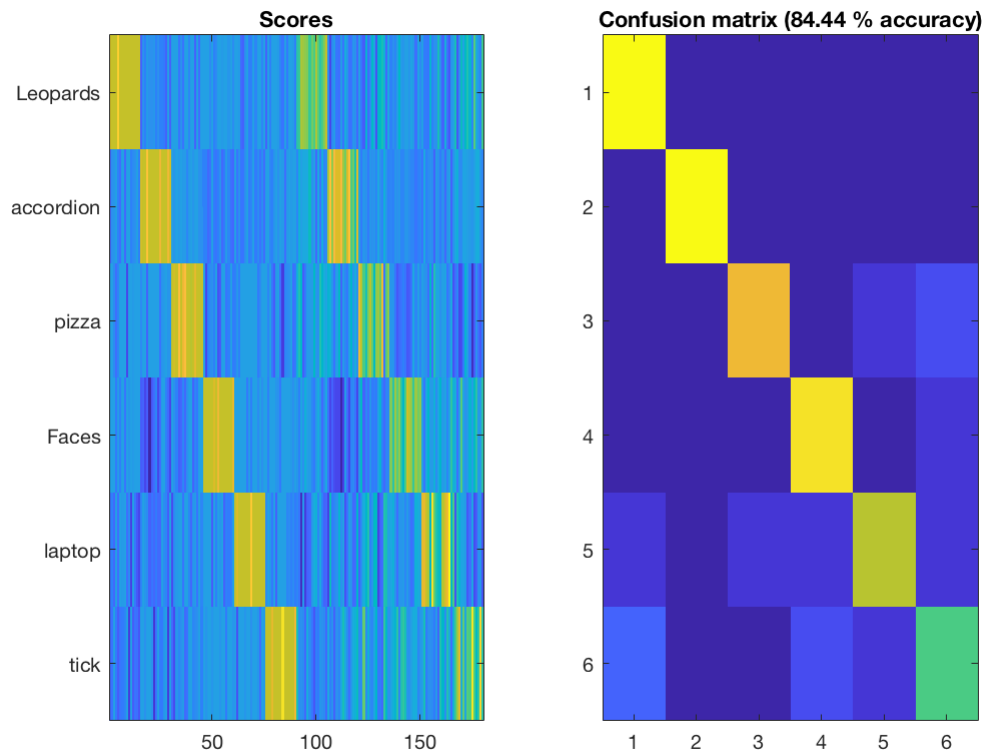

A lower accuracy of 84.44% is observed.

```
modelPath = fullfile('data','reduced-vocab-model.mat'); load(modelPath); model;
vocabPath = fullfile('data','reduced-vocab-vocab.mat'); load(vocabPath); vocab
```

```
vocab =
128x6 single matrix
    1.1234    21.4543    11.6557    16.2007    19.2118    33.5356
    0.5161    14.6118    16.2311    17.1164    29.4251    11.7328
    0.7841    14.5942    37.5170    26.0759    16.7001     9.0970
    0.1945    16.7308    27.9172    12.9012    11.3330    22.3647
    0.3987    34.8277    16.1615    11.3468    20.2988    19.1328
    0.8197    14.9710    15.2203    13.3195    29.9366    10.4675
    0.6086     8.8258    28.0213    28.8944    16.2982    15.2576
    0.1987     9.2216    13.9126    16.7263    10.2820    39.3471
    0.2732    25.9330    14.8228    18.3160    31.5388    47.6233
    0.3282    16.4696    20.8563    22.4670    47.4100    16.9878
    ⋮
```


```
visualizeImgClass(imagePaths, model);
```



We observe that although the classification accuracy has gone down, in the sample studied, the majority of pizzas have been classified correctly. There are enough clusters to classify the categories quite well as they are equal in size. We now try with less words than categories.


```
words = 2; modified_phow_caltech101(categorySubset, 'reduced-vocab', words);
```

```
Training model for class tick
Training model for class laptop
Training model for class Faces
Training model for class pizza
Training model for class accordion
Training model for class Leopards
```

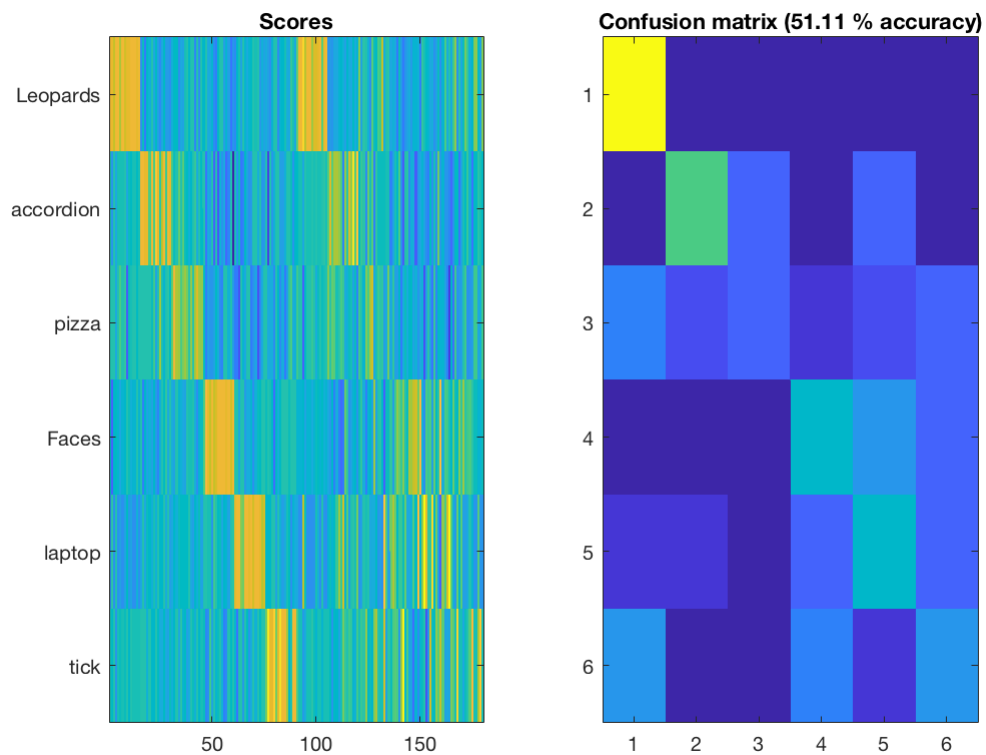

We now observe a much lower classification accuracy (51.1%), as there are not enough words to classify each image to the different categories. Let's see whether the same images are classified.

```
modelPath = fullfile('data','reduced-vocab-model.mat');
load(modelPath);
visualizeImgClass(imagePaths, model);
```

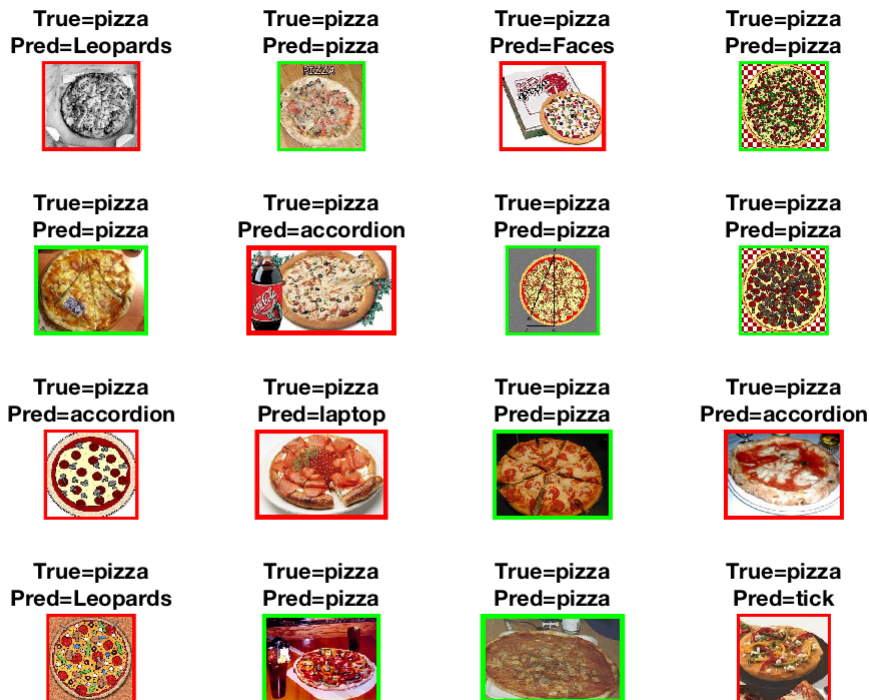It is now observed that many of the same pizzas are now classified incorrectly. It is important to have at least as many words as there are classification categories.

d)

Explore and explain how the k-means is applied, which parameters are used, what is there meaning and what are the advantages and the limitations of the method.

Code to construct vocabulary:

```
% vocab = vl_kmeans(descrs, conf.numWords, 'algorithm', 'elkan', 'MaxNumIterations', 50);
```

The image descriptors are passed to the kmeans algorithm as the data to cluster, and the number of words passed as an argument is used to determine the number of centroids that the kmeans algorithm will cluster the data to.

The algorithm chosen in the example is the 'elkan' algorithm, which is a fast version of the 'lloyd' algorithm, using triangular inequalities to optimize it. The 'lloyd' algorithm finds evenly spaced sets of points, which is what the k-means algorithm needs to find the centroid positions.

It finds a centroid for a set of points, and then re-partitions and re-calculates the centroids. The 'MaxNumIterations' parameter limits how many times it re-calculates in the case of it not converging before hand. Convergence is determined when the centroids are re-calculated but have not changed position since the last calculation.

The advantages of k-means is that it is unsupervised, and therefore the labels of the data do not need to be known. Also the clusters produced by k-means can be reused on new data. So providing that the k-

means algorithm has been clustered on a large amount of image categories and corresponding images, it can be used to cluster new data effectively.

However, selecting the ideal cluster size can sometimes be difficult, and once a cluster size has been determined, the whole algorithm has to be re-run to calculate a new cluster size.

e)

The function `getImageDescriptor` gives the spatial histogram of the image.

What is the spatial histogram?

It is a step of the object recognition by Bag-of-Words algorithm done between the training visual words step and computing the feature kernel map. It consists of breaking the image down in cells and perform the histogram of visual words in each cell. Afterwards, the histograms of each cell are concatenated. This is done in order to keep spatial information which would have been lost if the histogram is applied to the entire image only.


What dimension does it have?

The dimension of the histogram are the number of row cells times the number of columns cells (total number of partitions) times the number of visual words considered (bins). The "TinyProblem" settings of the code which considers only just 5 classes, have a 2 by 2 divisions (4 cells in total) with a total number of words value of 300. The size of the concatenated histogram sum up to 1200 values.

What happens if we augment `model.numSpatialX` from 2 to 4?

First, the number of cells doubled together with the datapoints required in the histogram (2400). Secondly, the accuracy also increased from 92% to 96%. However, if `model.numSpatialY` is also set to 4, the number of histogram values increases to 4800 and the the average accuracy also improves up to 97.33%. Latest settings, all faces were correctly classified and the background images missclassified were reduced to 2.

```
figure
imagesc([13 0 0 1 1; 0 15 0 0 0; 0 0 15 0 0; 0 0 0 15 0; 0 0 0 0 15]);
title(sprintf('Confusion matrix (%.2f %% accuracy)', 97.33)) ;
```

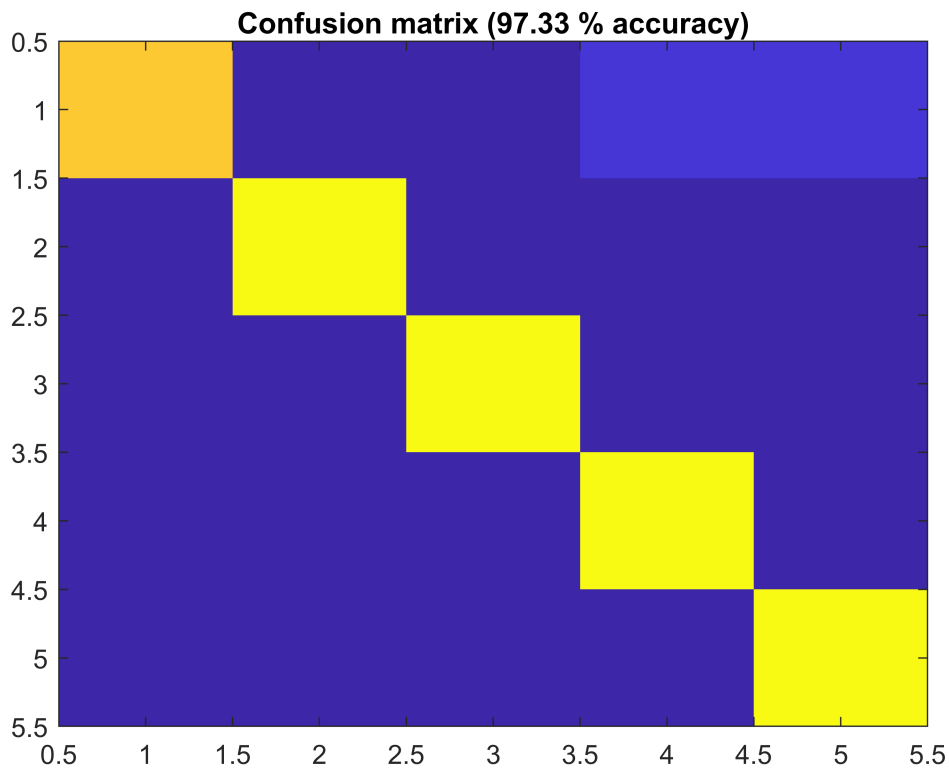

f)

The SVM classification with homogeneous kernels is performed by the `vl_svmtrain` function that needs the homogeneous kernel map obtained by the `vl_homkernmap` function.

What are the parameters obtained after the training process?

The training process using SVM generates two main parameters named W (weights) and b (bias) which are persisted in the model object.

What dimension do they have?

A SVM model is trained for each class.

The dimension of the weights of a single SVM model is the number of datapoints times the number of classes (1). With default settings of `TinyProblem`, the dimensions are 3600×1 . The final W dimension of the training process will be the concatenation of the weights for each class, with default settings, 5 classes (3600×5). The vector has a dimension of 3600 because the `vl_homkernmap` computes a $2 \times N + 1$ dimensional approximated kernel map for the Chi2 kernel. The input vector of `vl_homkernmap` is 1200 (the spatial histogram explained in e) and the value of N is 1. Thus $2 \times 1 + 1$ is 3, the output of the kernel map is $3 \times 1200 = 3600$ which is then passed to the SVM.

The dimension of the bias of a single SVM model is 1. Thus the final b dimension of the training process will be 1×5 (number of classes).

How do you apply them to obtain the score of the final classification?

The scores can be computed using the weights and the bias with the formula: $W^T X + b = Y$ and the sign of Y should match the Label or class vector made of -1 and +1 values.

g)


Is the algorithm invariant to rotation of the images?

```
figure();
```

```
catName = 'Leopards';  
mkdir(catName);
```

Warning: Directory already exists.

```
imgPath = fullfile('data','caltech-101','101_ObjectCategories',catName,'image_0001.jpg');  
imgPaths = { imgPath };  
imgData = imread(imgPath);  
rotations = [45, 90, 135, 180, 225, 270];  
  
for rotIdx=1:length(rotations)  
    rotation = rotations(rotIdx);  
    name = strcat(catName, filesep, 'tmp_', num2str(rotation), '.jpg');  
    imwrite(imrotate(imgData, rotation), name);  
    imgPaths = horzcat(imgPaths, name);  
end  
modelPath = fullfile('data','baseline-model.mat');  
load(modelPath);  
visualizeImgClass(imgPaths, model);
```

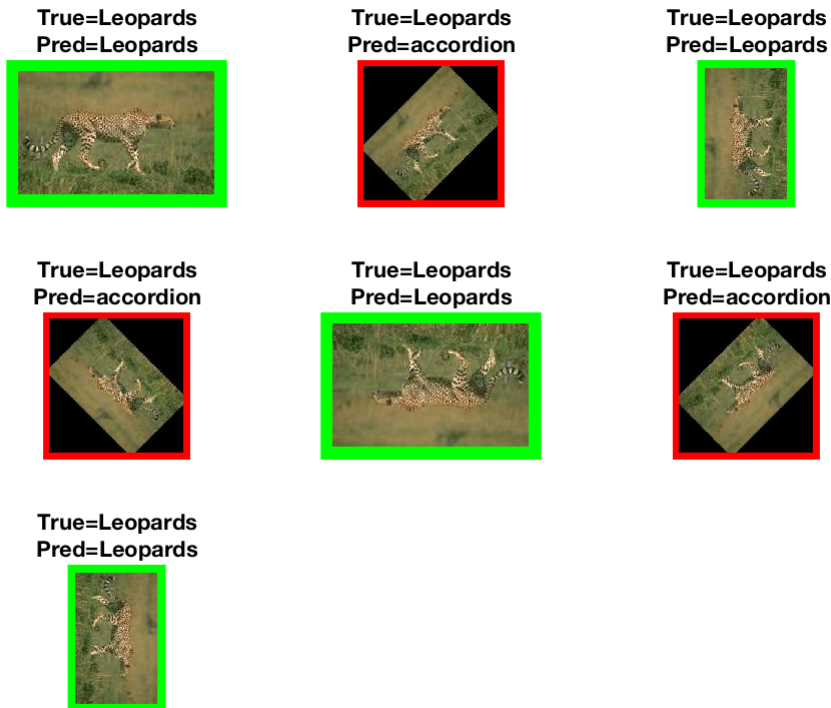


It appears that the algorithm is invariant to rotations at multiples of only 90 degrees, however this is because the other rotations introduce black image borders which confuse the algorithm into believing it is an accordion.

```
figure();

catName = 'accordion';
mkdir(catName);
imgPath = fullfile('data', 'caltech-101', '101_ObjectCategories', catName, 'image_0007.jpg');
imgPaths = { imgPath };
imgData = imread(imgPath);
rotations = [45, 90, 135, 180, 225, 270];

for rotIdx=1:length(rotations)
    rotation = rotations(rotIdx);
    name = strcat(catName, filesep, 'tmp_', num2str(rotation), '.jpg');
    imwrite(imrotate(imgData, rotation), name);
    imgPaths = horzcat(imgPaths, name);
end
modelPath = fullfile('data', 'baseline-model.mat');
load(modelPath);
visualizeImgClass(imgPaths, model);
```

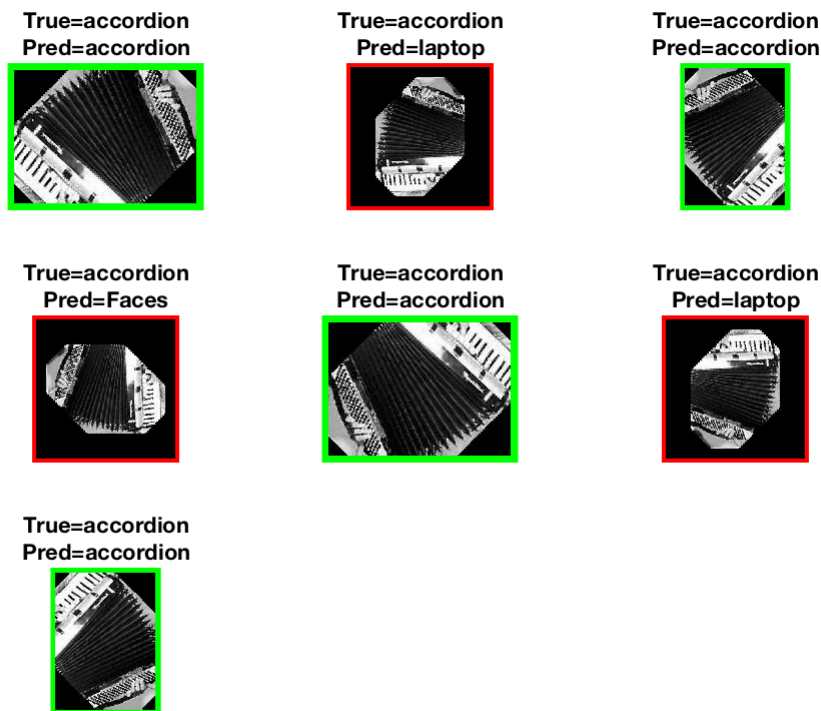

With the accordion, we observe that the rotation confuses the algorithm, at rotations which are not a multiple of 90.


Is the algorithm invariant to rescaling of the images?

```
figure();

catName = 'Leopards';
imgPath = fullfile('data', 'caltech-101', '101_ObjectCategories', catName, 'image_0003.jpg');
imgPaths = { imgPath };
imgData = imread(imgPath);

scales = [2, 0.9, 0.5, 0.3, 0.1];
for scaleIdx=1:length(scales)
    scale = scales(scaleIdx);
    name = strcat(catName, filesep, 'tmp_', num2str(scale), '.jpg');
    newImg = imresize(imgData, scale);
    imwrite(newImg, name);
    imgPaths = horzcat(imgPaths, name);
end

visualizeImgClass(imgPaths, model);
```

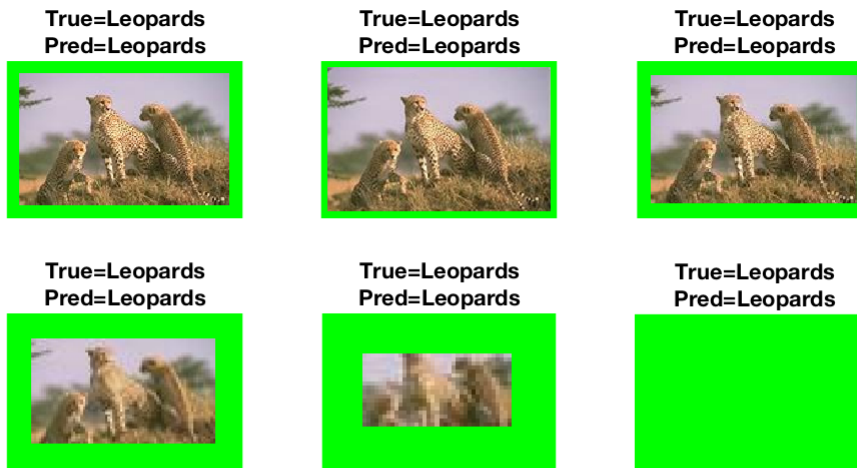

The algorithm is found to classify the leopord at large and small scales.

```
figure();

catName = 'accordion';
imgPath = fullfile('data','caltech-101','101_ObjectCategories',catName,'image_0002.jpg');
imgPaths = { imgPath };
imgData = imread(imgPath);


scales = [2, 0.9, 0.5, 0.3, 0.1];
for scaleIdx=1:length(scales)
    scale = scales(scaleIdx);
    name = strcat(catName, filesep, 'tmp_', num2str(scale), '.jpg');
    newImg = imresize(imgData, scale);
    imwrite(newImg, name);
    imgPaths = horzcat(imgPaths, name);
end

visualizeImgClass(imgPaths, model);
```


True=accordion
Pred=accordion



True=accordion
Pred=accordion



True=accordion
Pred=accordion



True=accordion
Pred=accordion



True=accordion
Pred=accordion



True=accordion
Pred=Leopards



However, it has trouble identifying the accordion at the smallest scale (0.1 of the original size).

h)

Compute how the F-score changes when the number of categories augment (e.g. from 5 to 10 to 15 to 100).

Setting 5 categories

```
resultsPath = fullfile('data','baseline-result.mat');  
load(resultsPath)  
[F1, Precision, Recall] = f1Score(confus)
```

```
F1 =  
    1.0000    1.0000    0.9655    0.9333    0.9677    0.9333  
Precision =  
    1.0000    1.0000    1.0000    0.9333    0.9375    0.9333  
Recall =  
    1.0000    1.0000    0.9333    0.9333    1.0000    0.9333
```

```
mean(F1)
```



```
ans = 0.9667
```

Setting 10 categories


```
TenCategories = {'Leopards', 'accordion', 'pizza', 'Faces', 'laptop', 'tick',...
'crab', 'water_lilly', 'mandolin', 'wheelchair'};
```

```
modified_phow_caltech101(TenCategories, '10-categories');
```

```
Training model for class Leopards
Training model for class Faces
Training model for class crab
Training model for class accordion
Training model for class tick
Training model for class pizza
Training model for class laptop
Training model for class water_lilly
Training model for class mandolin
Training model for class wheelchair
```

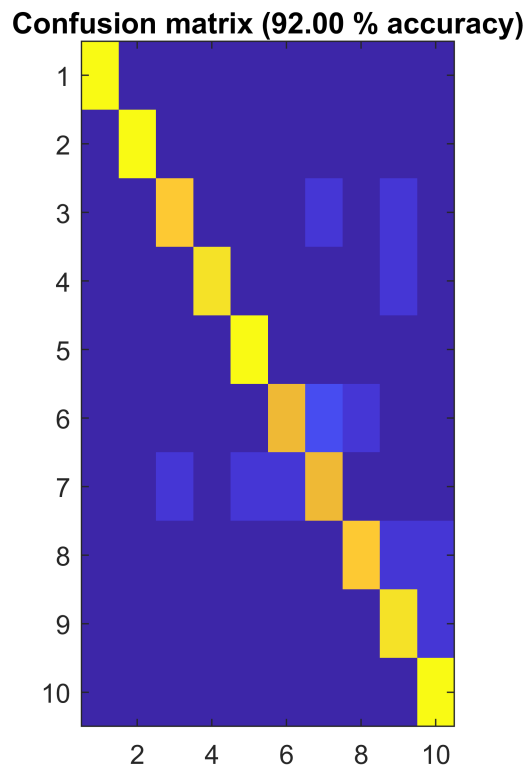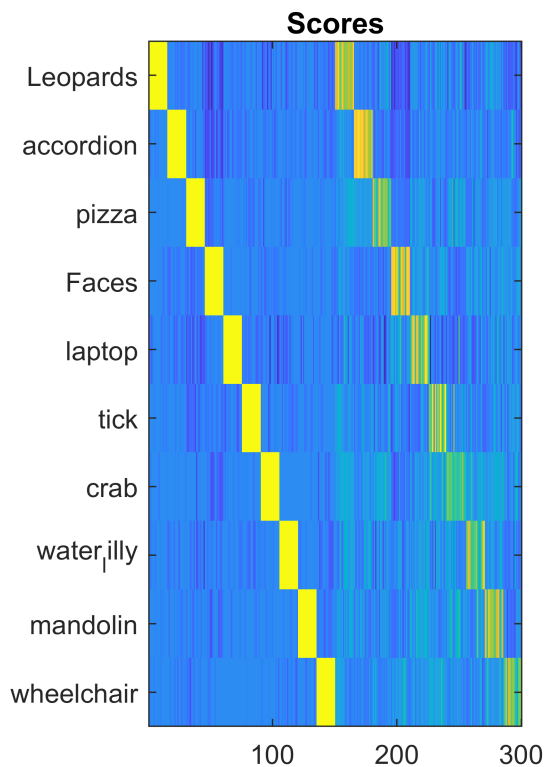

```
resultsPath = fullfile('data','10-categories-result.mat');
load(resultsPath)
[F1, Precision, Recall] = f1Score(confus)
```

```
F1 =
Columns 1 through 7 ...
    1.0000    1.0000    0.8966    0.9655    0.9677    0.8571    0.8000
Columns 8 through 10
    0.8966    0.8750    0.9375
Precision =
Columns 1 through 7 ...
    1.0000    1.0000    0.9286    1.0000    0.9375    0.9231    0.8000
Columns 8 through 10
    0.9286    0.8235    0.8824
Recall =
Columns 1 through 7 ...
```

1.0000	1.0000	0.8667	0.9333	1.0000	0.8000	0.8000
Columns 8 through 10						
0.8667	0.9333	1.0000				

```
mean(F1)
```



```
ans = 0.9196
```

Setting 100 categories

```
modified_phow_caltech101();
```

```
Training model for class Faces
Training model for class BACKGROUND_Google
Training model for class anchor
Training model for class brontosaurus
Training model for class crayfish
Training model for class Leopards
Training model for class airplanes
Training model for class Faces_easy
Training model for class accordion
Training model for class brain
Training model for class crab
Training model for class cougar_face
Training model for class ferry
Training model for class Motorbikes
Training model for class bonsai
Training model for class ewer
Training model for class joshua_tree
Training model for class binocular
Training model for class cougar_body
Training model for class euphonium
Training model for class inline_skate
Training model for class beaver
Training model for class chandelier
Training model for class emu
Training model for class ibis
Training model for class bass
Training model for class chair
Training model for class elephant
Training model for class helicopter
Training model for class cellphone
Training model for class electric_guitar
Training model for class hedgehog
Training model for class barrel
Training model for class ceiling_fan
Training model for class ant
Training model for class dragonfly
Training model for class headphone
Training model for class car_side
Training model for class dolphin
Training model for class hawksbill
Training model for class minaret
Training model for class cannon
Training model for class dollar_bill
Training model for class grand_piano
Training model for class metronome
Training model for class camera
Training model for class dalmatian
Training model for class butterfly
Training model for class gramophone
```

Training model for class menorah
Training model for class cup
Training model for class mayfly
Training model for class buddha
Training model for class gerenuk
Training model for class crocodile_head
Training model for class mandolin
Training model for class garfield
Training model for class pyramid
Training model for class crocodile
Training model for class lotus
Training model for class platypus
Training model for class flamingo_head
Training model for class scorpion
Training model for class flamingo
Training model for class lobster
Training model for class pizza
Training model for class llama
Training model for class scissors
Training model for class pigeon
Training model for class starfish
Training model for class schooner
Training model for class laptop
Training model for class panda
Training model for class stapler
Training model for class saxophone
Training model for class lamp
Training model for class pagoda
Training model for class soccer_ball
Training model for class ketch
Training model for class rooster
Training model for class snoopy
Training model for class okapi
Training model for class rhino
Training model for class kangaroo
Training model for class octopus
Training model for class sea_horse
Training model for class revolver
Training model for class sunflower
Training model for class nautilus
Training model for class wild_cat
Training model for class strawberry
Training model for class water_lilly
Training model for class umbrella
Training model for class watch
Training model for class wheelchair
Training model for class stop_sign
Training model for class trilobite
Training model for class stegosaurus
Training model for class yin_yang
Training model for class tick
Training model for class wrench
Training model for class windsor_chair

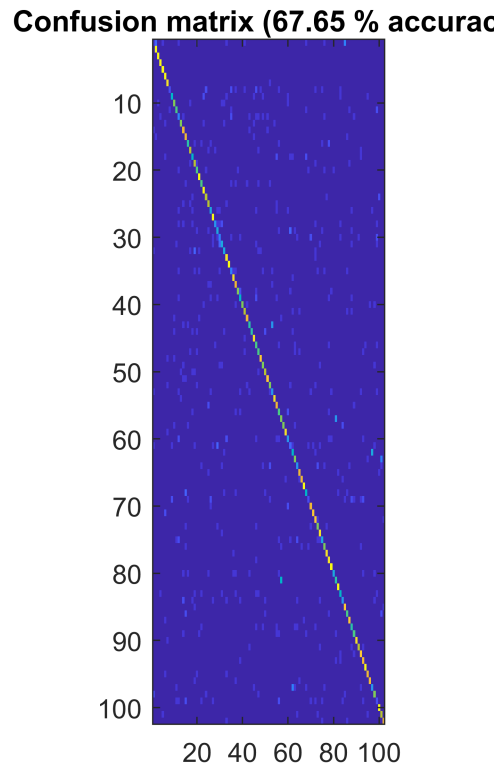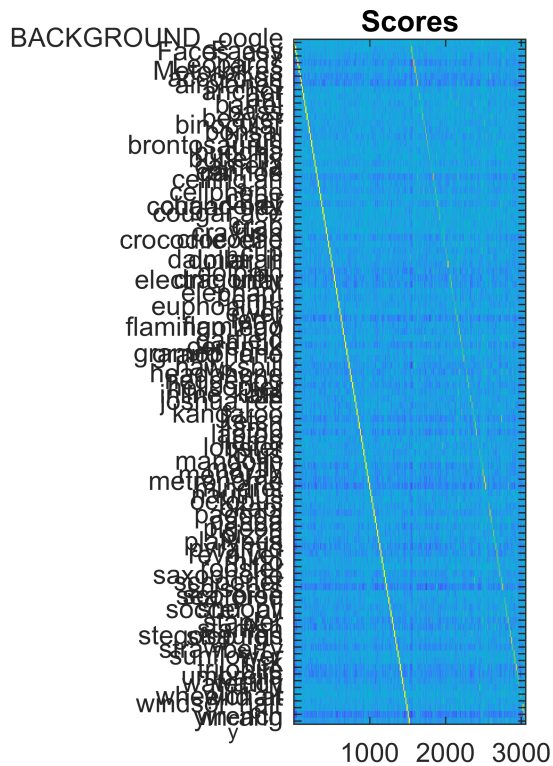

```
resultsPath = fullfile('data','baseline-result.mat');
load(resultsPath)
[F1, Precision, Recall] = f1Score(confus)
```

```
F1 =
Columns 1 through 7 ...
    0.0909    0.8824    0.9677    0.9375    0.9375    0.8333    0.8485
Columns 8 through 14
    0.2222    0.5600    0.6897    0.6429    0.2581    0.7407    0.6486
Columns 15 through 21
    0.6316    0.5926    0.7097    0.4828    0.6111    0.5806    0.8824
Columns 22 through 28
    0.6207    0.8824    0.7333    0.6667    0.4286    0.8571    0.4545
Columns 29 through 35
    0.4138    0.3077    0.4286    0.4615    0.7568    1.0000    0.3077
Columns 36 through 42
    0.8750    0.6667    0.7692    0.4828    0.8000    0.7333    0.8000
Columns 43 through 49
    0.5714    0.6957    0.8485    0.4865    0.5806    0.8667    0.6667
Column 50
    0.7097
Precision =
Columns 1 through 7 ...
    0.1429    0.7895    0.9375    0.8824    0.8824    0.7143    0.7778
Columns 8 through 14
    0.6667    0.7000    0.7143    0.6923    0.2500    0.8333    0.5455
Columns 15 through 21
    0.5217    0.6667    0.6875    0.5000    0.5238    0.5625    0.7895
Columns 22 through 28
    0.6429    0.7895    0.7333    0.6111    0.4615    0.7500    0.7143
Columns 29 through 35
    0.4286    0.3636    0.4615    0.5455    0.6364    1.0000    0.3636
Columns 36 through 42
```

```

    0.8235    0.5714    0.9091    0.5000    1.0000    0.7333    0.8000
Columns 43 through 49
    0.6154    1.0000    0.7778    0.4091    0.5625    0.8667    0.6667
Column 50
    0.6875
Recall =
Columns 1 through 7 ...
    0.0667    1.0000    1.0000    1.0000    1.0000    1.0000    0.9333
Columns 8 through 14
    0.1333    0.4667    0.6667    0.6000    0.2667    0.6667    0.8000
Columns 15 through 21
    0.8000    0.5333    0.7333    0.4667    0.7333    0.6000    1.0000
Columns 22 through 28
    0.6000    1.0000    0.7333    0.7333    0.4000    1.0000    0.3333
Columns 29 through 35
    0.4000    0.2667    0.4000    0.4000    0.9333    1.0000    0.2667
Columns 36 through 42
    0.9333    0.8000    0.6667    0.4667    0.6667    0.7333    0.8000
Columns 43 through 49
    0.5333    0.5333    0.9333    0.6000    0.6000    0.8667    0.6667
Column 50
    0.7333

```

```
mean(F1)
```

```
ans = 0.6632
```

i) Compute the F-score when different parameters of the algorithm are used.

In this section, we are going to focus on how PHOW step and size parameters influence the mean F1 score.

The number of words was fixed to a low value of 30 on purpose. It is known that low number of words tends to generalise too much and mix features together causing a low performance of the model. However, there may be a combination of step and size that could overcome the deficiency of using a low number of words. The categories used for the paramter optimization are: Background, Faces, Easy Faces, Leopards and Motorbikes, the default categories in the TinyProblem settings.

The sizes and steps values considered ranges from 3 to 12 in unit steps.

```

TinyCat = {'BACKGROUND_Google', 'Faces', 'Faces_easy', 'Leopards', 'Motorbikes'};

sizes = [3, 4, 5, 6, 7, 8, 9, 10, 11, 12];
steps = [3, 4, 5, 6, 7, 8, 9, 10, 11, 12];

[X,Y] = meshgrid(steps, sizes);
Z = zeros(size(X));
for i = 1:length(sizes)
    for j = 1:length(steps)
        opt = {'Sizes', sizes(i), 'Step', steps(j)};
        modified_phow_caltech101(TinyCat, 'f1-tests', 30, opt);
        load(fullfile('data', 'f1-tests-result.mat'));
        [F1, Precision, Recall] = f1Score(confus);
        Z(i,j) = mean(F1);
    end
end
end

```


Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards

Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards



Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards

Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Motorbikes
Training model for class Faces_easy
Training model for class Faces

Training model for class Leopards
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards

Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards


Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes
Training model for class BACKGROUND_Google
Training model for class Faces
Training model for class Faces_easy
Training model for class Leopards
Training model for class Motorbikes

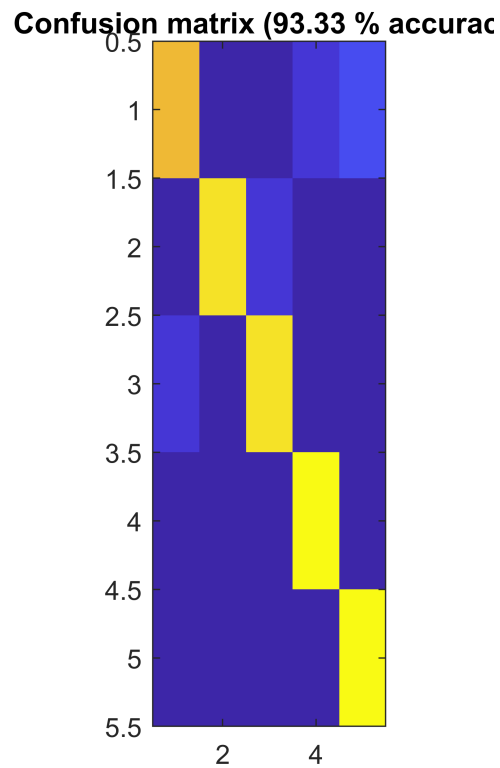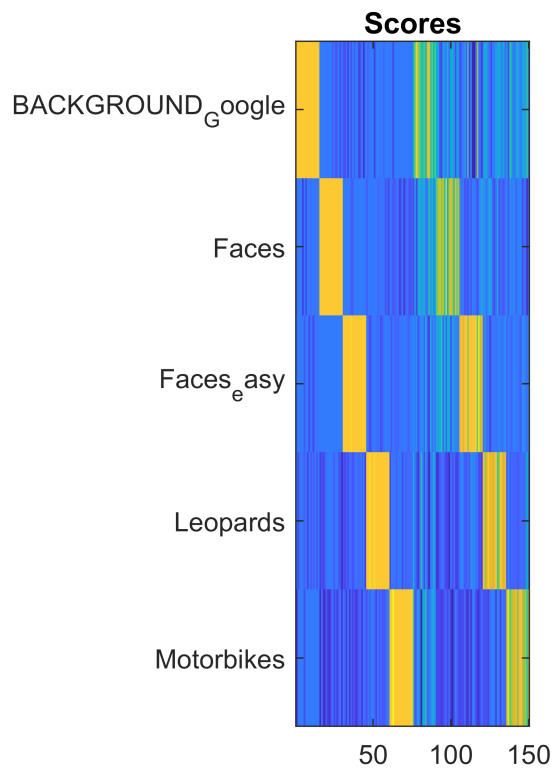

Plotting the results:

```
figure
surf(X,Y,Z), hold on, imagesc(Z), colorbar;
set(gca, 'ytick', 1:length(sizes), 'yticklabel', sizes); ylabel("Sizes");
set(gca, 'xtick', 1:length(steps), 'xticklabel', steps); xlabel("Steps");
zlabel("Mean F1 Score");
title("PHOW Size and Steps param. vs F1 score (5 cat.)");
```

PHOW Size and Steps param. vs F1 score (5 cat.)

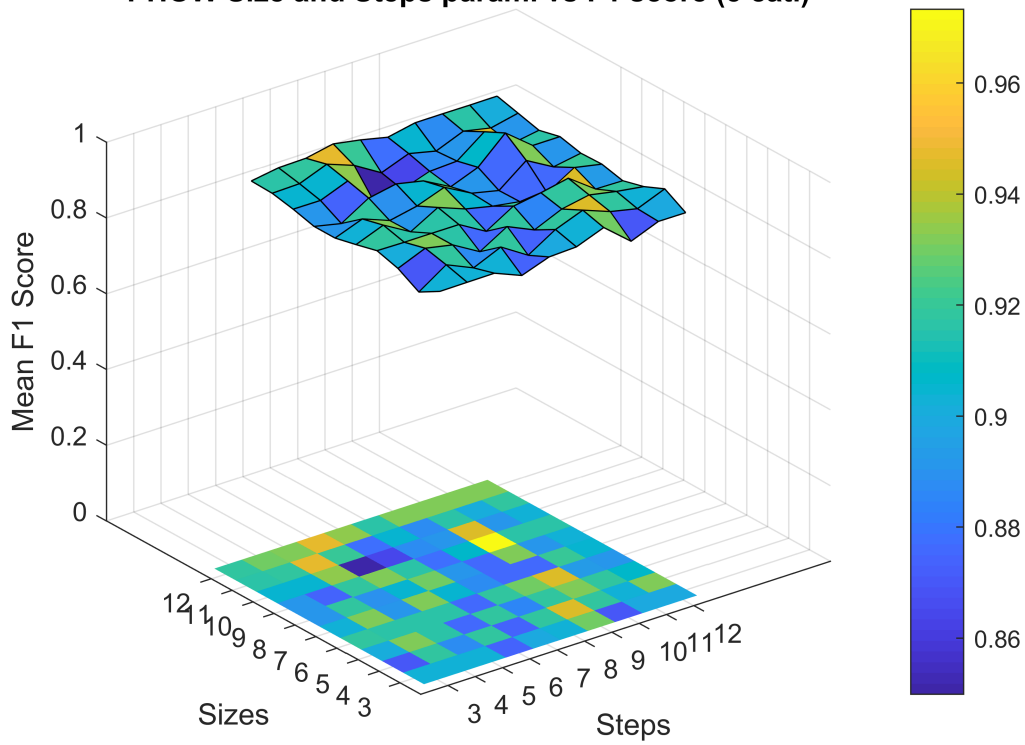

The figure shows the surface of mean F1 score across 100 combinations of sizes and step values. The mean F1 scores goes from 0.85 to a maximum of 0.9733, the maximum is obtained with a size value of 9 and and step value of 10. However, the surface seems a bit noisy and there is not a flat area of robust values.