

KARLSRUHE INSTITUTE OF TECHNOLOGY

SOFTWARE ENGINEERING PRACTICE

WINTER TERM 2015/2016

# rootJS - module guide

Node.js bindings for ROOT 6

*Jonas Schwabe*  
*Theo Beffart*  
*Sachin Rajgopal*  
*Christoph Wolff*  
*Christoph Haas*  
*Maximilian Früh*

supervised by  
Dr. Marek SZUBA

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	About this document . . . . .	3
1.2	Overview . . . . .	3
<b>2</b>	<b>CallbackHandler</b>	<b>4</b>
2.1	ctorCallback . . . . .	4
2.2	staticCtorCallback . . . . .	4
2.3	memberGetterCallback . . . . .	5
2.4	memberSetterCallback . . . . .	5
2.5	memberFunctionCallback . . . . .	5
2.6	staticGetterCallback . . . . .	6
2.7	staticSetterCallback . . . . .	6
2.8	staticFunctionCallback . . . . .	6
<b>3</b>	<b>NodeHandler</b>	<b>7</b>
3.1	initialize . . . . .	7
3.2	getExports . . . . .	7
<b>4</b>	<b>NodeApplication</b>	<b>8</b>
4.1	NodeApplication . . . . .	8
<b>5</b>	<b>TemplateFactory</b>	<b>9</b>
5.1	createTemplate . . . . .	9
<b>6</b>	<b>Proxy</b>	<b>11</b>
6.1	Proxy . . . . .	11
6.2	setAddress . . . . .	11
6.3	getAddress . . . . .	12
6.4	getType . . . . .	12
6.5	getScope . . . . .	12
6.6	isGlobal . . . . .	13
6.7	isTemplate . . . . .	13
6.8	isConst . . . . .	13
6.9	isStatic . . . . .	14
<b>7</b>	<b>FunctionProxyFactory</b>	<b>15</b>
7.1	createFunctionProxy . . . . .	15
7.2	fromArgs . . . . .	15
<b>8</b>	<b>FunctionProxy</b>	<b>16</b>
8.1	getCallFunc . . . . .	16
8.2	getMethodsFromName . . . . .	16
8.3	FunctionProxy . . . . .	17
8.4	getType . . . . .	17
8.5	validateArgs . . . . .	17
8.6	call . . . . .	18
<b>9</b>	<b>ObjectProxyFactory</b>	<b>19</b>
9.1	createObjectProxy . . . . .	19

<b>10</b>	<b>ObjectProxy</b>	<b>20</b>
10.1	ObjectProxy . . . . .	20
10.2	getType . . . . .	20
10.3	set . . . . .	21
10.4	get . . . . .	21
10.5	setProxy . . . . .	21
10.6	getProxy . . . . .	22
10.7	isPrimitive . . . . .	22
<b>11</b>	<b>Appendix</b>	<b>23</b>
11.1	Class diagram . . . . .	23
11.2	Dynamic Model . . . . .	24
11.3	Glossary . . . . .	26

# 1. Introduction

## 1.1. About this document

This document describes the structure of RootJS, it will be used as a blueprint in the implementation phase.

The document contains descriptions to all public methods, so that the implementation can be split up, it contains all classes that need to be implemented, descriptions to all public methods and, listed in the UML diagram in the appendix, some private functions and properties that might be handy during implementation.

## 1.2. Overview

When using node modules to extend the basic node api, one uses the *require* statement, providing the name of the module. *require* returns a JavaScript object which is called *exports*, containing everything the node modules decides to include.

In our case *require* will run the *initilize* method which will crawl through ROOT to find all globally accessible variables, functions and classes.

For all these items a property or function is being added to the *exports* object. These properties are bound to a callback function which is equipped with meta data, referring to the property or function in ROOT. With this information the callback function is able to call the actual ROOT functionality.

To send the results to node we need to convert the resulting objects or values. In order to convert the data we will use proxies for the different datatypes that will be returned by a factory.

The factory will use the datatype to select a matching Proxy implementation, when dealing with non scalar data, the factory will run through all methods and properties and use the Factory recursively.

Even though node programs are mainly used as server applications it can still handle graphical user interfaces. Graphical user interfaces need to refresh frequently in order to be responsive, as JavaScript only runs one thread at a time, the gui refresh needs to run on the same thread as the rest of the application. Graphical user interfaces are therefore supported as well.

This is handled in the *NodeApplication* class, further we will set the application name and a callback function for messages generated by root here.

## 2. CallbackHandler

The CallbackHandler class gets invoked whenever an encapsulated ROOT function or object is accessed. The callback functions follow one general pattern, when called from a nodeJS program *CallbackInfo* is provided. In the initialization phase we can save *InternalFields* which are belonging to these *CallbackInfos*. The internal fields are therefore filled with information about the associated ROOT functionality. The callback function uses this information to determine what to do exactly.

An inheritant of Proxy will be used to access the data or call the function / constructor and generate a nodeJS representation of the value to be returned.

### 2.1. ctorCallback

<i>Name</i>	<code>CallbackHandler::ctorCallback(args: FunctionCallbackInfo&lt;Value&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>args: FunctionCallbackInfo&lt;Value&gt;</i> information about the context
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Gets invoked whenever a non static constructor function of an encapsulated ROOT class was called.

### 2.2. staticCtorCallback

<i>Name</i>	<code>CallbackHandler::staticCtorCallback(args: FunctionCallbackInfo&lt;Value&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>args: FunctionCallbackInfo&lt;Value&gt;</i>
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Gets invoked whenever a static constructor of an encapsulated ROOT class was called.

## 2.3. memberGetterCallback

<i>Name</i>	<code>CallbackHandler::memberGetterCallback(property: Local&lt;String&gt;, info: PropertyCallbackInfo&lt;Value&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<code>property: Local&lt;String&gt;, info: PropertyCallbackInfo&lt;Value&gt;</code>
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Gets invoked whenever an encapsulated (class) member was requested.

## 2.4. memberSetterCallback

<i>Name</i>	<code>CallbackHandler::memberSetterCallback(property: Local&lt;String&gt;, value: Local&lt;Value&gt;, info: PropertyCallbackInfo&lt;Value&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<code>property: Local&lt;String&gt;, value: Local&lt;Value&gt;, info: PropertyCallbackInfo&lt;Value&gt;</code>
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Gets invoked whenever an encapsulated (class) member is attempted to be set.

## 2.5. memberFunctionCallback

<i>Name</i>	<code>CallbackHandler::memberFunctionCallback(args: FunctionCallbackInfo&lt;Value&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<code>args: FunctionCallbackInfo&lt;Value&gt;</code>
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Gets invoked whenever an non-static (class) function was called.

## 2.6. staticGetterCallback

<i>Name</i>	<code>CallbackHandler::staticGetterCallback(property: Local&lt;String&gt;, info: PropertyCallbackInfo&lt;Value&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<code>property: Local&lt;String&gt;, info: PropertyCallbackInfo&lt;Value&gt;</code>
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Gets invoked whenever an encapsulated static object was requested.

## 2.7. staticSetterCallback

<i>Name</i>	<code>CallbackHandler::staticSetterCallback(property: Local&lt;String&gt;, value: Local&lt;Value&gt;, info: PropertyCallbackInfo&lt;Value&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<code>property: Local&lt;String&gt;, value: Local&lt;Value&gt;, info: PropertyCallbackInfo&lt;Value&gt;</code>
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Gets invoked whenever an encapsulated static object is attempted to be set.

## 2.8. staticFunctionCallback

<i>Name</i>	<code>CallbackHandler::staticFunctionCallback(args: FunctionCallbackInfo&lt;Value&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<code>args: FunctionCallbackInfo&lt;Value&gt;</code>
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Gets invoked whenever a static function was called.

### 3. NodeHandler

The *NodeHandler* is the main entry point when you require RootJS by using

```
// JavaScript: Load ROOT bindings in JavaScript
var root = require(rootJS.node);

// C++: Expose the initialize method as the main entry point
NODE_MODULE(rootJS, initialize)
```

after running the *initialize* method ROOT is fully initialized and all features are exposed to JavaScript.

#### 3.1. initialize

<i>Name</i>	<code>NodeHandler::initialize(exports: Local&lt;Object&gt;, module: Local&lt;Object&gt;)</code>
<i>Visibility</i>	public static
<i>Parameters</i>	<i>exports: Local&lt;Object&gt;, module: Local&lt;Object&gt;</i> parameters passed by NodeJS
<i>Return value</i>	<i>none</i> The features will be exported by passing them to the exports parameter
<i>Behavior</i>	This will create an instance of <i>NodeApplication</i> and store it in <code>gApplication</code> , to ensure that all ROOT functionality that relies on <code>gApplication</code> will function properly. Further this will run <i>getExports</i> to retrieve the features to be exported to JavaScript which will then be put into the exports object which has been passed to this method

#### 3.2. getExports

<i>Name</i>	<code>NodeHandler::getExports()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>Local&lt;Object&gt;</b> features to be exported
<i>Behavior</i>	This method will run multiple private methods to collect global functions, global variables, macros and classes. All these items will be stored in a v8 object which will be passed to RootJS via the initialize method.



## 4. NodeApplication

ROOT uses TApplication to interface with the windowing system and event handlers. An instance of TApplication is usually stored in the global *gApplication* variable.

The main problem with using TApplication directly would be, that we could not hook into the *InitializeGraphics* method. When having a graphical user interface we need to do a UI update frequently:

```
gSystem->ProcessEvents();
```

To avoid having a lot of *ProcessEvents* calls, we wait until *InitializeGraphics* has been called at least once.

Further NodeApplication is being used to set the application's name and initialize a custom message callback which can be used to retrieve messages in JavaScript.

### 4.1. NodeApplication

<i>Name</i>	NodeApplication::NodeApplication(acn: char*, argc: int*, argv: char**)
<i>Visibility</i>	public
<i>Parameters</i>	acn: char*, argc: int*, argv: char**
<i>Return value</i>	« <b>constructor</b> » describe return value
<i>Behavior</i>	Set's the application name and constructs a custom message handler

## 5. TemplateFactory

Creates Javascript function templates from a given ROOT class using *TClassRef*. Methods and static members are set during creation through the use of ROOT reflections and the proxy factories. The created templates are kept in a cache to avoid unnecessary creation of already existing templates.

### 5.1. createTemplate

<i>Name</i>	<code>TemplateFactory::createTemplate(clazz: TClassRef)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>clazz</i> : <i>TClassRef</i> the class for which a template is to be created
<i>Return value</i>	<b>Local&lt;FunctionTemplate&gt;</b> the created template
<i>Behavior</i>	Gets the class from TClassRef and creates a new function template. Then it iterates over all static members of the class and sets the corresponding members of the template to respective proxy objects. It then iterates through the functions and also sets them. For further reference consider the following sequence diagram.

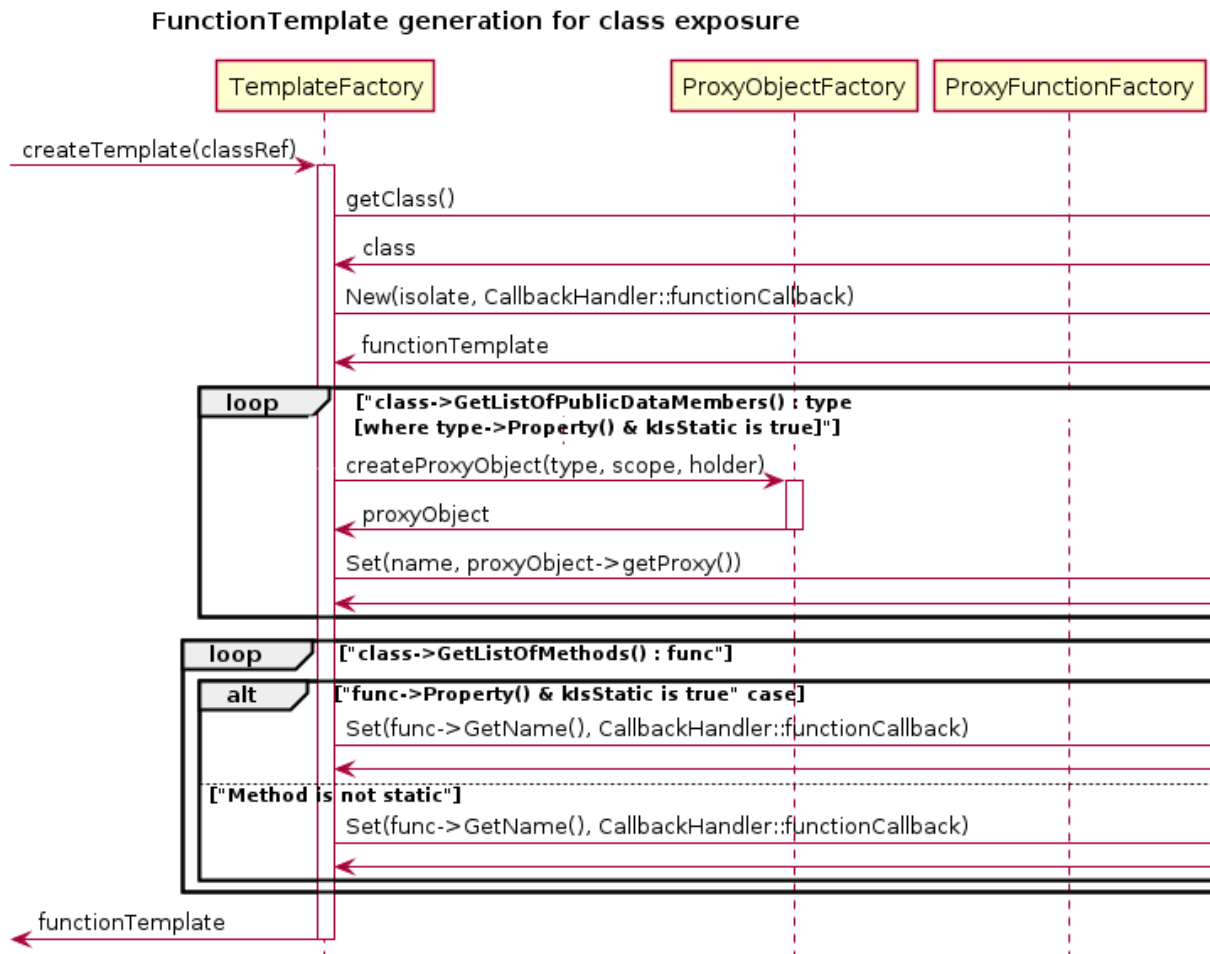


Figure 5.1: function template creation (full diagram in appendix)

## 6. Proxy

The *Proxy* class is an abstract class which acts as an intermediary between Node.js and ROOT. Both the *ObjectProxy* and *FunctionProxy* inherit the *Proxy* class. Both of them require the object's or function's *void\** address to access the original ROOT object. The *TObject* type is more accurately specified in each class which inherits *Proxy*. The *TClassRef* scope is used to access *TClass* and the necessary information about the class. The *Proxy* class holds the data, which both *ObjectProxy* and *FunctionProxy* require.

### 6.1. Proxy

<i>Name</i>	<code>Proxy::Proxy(address: void*, type: TObject, scope: TClassRef)</code>
<i>Visibility</i>	protected
<i>Parameters</i>	<p><i>address: void*</i> The memory address of the ROOT object</p> <p><i>type: TObject</i> The type of Object will be specified in the subclasses</p> <p><i>scope: TClassRef</i> The reference of the TClass so that it can be accessed</p>
<i>Return value</i>	« <b>constructor</b> » Returns a Proxy with the given parameters as a variables
<i>Behavior</i>	The Proxy constructor will be inherited by both ObjectProxy and FunctionProxy. The created Proxy will have the parameters as variables.

### 6.2. setAddress

<i>Name</i>	<code>Proxy::setAddress(address: void*)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>address: void*</i> The address to which the proxied ROOT object should be set to
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Sets the address of the proxied ROOT object.

### 6.3. getAddress

<i>Name</i>	<code>Proxy::getAddress()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>void*</b> The current address of the proxied ROOT object
<i>Behavior</i>	Gets the current address of the proxied ROOT object.

### 6.4. getType

<i>Name</i>	<code>Proxy::getType()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>TObject</b> The current type of the proxied ROOT object
<i>Behavior</i>	Gets the current type of the proxied ROOT object.

### 6.5. getScope

<i>Name</i>	<code>Proxy::getScope()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>TClassRef</b> The current scope of the proxied ROOT object
<i>Behavior</i>	Gets the current scope of the proxied ROOT object.

## 6.6. isGlobal

<i>Name</i>	<code>Proxy::isGlobal()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>bool</b> True if the Proxy is global
<i>Behavior</i>	Checks if the Proxy is global and hence visible throughout the program.

## 6.7. isTemplate

<i>Name</i>	<code>Proxy::isTemplate()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>bool</b> True if the Proxy is a template
<i>Behavior</i>	Checks if the Proxy is a template, which allows using generic types.

## 6.8. isConst

<i>Name</i>	<code>Proxy::isConst()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>bool</b> True if the Proxy is a constant
<i>Behavior</i>	Checks if the Proxy is a constant.

## 6.9. isStatic

<i>Name</i>	<code>Proxy::isStatic()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>bool</b> True if the Proxy is static
<i>Behavior</i>	Checks if the Proxy is static.

## 7. FunctionProxyFactory

The *FunctionProxyFactory* creates *FunctionProxy* objects. It differentiates between ROOT functions that can be overloaded and those that can't be.

### 7.1. createFunctionProxy

<i>Name</i>	<code>FunctionProxyFactory::createFunctionProxy(function: TFunction, scope: TClassRef)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<p><i>function: TFunction</i> The ROOT function to be proxied.</p> <p><i>scope: TClassRef</i> The scope of the function.</p>
<i>Return value</i>	<b>FunctionProxy</b> the proxied function
<i>Behavior</i>	A simple method to create <i>FunctionProxy</i> objects with for a given function in a given scope. This is used if there is no overloading or a <i>TFunction</i> is given directly.

### 7.2. fromArgs

<i>Name</i>	<code>FunctionProxyFactory::fromArgs(name: string, scope: TClassRef, args: FunctionCallbackInfo)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<p><i>name: string</i> The name of the ROOT function</p> <p><i>scope: TClassRef</i> The reference to the holding class that is searched for the function</p> <p><i>args: FunctionCallbackInfo</i> The arguments read from the <i>CallbackHandler</i></p>
<i>Return value</i>	<b>FunctionProxy</b> The proxied ROOT function
<i>Behavior</i>	This method is used to deal with overloaded functions, since JavaScript doesn't support it. It searches the given scope for a function with the given names and arguments and throws an exception if nothing is found.



## 8. FunctionProxy

Acts as a proxy for a ROOT callable (i.e. function or class method). It provides methods to execute such a callable and validate its arguments. It also maintains a map of *TFunction* - *CallFunc* entries to cache already used functions.

### 8.1. getCallFunc

<i>Name</i>	<code>FunctionProxy::getCallFunc(method: TFunction*)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>method: TFunction*</i> : pointer to the ROOT function for which a proxy is to be created
<i>Return value</i>	<b>CallFunc*</b> a pointer to the CallFunc object provided by cling
<i>Behavior</i>	Gets a pointer to a <i>CallFunc</i> object, which encapsulates the provided ROOT function in memory.

### 8.2. getMethodsFromName

<i>Name</i>	<code>FunctionProxy::getMethodsFromName(scope: TClassRef, name: string)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>scope: TClassRef</i> reference to the class which is checked for methods with the specified name <i>name: string</i> name of the overloaded methods which shall be returned
<i>Return value</i>	<b>vector&lt;TFunction*&gt;</b> methods that match the specified name
<i>Behavior</i>	Gets a reference to a class and a method name string. It returns all methods of the class with the specified name. This is needed since JavaScript does not support method overloading.

### 8.3. FunctionProxy

<i>Name</i>	<code>FunctionProxy::FunctionProxy(address: void*, function: TFunction, scope: TClassRef)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>address: void*</i> memory address of the proxied function <i>function: TFunction</i> the function's reflection object <i>scope: TClassRef</i> the class that the function belongs to
<i>Return value</i>	« <b>constructor</b> » the created <i>FunctionProxy</i>
<i>Behavior</i>	Creates the <i>FunctionProxy</i> .

### 8.4. getType

<i>Name</i>	<code>FunctionProxy::getType()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>TFunction</b> the <i>TFunction</i> object that contains the function's reflection data
<i>Behavior</i>	Returns the wrapped function's <i>TFunction</i> object. It contains the meta data of its corresponding function.

### 8.5. validateArgs

<i>Name</i>	<code>FunctionProxy::validateArgs(args: FunctionCallbackInfo)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>args: FunctionCallbackInfo</i> information about the context of the call, including the number and values of arguments
<i>Return value</i>	<b>ObjectProxy[]</b> array of the arguments as proxies
<i>Behavior</i>	Checks whether the function is being called with the proper arguments and wraps them in proxies so they can be used by the call method.

## 8.6. call

<i>Name</i>	<code>FunctionProxy::call(args: ObjectProxy[])</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>args: ObjectProxy[]</i> proxies containing arguments for the method
<i>Return value</i>	<b>ObjectProxy</b> proxy for the object returned by the called method
<i>Behavior</i>	Calls the actual method in memory using Cling. The argument object proxies' contents are read and given to the called method.

## 9. ObjectProxyFactory

The *ObjectProxyFactory* creates *ObjectProxy* instances with *TDataMember* type, *TClassRef* scope and *ObjectProxy* holder. It encapsulates ROOT objects recursively for use in Javascript.

### 9.1. createObjectProxy

<i>Name</i>	<code>ObjectProxyFactory::createObjectProxy(type: TDataMember, scope: TClassRef, holder: ObjectProxy)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<p><i>type: TDataMember</i> The type identification which the ObjectProxy will have</p> <p><i>scope: TClassRef</i> The class the ObjectProxy belongs to</p> <p><i>holder: ObjectProxy</i> The holder is the ObjectProxy which will encapsulate and hold the newly created ObjectProxy</p>
<i>Return value</i>	<b>ObjectProxy</b> Returns the ObjectProxy which is created with the given parameters. 1q
<i>Behavior</i>	A new ObjectProxy is created each time the createObjectProxy method is called up.

## 10. ObjectProxy

The *ObjectProxy* class is used to represent ROOT objects. It differentiates between primitive and non-primitive object types.

There are the following implementations of *ObjectProxy*:

- **EnumProxy** Maps C++ enums to JavaScript strings
- **StructProxy** Maps C++ structs to JavaScript objects
- **ArrayProxy** Maps C++ arrays to JavaScript arrays, we cannot enlarge C++ arrays, so we will throw an Exception on overflows
- **PointerProxy** Maps C++ pointers to JavaScript objects
- **NumberProxy** Uses a C++ template to map all C++ numbers to JavaScript Numbers
- **StringProxy** Maps C++ strings and c-strings to JavaScript strings
- **BooleanProxy** Maps C++ root boolean to Javascript boolean

The *ObjectProxyFactory* decides which *ObjectProxy* needs to be instantiated. Internally all these *ObjectProxies* work the same way by linking a *v8::Local* with a *TDataMember*

### 10.1. ObjectProxy

<i>Name</i>	<code>ObjectProxy::ObjectProxy(type: TDataMember, scope: TClassRef)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>type TDataMember</i> The type of the object <i>scope TClassRef</i> The reference to the class of the object
<i>Return value</i>	« <b>constructor</b> » the newly constructed ObjectProxy
<i>Behavior</i>	Creates a new ObjectProxy with the given type and scope.

### 10.2. getType

<i>Name</i>	<code>ObjectProxy::getType()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>TDataMember</b> the type of the ObjectProxy
<i>Behavior</i>	Returns the type of the Object behind the proxy.

### 10.3. set

<i>Name</i>	<code>ObjectProxy::set(value: ObjectProxy)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>value: ObjectProxy</i> the value to set
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Sets the value of the Object behind the proxy.

### 10.4. get

<i>Name</i>	<code>ObjectProxy::get()</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>Local&lt;Value&gt;</b> The value the object has.
<i>Behavior</i>	Returns the value that was set for the object.

### 10.5. setProxy

<i>Name</i>	<code>ObjectProxy::setProxy(proxy: Local&lt;Object&gt;)</code>
<i>Visibility</i>	public
<i>Parameters</i>	<i>proxy: Local&lt;Object&gt;</i> The v8 object which will be proxy of the ROOT object.
<i>Return value</i>	<b>none</b>
<i>Behavior</i>	Sets <i>proxy: Local&lt;Object&gt;</i> to be the proxy of the ROOT object.

## 10.6. getProxy



<i>Name</i>	<code>ObjectProxy::getProxy()</code>
<i>Visibility</i>	<code>public</code>
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>Local&lt;Object&gt;</b> The current proxy of the ROOT object.
<i>Behavior</i>	Gets the proxy of the ROOT object.

## 10.7. isPrimitive

<i>Name</i>	<code>ObjectProxy::isPrimitive()</code>
<i>Visibility</i>	<code>public</code>
<i>Parameters</i>	<i>none</i>
<i>Return value</i>	<b>bool</b> Whether or not the represented object is of a primitive type or not.
<i>Behavior</i>	Returns <i>true</i> if the represented object's type is primitive, <i>false</i> if not.

# 11. Appendix

## 11.1. Class diagram

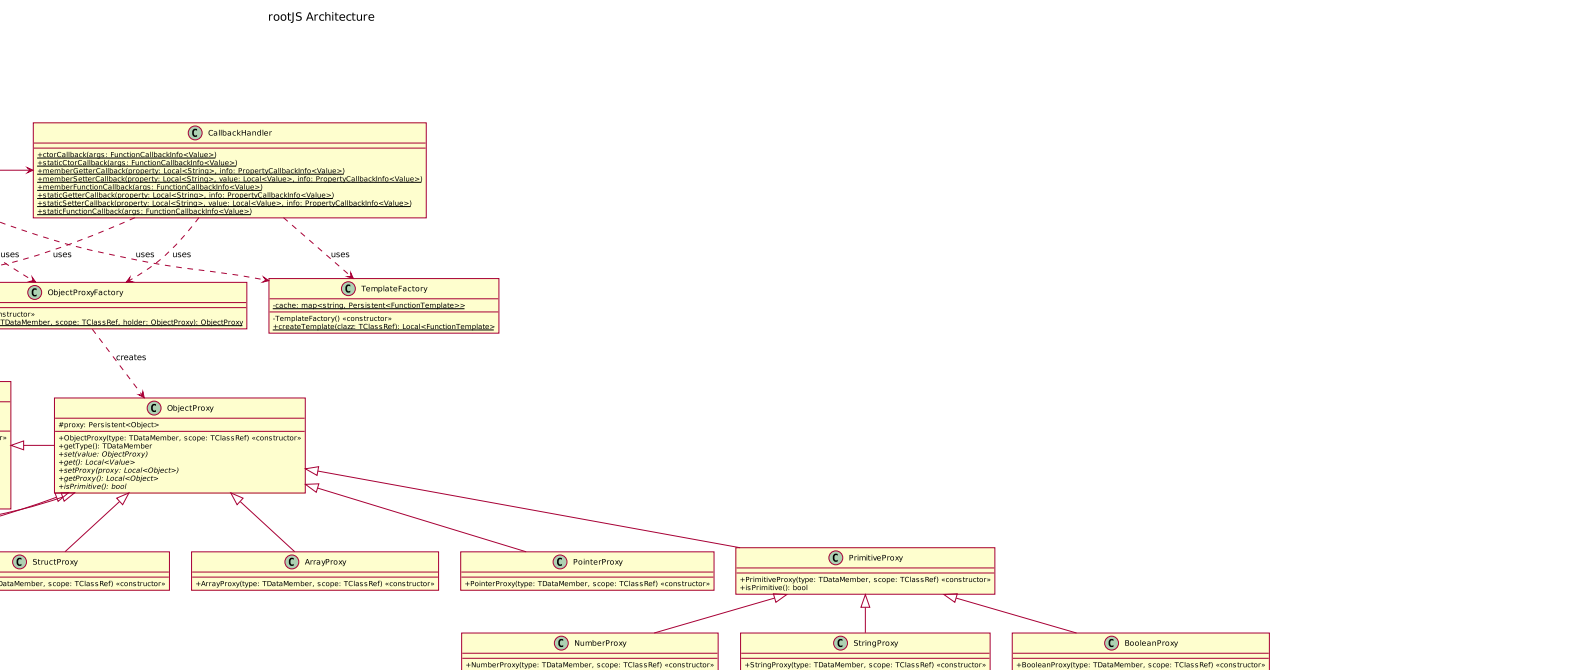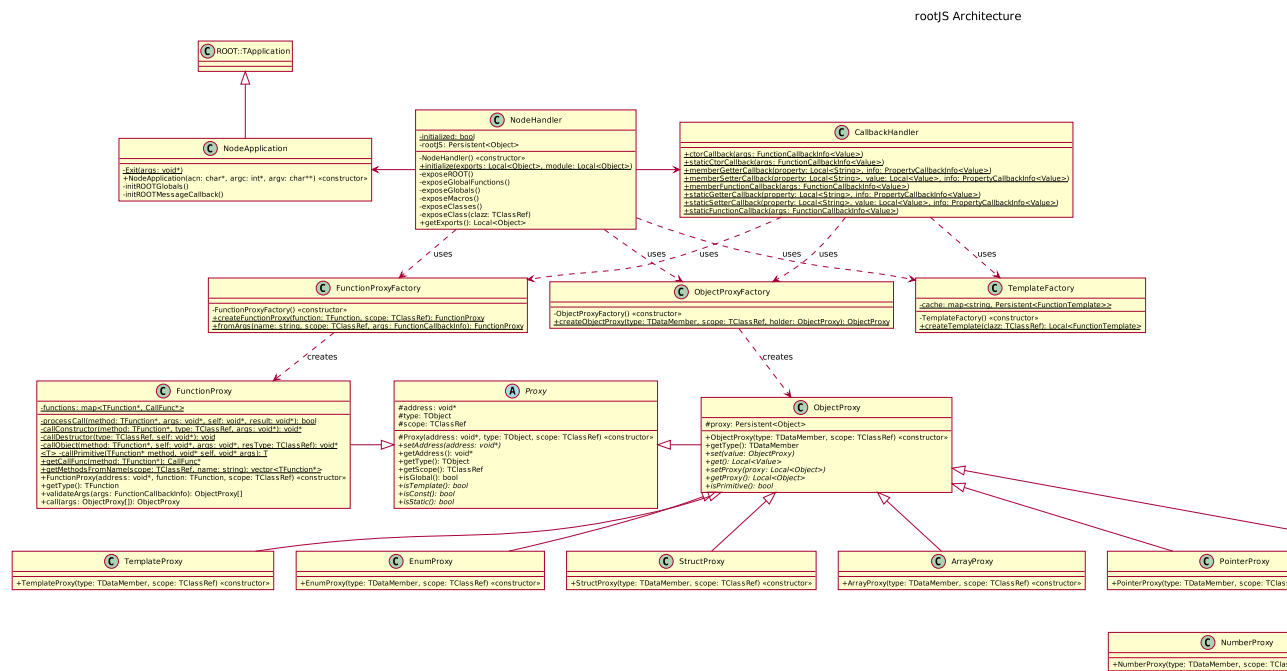



## 11.2. Dynamic Model

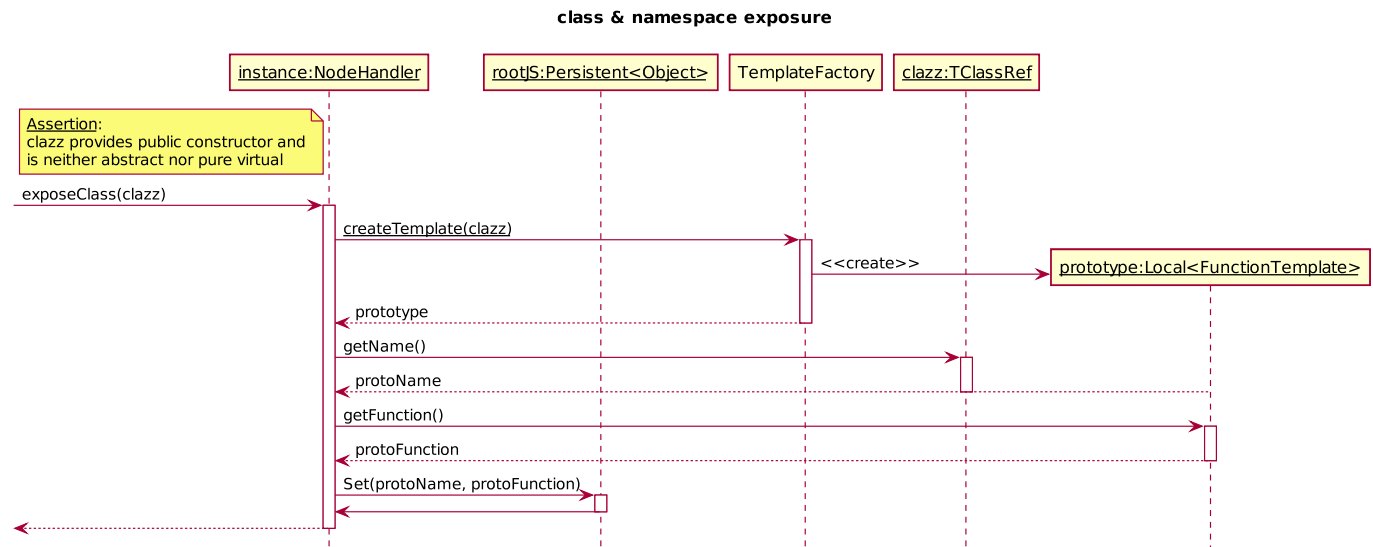


Figure 11.3: class exposure sequence

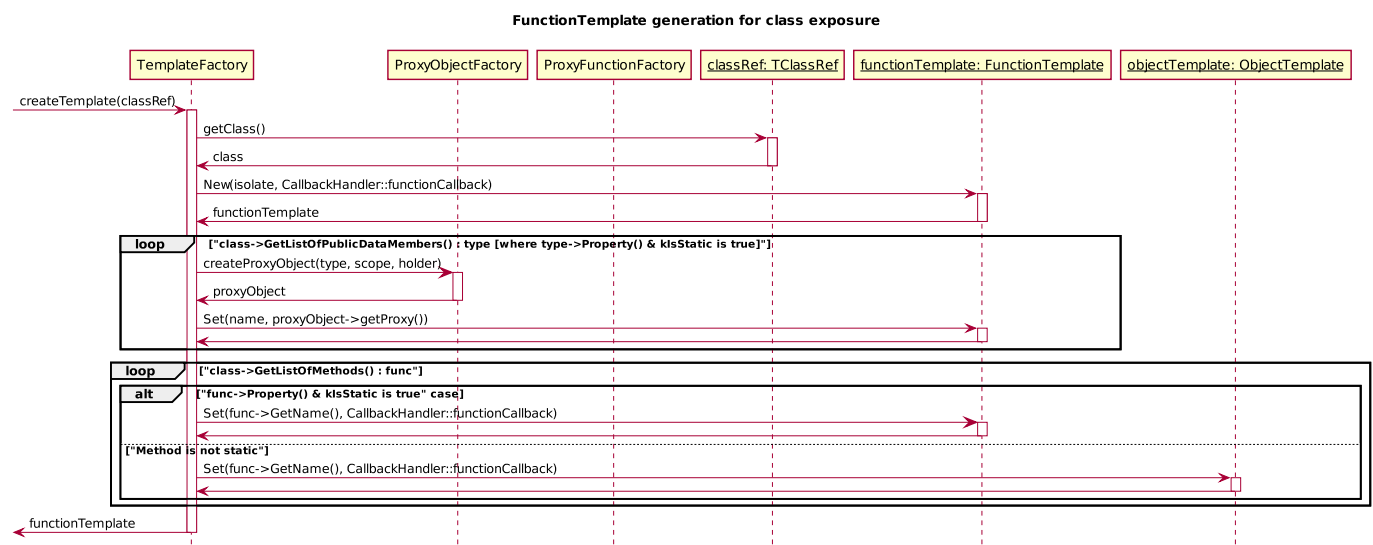


Figure 11.4: class exposure sequence

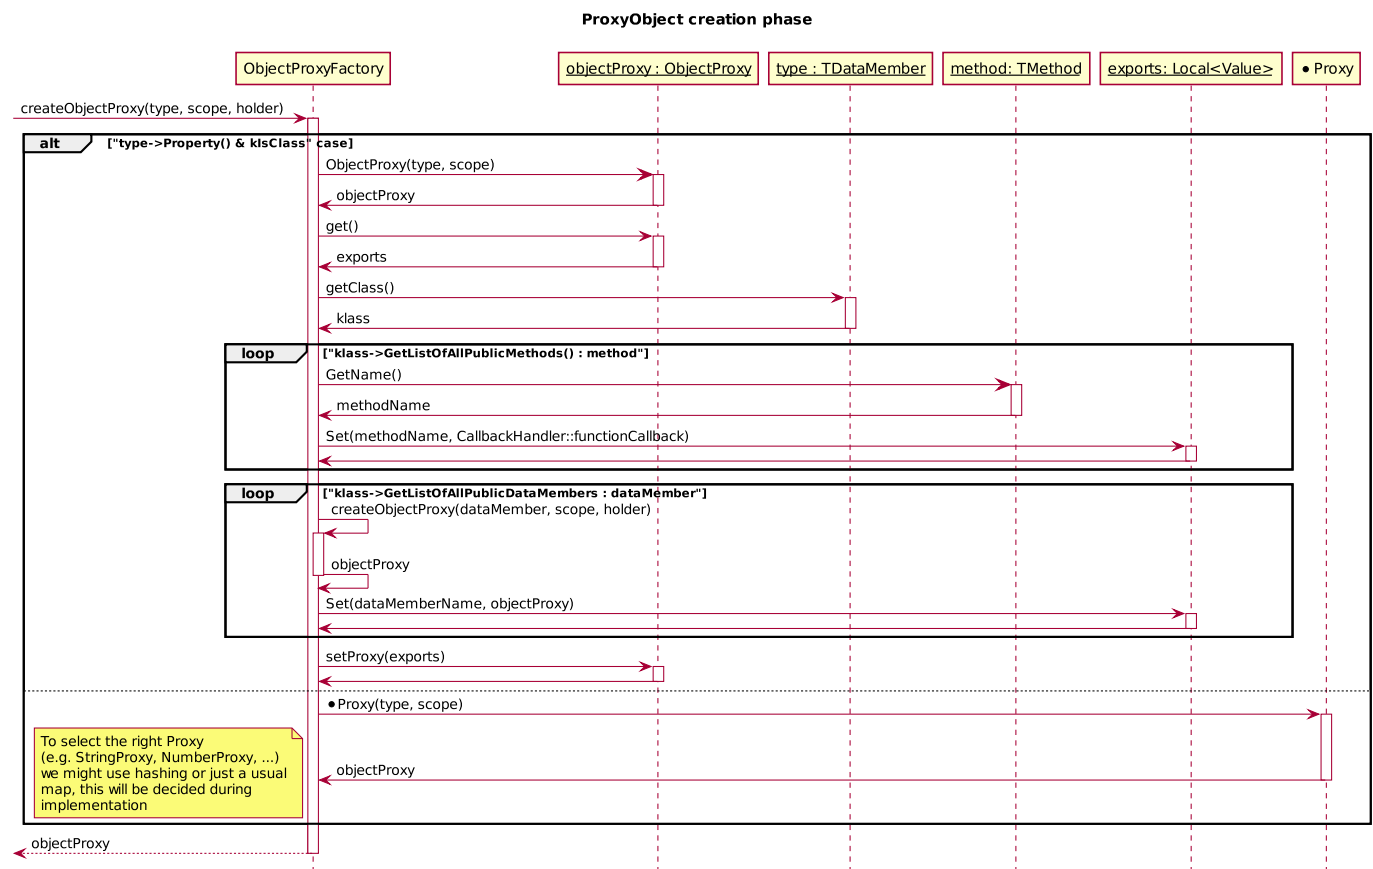


Figure 11.5: ProxyObject creation sequence

## 11.3. Glossary

### **Callback**

A function which is passed as an argument to some code, which is then expected to call the argument back.

### **Constructor**

A method which is used to create an object.

### **Encapsulation**

A piece of functionality of certain languages used to restrict access to some of the object's variables and methods

### **Instance**

A created object.

### **Proxy**

A class functioning as an intermediary between two classes.

### **Static**

A method which does not require the object to be instantiated.

### **Template**

A feature of C++ that allows classes and functions to operate with generic types.

### **v8**

An open source JavaScript engine, written in C++ and made by Google.