Data curation: bad habits

23

```
import pandas as pd
import numpy as np
...
# my secret processing code
# shareable via email
# thumb drive of raw data shareable via PRIORITY air mail
for file in too_many_files:
        data.append(pd.read_csv("human_readable.txt"))
data.drop_nan()
data.filter(value>2))) #.filter(value<2)
for d in data:
        d.to_netcdf()
xr.concat(xr.open_dataset(d for d in data)).to_zarr()
```

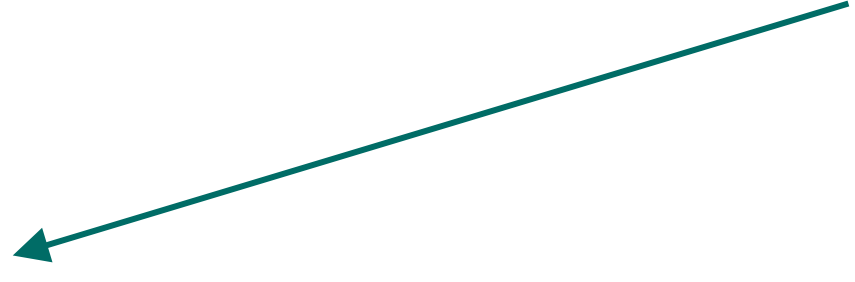

data (almost)
impossible to access

← computationally intensive,

not scalable

Data curation: bad habits

```
import pandas as pd
import numpy as np
...
# my secret processing code
# shareable via email
# thumb drive of raw data shareable via PRIORITY air mail
for file in too_many_files:
        data.append(pd.read_csv("human_readable.txt"))
data.drop_nan()
data.filter(value>2))) #.filter(value<2)
for d in data:
        d.to_netcdf()
xr.concat(xr.open_dataset(d for d in data)).to_zarr()
```

data (almost) impossible to access

computationally intensive, not scalable

Shifting the burden