


2.2 Smoothing

Images can exhibit different levels of *noise*: a random variation of brightness or color information created by a random process, that is, artifacts that don't appear in the original scene!. It is mainly produced by factors like the sensor response (more in CMOS technology), analog-to-digital conversion, *dead* sensor pixels, or bit errors in transmission, among others.

There are two typical types of noise:

- **Salt & pepper** noise (black and white pixels in random locations of the image) or **impulse** noise (only white pixels)
- **Gaussian** noise (intensities are affected by an additive zero-mean Gaussian error).

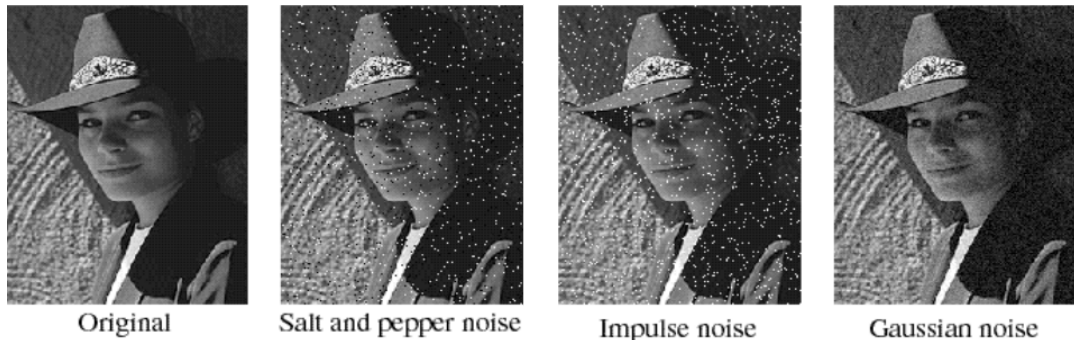

In this section, we are going to learn about some smoothing techniques aiming to eliminate or reduce such noise, including:

- Convolution-based methods
 - Neighborhood averaging
 - Gaussian filter
- Median filter
- Image average

Problem context - Number-plate recognition



Returning to the parking access problem proposed by UMA, they were grateful with your previous work. However, after some testing of your code, there were some complaints about binarization because it is not working as well as they expected. It is suspected that the found difficulties are caused by image noise. The camera that is being used in the system is having some problems (e.g. challenging lighting conditions), so different types of noise are appearing in its captured images.

This way, UMA asked you again to provide some help with this problem!

```
In [1]: import numpy as np
import scipy import signal
import cv2
import matplotlib.pyplot as plt
import matplotlib
from ipywidgets import interactive, fixed, widgets
matplotlib.rcParams['figure.figsize'] = (15.0, 15.0)
import random

images_path = './images/'
```

ASSIGNMENT 1: Taking a look at images

First, **display the images** `noisy_1.jpg` and `noisy_2.jpg` and try to detect why binarization is in trouble when processing them.



```
In [2]: # ASSIGNMENT 1
# Read 'noisy_1.jpg' and 'noisy_2.jpg' images and display them in a 1x2 plot
# Write your code here!

# Read images
noisy_1 = cv2.imread(images_path + 'noisy_1.jpg',0)
noisy_2 = cv2.imread(images_path + 'noisy_2.jpg',0)

# Display first one
plt.subplot(121)
plt.imshow(noisy_1, cmap = 'gray')
plt.title('Noisy 1')

# Display second one
plt.subplot(122)
plt.imshow(noisy_2, cmap = 'gray')
plt.title('Noisy 2')

plt.show()
```

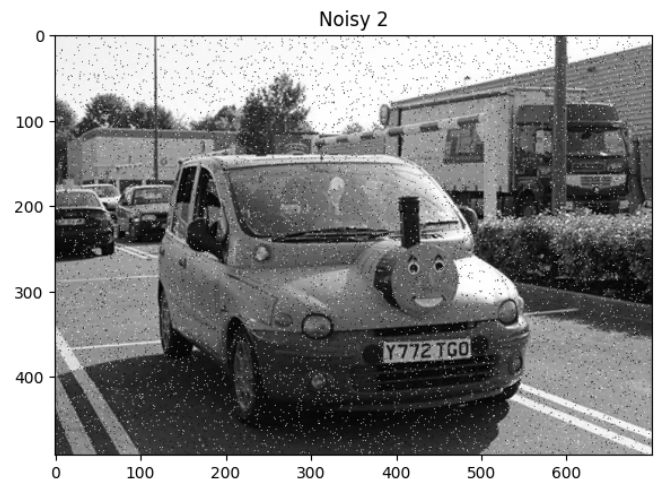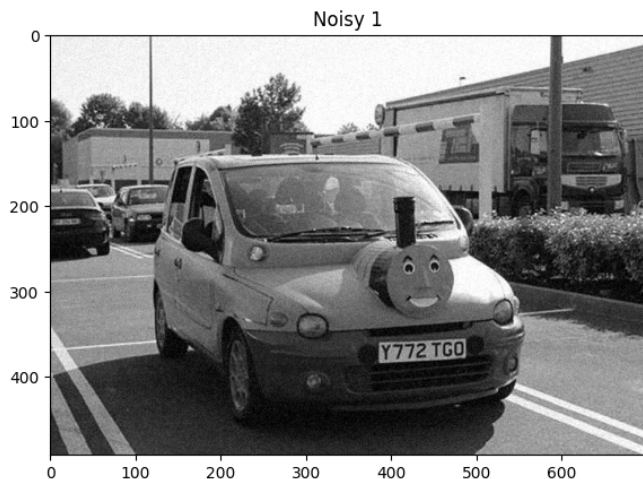

Thinking about it (1)

Once you displayed both images, **answer the following questions**:

- What is the difference between them?
Ambas presentan ruido, pero en la primera de ellas se trata de un ruido gaussiano y en la segunda de "sal y pimienta".
- Why can this happen (the noise)?
Porque quizás las fotografías se han tomado con un tipo de sensor pequeño, la iluminación no era la mas adecuada, o diversos factores que pueden intervenir para que aparezca ruido en las imagenes.
- What could we do to face this issue?
Podemos aplicar tecnicas estudiadas en esta asignatura, que se encargan de eliminar (o al menos reducir) el ruido presenta en algunas fotografías, tal y como se ha presentado al comienzo de este capitulo.

2.2.1 Convolution-based methods

There are some interesting smoothing techniques based on the convolution, a mathematical operation that can help you to alleviate problems caused by image noise. Two good examples are **neighborhood averaging** and **Gaussian filter**.

a) Neighborhood averaging

Convolving an image with a *small* kernel is similar to apply a function over all the image. For example, by using convolution it is possible to apply the first smoothing operator that you are going to try, **neighborhood averaging**. This operator averages the intensity values of pixels surrounding a given one, efficiently removing noise. Formally:

$$S(i, j) = \frac{1}{p} \sum_{(m,n) \in s} I(m, n)$$

with s being the set of p pixels in the neighborhood ($m \times n$) of (i, j) . Convolution permits us to implement it using a kernel, resulting in a linear operation! For example, a kernel for a 3x3 neighborhood would be:

1/9	1/9	1/9
1/9	1/9	1/9
1/9	1/9	1/9

You can think that the kernel is like a weight matrix for neighbor pixels, and convolution like a double `for` loop that applies the kernel pixel by pixel over the image. An important parameter when defining a kernel is its **aperture**, that is, how many row/columns it has in addition to the one in the middle in both sides. For example, the previous kernel has an aperture of 1, while a 5x5 kernel would have an aperture of 2, a 7x7 kernel of 3, and so on.

Not everything will be perfect, and the **main drawback** of neighborhood averaging is the blurring of the edges appearing in the image.

ASSIGNMENT 2: Applying average filtering

Complete the method `average_filter()` that convolves an input image using a kernel which values depend on its size (e.g. for a size 3x3 size its values are 1/9, for a 5x5 size 1/25 and so on). Then display the differences between the original image and the resultant one if `verbose` is `True`. It takes the image and kernel aperture size as input and returns the smoothed image.

Tip: OpenCV defines the 2D-convolution `cv2.filter2D(src, ddepth, kernel)`.

(https://docs.opencv.org/master/d4/d86/group_imgproc_filter.html#ga27c049795ce870216ddfb366086b5a04) method, where:

- the `ddepth` parameter means desired depth of the destination image.
 - Input images (`src`) use to be 8-bit unsigned integer (`ddepth=cv2.CV_8U`).
 - However, output sometimes is required to be 16-bit signed (`ddepth=cv2.CV_16S`)

```
In [3]: # ASSIGNMENT 2
# Implement a function that applies an 'average filter' to an input image. The kernel size of the filter is also an input.
# Show the input image and the resulting one in a 1x2 plot.
def average_filter(image, w_kernel, verbose=False):
    """ Applies neighborhood averaging to an image and display the result.

    Args:
        image: Input image
        w_kernel: Kernel aperture size (1 for a 3x3 kernel, 2 for a 5x5, etc.)
        verbose: Only show images if this is True

    Returns:
        smoothed_img: smoothed image
    """
    # Write your code here!

    # Create the kernel
    height = 2*w_kernel + 1 # or number of rows
    width = 2*w_kernel + 1 # or number of columns
    kernel = np.ones((height, width), np.float32)/(height*width)

    # Convolve image and kernel
    smoothed_img = cv2.filter2D(image, cv2.CV_16S, kernel)

    # verbose = True

    if verbose:
        # Show the initial image
        plt.subplot(121)
        plt.title('Noisy')
        plt.imshow(image, cmap = 'gray')
        #plt.show()

        # Show the resultant one
        plt.subplot(122)
        plt.title('Average filter')
        plt.imshow(smoothed_img, cmap = 'gray')
        #plt.show()

    return smoothed_img
```

You can use the next snippet of code to **test if your results are correct**:

```
In [4]: # Try this code
image = np.array([[1,6,2,5],[22,6,22,7],[7,7,13,0],[0,2,8,4]], dtype=np.uint8)
w_kernel = 1
print(average_filter(image, w_kernel))
```

```
[[ 9 12  9 12]
 [ 8 10  8 10]
 [ 7 10  8 11]
 [ 5  7  6  8]]
```

Expected output:

```
[[ 9 12  9 12]
 [ 8 10  8 10]
 [ 7 10  8 11]
 [ 5  7  6  8]]
```

Thinking about it (2)

You are asked to use the code cell below (the interactive one) and try **average_filter** using both noisy images `noisy_1.jpg` and `noisy_2.jpg`. Then, **answer the following questions**:

- Is the noise removed from the first image?
Sí, el ruido es eliminado notablemente
- Is the noise removed from the second image?
Esta vez, no es tan considerable el cambio de ruido que se puede apreciar, aunque igualmente el método que hemos programado eliminar un poco de ruido (en funcion de la anchura que le demos al kernel)

- Which value is a good choice for `w_kernel` ? Why?

Para la 1ª imagen el valor es 1, y para la 2ª imagen el valor es 2. Igualmente, a medida que aumentamos el valor de la anchura del kernel, internamente lo que estamos haciendo es aumentar el propio kernel en sí, y por tanto, el procedimiento tomará mas vecinos para hacer la media de intensidades totales de píxeles. Como consecuencia, puede que se reduzca aun mas el ruido, pero tambien se pierde precision de detalles y calidad de imagen en algunos aspectos.

```
In [5]: # Interact with the kernel size
noisy_img = cv2.imread(images_path + 'noisy_2.jpg', 0)
interactive(average_filter, image=fixed(noisy_img), w_kernel=(0,5,1), verbose=fixed(True))
```

```
Out[5]: interactive(children=(IntSlider(value=2, description='w_kernel', max=5), Output()), _dom_classes=('widget-inte...
```

b) Gaussian filtering

An alternative to neighborhood averaging is **Gaussian filtering**. This technique applies the same tool as averaging (a convolution operation) but with a more complex kernel.

The idea is to take advantage of the normal distribution for creating a kernel that keeps borders in the image while smoothing. This is done by giving more relevance to the pixels that are closer to the kernel center, creating a **neighborhood weighted averaging**. For example, considering a kernel with an aperture of 2 (5 × 5 size), its values would be:

0.003	0.013	0.022	0.013	0.003
0.013	0.059	0.097	0.059	0.013
0.022	0.097	0.159	0.097	0.022
0.013	0.059	0.097	0.059	0.013
0.003	0.013	0.022	0.013	0.003

For defining such a kernel it is used the Gaussian bell:

In 1-D:

$$g_{\sigma}(x) = \frac{1}{\sigma\sqrt{2\pi}} \exp\left(-\frac{x^2}{2\sigma^2}\right)$$

In 2-D, we can make use of the *separability property* to separate rows and columns, resulting in convolutions of two 1D kernels:

$$g_{\sigma}(x, y) = \underbrace{\frac{1}{2\pi\sigma^2} \exp\left(-\frac{x^2 + y^2}{2\sigma^2}\right)}_g = \underbrace{\frac{1}{\sigma\sqrt{2\pi}} \exp\left(-\frac{x^2}{2\sigma^2}\right)}_{g_x} * \underbrace{\frac{1}{\sigma\sqrt{2\pi}} \exp\left(-\frac{y^2}{2\sigma^2}\right)}_{g_y}$$

For example:

$$g = g_y \otimes g_x \rightarrow \begin{bmatrix} 1 & 2 & 1 \\ 2 & 4 & 2 \\ 1 & 2 & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 2 \\ 1 \end{bmatrix} \otimes \begin{bmatrix} 1 & 2 & 1 \end{bmatrix}$$

And because of the *associative property*:

$$\underbrace{f \otimes g}_{\text{2D convolution}} = f \otimes (g_x \otimes g_y) = \underbrace{(f \otimes g_x) \otimes g_y}_{\text{Two 1D convolutions}}$$

In this way, we do $2n$ operations instead of n^2 , being n the kernel size. This is relevant in kernels with a big size!

The degree of smoothing of this filter can be controlled by the σ parameter, that is, the **standard deviation** of the Gaussian distribution used to build the kernel. The bigger the σ , the more smoothing, but it could result in a blurrier image!

The σ parameter also influences the **kernel aperture** value to use, since it must be proportional. It has to be big enough to account for non-negligible values in the kernel! For example, in the kernel below, it doesn't make sense to increase its aperture (currently 1) since new rows/columns would have very small values:

1	15	1
15	100	15
1	15	1

ASSIGNMENT 3: Implementing the famous gaussian filter

Complete the `gaussian_filter()` method in a similar way to the previous one, but including a new input: `sigma`, representing the standard deviation of the Gaussian distribution used for building the kernel.

As an illustrative example of separability, we will obtain the kernel by performing the convolution of a 1D `vertical_kernel` with a 1D `horizontal_kernel`, resulting in the 2D gaussian `kernel` !

Tip: Note that NumPy defines mathematical functions that operate over arrays like [exponential](https://docs.scipy.org/doc/numpy/reference/generated/numpy.exp.html) (<https://docs.scipy.org/doc/numpy/reference/generated/numpy.exp.html>) or [square-root](https://docs.scipy.org/doc/numpy/reference/generated/numpy.sqrt.html) (<https://docs.scipy.org/doc/numpy/reference/generated/numpy.sqrt.html>), as well as mathematical [constants](https://docs.scipy.org/doc/numpy/reference/constants.html) (<https://docs.scipy.org/doc/numpy/reference/constants.html>), like `np.pi`. Remember the associative property of convolution.

Tip 2: The code below uses **List Comprehension** for creating a list of numbers by evaluating an expression within a `for` loop. Its syntax is: `[expression for item in list]`. You can find multiple examples of how to create lists using this technique on the [internet](http://www.google.com/search?q=python+list+comprehension) (<http://www.google.com/search?q=python+list+comprehension>).

```
In [6]: # ASSIGNMENT 3
# Implement a function that:
# -- creates a 2D Gaussian filter (tip: it can be done by implementing a 1D Gaussian filter and doing the outer product of
# -- convolves the input image with the kernel
# -- displays the input image and the filtered one in a 1x2 plot (if verbose=True)
# -- returns the smoothed image
def gaussian_filter(image, w_kernel, sigma, verbose=False):
    """ Applies Gaussian filter to an image and display it.

    Args:
        image: Input image
        w_kernel: Kernel aperture size
        sigma: standard deviation of Gaussian distribution
        verbose: Only show images if this is True

    Returns:
        smoothed_img: smoothed image
    """
    # Write your code here!

    # Create kernel using associative property
    s = sigma
    w = w_kernel

    #EN NONE APLICAR FORMULA DE LA GAUSSIANA
    kernel_1D = np.float32([(1/(s*np.sqrt(2*np.pi)))*np.exp(-((pow(z,2))/(2*pow(s,2)))) for z in range(-w,w+1)]) # Evaluat
    vertical_kernel = kernel_1D.reshape(2*w+1,1) # Reshape it as a matrix with just one column
    horizontal_kernel = kernel_1D.reshape(1,2*w+1) # Reshape it as a matrix with just one row
    kernel = signal.convolve2d(vertical_kernel, horizontal_kernel) # Get the 2D kernel

    # Convolve image and kernel
    smoothed_img = cv2.filter2D(image,cv2.CV_16S,kernel)

    if verbose:
        # Show the initial image
        #plt.subplot(121)
        plt.imshow(image, cmap = 'gray')
        plt.title('Noisy')
        plt.show()

        # Show the resultant one
        #plt.subplot(122)
        plt.imshow(smoothed_img, cmap = 'gray')
        plt.title('Gaussian filter')

    return smoothed_img
```

Again, you can use next code to **test if your results are correct**:

```
In [7]: image = np.array([[1,6,2,5],[10,6,22,7],[7,7,13,0],[0,2,8,4]], dtype=np.uint8)
w_kernel = 1
sigma = 1
print(gaussian_filter(image, w_kernel,sigma))

[[5 6 7 8]
 [5 7 7 8]
 [4 6 7 7]
 [3 5 5 5]]
```

Expected output:

```
[[5 6 7 8]
 [5 7 7 8]
 [4 6 7 7]
 [3 5 5 5]]
```

Thinking about it (3)

You are asked to try `gaussian_filter` using both noisy images `noisy_1.jpg` and `noisy_2.jpg` (see the cell below). Then, **answer following questions**:


- Is the noise removed from the first image?
Sí, el ruido es notablemente eliminado en esta imagen, aunque es necesario variar un poco los parámetros.
- Is the noise removed from the second image?
Esta vez la mejora es menos significativa.
- Which value is a good choice for `w_kernel` and `sigma` ? Why?
2 y 1.30 aproximadamente. Son los valores que hacen que ambas imagen traten de reducir el ruido al igual que tambien hacer una sobrereducion que produzca perdida de calidad en la imagen.

```
In [8]: # Interact with the kernel size and the sigma value
noisy_img = cv2.imread(images_path + 'noisy_2.jpg', 0)
interactive(gaussian_filter, image=fixed(noisy_img), w_kernel=(0,5,1), sigma=(1,3,0.3), verbose=fixed(True))
```

```
Out[8]: interactive(children=(IntSlider(value=2, description='w_kernel', max=5), FloatSlider(value=1.9, description='s...
```

2.2.2 Median filter

There are other smoothing techniques besides those relying on convolution. One of them is **median filtering**, which operates by replacing each pixel in the image with the median of its neighborhood. For example, considering a 3×3 neighborhood:

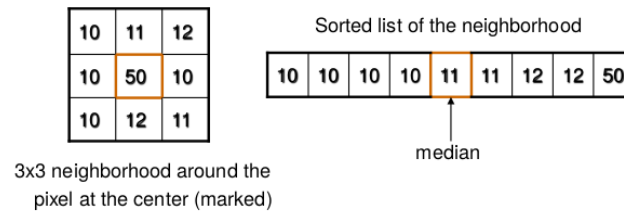

Median filtering is quite good preserving borders (it doesn't produce image blurring), and is very effective to remove salt&pepper noise.

An **important drawback** of this technique is that it is not a linear operation, so it exhibits a high computational cost. Nevertheless there are efficient implementations like pseudomedian, sliding median, etc.

ASSIGNMENT 4: Playing with the median filter

Let's see if this filter could be useful for our plate number recognition system. For that, complete the `median_filter()` method in a similar way to the previous techniques. This method takes as inputs:

- the initial image, and
- the window aperture size (`w_window`), that is, the size of the neighborhood.

Tip: take a look at `cv2.medianBlur()` (https://docs.opencv.org/master/d4/d86/group_imgproc_filter.html#ga564869aa33e58769b4469101aac458f9).

```
In [9]: # ASSIGNMENT 4
# Implement a function that:
# -- applies a median filter to the input image
# -- displays the input image and the filtered one in a 1x2 plot if verbose = True
# -- returns the smoothed image
def median_filter(image, w_window, verbose=False):
    """ Applies median filter to an image and display it.

    Args:
        image: Input image
        w_window: window aperture size
        verbose: Only show images if this is True

    Returns:
        smoothed_img: smoothed image
    """

    #Apply median filter
    smoothed_img = cv2.medianBlur(image, 2*w_window+1)

    if verbose:
        # Show the initial image
        #plt.subplot(121)
        plt.imshow(image, cmap = 'gray')
        plt.title('Noisy')
        plt.show()

        # Show the resultant one
        #plt.subplot(122)
        plt.imshow(smoothed_img, cmap = 'gray')
        plt.title('Median filter')

    return smoothed_img
```

You can use the next code to **test if your results are correct**:

```
In [10]: image = np.array([[1,6,2,5],[10,6,22,7],[7,7,13,0],[0,2,8,4]], dtype=np.uint8)
w_window = 2
print(median_filter(image, w_window))

[[6 5 5 5]
 [6 5 5 5]
 [6 5 5 5]
 [6 4 4 4]]
```

Expected output:

```
[[6 5 5 5]
 [6 5 5 5]
 [6 5 5 5]
 [6 4 4 4]]
```

Now play a bit with the parameters of the algorithm!

```
In [11]: # Interact with the window size
noisy_img = cv2.imread(images_path + 'noisy_2.jpg', 0)
interactive(median_filter, image=fixed(noisy_img), w_window=(1,5,1), verbose=fixed(True))

Out[11]: interactive(children=(IntSlider(value=3, description='w_window', max=5, min=1), Output()), _dom_classes=('widg...
```

Thinking about it (4)

You are asked to try **median_filter** using both noisy images `noisy_1.jpg` and `noisy_2.jpg`. Then, answer following questions:

- Is the noise removed from the first image?
No del todo, incluso aplicando la técnica que acabamos de implementar el ruido no es eliminado del todo.
- Is the noise removed from the second image?
En esta ocasión, en esta imagen sí que se nota más el cambio en cuanto a reducción de ruido
- Which value is a good choice for `w_window`? Why?
En torno a 1 o 2, ya que a partir de ahí la excesiva reducción de ruido provoca un "emborramiento" de la imagen, y como consecuencia una total imposibilidad de extraer información de ella.

2.2.3 Image average

Next, we asked UMA for the possibility to change their camera from a single shot mode to a multi-shot sequence of images. This is a continuous shooting mode also called *burst mode*. They were very kind and provided us with the sequences `burst1_(0:9).jpg` and `burst2_(0:9).jpg` for testing.

Image sequences allow the usage of **image averaging** for noise removal, the last technique we are going to try. In this technique the content of each pixel in the final image is the result of averaging the value of that pixel in the whole sequence. Remark that, in the context of our application, this technique will work only if the car is fully stopped!

The idea behind image averaging is that using a high number of noisy images from a still camera in a static scene, the resultant image would be noise-free. This is supposed because some types of noise usually has zero mean. Mathematically:

$$\underset{\text{Average image}}{\underbrace{g(x, y)}} = \frac{1}{M} \sum_{i=1}^M f_i(x, y) = \frac{1}{M} \sum_{i=1}^M [f_{\text{noise_free}}(x, y) + \underbrace{\eta_i(x, y)}_{\text{Noise Image}}] = f_{\text{noise_free}}(x, y) + \frac{1}{M} \sum_{i=1}^M \eta_i(x, y)$$

$$\begin{aligned} g(x, y) &= \frac{1}{M} \sum_{i=1}^M f_i(x, y) = \frac{1}{M} \sum_{i=1}^M [f_{\text{noise_free}}(x, y) + n_i(x, y)] = \\ &= f_{\text{noise_free}}(x, y) + \frac{1}{M} \sum_{i=1}^M n_i(x, y) \end{aligned}$$

This method:

- is very effective with gaussian noise, and
- it also preserves edges.

On the contrary:

- it doesn't work well with salt&pepper noise, and
- it is only applicable for sequences of images from a still scene.

ASSIGNMENT 5: And last but not least, image averaging

We want to analyze the suitability of this method for our application, so you have to complete the `image_averaging()` method. It takes:

- a sequence of images structured as an array with dimensions [sequence length × height × width], and
- the number of images that are going to be used.

Tip: Get inspiration from here: [average of an array along a specified axis \(https://docs.scipy.org/doc/numpy-1.9.2/reference/generated/numpy.average.html\)](https://docs.scipy.org/doc/numpy-1.9.2/reference/generated/numpy.average.html)

```
In [12]: # ASSIGNMENT 5
# Implement a function that:
# -- takes a number of images of the sequence (burst_length)
# -- averages the vale of each pixel in the selected part of the sequence
# -- displays the first image in the sequence and the final, filtered one in a 1x2 plot if verbose = True
# -- returns the average image
def image_averaging(burst, burst_length, verbose=False):
    """ Applies image averaging to a sequence of images and display it.

    Args:
        burst: 3D array containing the fully image sequence.
        burst_length: Natural number indicating how many images are
                     going to be used.
        verbose: Only show images if this is True

    Returns:
        average_img: smoothed image
    """

    #Take only `burst_length` images
    burst = burst[:burst_length,:,:]

    # Apply image averaging
    average_img = np.average(burst,0)

    # Change data type to 8-bit unsigned, as expected by plt.imshow()
    average_img = average_img.astype(np.uint8)

    if verbose:
        # Show the initial image
        #plt.subplot(121)
        plt.imshow(burst[:, :, 1], cmap = 'gray')
        plt.title('Noisy')
        plt.show()

        # Show the resultant one
        #plt.subplot(122)
        plt.imshow(average_img, cmap = 'gray')
        plt.title('Image averaging')

    return average_img
```

You can use the next code to **test if your results are correct**:

```
In [13]: burst = np.array([[[1,6,2,5],[10,6,22,7],[7,7,13,0],[0,2,8,4]],
                           [[7,7,13,0],[0,2,8,4],[1,6,2,5],[10,6,22,7]],
                           [[7,7,13,0],[0,2,8,4],[1,6,2,5],[10,6,22,7]]],dtype=np.uint8)

print(image_averaging(burst, 2))

[[ 4  6  7  2]
 [ 5  4 15  5]
 [ 4  6  7  2]
 [ 5  4 15  5]]
```

Expected output:

```
[[ 4  6  7  2]
 [ 5  4 15  5]
 [ 4  6  7  2]
 [ 5  4 15  5]]
```

Now check how the number of images used affect the noise removal (play with both sequences):

```
In [14]: # Interact with the burst length
# Read image sequence
burst = []
for i in range(10):
    burst.append(cv2.imread('./images/burst2_' + str(i) + '.jpg', 0))

# Cast to array
burst = np.asarray(burst)

interactive(image_averaging, burst=fixed(burst), burst_length=(1, 10, 1), verbose=fixed(True))
```

```
Out[14]: interactive(children=(IntSlider(value=5, description='burst_length', max=10, min=1), Output()), _dom_classes=(...
```

Thinking about it (5)

You are asked to try `image_averaging` with `burst1_XX.jpg` and `burst2_XX.jpg` sequences. Then, **answer these questions**:

- Is the noise removed in both sequences?

Por lo general, el ruido es eliminado en ambas secuencias, aunque en muchísima mayor notación en la primera de ellas. En la segunda secuencia, se reduce bastante el ruido presente pero no se llega a eliminar del todo.

- What number of photos should the camera take in each image sequence?

Para la primera secuencia es suficiente tomando unas 4 o 5 imagenes mientras que, como ya hemos comentado antes, para la segunda secuencia el numero

2.2.4 Choosing a smoothing technique

The next code cell runs the explored smoothing techniques and shows the results provided by each one while processing two different car license plates, **with two different types of noise. Check them!**

```

In [15]: #Read first noisy image
im1 = cv2.imread('./images/burst1_0.jpg', 0)
im1 = im1[290:340,280:460]

# Read second noisy image
im2 = cv2.imread('./images/burst2_0.jpg', 0)
im2 = im2[290:340,280:460]

# Apply neighborhood averaging
neighbor1 = average_filter(im1, 1)
neighbor2 = average_filter(im2, 1)

# Apply Gaussian filter
gaussian1 = gaussian_filter(im1, 2,1)
gaussian2 = gaussian_filter(im2, 2,1)

# Apply median filter
median1 = median_filter(im1, 1)
median2 = median_filter(im2, 1)

# Apply image averaging
burst1 = []
burst2 = []
for i in range(10):
    burst1.append(cv2.imread('./images/burst1_' + str(i) + '.jpg', 0))
    burst2.append(cv2.imread('./images/burst2_' + str(i) + '.jpg', 0))

burst1 = np.asarray(burst1)
burst2 = np.asarray(burst2)

burst1 = burst1[:,290:340,280:460]
burst2 = burst2[:,290:340,280:460]

average1 = image_averaging(burst1, 10)
average2 = image_averaging(burst2, 10)

# Plot results
plt.subplot(521)
plt.imshow(im1, cmap='gray')
plt.title('Noisy 1')

plt.subplot(522)
plt.imshow(im2, cmap='gray')
plt.title('Noisy 2')

plt.subplot(523)
plt.imshow(neighbor1, cmap='gray')
plt.title('Neighborhood averaging')

plt.subplot(524)
plt.imshow(neighbor2, cmap='gray')
plt.title('Neighborhood averaging')

plt.subplot(525)
plt.imshow(gaussian1, cmap='gray')
plt.title('Gaussian filter')

plt.subplot(526)
plt.imshow(gaussian2, cmap='gray')
plt.title('Gaussian filter')

plt.subplot(527)
plt.imshow(median1, cmap='gray')
plt.title('Median filter')











plt.subplot(528)
plt.imshow(median2, cmap='gray')
plt.title('Median filter')

plt.subplot(529)
plt.imshow(average1, cmap='gray')
plt.title('Image averaging')

plt.subplot(5,2,10)
plt.imshow(average2, cmap='gray')
plt.title('Image averaging')

```

Out[15]: Text(0.5, 1.0, 'Image averaging')

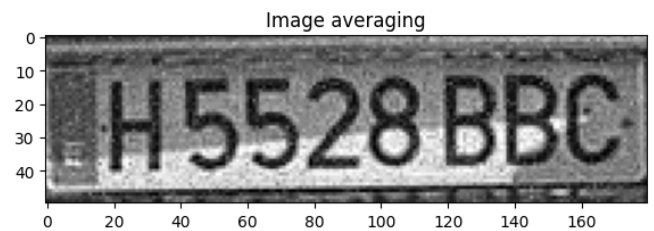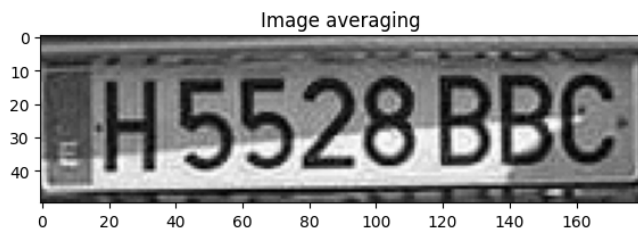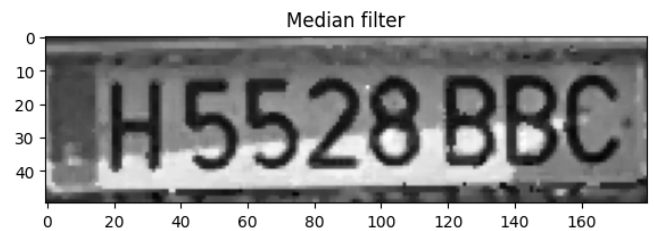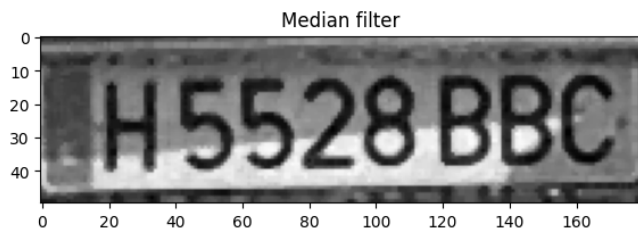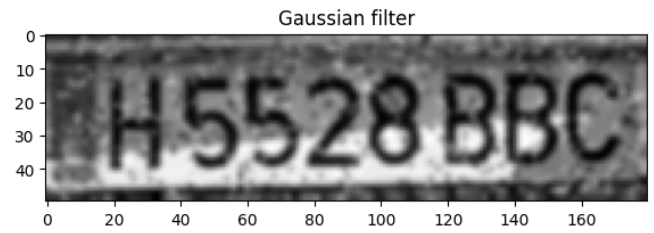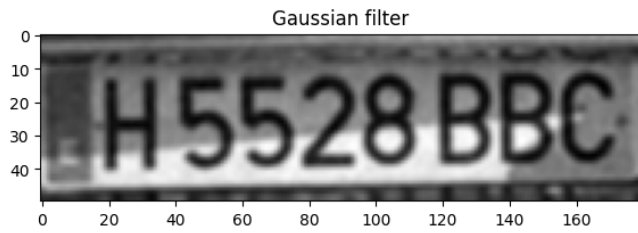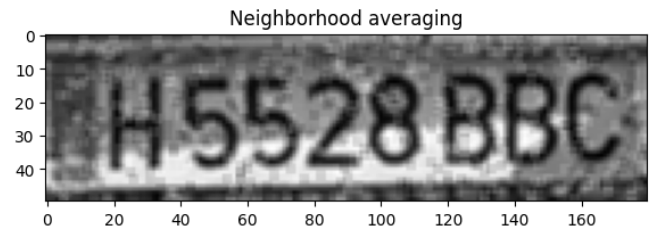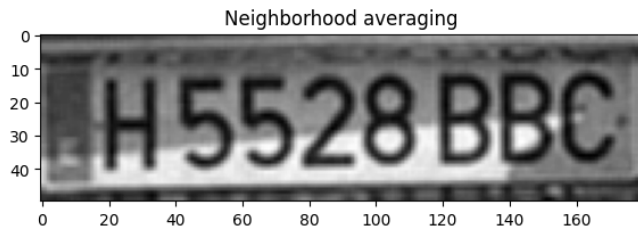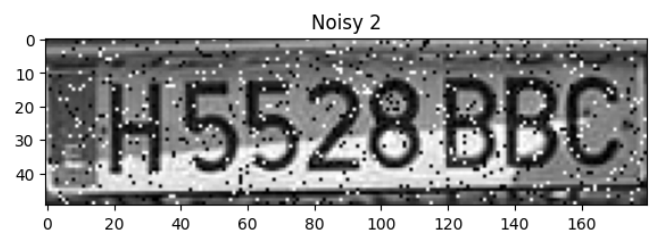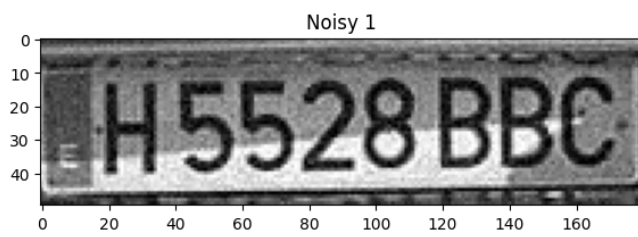

Thinking about it (6)

And the final question is:

- **What method would you choose** for a final implementation in the system? *Why?*

De todas las tecnicas que hemos ido implementando durante esta sesión de práctica, como ademas podemos apreciar en la salida el codigo que acabamos de implementar, la mejor de todas ellas y la que mas notablemente elimina el ruido es "Median Filter".

Conclusion

That was a complete and awesome job! Congratulations, you learned:

- how to reduce noise in images, for both salt & pepper and Gaussian noise,
- which methods are useful for each type of noise and which not, and
- to apply convolution and efficient implementations of some kernels.

If you want to improve your knowledge about noise in digital images, you can surf the internet for *speckle noise* and *Poisson noise*.