

SCHOOL MANAGEMENT SYSTEM

A

Project Report

*Submitted in partial fulfillment of the requirement for the award of Degree
of*

Bachelor of Computer Applications

Submitted to

**444 – Swatantrata-Senani Shankar Lal Agrawal
Prabandhan Ewam Takniki Mahavidyalay**



Submitted By

Under Joint Guidance of

Roshan Kumar
Registration No.**202244400074**
BCA-**3RD** Year
Session-**2022-2025**

Prof. Ravi Kumar Soni &
Prof. Niraj Kumar Singh
[Asst. Professor]
Computer Science &
Information Technology



**Swatantrata-Senani Shankar Lal Agrawal
Prabandhan Ewam Takniki Mahavidyalay**
Department of Computer Science & Information Technology
Session 2022-2025

DATE:.....

CERTIFICATE

This is to certify that the work embodies in this project entitled, **School Management System**, being submitted by **Roshan Kumar** (**202244400074**) in partial fulfillment of the requirement for the award of “**Bachelor of Computer Applications**” to **PATLIPUTRA UNIVERSITY, PATNA** during the academic year **2022-25** is a record of bonafide piece of work, carried out by him/her under our/my supervision and guidance in the “**Department of Computer Science & information Technology**”, **SSSAPTM PATNA**.



Dr. Neeraj Agrawal
Director

Er. Amit Kumar Shukla
Head of Department-IT

Prof. Ravi Kumar Soni
Assistant Professor-IT



**Swatantrata-Senani Shankar Lal Agrawal
Prabandhan Ewam Takniki Mahavidyalay**

Department of Computer Science & Information Technology

Session 2022-2025

Date: _____

APPROVAL CERTIFICATE

The project report entitled **School Management System**, being submitted by **Roshan Kumar** (202244400074) has been examined by us and is hereby approved for the award of degree “**Bachelor of Computer Applications**”, for which it has been submitted. It is understood that by this approval the undersigned do not necessarily endorse or approve any statement made, the opinion expressed or conclusion drawn therein, but approve the project only for the purpose for which it has been submitted.



(Internal Examiner)

(External Examiner)

Date:

Date:



**Swatantrata-Senani Shankar Lal Agrawal
Prabandhan Ewam Takniki Mahavidyalay**

**Department of Computer Science & Information
Technology**

Session 2022-2025

Date: _____

DECLARATION

I, **Roshan Kumar** hereby declare that the work, which is being presented in the project report entitled "**School Management System**", partial fulfillment of the requirements for the award of degree of "**Bachelor of Computer Applications**" submitted in the department of **Computer Science & Information Technology (Swatantrata Senani Shankar Lal Agrawal Prabandhan Ewam Takniki Mahavidyalay)** is an authentic record of my own work carried under the joint guidance of **Prof. Ravi Kumar Soni Sir and Prof. Niraj Kumar Singh Sir**. I have not submitted the matter embodied in this report for the award of any other degree.

Roshan Kumar

Registration No : **202244400074**

BCA 3RD Year

ACKNOWLEDGEMENT

"A journey is easier when you travel together. Interdependence is certainly more valuable than independence."

I would like to thanks, **Prof. Ravi Kumar Soni Sir** and **Prof. Niraj Kumar Singh Sir**, for providing regular guidance and insight into my project work. I also thank them for all advice he has given me in the past year, and for always having time for me, whenever I needed.

I give special thanks to **Er. Amit Kumar Shukla Sir**, **Prof. Raju Upadhyay Sir**, and **Prof. Anjesh Sir** for always being willing to help find solutions to any problems I had with my work.

"The completion of any project depends upon the cooperation, coordination, and combined efforts of several resources of knowledge, inspiration, and energy".

I also extend my deepest gratitude to **Director**, CIMAGE GROUP OF INSTITUTIONS, PATNA, **Dr. Neeraj Agrawal Sir**, **Dean** CIMAGE GROUP OF INSTITUTIONS, PATNA, **Dr. Neeraj Kumar Sir** and **Centre Head Mrs. Megha Agrawal Ma'am** for providing all the necessary facilities and true encouraging environment to bring out the best in my endeavors.

I express my gratitude and thanks to all the staff members of Computer Science departments for their sincere cooperation in furnishing relevant information to complete this Project well in time successfully.

I extend a special word to my friends, who have been a constant source of inspiration throughout my project work.

Lastly but not least I must express my cordial thank to my parent and family members who gave me the moral support without that it is impossible to complete my project work. With this note, I thank everyone for the support.

Roshan Kumar

Registration No : **202244400074**

BCA 3rd Year

Session-2022-2025

CONTENTS

REPORTo
INTRODUCTION.....	7
OBJECTIVE	8

PROJECT CATEGORY PHP	9
ADVANTAGES OF PHP	9
TOOLS/PLATFORM required.....	12
HARDWARE & SOFTWARE REQUIREMENTS	12
PROBLEM DEFINITION	12
REQUIREMENT SPECIFICATIONS	13
PROJECT PLANNING & SCHEDULING	14
GANTT CHART	15
 PERT CHART	18
SYSTEM ANALYSIS	1
IDENTIFICATION OF NEED	1
FEASIBILITY STUDY	6
TECHNICAL FEASIBILITY:	7
ECONOMICAL FEASIBILITY:	7
OPERATIONAL FEASIBILITY:	8
ANALYSIS.....	10
DFD	10
MODULE DESCRIPTION	16
DATA STRUCTURE Snap shot	17
LIST OF REPORTS	22
SCOPE AND FUTURE ENHANCEMENT	23
IMPLEMENTATION METHODOLOGY	23
TESTING.....	25
 LIMITATIONSANDFURTHER ENHANCEMENTS	28
SECURITY MECHANISM	29

SNAPSHOTS

.....30

SAMPLE PROJECT

INTRODUCTION

The “SCHOOL MANAGEMENT SYSTEM” has been design with the help of two powerful programming languages “PHP” and “MySQL”. The “PHP” being in the foreground and the “MySQL” in the background respectively.

The foreground language is favorite today, due to his interactive user interface and supporting powerful tool for development of interactive software.

The background language is favorite many of the programmers because it offers the much wanted structured query facility. The MySQL provides high security, as the database is stored in the logical area called “DB Engine”. As “DB Engine” is created in the virtual memory and end user cannot access that directly it.

With these thoughts the “SCHOOL MANAGEMENT SYSTEM” has been developed. The “PHP” gives the interactive look and “MySQL” gives high security. The “SUNRISE PUBLIC SCHOOL” is a big school of our country, it should have high

security. So the “SCHOOL MANAGEMENT SYSTEM” has been developed after brainstorming the needs and requirements of the “SUNRISE PUBLIC SCHOOL”.

OBJECTIVE

The motive of the project entitled “**School Automation System**” is to maintain all the record and activities taken place in the administrative department of the school.

The objectives of this system:

- Maintain the information about students.
- Maintain the details of staff members.
- Maintain the Software user details
- Record the various kinds of fees details.
- Maintain the back-up of software.
- Provide various reports like fee report, student report etc.

PROJECT CATEGORY PHP

Just like Java, **PHP** (Hypertext Preprocessor) is also a widely-used, general-purpose scripting language that is especially suited for web development. PHP was created by **Rasmus Lerdorf** in 1994 and has evolved significantly over the years. Unlike Java, which runs on the JVM, PHP scripts are executed on the server, typically interpreted by a web server like Apache or Nginx using a PHP processor module. PHP is known for its ease of use in web environments, enabling developers to embed code directly into HTML. It supports object-oriented programming, integrates with a wide variety of databases, and is open-source. PHP powers many popular content management systems like WordPress, Joomla, and Drupal, and is a backbone of a large portion of the web today.

ADVANTAGES OF PHP

1. Open Source and Free

- PHP is completely free to download and use.
- Large community support contributes to its continuous improvement and wide availability of resources.

2. Easy to Learn and Use

- PHP has a simple and forgiving syntax that is easy for beginners to pick up.
- You can embed PHP directly into HTML, which makes it very intuitive for web developers.

3. Cross-Platform Compatibility

- PHP works on all major operating systems like Windows, Linux, macOS.
- It is compatible with most web servers (Apache, Nginx, IIS), and can be integrated into various platforms.

4. Strong Community and Documentation

- Extensive documentation is available for PHP.
- A massive community offers support through forums, tutorials, and Q&A platforms like Stack Overflow.

5. Supports All Major Databases

- PHP works with a wide range of databases such as MySQL, PostgreSQL, SQLite, MongoDB, and more.

|

6. Fast Development and Deployment

- With a wide variety of frameworks (like Laravel, Symfony, CodeIgniter), PHP allows rapid web application development.
- It simplifies common tasks such as database access, session handling, and form validation.

7. Scalability and Performance

- PHP can be used to create both small websites and large, complex web applications.
- Tools like OPcache and various caching techniques help improve performance.

8. Secure with Proper Practices

- While PHP has had security concerns in the past, using best practices and modern frameworks significantly increases its security.**

9. Integration and Flexibility

- PHP can easily integrate with technologies like JavaScript, XML, JSON, REST APIs, and even Java or Python components.**

10. Proven Track Record

- Used by major websites like Facebook (originally), WordPress, Wikipedia, and more.**
- Reliable for both personal and enterprise-level projects.**

TOOLS/PLATFORM REQUIRED

Operating System

- Windows XP ,Windows 7.

HARDWARE & SOFTWARE REQUIREMENTS

Hardware Requirements:

- Server with PHP and MYSQL Support
- Pentium IV Processor
- 512 MB RAM
- 80 GB Hard Disk

Software Requirements:

- Frontend: HTML, CSS , Bootstrap & JavaScript
- Backend: PHP
- Database: MySQL
- Editor: VS Code/ Notepad

To maintain the record of students, staffs, fees, and various users, in order to help the school administration.

REQUIREMENT SPECIFICATIONS

A Software Requirements Specification (SRS) is a complete description of the behavior of the system to be developed. It includes a set of use cases that describe all the interactions the users will have with the software. Use cases are also known as functional requirements. In addition to use cases, the SRS also contains non-functional (or supplementary) requirements. Nonfunctional requirements are requirements which impose constraints on the design or implementation (such as performance engineering requirements, quality standards, or design constraints).

The general requirements of the project are:

- **To maintain the admission details.**
- **To keep track the teacher and students details.**
- **To record User details.**
- **To keep the record of various types of fee details.**
- **To keep the back-up of important data.**

PROJECT PLANNING & SCHEDULING

Project planning is part of project management, which relates to the use of schedules such as Gantt charts to plan and subsequently report progress within the project environment.

Initially, the project scope is defined and the appropriate methods for completing the project are determined. Following this step, the durations for the various tasks necessary to complete the work are listed and grouped into a work breakdown structure. The logical dependencies between tasks are defined using an activity network diagram that enables identification of the critical path. Float or slack time in the schedule can be calculated using software. Then the necessary resources can be estimated and costs for each activity can be allocated to each resource, giving the total project cost. At this stage, the project plan may be optimized to achieve the appropriate balance between resource usage and project duration to comply with the project objectives. Once established and agreed, the plan becomes what is known as the baseline. Progress will be measured against the baseline throughout the life of the project. Analyzing progress compared to the baseline is known as earned value management.


The PROJECT SCHEDULE is a calendar that links the tasks to be done with the resources that will do them. Before a project schedule can be created, the project manager must have a work breakdown structure (WBS), an effort estimate for each task, and a resource list with availability for each resource. If these are not yet available, it may be possible to create something that looks like a schedule, but it will essentially be a work of fiction. A project manager's time is better spent on working with the team to create a WBS and estimates (using a consensus-driven estimation method like Wideband Delphi) than on trying to build a project schedule without them. The reason for this is that a schedule itself is an estimate: each date in

the schedule is estimated, and if those dates do not have the buy-in of the people who are going to do the work, the schedule will almost certainly be inaccurate.

GANTT CHART

Gantt charts (developed by Henry L. Gantt) are a project control technique that can be used for several purposes including scheduling, budgeting and resource planning. A Gantt chart is a bar chart with each bar representing an activity.

The bars are drawn against a time line. The length of each bar is proportional to the length of time planned for the activity. Gantt chart can take different phase depending on their intended use. The Gantt chart of **School Management System** is drawn for the time management. The Gantt chart is drawn below:

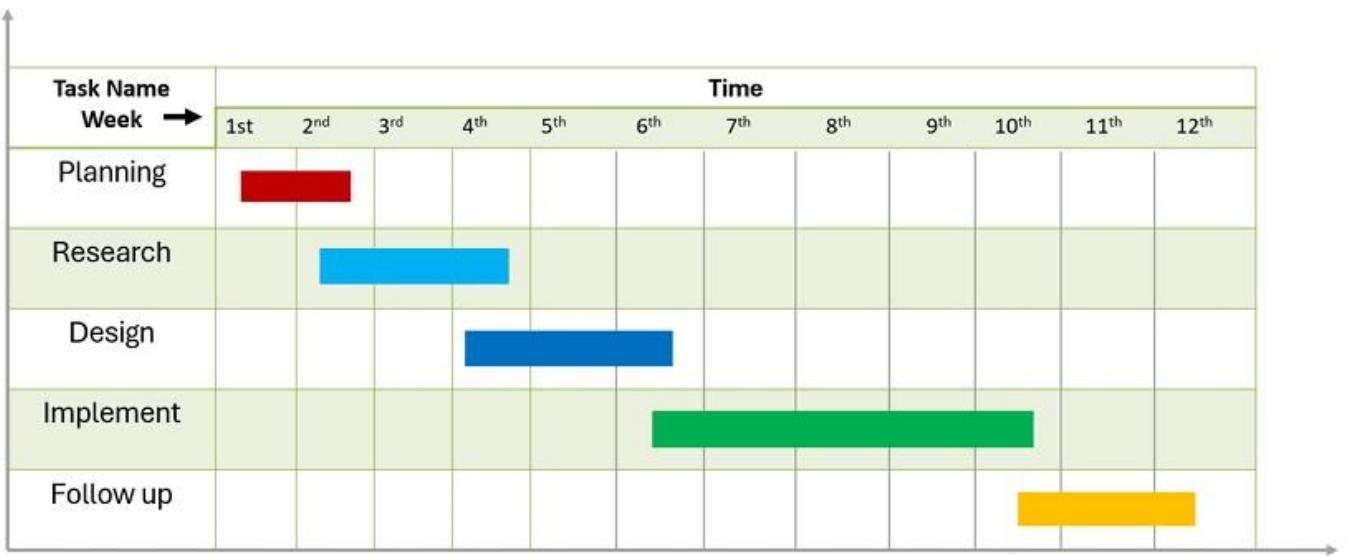

PERT CHART

PERT (Project Evaluation and Review Technique) charts consist of a network of boxes and arrows. The boxes represent activities and the arrows represent task dependencies.

PERT is organized by events and activities or tasks. PERT have more advantages and they are likely to be used for more complex projects. Through PERT chart the various task paths are defined. PERT enables the calculation of critical path. Each path consists of combination of tasks, which must be completed. The time and the cost associated with each task along a path are calculated, and the path that requires the greatest amount of elapsed time is the critical path. Calculation of the critical path enables project manager to monitor this series of task more closely than others to shift resources to it, if it begins to fall behind schedule.


PERT controls time and cost during the project and also facilitate finding the right balance between completing a project on time and completing it within the budget. There are thus not one but many critical paths, depending on the permutations of the estimates for each task. This makes analysis of critical path in PERT charts very complex. The PERT chart representation of the **School Management System** is shown below.

31st March

30th April

1st May

31st May

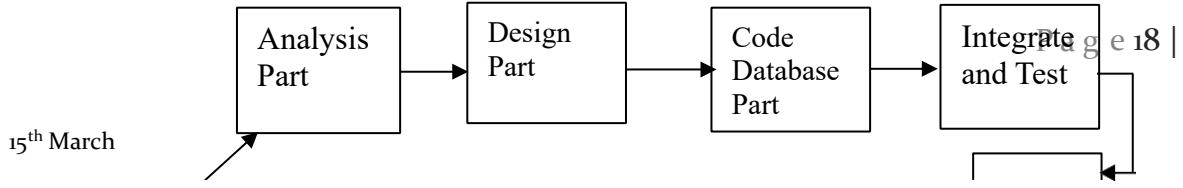

SYSTEM ANALYSIS

IDENTIFICATION OF NEED

To Important Indication for software we use the Principles of Requirement Engineering. Requirement engineering provides the appropriate mechanism for understanding what the customer wants, analyzing need, assessing feasibility, negotiating a reasonable solution, specifying the solution unambiguously, validating the specification and managing the requirement as they are transformed into an operational system. The requirement engineering process can be described in five distinct steps:

Requirement elicitation.

Requirement analysis & negotiation.

Requirement specification.

System Modeling.

Requirement validation.

Requirement Management.

In other words we can say that requirement analysis is a software task that bridges the gap between system level requirement engineering and software design.

Requirement analysis allows the software engineering to refine the software allocation and build models of the data, functional and behavioral domains that will be treated by software. Requirement analysis provides the software designer with a representation of information, function and behavior that can be translated into data, architectural, interface and component level design; finally the requirement specification provides the developer and the customer with the means to assess quality once software is built.

The most commonly used requirement elicitation technique is to conduct a meeting or interview. The first meeting between a software engineer and customer can be likened to the awareness of a first date between two adolescents. Neither person knows what to

say or ask; Both are worried that what they do say will be misinterpreted; both are thinking about where it might lead (Both likely have radically different expectation here); Both want to get the think over with, but at the same time, both want it to be a success.

Here according to this principle the analyst starts by asking context-free-questions. That is a set of question that will lead to a basic understanding of the problem, the people who want a solution, the nature of solution that is desired, and the effectiveness of the first encounter itself. The first set of Context-free question focuses on the

customer, the overall goals, and the benefits. For example, the analyst might ask: -

Who is behind the request for this Work?

Who will use the solution?

What will be economic benefit of a successful solution?

Is there another source for the solution that you need?

The next set of questions enables the software engineer to gain a better Understanding of the problem and the customer to voice his or her perceptions about a solution: -

How would you characterize “good” output that would be generated by a successful solution?

What problem(s) will this solution address?

Can you show me (or describe) the environment in which the solution will be used?

Will special performance issues or constraints affect the way the solution is approached?

The final set of question focuses on the effectiveness of the meeting:

Are you the right person to answer these questions? Are your answers? Official”?

Are my questions relevant to the problem that you have?

Am I asking too many questions?

Can anyone else provide additional information?

Should I be asking you anything else?

According to the above concepts I went to institution and met its staffs, management, and some persons related with the organizational work, which advised me related with my project such as details of agent, policy related information will be cater this system.

Preliminary Investigation: -

The first step in the system development life cycle is the preliminary investigation to determine the feasibility of the System. The purpose of the preliminary investigation is to evaluate project requests. It is not a design study nor does it includes the collection of details top describe the business system in all respect. Rather, it is collecting of information that helps committee members to evaluate the merits of the project request and make an informed judgment about the feasibility of the proposed project.

Here for the Ngo Management System, I have worked on the preliminary investigation that accomplished the following objectives: -

Clarify and understand the project request.

Determine the size of the project.

Assess costs and benefits of alternative approaches.

Determine the technical and operational; feasibility of alternative approaches.

Report the findings to management, with recommendation outlining the acceptances or rejection of the proposal.

Considering above criteria I also keep in mind that the requirements are clearly understandable when the clarification of project request is enquired. The data of the Ngo Management System, which are collected by me during preliminary investigation, are through Reviewing organization Documents Onsite observation and

Conducting interviews.

FEASIBILITY STUDY

Not everything imaginable is feasible, not even in software, even as it may appear to outsiders. Feasibility is the determination of whether or not a project is wrong doing. On the contrary, software feasibility has seven solid dimensions as below: -

- **Technical feasibility.**
- **Operational feasibility.**
- **Economic feasibility.**
- **Social feasibility.**
- **Management feasibility.**
- **Legal feasibility.** • **Time feasibility.**

The process followed in making this determination is called a feasibility study. The type of study determines if a project can and should be taken. Once it has been determined that a project is feasible, that analyst can go ahead and prepare the project specification which finalizes project requirements. Generally, feasibility studies are undertaken within tight time constraints and normally culminate in a written and oral feasibility report. The contents and recommendation of such a study will be used as a sound basis for deciding whether to proceed, postpone or cancel the project. Thus, since the feasibility study may lead to the commitment of large resources, it becomes necessary that it should be conducted competently and that no fundamental errors of judgment are made.

In other words we can say that a feasibility study is conducted to select the best system that meets performance requirement. This contains and identification description, an evaluation of candidate system and the selection of best system for the job. The system required a statement of constraints; the identification of specific system objective and a description of outputs define performance.

TECHNICAL FEASIBILITY: -

Technical feasibility is concerned with specifying equipment and software that will successfully satisfy the user requirements. My project is fit in technical feasibility because it requires neither too much heavy configuration system for its run nor in its development.

Following hardware and software components are used in the development of proposed system.

The same configuration system is also meets all the requirements to run or for implements to run or for implementation of the system. Though I have also tested this software for that systems whose configuration is lower than the above specified

ECONOMICAL FEASIBILITY: -

Economic analysis is the most frequently used technique for evaluation of the effectiveness of a proposed system. More commonly known as Cost/Benefit analysis, the procedure is to determine the benefits and saving that are expected from a proposed system and compare them with costs. If benefits outweigh costs, a decision is taken to design and implement the system. Other weight costs, a decision is taken to design and implement the system. Otherwise, further justification or alternative in the proposed system will have to be made if is to have a chance of being approved. This is an ongoing effort that improves in accuracy at each phase of the system life cycle.

Before establishing Economical Feasibility so as to justify the expenses that different organization working under this category has to bear for this Software. It is crystal clear that the user or Customer of this Software has no need to invest heavy amount for this software. As my project has been written in such a language, which is a platform

Independent. It has also the feature of WORM. It means it possess the technology of Write Once & Read Many.

There is no any heavy expense on the maintenance of this Software. Also there is no need to expense a heavy amount on the set of "Very Expert Personals" because it is very easy and user-friendly software. It is fully tighten protection of Secret Password and User Name for unauthorized access of this Software.

For different types of Process or Operation, Reports or Query and Output also, there is no need of heavy expenditure.

OPERATIONAL FEASIBILITY: -

My project is also fit in Operational Feasibility Study. As I have explained before this about Technical Feasibility and Economical Feasibility, this Software is very easy and user-friendly.

I have used a very easy menu system and also used some control buttons in the easy way by which one can choose the options on his desire.

Though this is fully protected with the security by word (Password and user name), if both are matched only then one can get access of this software.

Various Reports, Forms and Queries can be generated on the fingertips for the user. In nutshell we can say that it has following operational features:

1. It is User-Friendly.


2. It is having less paperwork.
3. Efficient tractability.
4. Query can be generated.
5. Various Reports and Forms can be generated.
6. Fully protected by Password and User name for unauthorized access.

ANALYSIS

System Analysis refers into the process of examining a situation with the intent of improving it through better procedures and methods. System Analysis is the process of planning a new System to either replace or complement an existing system.


DFD

The DFD is an excellent communication tool for analysts to model processes and functional requirements. Used effectively, it is a useful and easy to understand modeling tool. It has broad application

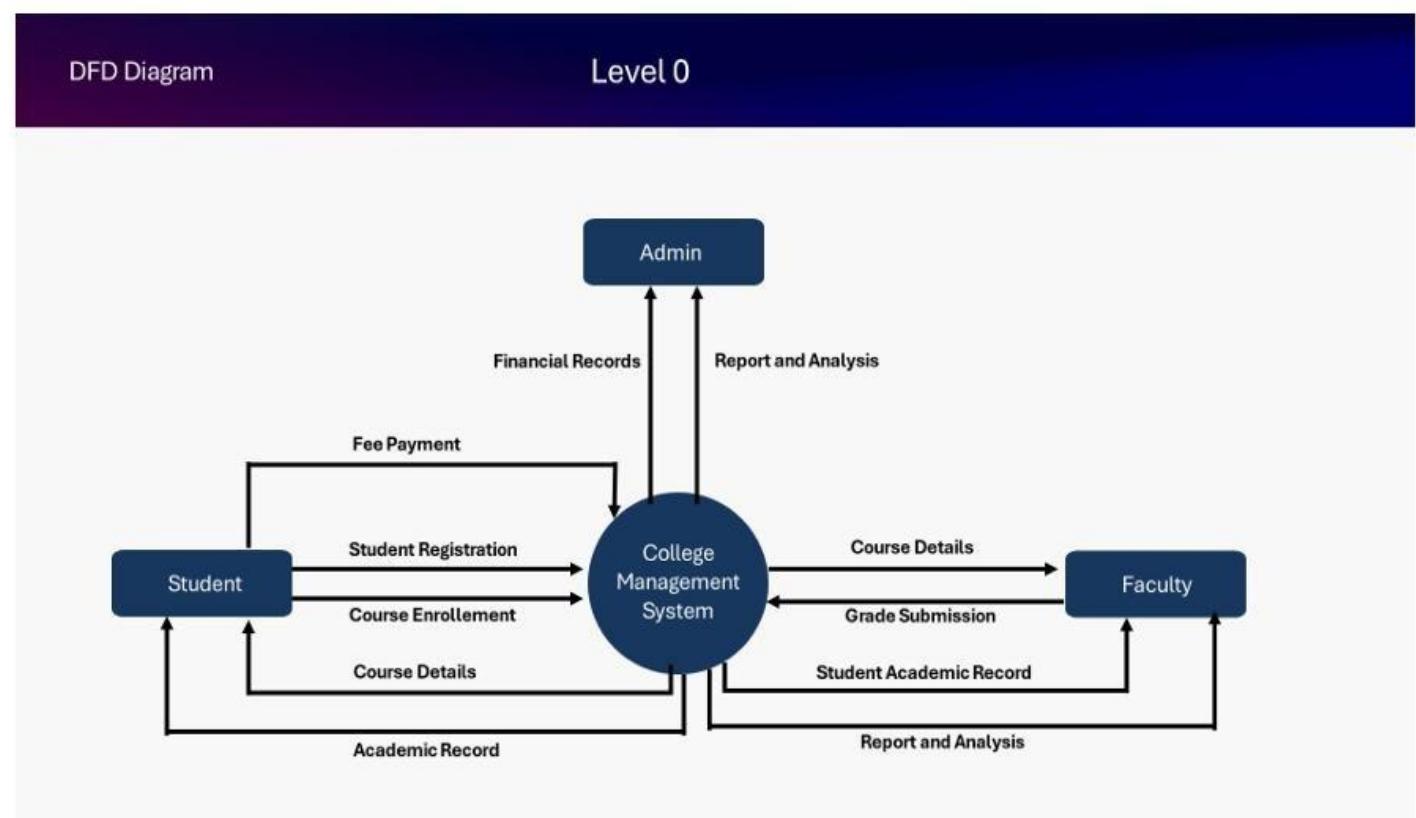


DFD Diagram

Level 1

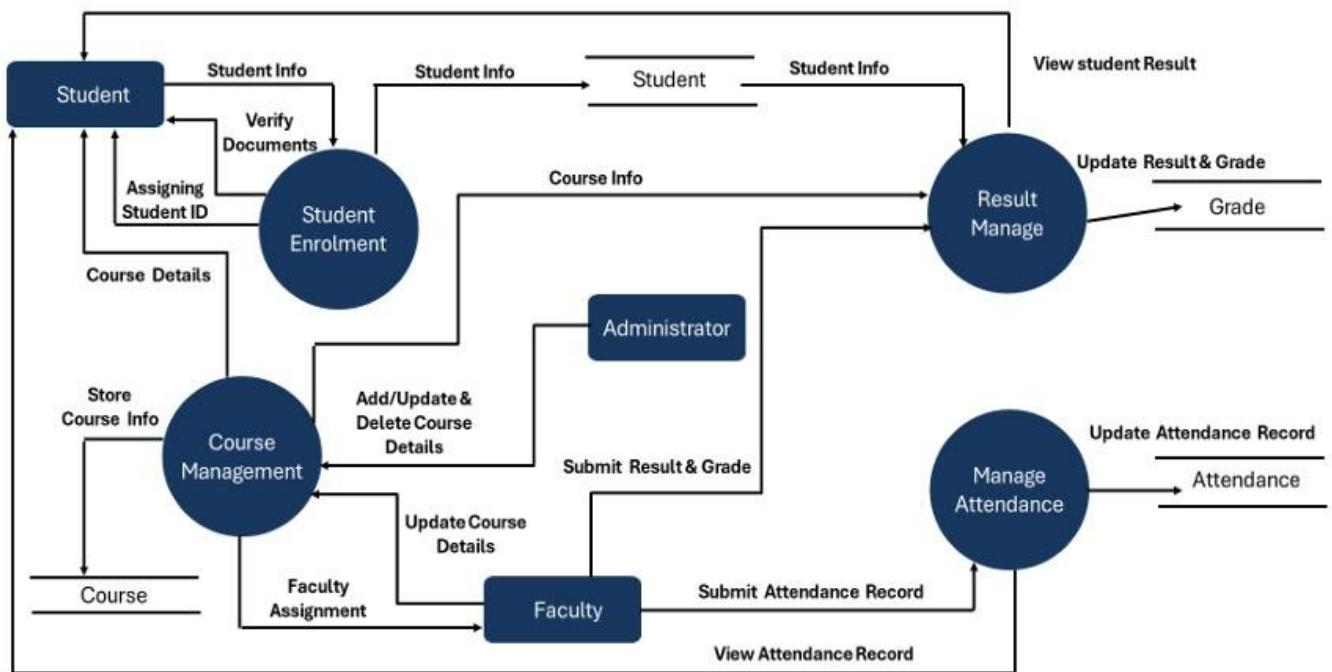

DFD 2 : VIEW RECORD

DFD 3: ATTENDENCE RECORD

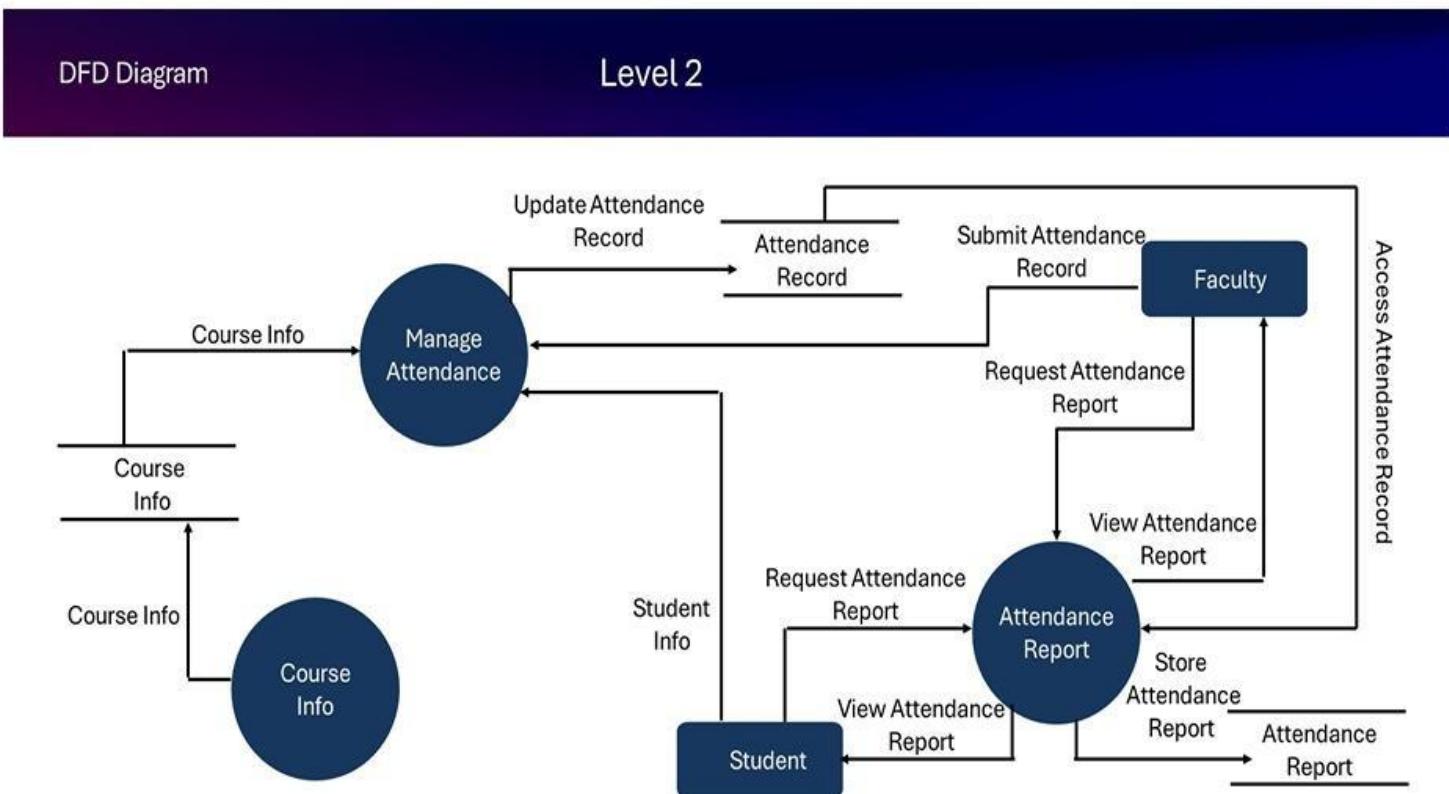

MODULE DESCRIPTION

These are the following Modules in the project:-

1. **STUDENT** :- This module is used for the information about the students through which it can be considered for particular student information as roll_no, address, course, admission status etc. In this module admission, student record updation , deletion etc happen.
2. **STAFF/EMPLOYEE** :- This module consists, the information about employees (working members) in the college for their different posts as faculties, coordinator, peon and other teaching & non-teaching staffs.
3. **FEE** : - This module maintains the information of student's admission fee , monthly fee and different type of fee Dues etc.
4. **SETTING** :- It is necessary to maintain the security level by implementing the concept of user authentication checking. The security module deals with user authentication and security measures. In which the user login id and password is used to secure & maintain the protection feature.
5. **REPORT** :-This module is used to view or print different type of Report like admission details, fee details etc.

DATA STRUCTURE SNAP SHOT

DATA DICTIONERY:- The data dictionary stores description of data items and structures, as well as systems processes. Data dictionary used for database design in this project is mentioned. Care was taken during the database design for future expansion of school's need.

User_ Details (Login)

```
CREATE TABLE `users` (
  `s_no` int(15) NOT NULL,
  `id` varchar(40) NOT NULL,
  `email` varchar(256) NOT NULL,
  `password_hash` varchar(700) NOT NULL,
  `role` varchar(20) NOT NULL,
  `theme` varchar(20) NOT NULL DEFAULT 'light'
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;
```

Student Details (student_add):

```
CREATE TABLE `students` (
  `s_no` int(20) NOT NULL,
  `id` varchar(40) NOT NULL,
  `fname` varchar(100) NOT NULL,
  `lname` varchar(100) NOT NULL,
  `father` varchar(200) NOT NULL,
  `gender` varchar(10) NOT NULL,
  `class` varchar(20) NOT NULL,
  `section` varchar(50) NOT NULL,
  `dob` varchar(15) NOT NULL,
  `image` varchar(50) NOT NULL DEFAULT '1701517055user.png',
  `phone` varchar(15) NOT NULL,
  `email` varchar(100) NOT NULL,
  `address` varchar(200) NOT NULL,
  `city` varchar(50) NOT NULL,
  `zip` varchar(20) NOT NULL,
  `state` varchar(50) NOT NULL,
  `request_date` varchar(30) NOT NULL,
  `request_time` varchar(30) NOT NULL,
  `request` varchar(20) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci;
```

Teachers Details (teachers_add):-

```
CREATE TABLE `teachers` (
  `s_no` int(20) NOT NULL,
  `id` varchar(40) NOT NULL,
  `fname` varchar(100) NOT NULL,
  `lname` varchar(100) NOT NULL,
  `father` varchar(150) NOT NULL,
  `subject` varchar(50) NOT NULL,
  `gender` varchar(10) NOT NULL,
  `dob` varchar(20) NOT NULL,
  `image` varchar(30) NOT NULL DEFAULT '1701517055user.png',
  `phone` varchar(20) NOT NULL,
  `email` varchar(50) NOT NULL,
  `address` varchar(512) NOT NULL,
  `city` varchar(50) NOT NULL,
  `zip` varchar(20) NOT NULL,
  `state` varchar(50) NOT NULL,
  `class` varchar(20) NOT NULL,
  `section` varchar(20) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;
```

Attendence (Student) :

```
CREATE TABLE `attendance` (
  `s_no` int(20) NOT NULL,
  `student_id` varchar(40) NOT NULL,
  `attendance` varchar(10) NOT NULL,
  `class` varchar(30) NOT NULL,
  `section` varchar(5) NOT NULL,
  `date` datetime NOT NULL DEFAULT current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci;
```

Admin (Login) :

```
CREATE TABLE `admins` (
  `s_no` int(20) NOT NULL,
  `id` varchar(30) NOT NULL,
  `fname` varchar(100) NOT NULL,
  `lname` varchar(100) NOT NULL,
  `dob` varchar(20) NOT NULL,
  `image` varchar(40) NOT NULL DEFAULT '1701517055user.png',
  `phone` varchar(20) NOT NULL,
  `gender` varchar(20) NOT NULL,
  `address` varchar(700) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci;
```

TimeTable :

```
CREATE TABLE `time_table` (
  `s_no` int(20) NOT NULL,
  `class` varchar(50) NOT NULL,
  `section` varchar(10) NOT NULL,
  `start_time` varchar(20) NOT NULL,
  `end_time` varchar(20) NOT NULL,
  `mon` varchar(30) NOT NULL,
  `tue` varchar(30) NOT NULL,
  `wed` varchar(30) NOT NULL,
  `thu` varchar(30) NOT NULL,
  `fri` varchar(30) NOT NULL,
  `sat` varchar(30) NOT NULL,
  `editor_id` varchar(40) NOT NULL,
  `timestamp` datetime NOT NULL DEFAULT current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci;
```

Fee _Record :

```
CREATE TABLE `fee_record` (
  `s_no` int(11) NOT NULL,
  `id` varchar(20) NOT NULL,
  `month` varchar(20) NOT NULL,
  `other_collection` int(5) NOT NULL,
  `total` int(5) NOT NULL,
  `paid` int(5) NOT NULL,
  `balance` int(5) NOT NULL,
  `timestamp` datetime NOT NULL DEFAULT current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_unicode_ci
```

Class :

```
CREATE TABLE `classes` (
  `s_no` int(10) NOT NULL,
  `class` varchar(20) NOT NULL,
  `section` varchar(1) NOT NULL,
  `fees` int(5) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_unicode_ci
```

Exam Result :

```
CREATE TABLE `exams` (
  `s_no` int(20) NOT NULL,
  `exam_id` varchar(40) NOT NULL,
  `exam_title` varchar(512) NOT NULL,
  `subject` varchar(50) NOT NULL,
  `class` varchar(30) NOT NULL,
  `section` varchar(10) NOT NULL,
  `total_marks` varchar(10) NOT NULL,
  `passing_marks` varchar(10) NOT NULL,
  `timestamp` datetime NOT NULL DEFAULT current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci
```

Marks :

```
CREATE TABLE `marks` (
  `s_no` int(20) NOT NULL,
  `exam_id` varchar(40) NOT NULL,
  `subject` varchar(255) NOT NULL,
  `student_id` varchar(40) NOT NULL,
  `marks` varchar(10) NOT NULL DEFAULT ''
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci
```

Notes :

```
CREATE TABLE `notes` (
  `s_no` int(20) NOT NULL,
  `sender_id` varchar(40) NOT NULL,
  `editor_id` varchar(40) NOT NULL,
  `class` varchar(50) NOT NULL,
  `subject` varchar(100) NOT NULL,
  `title` varchar(100) NOT NULL,
  `comment` varchar(1000) NOT NULL,
  `file` varchar(50) NOT NULL,
  `timestamp` datetime NOT NULL DEFAULT current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci;
```

Notices :

```
CREATE TABLE `notice` (
  `s_no` int(20) NOT NULL,
  `sender_id` varchar(40) NOT NULL,
  `editor_id` varchar(40) NOT NULL,
  `title` varchar(100) NOT NULL,
  `body` varchar(1000) NOT NULL,
  `file` varchar(100) NOT NULL,
  `importance` varchar(5) NOT NULL DEFAULT '1',
  `timestamp` datetime NOT NULL DEFAULT current_timestamp(),
  `role` varchar(11) NOT NULL,
  `class` varchar(11) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci;
```

```
CREATE TABLE `reminders` (
  `s_no` int(20) NOT NULL,
  `id` varchar(40) NOT NULL,
  `message` varchar(2000) NOT NULL,
  `status` varchar(15) NOT NULL DEFAULT 'pending'
) ENGINE=InnoDB DEFAULT CHARSET=latin1 COLLATE=latin1_swedish_ci
```

Syllabuss :

```
CREATE TABLE `syllabus` (
  `s_no` int(20) NOT NULL,
  `class` varchar(50) NOT NULL,
  `subject` varchar(100) NOT NULL,
  `file` varchar(100) NOT NULL DEFAULT '-1'
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci
```

Student Guardian :

```
CREATE TABLE `student_guardian` (
  `s_no` int(20) NOT NULL,
  `id` varchar(40) NOT NULL,
  `gname` varchar(200) NOT NULL,
  `gphone` varchar(20) NOT NULL,
  `gaddress` varchar(200) NOT NULL,
  `gcity` varchar(100) NOT NULL,
  `gzip` varchar(50) NOT NULL,
  `relation` varchar(256) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_general_ci
```

Reminders :

LIST OF REPORTS

The following reports will be generated:-

1. Registration: - This report contains the information of all registered students of the school.
2. Fee: - In this report, the fee details will be displayed.

SCOPE AND FUTURE ENHANCEMENT

There is always a scope of betterment and the candidate system is not against perception. The project uses very nearly the same calculations as School does; if clients want any other type of changes it can also be done because the project is upgradeable.

The project can be used as a sub-project for any other projects. The main future scope is as follows:-

- To Store the large amount of data for future point of view.
- Reducing manual efforts for maintain the system.
- Reducing the lead time.
- It gives correct information about Student details, Staff details, Fee etc.

IMPLEMENTATION METHODOLOGY

Implementation of a tested system is done on the actual location with the actual hardware, Software and manpower platforms or limitation. To implement of this software, the followings are the necessary:

This project run on internet or intranet , so I have to selected internet supportive software. For implementing this software a web- server is required . I have to install IIS(internet information service). Know this project is web-based so it will need a web-browser which will act as its interface, so for this project install a web-browser capable of providing proper interface to this project such as internet Explorer/mozilla Firefox/opera e.t.c and many other browser.and for back-end operation ,I have to install ORACLE 9i which handle all the work related to database query and updation as required by the software. In future also use better databases.we know that this project will be developed on heavy platform ASPJAVA with c# , so there is requirement of advance processer and proper RAM and other advance Hardware configuration.

Create separate user for this application: A user named as “admin” with the password “pass” is to be created for storing the data in a separate place. Storing data under separate user will protect the data. Oracle Navigator can be used for creating the said username and password.

Create required tables: The structure of tables required for this project (Detail given in the data base design section) is to be created in the said user. The SQL statement CREATE can be used for creating such tables.

Create Distributable set of files: An installation package of the software is to be built for implementation of the project at desired location.

TESTING

Software testing consists of the following stages.

a) TEST PLAN DEVELOPMENT:-

The importance of software testing and its implications need not be emphasized. Software testing is a critical element of software quality assurance and represents the ultimate review of specifications, design and coding. The main objective of testing is to uncover a host of errors, systematically, with minimum effort and time. It improves the reliability of the software.

b) TESTING STRATEGY:-

A testing strategy explains how to conduct a test to uncover all the errors with minimum possible time and effort. It should be flexible enough to promote customization that may be necessary in due course of development process.

c) UNIT TESTING:-

Unit testing focuses verification effort on the smallest unit of software module using the detailed design criteria. Process specifications testing are done to uncover errors within the boundaries of the module. All modules must be successful in the unit test before start of the integration testing. The software developed for e-banking is tested module wise by giving normal values and extreme values as input. All the bugs have been identified and removed. The software designed is tested module wise. Before using the software, an employee has to give organization name and password.

In the next stage he has to provide division name, employee ID and password. If any of this information is wrong, the system gives an error message- “invalid user and password”

INTEGRATION TESTING:-

It is a systematic technique for constructing different program module in to an integrated software structure. This test uncovers the errors during integration process. The integration aspect is tested after integrating all the modules and validated.

VALIDATION TESTING:-

After the culmination of integration testing the software is ready as per the specification. But it has to be validated as per the specification and to uncover the unexpected future errors and to improve its reliability. The random value and boundary values as input is fed to the software

developed and studied the software performance and validated **TEST CASE DESIGN**

The techniques that are used in deriving the test cases are explained below.

CONDITION TESTING:-

Condition testing is a test case design method that exercises the logical conditions contained in the program. The possible components in a condition statement are a Boolean operator, Boolean variable, relational operator, arithmetic expression and parenthesis.

BOUNDARY VALUE ANALYSIS:-

Boundary value analysis leads to the selection of test cases that exercise the boundary conditions or boundary values. It is observed that a large number of errors tend to appear at the boundaries of the input domain than in the center. The boundary condition is tested by inserting values beyond specification/availability of project allocations. E.g. the software is tested by giving more amount of money in the indent form than available in the budget. Under this conciliation the software gives an error message stating that insufficient fund.

EQUIVALENCE PARTITIONING:-

Equivalence portioning is a black box testing method that divides the input domain of a program into classes of data from which test cases

can be derived. A typical test uncovers a class errors might otherwise require many more test cases before the error is observed. Equivalence classes for input determine the valid and invalid inputs for the program

LIMITATIONS AND FURTHER ENHANCEMENTS

LIMITATIONS:

Despite tremendous growth potentialities continues with a series of challenges and contradictions in its implementations. The main shortcomings are mentioned below.

- Easy transaction of money.
- Reliability of electronic payment system.
- Accounting, legal, taxation and security issues etc.

RECOMMENDED AREAS FOR FURTHER RESEARCH

Considering the fact that has already gone ahead the following areas needs to be further probed for improving the system to meet the changing scenario.

- 1) There is a lot of scope for future research in the areas like automatic component/material planning, automatic advanced indenting, micro transactions, and customer relationship management.

2) Components like electronic payment system, digital certificates, electronic tokens, electronic cheques etc. are still in an embryonic stage of development. This area opens up a lot of scope for further research.

In the absence of universal standards for electronic transactions, the organization should develop a standard internal to it and that translate between its formats and those supported by its trading partners. This approach reduces dependence on industry schedules for adopting standards, and avoids the pitfalls of an organization-imposed solution.

SECURITY MECHANISM

Implementation of security is a key issue in any software development different application use different kind of security mechanism according to their need. In Ngo Management System the implementation of security has been confined up to the user level. The “Ngo Management System” authenticates a user by its username and password to a user. A user is able to work on the software if s/he is an authorized user with user id and password.

It is the system administrator who is responsible for granting permission to any user. He can grant as well as revoke permissions from any user. Another important security level is data level. In the data level security defined validation and constraints in the database. Due to this only valid data can be entered in the tables.

All information and management forms are stored within the system, and access to this sensitive information is controlled through an effective authentication system: one has to know the USER ID, and PASSWORD to gain access to any of the information.

The management (administrator) can create new user, while a normal user can't do this. This system will provide the facility to change the password according to the user need. For security measure the 'Password' field will be taken as 'Varchar2' data type, so that a user can use in this field both integer and alphabets.

SNAPSHOTS

Login

Enter your email

Enter your password

[Forgot password?](#)

Submit

LOGIN FORM
(login.php)



code for login page :-

```

<?php
error_reporting(0); session_start();

if (isset($_SESSION['uid'])) {
    $uid = $_SESSION['uid'];
    include('assets/config.php');

    $query = "SELECT `role` FROM `users` WHERE `users`.`id`=?";
    $stmt = mysqli_prepare($conn, $query);

    mysqli_stmt_bind_param($stmt, "s", $uid);
    mysqli_stmt_execute($stmt);

    $result = mysqli_stmt_get_result($stmt);
    $row = mysqli_fetch_array($result);

    mysqli_stmt_close($stmt);

    if ($row && isset($row['role'])) {
        if ($row['role'] == "admin") {
            header('Location: admin_panel/dashboard.php');
            exit();
        } else if ($row['role'] == "owner") {
            header('Location: owner_panel/index.php');
            exit();
        } else if ($row['role'] == "teacher") {
            header('Location: teacher_panel/dashboard.php');
            exit();
        } else if ($row['role'] == "student") {
            header('Location: student_panel/index.php');
            exit();
        }
    }
?>
<!DOCTYPE html>
<html lang="en" dir="ltr">

<head>
    <meta charset="UTF-8">
    <title>School Management</title>
    <!-- Fontawesome CDN Link -->
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.3/css/all.min.css">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css">
    <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.3.0/font/bootstrap-icons.css" /> <link
    rel="stylesheet" href="login-form-style.css">
    <link rel="icon" type="image/x-icon" href="images/1.png">
</head>

```

```

<body>
<div class="container">
  <input type="checkbox" id="flip">
  <div class="cover">
    <div class="front">
      
      <div class="text">
        <span class="text-1">SCHOOL MANAGEMENT SYSTEM<br></span>
        <span class="text-2">Plan serve program</span>
      </div>
    </div>
  </div>

</div>
<div class="forms">
  <div class="form-content">
    <div class="login-form">

      <div class="title" id='board-title'>Login</div>

      <div class="alert-box">
        <div class="alert alert-danger text-center mt-3" role="alert" id="error-msg">

        </div>
      </div>

      <form action="index.php" id="login-form" method="post">
        <div class="input-boxes">
          <div class="input-box">
            <i class="fas fa-envelope"></i>
            <input type="email" name="email" placeholder="Enter your email" id='loginEmail' required>
          </div>
          <div class="input-box">
            <i class="fas fa-lock"></i>
            <input type="password" name="password" placeholder="Enter your password" id="password" required>
            <i class="bi bi-eye-fill" style="margin-left:auto; margin-right: 6px;" id="togglePassword"></i>
          </div>
          <div class="text"><a id="forgotpassword">Forgot password?</a></div>
          <div class="button input-box">
            <button type="submit" class="btn">
              Submit
            </button>
          </div>
        </div>
      </form>

      <!-- forgot password gui -->
      <form action="index.php" id="forgotPassword-form" method="post" style="display:none;">

        <div class="input-boxes">

```

```

<div class="input-box">
  <i class="fas fa-envelope"></i>
  <input type="email" name="email" id="forgotEmail" placeholder="Enter your email" required>
</div>

<div class="text" style="margin-bottom: 20px; display:flex">
  <a id="backToLogin">Back to Login?</a>
</div>

<div class="button input-box">
  <button type="submit" id='sendCodeBtn'>
    Send Code
  </button>
</div>

</div>
</form>

<form id="otpVarification-form" method="post" style="display:none;">

  <div class="input-boxes">
    <div class="input-box">
      <i class="fas fa-envelope"></i>
      <input type="text" name="email" value="some value" id="otpDisabledEmail" required>
    </div>

    <div class="input-box">
      <i class="fas fa-lock"></i>
      <input type="text" name="otp" placeholder="Enter code" id="otpCode" required>
    </div>

    <div class="text" style="margin-bottom: 20px; display:flex">
      <a id="backToforgotPasswordForm">Back</a>
      <a id="resendOTP" style='margin-left: auto;'>Resend OTP?</a>
    </div>

    <div class="button input-box">
      <button type="submit" id='verifyCodeBtn'>
        Verify Code
      </button>
    </div>

  </div>
</form>

<form id="createNewPassword-form" method="post" style="display:none;">

  <div class="input-boxes">
    <div class="input-box">

```

```

<i class="fas fa-lock"></i>
<input type="password" name="newpassword" id='newpassword' placeholder='Enter new password' required>
</div>

<div class="invalid-feedback" id='weakPasswordFeedback'></div>

<div class="input-box">
<i class="fas fa-lock"></i>
<input type="password" name="confirmpassword" id='confirmpassword' placeholder='Confirm password' required>
</div>
<div class="invalid-feedback" id='passwordNotSame'>
New password and confirm password are not same!
</div>

<div class="form-check mt-3 ">
<input class="form-check-input" type="checkbox" value="" id="showPasswords">
<label class="form-check-label" for="showPasswords" id='showPasswordLabel'>
Show password
</label>
</div>

<div class="button input-box">
<button type="submit" id='changePasswordBtn'>
    Change password
</button>
</div>

</div>
</form>

<!-- end of forgot password gui -->

</div>
</div>
</div>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script> <script
src="index.js"></script>

</body>

</html>

```

Forgot Password

 Enter your email

[Back to Login?](#)

[Send Code](#)



Forget Password.php :

```
<?php error_reporting(0);
session_start();

use PHPMailer\PHPMailer\PHPMailer;
use PHPMailer\PHPMailer\Exception;

include('assets/config.php');
$response = array();

$response['status'] = "";
$response['message'] = "";

if(isset($_POST['otp']) && isset($_POST['email'])){
    $email = mysqli_real_escape_string($conn, $_POST['email']);
    $otp = mysqli_real_escape_string($conn, $_POST['otp']) . ";

    $generatedOtp = $_SESSION['otp'];

    if($otp == $generatedOtp){
        $response['status'] = 'success';
        $response['message'] = 'otp matched';
        unset($_SESSION['otp']);
    }else{
        $response['status'] = 'ERROR';
        $response['message'] = 'Invalid OTP! ';
    }
}

}else if(isset($_POST['password']) && isset($_POST['email'])){
```

```

$email = mysqli_real_escape_string($conn, $_POST['email']);
$password = mysqli_real_escape_string($conn, $_POST['password']);

$passwordHash = password_hash($password, PASSWORD_DEFAULT);

$sql = "UPDATE `users` SET `password_hash` = ? WHERE `users`.`email` = ?;";
$stmt2 = mysqli_prepare($conn, $sql);
mysqli_stmt_bind_param($stmt2, "ss", $passwordHash, $email);

$sql2 = "SELECT `id` FROM `users` WHERE `users`.`email`=?;";
$stmt3 = mysqli_prepare($conn, $sql2);
mysqli_stmt_bind_param($stmt3, "s", $email);
mysqli_stmt_execute($stmt3);
$result = mysqli_stmt_get_result($stmt3);

if(mysqli_stmt_execute($stmt2) && mysqli_num_rows($result) > 0){

    $row = mysqli_fetch_assoc($result);
    $_SESSION['uid'] = $row['id'];
    $response['status'] = 'update_success';
    $response['message'] = 'Password successfully updated';
} else{
    $response['status'] = 'Error';
    $response['message'] = 'Unable to update password...!';
}

mysqli_stmt_close($stmt2);
}

else if(isset($_POST['email'])){


```

```

$email = mysqli_real_escape_string($conn, $_POST['email']);

function domain_exists($email, $record = 'MX'){

    list($user, $domain) = explode('@', $email);
    return checkdnsrr($domain, $record);
}

if (filter_var($email, FILTER_VALIDATE_EMAIL) &&
domain_exists($email)) {

    $query = "SELECT * FROM `users` WHERE `email`=?;";
    $stmt = mysqli_prepare($conn, $query);
    mysqli_stmt_bind_param($stmt, "s", $email);
    mysqli_stmt_execute($stmt);
    $result = mysqli_stmt_get_result($stmt);

    if(mysqli_num_rows($result) > 0){
        $response['status'] = 'success';

        $OTP = generateOTP();
        $mail = getEmailObject($email, $OTP);

        try {
            $mail->send();
            $response['status'] = 'success';
            $response['email'] = $email . "";
            $_SESSION['otp'] = $OTP . "";
        } catch (Exception $e) {
            $response['status'] = 'ERROR';
            $response['message'] = 'Something went wrong!';
        }
    }
}

```

```

}else{
    $response['status'] = 'ERROR';
    $response['message'] = 'Email not found!';
}
mysqli_stmt_close($stmt);
} else {
    $response['status'] = 'ERROR';
    $response['message'] = 'Invalid email!';
}
}else{
    $response['status'] = 'ERROR';
    $response['message'] = 'Something gone wrong!';
}

echo json_encode($response);

function generateOTP(){
    return rand(100000, 999999);
}

function getEmailObject($reciever, $otp){
    require 'phpmailer/src/Exception.php';
    require 'phpmailer/src/PHPMailer.php';
    require 'phpmailer/src/SMTP.php';

    $title = 'OTP Verification email';
    $message = '<h3>OTP Verification email</h3><p>Your one time password is <b>'.$otp.'</b>. Stay connected with Us.</p><p>This email is computer generated so please do not reply this email.</p>';
}

```

```
$mail = new PHPMailer(true);

$mail->isSMTP();
$mail->Host = 'smtp.gmail.com';
$mail->SMTPAuth = true;
$mail->Username = 'roshanraj69084@gmail.com';
$mail->Password = 'hftq jbmk kfjq xbmb';
$mail->SMTPSecure = 'tls';
$mail->Port = 587;

$mail->setFrom('roshanraj69084@gmail.com');
$mail->addAddress("$.reciever");

$mail->isHTML(true);

$mail->Subject = $title;
$mail->Body = $message;

return $mail;
}

?>
```

MAIN FORM (main_admin.) for admin :

The screenshot shows the main dashboard for an administrator. On the left is a sidebar with icons for Dashboard, Teacher, Student, Subjects, Attendance, Notice Board, Time Table, Syllabus, Notes, Marks, Bus Service, Settings, and Logout. The main area has a header with a search bar and a blue button. Below the header is a section titled 'Analytics' with four cards: 'Teachers' (4), 'Students' (3), 'Home work and Notes' (3), and 'Notices' (4). The 'Latest Notices' section lists four notices with columns for Title, Date, and Sender. The 'Reminders' section lists two reminders with delete icons.

Title	Date	Sender
Ghs	07 Mar, 2025	You
Holiday notice	19 Jun, 2024	You
Title 2	19 Jun, 2024	You
Notice title	19 Jun, 2024	You

code :

```

<?php include('partials/_header.php') ?>

<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="1" id="checkFileName">
<!-- End of Sidebar -->

<div class="modal fade" id="reminder-modal" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Add
                Reminder</h1>

```

```

        <button type="button" class="close mr-2" data-bs-dismiss="modal"
aria-label="Close"><i
    class='bx bx-x'></i></button>
</div>
<div class="modal-body">

    <div class="container mr-3 ml-3">
        <div class="alert alert-warning reminder-error" role="alert"
style="min-height: 50px; display: none;">
            Message can't be empty!
        </div>
        <div class="mb-3">
            <!-- <label for="exampleFormControlTextarea1"
class="formlabel">Example textarea</label> -->
            <textarea class="form-control" id="reminder-msg"
rows="3"></textarea>
        </div>
    </div>

    </div>
    <div class="modal-footer">
        <button type="button" class="btn btn-primary text-center
_flexcontainer" onclick="addReminder()"><i
    class='bx bx-plus'></i>&ampnbsp<strong>ADD</strong></button>
    </div>
    </div>
</div>

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>
    <!-- End of Navbar -->

    <main>

```

```

<div class="header">
  <div class="left">
    <h1>Dashboard</h1>
    <ul class="breadcrumb">
      <li><a>
        Analytics
      </a></li>

      </ul>
    </div>
    <!-- <a href="#" class="report">
      <i class='bx bxs-file-pdf'></i>
      <span>Worksheet PDF</span>
    </a> -->
  </div>

  <!-- Insights -->
  <ul class="insights">
    <li onclick="showTeacherList()">
      <!-- <i class='bx bx-calendar-check'></i> -->
      <i class='bx bxs-user'></i>
      <span class="info">
        <h3 class="text-center" id="teacherCount">_ _ _</h3>
        <p>Teachers</p>
      </span>
    </li>
    <li onclick="showStudentList()">
      <i class='bx bxs-group'></i>
      <span class="info">
        <h3 class="text-center" id="studentCount">_ _ _</h3>
        <p>Students</p>
      </span>
    </li>
    <li onclick="showNotesList()">
      <i class='bx bx-book'></i>

```

```

<span class="info">
    <h3 class="text-center" id="classCount">_ _ _</h3>
    <p>Home work and Notes</p>
</span>
</li>
<li onclick="showNoticeList()">
    <i class='bx bxs-bookmark'></i>
    <span class="info">
        <h3 class="text-center" id="noticeCount">_ _ _</h3>
        <p>Notices</p>
    </span>
</li>
</ul>
<!-- End of Insights -->

<div class="bottom-data">
    <div class="orders">
        <div class="header">
            <i class='bx bx-receipt'></i>
            <h3 id="text-heading">Latest Notices</h3>
            <i class='bx bx-filter'></i>
            <a href="noticeboard.php" ><i class='bx bx-plus icon-hover-circle' id="plusIconNotification" style="font-size: 30px;"></i></a>
        </div>
    <table>
        <thead>
            <tr>
                <th>Title</th>
                <th>Date</th>
                <th>Sender</th>
            </tr>
        </thead>
        <tbody id="noticeTableBody">

```

```

        </tbody>
    </table>
</div>

<!-- Reminders -->
<div class="reminders">
    <div class="header">
        <i class='bx bx-note'></i>
        <h3>Remiders</h3>
        <!-- <i class='bx bx-filter'></i> -->
        <a data-bs-toggle="modal" data-bs-target="#reminder-modal" style="font-size: 30px;" class='bx bx-plus icon-hover-circle'></i></a>
    </div>
    <ul class="task-list" id="all-reminders">
        </ul>
    </div>

<!-- End of Reminders-->

</div>
<br>
</main>
</div>

<script src="../assets/js/dashboard.js"></script> <?php
include("partials/_footer.php");

```

Teacheradd.php :

The screenshot shows the 'Teacher' section of an ERP application. The left sidebar has a 'Teacher' item selected. The main content area displays a 'Teachers' list with two prominent buttons: 'Add Teacher' (green icon) and 'Remove Teacher' (red icon).

```
<?php include('partials/_header.php') ?>

<!-- confirm edit alert modal--&gt;
&lt;div class="modal fade" id="edit-confirmation-modal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true"&gt;
    &lt;div class="modal-dialog modal-dialog-centered"&gt;
        &lt;div class="modal-content"&gt;
            &lt;div class="modal-header"&gt;
                &lt;/div&gt;
            &lt;div class="modal-body"&gt;</pre>
```

```

<strong>Do you really want to Edit Teacher Details?</strong>
</div>
<div class="modal-footer">
    <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
    <button type="button" class="btn btn-danger" id="confirm-edit-btn">Edit</button>
</div>
</div>
</div>
<!-- end of onfirm edit alert modal-->

<!-- alert to delete teacher -->
<div class="modal fade" id="delete-confirmation-modal" tabindex="-1" aria-labelledby="exampleModalLabel"
aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                </div>
            <div class="modal-body">
                <strong>Do you really want to delete Teacher?</strong>
            </div>
            <div class="modal-footer">
                <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
                <button type="button" class="btn btn-danger" onclick="deleteTeacherWithIdSeted()">Delete</button>
            </div>
        </div>
    </div>
<!-- end of alert to delete teacher -->
<!--add new student model -->

<div class="modal" style="z-index: 2000;" id="addTeacherModal" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Teacher Details</h1>
                <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i
class='bx bx-x'></i></button>
            </div>
            <form class="needs-validation" id="general-form" novalidate>
                <div class="modal-body">
                    <div class="container my-3">
                        <div class="mb-3">

```

```

        <label for="fullname" class="form-label">Full Name <span style="color: red;">*</span></label>
<div class="row">
    <div class="col">
        <input type="name" pattern="[A-Za-z]+" class="form-control" placeholder="First name"
aria-label="First name" id="fname" name="fname" required>
        <div class="invalid-feedback">
required!
        </div>
    </div>
    <div class="col">
        <input type="name" pattern="[A-Za-z]+" class="form-control" placeholder="Last name"
aria-label="Last name" id="lname" name="lname" required>
        <div class="invalid-feedback">
required!
        </div>
    </div>
</div>

```

```

<div class="mb-3">
    <label for="details" class="form-label">Class Teacher Details <span style="color: red;">*</span></label>
    <div class="row">
        <div class="col">
            <select class="form-select" id="class" name="class" style="width:100%;" required>

                <option selected disabled value="">---select--</option>
                <option value="null">Not Applicable</option>
                <!-- <option value="12s">12 (Math)</option>
                <option value="12s">12 (Bio)</option>
                <option value="12c">12 (Commerce)</option>
                <option value="11s">11 (Math)</option>
                <option value="11s">11 (Bio)</option>
                <option value="11c">11 (Commerce)</option>
                <option value="10">10</option>
                <option value="9">9</option>
                <option value="8">8</option>
                <option value="7">7</option>
                <option value="6">6</option>
                <option value="5">5</option>
                <option value="4">4</option>
                <option value="3">3</option>
                <option value="2">2</option>
                <option value="1">1</option>

```

```

<option value="pg">pg</option>
<option value="lkg">lkg</option>
<option value="ukg">ukg</option> -->
<?php include('partials/select_classes.php') ?>
</select>
<div class="invalid-feedback">

required!
</div>
</div>
<div class="col">
<select class="form-select" id="section" name="section" style="width:100%;"

required>
<option selected disabled value="">--select--</option>
<!-- <option value="A">A</option>
<option value="B">B</option>
<option value="C">C</option> -->
<option value="null">Not Applicable</option>
<?php include('partials/selection_section.php') ?>
</select>
<div class="invalid-feedback">

required!
</div>
</div>
</div>
<div class="invalid-feedback" id="invalidClassTeacher">
Either both are not applicable or both are selected!!
</div>
</div>

<div class="mb-3">
    <label for="subject" class="form-label">Related Subject <span style="color: red;">*</span></label>
        <input type="text" class="form-control" id="subject" aria-describedby="emailHelp" name="subject" required>
                    <div class="invalid-feedback">
required!
</div>
</div>

<div class="mb-3">
    <label for="gender" class="form-label">Gender <span style="color: red;">*</span></label>
    <select class="form-select" id="gender" name="gender" required>
        <option selected disabled value="">--select--</option>
        <option value="Male">Male</option>
        <option value="Female">Female</option>
        <option value="Other">Other</option>
    </select>

```

```

        <div class="invalid-feedback">
required!
        </div>
</div>

        <div class="mb-3">
            <label for="dob" class="form-label">Date of Birth <span style="color: red;">*</span></label>
<input type="date" class="form-control" id="dob" aria-describedby="emailHelp" name="dob"
required>
            <div class="invalid-feedback">
required!
            </div>
            </div>
        </div>
</div>
<div class="modal-footer">

        <button type="button" class="btn btn-primary" id="general-info-btn">
            <div><i class='bx bxs-chevrons-right'></i><span> next</span></div>
        </button>
</div>
</form>

        </div>
</div>
</div>

<!-- personal information -->
<div class="modal" style="z-index: 2000;" id="personalInformationModal" tabindex="-1"    aria-
labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Address Details <span style="color:
red;">*</span></h1>
                <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i
class='bx bx-x'></i></button>
            </div>
            <form class="needs-validation" id="personal-form" novalidate>
                <div class="modal-body">
                    <div class="container my-3">

                        <div class="mb-3">
                            <label for="phone" class="form-label">Phone number <span style="color: red;">*</span></label>
                            <input type="tel" class="form-control" id="phone" name="phone"
placeholder="Enter phone number" maxlength="10" required>

```

```

<div class="valid-feedback">
    <!-- Bootstrap "check" icon for valid input -->
    <!-- <i class="bi bi-check text-success"></i> -->
</div>
<div class="invalid-feedback" id="phone-mdg">
Please enter a valid 10-digit phone number. </div>
</div>

<div class="mb-3">
    <label for="email" class="form-label">Email <span style="color: red;">*</span></label>
<input type="email" class="form-control" id="email" aria-describedby="emailHelp"
name="email" required> <div class="invalid-feedback"> required!
</div>
</div>

<div class="mb-3">
    <label for="address" class="form-label">Address <span style="color: red;">*</span></label>
<input type="text" class="form-control" id="address" aria-describedby="emailHelp"
name="address" required> <div class="invalid-feedback"> required!
</div>
</div>

<div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">City <span style="color: red;">*</span></label>
    <div class="row">
        <div class="col">
            <input type="text" class="form-control" id="city" placeholder="City name"
aria-label="First name" name="city" required>
            <div class="invalid-feedback">
required!
            </div>
        </div>
        <div class="col">
            <input type="text" class="form-control" id="zip" placeholder="Zip code"
aria-label="Last name" name="zip" maxlength="6" required>
            <div class="invalid-feedback">
required!
            </div>
        </div>
    </div>
</div>

<div class="mb-3">

```

```

<label for="state" class="form-label">State <span style="color: red;">*</span></label>
<select class="form-select" aria-label="Default select example" id="state" name="state"
required>
    <option selected disabled value="">--select--</option>
    <option value="Andhra Pradesh">Andhra Pradesh</option>
    <option value="Arunachal Pradesh">Arunachal Pradesh</option>
    <option value="Assam">Assam</option>
    <option value="Bihar">Bihar</option>
    <option value="Chhattisgarh">Chhattisgarh</option>
    <option value="Goa">Goa</option>
    <option value="Gujarat">Gujarat</option>
    <option value="Haryana">Haryana</option>
    <option value="Himachal Pradesh">Himachal Pradesh</option>
    <option value="Jharkhand">Jharkhand</option>
    <option value="Karnataka">Karnataka</option>
    <option value="Kerala">Kerala</option>
    <option value="Madhya Pradesh">Madhya Pradesh</option>
    <option value="Maharashtra">Maharashtra</option>
    <option value="Manipur">Manipur</option>
    <option value="Meghalaya">Meghalaya</option>
    <option value="Mizoram">Mizoram</option>
    <option value="Nagaland">Nagaland</option>
    <option value="Odisha">Odisha</option>
    <option value="Punjab">Punjab</option>
    <option value="Rajasthan">Rajasthan</option>
    <option value="Sikkim">Sikkim</option>
    <option value="Tamil Nadu">Tamil Nadu</option>
    <option value="Telangana">Telangana</option>
    <option value="Tripura">Tripura</option>
    <option value="Uttar Pradesh">Uttar Pradesh</option>
    <option value="Uttarakhand">Uttarakhand</option>
    <option value="West Bengal">West Bengal</option>
    <option value="Andaman and Nicobar Islands">Andaman and Nicobar Islands</option>
<option value="Chandigarh">Chandigarh</option>
    <option value="Dadra and Nagar Haveli and Daman and Diu">Dadra and Nagar Haveli and
Daman and Diu</option>
        <option value="Delhi">Delhi</option>
        <option value="Jammu and Kashmir">Jammu and Kashmir</option>
        <option value="Ladakh">Ladakh</option>
        <option value="Lakshadweep">Lakshadweep</option>
        <option value="Puducherry">Puducherry</option>

    </select>
    <div class="invalid-feedback">
required!
    </div>

```

```

        </div>
    </div>
</div>
<div class="modal-footer">
    <button type="button" onclick="backToStudentDetail()" class="btn btn-secondary">
        <div><i class='bx bxs-chevrons-left'></i><span>Back</span></div>
    </button>
    <button type="button" class="btn btn-primary" id="personal-info-btn">
        <div><i class='bx bxs-chevrons-right'></i><span> next</span></div>
    </button>
</div>
</form>
</div>
</div>
<!-- end of personal information-->

<!-- Guardian information -->
<div class="modal" style="z-index: 2000;" id="guardian_information" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Emergency Contact Details <span style="color: red;">*</span></h1>
                <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i class='bx bx-x'></i></button>
            </div>
            <form class="needs-validation" id="guradian-form" novalidate>
                <div class="modal-body">
                    <div class="container my-3">
                        <div class="mb-3">
                            <label for="guardian" class="form-label">Guardian name <span style="color: red;">*</span></label>
                            <input type="name" pattern="[A-Za-z\s]+" class="form-control" id="guardian"
                                ariadescribedby="emailHelp"
                                name="guardian" required>
                        <div class="invalid-feedback">
                            required!
                        </div>
                    </div>
                    <div class="mb-3">
                        <label for="gphone" class="form-label">Phone number <span style="color: red;">*</span></label>

```

```

        <input type="tel" class="form-control" id="gphone" name="gphone"
placeholder="Enter phone number" maxlength="10" required>           <div
class="valid-feedback">
        </div>
        <div class="invalid-feedback" id="phone-g">
            Please enter a valid 10-digit phone number.
        </div>
    </div>

<div class="mb-3">
    <label for="gaddress" class="form-label">Address <span style="color: red;">*</span></label>
<input type="text" class="form-control" id="gaddress" aria-describedby="emailHelp"
name="gaddress" required>           <div class="invalid-feedback">           required!
        </div>
    </div>

<div class="mb-3">
    <label for="city-info" class="form-label">City <span style="color: red;">*</span></label>
    <div class="row">
        <div class="col">
            <input type="text" class="form-control" placeholder="City name"
aria-label="First name" id="gcity" name="gcity" required>
            <div class="invalid-feedback">
required!
            </div>
        </div>
        <div class="col">
            <input type="text" class="form-control" placeholder="Zip code"
aria-label="Last name" id="gzip" name="gzip" maxlength="6" required>
            <div class="invalid-feedback">
required!
            </div>
        </div>
    </div>
</div>

<div class="mb-3">
    <label for="relation" class="form-label">Relation to teacher <span style="color: red;">*</span></label>
    <input type="text" pattern="[A-Za-z]+" class="form-control" id="relation"
aria-describedby="emailHelp"
name="relation" required>
    <div class="invalid-feedback">
required!
    </div>

```

```

        </div>
    </div>
</div>
<div class="modal-footer">
    <button type="button" class="btn btn-secondary" onclick="backToAddressDetail()">
        <div><i class='bx bxs-chevrons-left'></i><span>Back</span></div>
    </button>
    <button type="button" class="btn btn-primary" id="guardian-form-btn"><span>Submit
</span></button>
</div>
</form>
</div>
</div>
<!-- end of Guardian information-->

<!-- end of add new student model -->

<!-- Remove student model -->
<div class="modal removeTeacherModal" style="z-index: 2000;" id="removeStudentModel" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title text-danger fs-5" id="exampleModalLabel">Delete Teacher</h1>
            <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i
                class='bx bx-x'></i></button>
            </div>
            <form class="needs-validation" id="remove-teacher-form" novalidate>
                <div class="modal-body">
                    <div class="container my-3">
                        <div class="mb-3">
                            <label for="teacher-id" class="form-label">Teacher ID</label>
                            <input type="text" class="form-control" id="teacher-id" aria-describedby="" required>
<div class="invalid-feedback">
                            Please provide a valid Teacher ID.
                        </div>
                    </div>
                </div>
            </div>
            <div class="modal-footer">

```

```

<button type="button" class="btn btn-danger" id="remove-teacher-btn">
    <div><span>Delete Teacher</span></div>
</button>
</div>
</form>
</div>
</div>
</div>

<!-- end of Remove student model --&gt;

&lt;!-- Sidebar --&gt;
&lt;?php include('partials/_sidebar.php') ?&gt;
&lt;input type="hidden" value="2" id="checkFileName"&gt;
&lt;!-- End of Sidebar --&gt;

&lt;!-- Main Content --&gt;
&lt;div class="content"&gt;
    &lt;!-- Navbar --&gt;
    &lt;?php include("partials/_navbar.php"); ?&gt;

    &lt;!-- End of Navbar --&gt;

    &lt;main&gt;
        &lt;div class="header"&gt;
            &lt;div class="left"&gt;
                &lt;h1&gt;Teacher&lt;/h1&gt;
            &lt;/div&gt;
        &lt;/div&gt;
        &lt;div class="bottom-data"&gt;

            &lt;div class="orders"&gt;

                &lt;!-- Nav tabs --&gt;
                &lt;ul class="nav nav-tabs" id="myTab" role="tablist"&gt;
                    &lt;li class="nav-item me-1" role="presentation"&gt;
                        &lt;button class="nav-link active" id="addTeacherTab" data-bs-toggle="tab" data-bs-target="#home"
                            type="button" role="tab" aria-controls="home" aria-selected="true"&gt;Add Teacher&lt;/button&gt;
                    &lt;/li&gt;
                    &lt;li class="nav-item me-1" role="presentation"&gt;
                        &lt;button class="nav-link" id="showTeacherTab" data-bs-toggle="tab" data-bs-target="#profile"
                            type="button" role="tab" aria-controls="profile" aria-selected="false"
                            onclick="showTeachers()"&gt;Show
                            Teachers&lt;/button&gt;
                    &lt;/li&gt;
                &lt;/ul&gt;
            &lt;/div&gt;
        &lt;/div&gt;
    &lt;/main&gt;
&lt;/div&gt;
</pre>

```

```

</li>

<li class="nav-item me-1" role="presentation">
    <button class="nav-link" id="show-leave-tab" data-bs-toggle="tab" data-bs-target="#leave-tab"
    type="button" role="tab" aria-controls="leave-tab" aria-selected="false" >Teachers
    Leave</button>
</li>

</ul>

<!-- Tab panes -->
<div class="tab-content">
    <div class="tab-pane active" id="home" role="tabpanel" aria-labelledby="home-tab" tabindex="0">
        <br>
        <!-- Take attendance -->
        <div class="attendanceTable" style="display: block;">
            <div class="header">
                <i class='bx bx-receipt'></i>
                <h3>Teachers</h3>
                <div class="student-btns">
                    <div class="student-btns">
                        <div class="dropdown dropdown-center">
                            <a class="notif" data-bs-toggle="dropdown" aria-expanded="false"
                            id="dropDownListForSubmit">
                                <i class='bx bx-filter'></i>
                            </a>
                            <ul class="dropdown-menu">
                                <li><a class="dropdown-item reset-attendance" id="add_student_dropdown"
                                data-bs-toggle="modal" data-bs-target="#addTeacherModal">Add
                                    Teacher</a></li>
                                <li><a class="dropdown-item submit-attendance"
                                id="remove_student_dropdown" data-bs-toggle="modal"
                                data-bs-target="#removeStudentModel">Remove Teacher</a></li>
                            </ul>
                        </div>
                    </div>
                </div>
                <hr>
                <br>
            <div class="container add-remove">
                <ul class="insights">

```

```

<a class="addlink" data-bs-toggle="modal" data-bs-target="#addTeacherModal"
id="addTeacherButton">
    <li class="additem">
        <!-- <i class='bx bx-calendar-check'></i> -->
        <i class='bx bxs-user-plus'></i>
        <span class="info">
            <h3>
                Add
            </h3>
            <h3>Teacher</h3>
            </span>
        </li>
    </a>
<!-- model add student -->

<!-- end of model add student -->

<a class="removelink" data-bs-toggle="modal" data-bs-target="#removeStudentModel">
    <li class="removeitem">
        <i class='bx bxs-user-minus'></i>
        <span class="info">
            <h3>
                Remove
            </h3>
            <h3>Teacher</h3>
            </span>
        </li>
    </a>
</ul>
</div>

<br>
<hr>
</div>

<!-- end of Take attendance -->
</div>
<br>
<div class="tab-pane" id="profile" role="tabpanel" aria-labelledby="profile-tab" tabindex="0">
<div class="showAttendence">

    <!-- Attendance on Specific date -->

```

```

<div class="container">
    <br>
    <!-- Take attendance -->
    <div class="attendanceTable" style="display: block;">
        <div class="header">
            <i class='bx bx-list-ul'></i>
<h3>Teacher List</h3>

        <!-- <a href="#" class="excel">
            <i class="fa fa-file-excel-o" aria-hidden="true"></i>
            <span>EXCEL</span>
        </a>
<a href="#" class="report">
            <i class='bx bxs-file-pdf'></i>
            <span>PDF</span>
        </a> -->

        <div class="_flex-container">
            <input class="form-control me-2" type="search" placeholder="Search" style="max-width: 225px; height: 40px;" id="search-teacher-name"
                aria-label="Search">
            <button class="btn btn-success" type="button" id="searchTeacherByNameBtn" disabled><i class='bx bx-search-alt'></i></button>
        </div>
        </div>
        <hr class="text-danger">
        <!--table-->
        <div class="students-table">
            <table class="remove-cursor-pointer">
                <thead>
                    <tr>
                        <th scope="col" class="thead col-2">#</th>
                        <th scope="col" class="thead col-2">Teacher ID</th>
                        <th scope="col" class="thead col-5">Name</th>
                        <th scope="col" class="thead col-3">Action</th>
                    </tr>
                </thead>
                <tbody id="teacher-table-body">
                    <!-- content come from database -->
                </tbody>
            </table>
        </div>
        <div id="dataNotAvailable">

```

```

<div class="_flex-container box-hide">

    <div class="no-data-box">
        <div class="no-dataicon">
            <i class='bx bx-data'></i>
        </div>
        <p>No Data</p>
    </div>
</div>
<!--END table-->
</div>
<hr class="text-danger">

<div class="d-grid gap-2 d-md-flex justify-content-md-end">
    <div class="btn-group" role="group" aria-label="Basic example">
        <button type="button" class="btn btn-secondary" id="prev-page-btn">prev</button>
        <a class="btn btn-secondary disabled" role="button" aria-disabled="true"
id="page-number">1</a>
        <button type="button" class="btn btn-secondary" id="next-page-btn">next</button>
    </div>
</div>

</div>
<!-- Attendence on Specific date -->

</div>
</div>

<div class="tab-pane" id="leave-tab" role="tabpanel" aria-labelledby="leave-tab" tabindex="0">
    <?php include('partials/teacher-shared/teachers-leave-tab.php') ?>
</div>

</div>

</div>

</main>

```

The screenshot shows the ERP application's interface. At the top left is a logo with a colorful globe icon and the text "ERP". To its right is a search bar with a magnifying glass icon. On the far left is a vertical sidebar with icons and text links: Dashboard, Teacher, Student (which is highlighted in green), Subjects, Attendance, Notice Board, Time Table, Syllabus, Notes, Marks, Bus Service, Settings, and Logout.

The main content area has a title "Students" at the top. Below it are three buttons: "Add Students" (green), "Show Students" (gray), and "Feedback" (gray). A sub-section titled "Students" contains two large buttons: "Add Student" (green icon) and "Remove Student" (red icon).

```
<div>
  <script src="../assets/js/teacher.js"></script>
  <script src="../assets/js/teacher-leave-on-admin.js"></script>
  <?php include('partials/_footer.php'); ?>
</div>
```

<script src="../assets/js/teacher.js"></script>
<script src="../assets/js/teacher-leave-on-admin.js"></script>
<?php include('partials/_footer.php'); ?>

AddStudent.php :

Code :

```

<?php include('partials/_header.php') ?>

<!-- confirm edit alert modal-->
<div class="modal fade" id="edit-confirmation-modal" tabindex="-1"
aria-labelledby="exampleModalLabel"
aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        </div>
      <div class="modal-body">
        <strong>Do you really want to Edit Student Details?</strong>
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-secondary" data-
bsdismiss="modal">Close</button>
        <button type="button" class="btn btn-danger" id="confirm-
editbtn">Edit</button>
      </div>
    </div>
  </div>
</div>
<!-- end of onfirm edit alert modal-->

<!-- alert to delete teacher -->
<div class="modal fade" id="delete-confirmation-modal" tabindex="-1"
aria-labelledby="exampleModalLabel"
aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        </div>
      <div class="modal-body">
        <strong>Do you really want to delete Student?</strong>
      </div>
    </div>
  </div>
</div>

```

```

<div class="modal-footer">
    <button type="button" class="btn btn-secondary" data-
bsdismiss="modal">Close</button>
    <button type="button" class="btn btn-danger"
onclick="deleteTeacherWithIdSeted()">Delete</button>
</div>
</div>
</div>
</div>
<!-- end of alert to delete teacher --&gt;
&lt!--add new student model --&gt;

&lt;div class="modal" style="z-index: 2000;" id="addTeacherModal" tabindex="-1"
aria-labelledby="exampleModalLabel"
aria-hidden="true"&gt;
    &lt;div class="modal-dialog modal-dialog-centered"&gt;
        &lt;div class="modal-content"&gt;
            &lt;div class="modal-header"&gt;
                &lt;h1 class="modal-title fs-5" id="exampleModalLabel"&gt;Student
Details&lt;/h1&gt;
                &lt;button type="button" class="close mr-2" data-bs-dismiss="modal"
aria-label="Close"&gt;&lt;i
class='bx bx-x'&gt;&lt;/i&gt;&lt;/button&gt;
            &lt;/div&gt;
            &lt;form class="needs-validation" id="general-form" novalidate&gt;
                &lt;div class="modal-body"&gt;
                    &lt;div class="container my-3"&gt;
                        &lt;div class="mb-3"&gt;
                            &lt;label for="fullname" class="form-label"&gt;Full Name &lt;span
style="color: red;"&gt;*&lt;/span&gt;&lt;/label&gt;
                            &lt;div class="row"&gt;
                                &lt;div class="col"&gt;
                                    &lt;input type="name" pattern="[A-Za-z]+" class="form-control"
placeholder="First name"&gt;
                                &lt;/div&gt;
                            &lt;/div&gt;
                        &lt;/div&gt;
                    &lt;/div&gt;
                &lt;/div&gt;
            &lt;/form&gt;
        &lt;/div&gt;
    &lt;/div&gt;
&lt;/div&gt;
</pre>

```

```
        aria-label="First name" id="fname" name="fname"
required>
    <div class="invalid-feedback">
required!
    </div>
    </div>
    <div class="col">
        <input type="name" pattern="[A-Za-z]+" class="form-control"
placeholder="Last name"
            aria-label="Last name" id="lname" name="lname"
required>
            <div class="invalid-feedback">
required!
            </div>
            </div>
            </div>
        </div>
```

```
<div class="mb-3">
    <label for="father" class="form-label">Father name <span
style="color: red;">*</span></label>
    <input type="text" pattern="[A-Za-z\s]+" class="form-control"
id="father" aria-describedby="emailHelp" name="father" required>

    <div class="invalid-feedback">
required!
    </div>
</div>

<div class="mb-3">
    <div class="row">
        <div class="col-6">
            <label for="dob" class="form-label">Date of Birth <span
style="color: red;">*</span></label>
            <input type="date" class="form-control" id="dob"
aria-describedby="emailHelp"
```

```

        name="dob" required>
<div class="invalid-feedback">
required!
</div>
</div>
<div class="col-6 student-image">

    <label for="gender" class="form-label">Gender <span
style="color: red;">*</span></label>
        <select class="form-select" id="gender" name="gender"
style="width:100%;" required>
            <option selected disabled value="">--select--</option>
<option value="Male">Male</option>
            <option value="Female">Female</option>
            <option value="Other">Other</option>
        </select>
        <div class="invalid-feedback">
required!
</div>
</div>
</div>
</div>

<div class="mb-3">
<div class="row">
    <div class="col-6">
        <label for="class" class="form-label">Class <span
style="color: red;">*</span></label>
            <select class="form-select" id="class" name="class"
style="width:100%;" required>
                <option selected disabled value="">---select--</option>
                <!-- <option value="12">12</option>
                <option value="11">11</option>
                <option value="10">10</option>
                <option value="9">9</option>

```

```

<option value="8">8</option>
<option value="7">7</option>
<option value="6">6</option>
<option value="5">5</option>
<option value="4">4</option>
<option value="3">3</option>
<option value="2">2</option>
<option value="1">1</option>
<option value="pg">pg</option>
<option value="lkg">lkg</option>
<option value="ukg">ukg</option> -->
<?php include('partials/select_classes.php') ?>
</select>
<div class="invalid-feedback">
required!
</div>
</div>
<div class="col-6">
    <label for="section" class="form-label">Section <span
style="color: red;">*</span></label>
    <select class="form-select" id="section" name="section"
style="width:100%;">
        <b>required</b>
        <option selected disabled value="">--select--</option>
        <!-- <option value="A">A</option>
        <option value="B">B</option>
        <option value="C">C</option> -->
        <?php include('partials/selelct_section.php') ?>
    </select>
    <div class="invalid-feedback">
required!
</div>
</div>
</div>
</div>

```

```

<div class="mb-3" id="uploadImageField">
    <div class="mb-3">
        <label for="image" class="form-label">Photo <span
style="color: red;">*</span></label>
        <input class="form-control" type="file" id="uploadImage"
name="image" placeholder="file"
accept=".png, .jpeg, .jpg">

    </div>
</div>

    </div>
</div>
<div class="modal-footer">

    <button type="button" class="btn btn-primary" id="general-infobtn">
        <div><i class='bx bxs-chevrons-right'></i><span>
next</span></div>
    </button>
</div>
</form>

</div>
</div>
</div>

<!-- personal information -->
<div class="modal" style="z-index: 2000;" id="personalInformationModal"
tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Address Details
<span style="color: red;">*</span></h1>

```

```

<button type="button" class="close mr-2" data-bs-dismiss="modal"
aria-label="Close"><i
    class='bx bx-x'></i></button>
</div>
<form class="needs-validation" id="personal-form" novalidate>
    <div class="modal-body">
        <div class="container my-3">
            <div class="mb-3">
                <label for="phone" class="form-label">Phone number <span
style="color: red;">*</span></label>
                <input type="tel" class="form-control" id="phone" name="phone"
placeholder="Enter phone number" maxlength="10" required>
            <div class="valid-feedback">
                </div>
                <div class="invalid-feedback" id="phone-mdg">
                    Please enter a valid 10-digit phone number.
                </div>
            </div>
            <div class="mb-3">
                <label for="email" class="form-label">Email <span style="color:
red;">*</span></label>
                <input type="email" class="form-control" id="email"
aria-describedby="emailHelp"
name="email" required>
            <div class="invalid-feedback">
                required!
            </div>
        </div>
        <div class="mb-3">
            <label for="address" class="form-label">Address <span
style="color: red;">*</span></label>
            <input type="text" class="form-control" id="address"
aria-describedby="emailHelp"

```

```

        name="address" required>
<div class="invalid-feedback">
required!
</div>
</div>
<div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">City <span
style="color: red;">*</span></label>
    <div class="row">
        <div class="col">
            <input type="text" class="form-control" id="city"
aria-describedby="emailHelp"
                name="city"      required>
<div
                class="invalid-feedback">
required!
</div>
</div>
<div class="col">
            <input type="text" class="form-control" id="zip"
aria-describedby="emailHelp"
                name="zip" placeholder="ZIP" maxlength="6" required>
<div class="invalid-feedback">
required!
</div>
</div>
</div>
</div>

<div class="mb-3">
    <label for="state" class="form-label">State <span style="color:
red;">*</span></label>
    <select class="form-select" aria-label="Default select example"
id="state" name="state"
                required>
        <option selected disabled value="">--select--</option>

```

```
<option value="Andhra Pradesh">Andhra Pradesh</option>
<option value="Arunachal Pradesh">Arunachal
Pradesh</option>
    <option value="Assam">Assam</option>
    <option value="Bihar">Bihar</option>
    <option value="Chhattisgarh">Chhattisgarh</option>
    <option value="Goa">Goa</option>
    <option value="Gujarat">Gujarat</option>
    <option value="Haryana">Haryana</option>
    <option value="Himachal Pradesh">Himachal
Pradesh</option>
        <option value="Jharkhand">Jharkhand</option>
        <option value="Karnataka">Karnataka</option>
        <option value="Kerala">Kerala</option>
        <option value="Madhya Pradesh">Madhya Pradesh</option>
        <option value="Maharashtra">Maharashtra</option>
        <option value="Manipur">Manipur</option>
        <option value="Meghalaya">Meghalaya</option>
        <option value="Mizoram">Mizoram</option>
        <option value="Nagaland">Nagaland</option>
        <option value="Odisha">Odisha</option>
        <option value="Punjab">Punjab</option>
        <option value="Rajasthan">Rajasthan</option>
        <option value="Sikkim">Sikkim</option>
        <option value="Tamil Nadu">Tamil Nadu</option>
        <option value="Telangana">Telangana</option>
        <option value="Tripura">Tripura</option>
        <option value="Uttar Pradesh">Uttar Pradesh</option>
        <option value="Uttarakhand">Uttarakhand</option>
        <option value="West Bengal">West Bengal</option>
        <option value="Andaman and Nicobar Islands">Andaman and
Nicobar Islands</option>
            <option value="Chandigarh">Chandigarh</option>
            <option value="Dadra and Nagar Haveli and Daman and
Diu">Dadra and Nagar Haveli and Daman and Diu</option>
```

```

        <option value="Delhi">Delhi</option>
        <option value="Jammu and Kashmir">Jammu and
Kashmir</option>
        <option value="Ladakh">Ladakh</option>
        <option value="Lakshadweep">Lakshadweep</option>
        <option value="Puducherry">Puducherry</option>

    </select>
    <div class="invalid-feedback">
required!
    </div>
    </div>
    </div>
    </div>
    <div class="modal-footer">
        <button type="button" onclick="backToStudentDetail()" class="btn
btn-secondary">
            <div><i class='bx bxs-chevron-left'></i><span>Back</span></div>
        </button>
        <button type="button" class="btn btn-primary" id="personal-
infobtn">
            <div><i class='bx bxs-chevron-right'></i><span>
next</span></div>
        </button>
    </div>
    </form>
    </div>
    </div>
</div>
<!-- end of personal information--&gt;

<!-- Guardian information --&gt;
</pre>

```

```

<div class="modal" style="z-index: 2000;" id="guardian_information"
tabindex="-1" aria-labelledby="exampleModalLabel" aria-
hidden="true">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        <h1 class="modal-title fs-5" id="exampleModalLabel">Emergency
Contact Details <span style="color: red;">*</span></h1>
        <button type="button" class="close mr-2" data-bs-dismiss="modal"
aria-label="Close"><i
          class='bx bx-x'></i></button>
      </div>
      <form class="needs-validation" id="guradian-form" novalidate>
        <div class="modal-body">

          <div class="container my-3">
            <div class="mb-3">
              <label for="guardian" class="form-label">Guardian name <span
style="color: red;">*</span></label>
              <input type="name" pattern="[A-Za-z\s]+" class="form-control"
id="guardian" aria-describedby="emailHelp"
                name="guardian" required>
            <div class="invalid-feedback">
required!
            </div>
          </div>
        </div>

        <div class="mb-3">
          <label for="gphone" class="form-label">Phone number <span
style="color: red;">*</span></label>
          <input type="tel" class="form-control" id="gphone"
name="gphone"
            placeholder="Enter phone number" maxlength="10" required>
        <div class="valid-feedback">
          </div>

```

```
<div class="invalid-feedback" id="phone-g">
Please enter a valid 10-digit phone number.
</div>
</div>

<div class="mb-3">
    <label for="gaddress" class="form-label">Address <span
style="color: red;">*</span></label>
        <input type="text" class="form-control" id="gaddress"
aria-describedby="emailHelp"
            name="gaddress" required>
<div class="invalid-feedback">
required!
</div>
</div>

<div class="mb-3">
    <label for="city-info" class="form-label">City <span style="color:
red;">*</span></label>
        <div class="row">
            <div class="col">
                <input type="text" class="form-control" placeholder="City
name"
                    aria-label="First name" id="gcity" name="gcity" required>
            <div class="invalid-feedback">
required!
            </div>
            </div>
            <div class="col">
                <input type="text" class="form-control" placeholder="Zip
code"
                    aria-label="Last name" id="gzip" name="gzip" required>
            <div class="invalid-feedback">
required!
            </div>
        </div>
    </div>
</div>
```

```

        </div>
        </div>
        </div>

<div class="mb-3">
    <label for="relation" class="form-label">Relationship to Student
<span style="color: red;">*</span></label>
    <input type="text" pattern="[A-Za-z]+" class="form-control"
id="relation" aria-describedby="emailHelp"
        name="relation" required>
<div class="invalid-feedback">
required!
        </div>
        </div>
        </div>
    </div>
    <div class="modal-footer">
        <button type="button" class="btn btn-secondary"
onclick="backToAddressDetail()">
            <div><i class='bx bxs-chevrons-left'></i><span>Back</span></div>
        </button>
        <button type="button" class="btn btn-primary" id="guardian-
formbtn"><span>Submit </span></button>
    </div>
</form>
</div>
</div>
</div>
<!-- end of Guardian information-->

<!-- end of add new student model -->

<!-- Remove student model -->
<div class="modal removeTeacherModal" style="z-index: 2000;" id="removeStudentModel" tabindex="-1"

```

```
aria-labelledby="exampleModalLabel" aria-hidden="true">
<div class="modal-dialog modal-dialog-centered">
  <div class="modal-content">
    <div class="modal-header">
      <h1 class="modal-title text-danger fs-5"
id="exampleModalLabel">Delete Student</h1> <button type="button"
class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i
class='bx bx-x'></i></button>
    </div>
    <form class="needs-validation" id="remove-student-form" novalidate>
      <div class="modal-body">
        <div class="container my-3">

          <div class="mb-3">
            <label for="student-id" class="form-label">Student ID</label>
            <input type="text" class="form-control remove_student_id"
id="student-id" aria-describedby="" required>
            <div class="invalid-feedback">
              Please provide a valid Student ID.
            </div>
          </div>

        </div>
      </div>
      <div class="modal-footer">

        <button type="button" class="btn btn-danger" id="remove-
studentbtn">
          <div><span>Delete Student</span></div>
        </button>
      </div>
    </form>
  </div>
</div>
```

```

<!-- end of Remove student model -->

<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="3" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>

    <!-- End of Navbar -->

    <main>
        <div class="header">
            <div class="left">
                <h1>Students</h1>
                <ul class="breadcrumb">
                    <li><a href="#">

                        </a></li>

                    </ul>
                </div>
            </div>
            <div class="bottom-data">

                <div class="orders">

                    <!-- Nav tabs -->
                    <ul class="nav nav-tabs" id="myTab" role="tablist">
                        <li class="nav-item me-1" role="presentation">
                            <button class="nav-link active" id="addStudentTab" data-
bstoggle="tab" data-bs-target="#home" onclick="AddStudentBtnClick()" type="button" role="tab" aria-controls="home" aria-selected="true">Add

```

```

Students</button>
    </li>
    <li class="nav-item me-1" role="presentation">
        <button class="nav-link" id="view-students-tab" data-
bstoggle="tab" data-bs-target="#profile" type="button" role="tab"
ariacontrols="profile" aria-selected="false" onclick="showStudents()">Show
            Students</button>
        </li>
        <li class="nav-item me-1" role="presentation">
            <button class="nav-link" id="feedback-students-tab" data-
bstoggle="tab" data-bs-target="#feedback" type="button" role="tab"
ariacontrols="feedback" aria-selected="false">Feedback</button>
        </li>
    </ul>

    <!-- Tab panes -->
    <div class="tab-content">
        <div class="tab-pane active" id="home" role="tabpanel"
arialabelledby="home-tab" tabindex="0">
            <br>
            <!-- Take attendence -->
            <div class="attendanceTable" style="display: block;">
                <div class="header">
                    <i class='bx bx-receipt'></i>
                    <h3>Students</h3>
                    <div class="student-btns">
                        <!-- <a class="add-btns" > <i class='bx bx-filter'></i></a> -->
                        <div class="dropdown dropdown-center">
                            <a class="notif" data-bs-toggle="dropdown" aria-
expanded="false" id="dropDownListForSubmit">
                                <i class='bx bx-filter'></i>

```

```

        </a>
<ul class="dropdown-
menu">
    <li><a class="dropdown-item reset-attendance"
id="add_student_dropdown" data-bs-toggle="modal" data-
bstarget="#addTeacherModal">Add Student</a></li>
    <li><a class="dropdown-item submit-attendance"
id="remove_student_dropdown" data-bs-toggle="modal" data-
bstarget="#removeStudentModel">Remove Student</a></li>
</ul>
</div>

</div>
</div>
<hr>
<br>

<div class="container add-remove">
    <ul class="insights">
        <a class="addlink" data-bs-toggle="modal" data-
bstarget="#addTeacherModal"
            id="addTeacherButton">
            <li class="additem">
                <!-- <i class='bx bx-calendar-check'></i> -->
                <i class='bx bxs-user-plus'></i>
                <span class="info">
                    <h3>
                        Add
                    </h3>
                    <h3>Student</h3>
                </span>
            </li>
        </a>
        <!-- model add student -->

```

```

<!-- end of model add student -->

<a class="removelink" id="remove-student-jumbo-btn" data-bs-toggle="modal" data-bs-target="#removeStudentModel">
    <li class="removeitem">
        <i class='bx bxs-user-minus'></i>
        <span class="info">
            <h3>
                Remove
            </h3>
            <h3>Student</h3>
        </span>
    </li>
</a>
</ul>
</div>

<br>
<hr>
</div>

<!-- end of Take attendance -->
</div>
<br>
<div class="tab-pane" id="profile" role="tabpanel" aria-labelledby="profile-tab" tabindex="0">
    <div class="showAttendence">
        <br>
        <div class="header">
            <i class='bx bx-list-ul'></i>
            <h3>Students List</h3>
        </div>
        <hr> <br>

```

```

<div class="container" style="display: flex;">

    <div class="row g-3 align-items-center">
        <div class="col-auto">
            <label for="inputPassword6" class="col-formlabel">&nbsp;Class&nbsp; </label>
        </div>
        <div class="col-auto">
            <select class="form-select" aria-label="Default select example">
                <option id="search-class">
                    <!-- <option selected>12</option>
                    <option>11</option>
                    <option>10</option>
                    <option>9</option>
                    <option>8</option> <option>7</option>
                    <option>6</option>
                    <option>5</option>
                    <option>4</option>
                    <option>3</option>
                    <option>2</option>
                    <option>1</option>
                    <option>pg</option>
                    <option>lkg</option>
                    <option>ukg</option> -->
                    <?php include('partials/select_classes.php') ?>
                </select>
            </div>
        </div>
    </div>
    <br>
    <div class="container" style="display: flex;">
        <div class="row g-3 align-items-center">
            <div class="col-auto">
                <label for="inputPassword6" class="col-form-

```

```

label">Section </label>
    </div>
    <div class="col-auto">
        <select class="form-select" aria-label="Default select example">
            id="search-section">
                <!-- <option selected>A</option>
                <option>B</option>
                <option>C</option> -->
                <?php include('partials/selelct_section.php') ?>
            </select>
        </div>
    </div>
</div>
<br>

<div class="container">
    <a class="find" onclick="findAndshowStudents()">
        <i class='bx bx-search-alt'></i>
        <span>Find</span>
    </a>
</div>
<br>
<hr>

<!-- Attendence on Specific date -->
<div class="container">
    <br>
    <!-- Take attendence -->
    <div class="attendanceTable" style="display: block;">
        <div class="header">
            <i class='bx bx-list-ul'></i>
            <h3>Students List</h3>

```

```

<!-- <a href="#" class="excel">
    <i class="fa fa-file-excel-o" aria-hidden="true"></i>
    <span>EXCEL</span>
</a>

<a href="#" class="report">
    <i class='bx bxs-file-pdf'></i>
    <span>PDF</span>
</a> -->

<div class="_flex-container">
    <input class="form-control me-2" type="search"
placeholder="Search" style="max-width: 225px; height: 40px;" id="searchteacher-name"
aria-label="Search">
    <button class="btn btn-success" type="button"
id="searchTeacherByNameBtn" disabled><i class='bx bx-search-alt'></i></button>
</div>

</div>
<hr class="text-danger">

<div class="container" style="display: flex;">

</div>

<!--table-->
<div class="students-table">
    <table class="remove-cursor-pointer">
        <thead>
            <tr>
                <th scope="col" class="thead col-2">#</th>

```

```

<th scope="col" class="thead col-2">Student ID</th>
<th scope="col" class="thead col-5">Name</th>
<th scope="col" class="thead col-3">Action</th>
</tr>
</thead>

<tbody id="teacher-table-body">
    <!-- content come from database -->
</tbody>

</table>
</div>
<div id="dataNotAvailable">

<div class="_flex-container box-hide">

<div class="no-data-box">
    <div class="no-dataicon">
        <i class='bx bx-data'></i>
    </div>
    <p>No Data</p>
    </div>
</div>
<!--END table-->
</div>
<hr class="text-danger">

<div class="d-grid gap-2 d-md-flex justify-content-md-end">
    <div class="btn-group" role="group" aria-label="Basic
example">
        <button type="button" class="btn btn-secondary"
id="prevpage-btn">prev</button>
        <a class="btn btn-secondary disabled" role="button"
aria-disabled="true"
            id="page-number">1</a>

```

```
        <button type="button" class="btn btn-secondary"
id="nextpage-btn">next</button>
        </div>
    </div>

    </div>
    <!-- Attendence on Specific date -->

    </div>
    </div>
    <br>
    <div class="tab-pane" id="feedback" role="tabpanel"
aria-labelledby="feedback-tab" tabindex="0">

        <?php include('partials/student-shared/feedback-tab.php') ?>

    </div>

    </div>

    </div>
</main>

</div>

<script src="../assets/js/student.js"></script>
<?php include('partials/_footer.php'); ?>
```

AddSubjects.php :

Code :

```
<?php include('partials/_header.php') ?>
```

```
<!-- confirm edit alert modal-->
```

```
<div class="modal fade" id="edit-confirmation-modal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
```

```
    <div class="modal-dialog modal-dialog-centered">
```

```
        <div class="modal-content">
```

```
            <div class="modal-header">
```



ERP



Search...



Subjects

Dashboard

Teacher

Student

Subjects

Attendance

Notice Board

Time Table

Syllabus

Notes

Marks

Bus Service

Settings

Logout

Subjects

Class 12 (Commerce)

Find

Class 12c Subjects

#	Subject	Action
1.	Hindi	
2.	Commerce	
3.	English	

```
</div>
```

```
<div class="modal-body">
```

```
    <strong>Do you really want to Edit this Subject?</strong>
```

```
</div>
```

```
<div class="modal-footer">
```

```
    <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
```

```
    <button type="button" class="btn btn-danger" id="confirm-edit-btn">Edit</button>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
<!-- end of onfirm edit alert modal-->
```

```

<!-- alert to delete subject -->
<div class="modal fade" id="delete-confirmation-modal" tabindex="-1" aria-labelledby="exampleModalLabel"
aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        </div>
      <div class="modal-body">
        <strong>Do you really want to delete this Subject?</strong>
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
        <button type="button" class="btn btn-danger" onclick="deleteSubject()">Delete</button>
      </div>
    </div>
  </div>
</div>
<!-- end of alert to delete subject -->

<!-- add subject modal-->
<div class="modal modal-md" style="z-index: 2000;" id="add-subject" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered modal-dialog-scrollable">
    <div class="modal-content">
      <div class="modal-header">
        <h1 class="modal-title fs-5" id="exampleModalLabel">Add Subject</h1>
        <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i
class='bx bx-x'></i></button>
      </div>
      <form class="needs-validation" id="create-subject-form" novalidate>
        <div class="modal-body">
          <div class="container my-3">
            <div class="mb-3">
              <label for="class" class="form-label">Class</label>
              <select class="form-select" aria-label="Default select example" name="class" id="class"
required>
                <!-- <option selected disabled value="">--select--</option>
                <option>12</option>
                <option>11</option>
                <option>10</option>
                <option>9</option>
                <option>8</option>
                <option>7</option>
                <option>6</option>

```

```

<option>5</option>
<option>4</option>
<option>3</option>
<option>2</option>
<option>1</option>
<option>pg</option>
<option>lkg</option>
<option>ukg</option> -->
<?php include('partials/select_classes.php') ?>
</select>
<div class="invalid-feedback">
Please select class.
</div>
</div>

<div class="mb-3">
    <label for="subject" class="form-label">Subject Name</label>
    <input type="text" class="form-control" name="subject" id="newSubjectName"
aria-describedby="emailHelp" required> <div class="invalid-feedback">
This field can't be empty!
</div>
</div>
</div>
<div class="modal-footer">

    <button type="button" class="btn btn-primary" id="add-subject-btn">
        <div><i class='bx bx-book-add'></i>&ampnbsp&ampnbsp<span>Add</span></div>
    </button>
</div>
</form>
</div>
</div>
<!-- end of upload syllabus label-->

<!-- edit uploaded notes -->
<div class="modal modal-md" style="z-index: 2000;" id="edit-subject" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered modal-dialog-scrollable">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Edit Subject</h1>
                <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i
class='bx bx-x'></i></button>

```

```

</div>
<form class="needs-validation" id="editSubjectForm" novalidate>
<div class="modal-body">
<div class="container my-3">

<div class="mb-3">
    <label for="subject" class="form-label">Subject Name</label>
    <input type="text" class="form-control" id="subject-edited-name" name="subject"
ariadescribedby="emailHelp" required>
    <div class="invalid-feedback">
Please select class.
    </div>
</div>

</div>
</div>
<div class="modal-footer">

<button type="button" class="btn btn-primary" id="save-new-subject-name">
    <div><span>Save</span></div>
</button>

</div>
</form>
</div>
</div>
</div>
</div>
<!-- end of edit uploaded notes-->
<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="4" id="checkFileName">
<!-- End of Sidebar -->
<!-- Main Content -->
<div class="content">
<!-- Navbar -->
<?php include("partials/_navbar.php"); ?>

<!-- End of Navbar -->

<main>
<div class="header">
<div class="left">
<h1>Subjects</h1>
</div>

```

```

</div>
<div class="bottom-data">

    <div class="orders">
        <!-- Tab panes -->
        <div class="tab-content">

            <div class="tab-pane active" id="profile" role="tabpanel" aria-labelledby="profile-tab"
tabindex="0">
                <div class="showAttendance">
                    <br>
                    <div class="header">
                        <i class='bx bx-receipt'></i>
                        <h3>Subjects </h3>
                        <a href="#" class="add" data-bs-toggle="modal" data-bs-target="#add-subject"
onclick="removeValidations()">
                            <i class='bx bx-plus'></i>
                            <span>Add</span>
                        </a>
                    </div>

                    <hr><br>
                    <div class="container" style="display: flex;">

                        <div class="row g-3 align-items-center">
                            <div class="col-auto">
                                <label for="class" class="col-form-label">Class </label>
                            </div>
                            <div class="col-auto">
                                <select class="form-select" aria-label="Default select example" name="class"
id="search-class">
                                    <!--<option selected>12</option>-->
                                    <!--<option>11</option>-->
                                    <!--<option>10</option>-->
                                    <!--<option>9</option>--> <!--
<option>8</option>--> <!--<option>7</option>-->
                                    <!--<option>6</option>--> <!--
<option>5</option>-->
                                    <!--<option>4</option>-->
                                    <!--<option>3</option>--> <!--
<option>2</option>-->
                                    <!--<option>1</option>-->
                                    <!--<option>pg</option>-->
                                    <!--<option>lkg</option>-->
                                    <!--<option>ukg</option>-->
                                <?php include('partials/select_classes.php') ?>
                            </div>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

        </select>
    </div>
</div>
</div>
<br>
<div class="container">
    <a class="find" id="find-btn">
        <i class='bx bx-search-alt'></i>
        <span>Find</span>
    </a>
</div>

<hr class="text-danger">

<div class="container">
    <br>
    <!-- Take attendance -->
    <div class="attendanceTable" style="display: block;">
        <div class="header">
            <i class='bx bx-list-ul'></i>
            <h3 id="subject-table-header">Class 12 Subjects</h3>
</div>

<hr class="text-danger">
<!--table-->
<div class="students-table subject-table">
    <table>
        <thead>
            <tr>
                <th scope="col" class="thead col-4">#</th>
                <th scope="col" class="thead col-5">Subject</th>
                <th scope="col" class="thead col-3">Action</th>
            </tr>
        </thead>
        <tbody id="subject-table-body">
            </tbody>
    </table>
</div>
<!--END table-->
<div id="dataNotAvailable">

```

```
<div class=" _flex-container box-hide">

    <div class="no-data-box">
        <div class="no-dataicon">
            <i class='bx bx-data'></i>
        </div>
        <p>No Data</p>
    </div>
</div>

</div>

<hr class="text-danger">
</div>
</div>

</div>

</div>

</main>

</div>

<script src="../assets/js/subjects.js"></script>
<?php include('partials/_footer.php'); ?>
Attendance.php :
```

ERP

Search...

Take Attendance Date Wise Attendance

Show Attendance

Class: I2 (Science)

Section: A

Find

Show Attendance

#	Roll No.	Name	Total Days	Present	Percentage
1.	SI740751337	Rahul jha	2	1	<input type="checkbox"/>

Logout

Reset

```

<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="5" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>

    <!-- End of Navbar -->

    <main>
        <div class="header">
            <div class="left">
                <h1>Attendance</h1>
                <ul class="breadcrumb">
                    <li><a href="#">
                        </a></li>
                
```

```

        </ul>
    </div>

</div>
<div class="bottom-data">

    <div class="orders">

        <!-- Nav tabs -->
        <ul class="nav nav-tabs" id="myTab" role="tablist">
            <li class="nav-item" role="presentation">
                <button class="nav-link active" id="home-tab" data-bs-toggle="tab" data-bs-target="#home"
type="button" role="tab" aria-controls="home" aria-selected="true">Take Attendance</button>
            </li>
            <li class="nav-item" role="presentation">
                <button class="nav-link showAttendenceBtn" id="profile-tab" data-bs-toggle="tab"
data-bs-target="#profile" type="button" role="tab" aria-controls="profile" aria-
selected="false">Date Wise
                    Attendance</button>
            </li>
        </ul>

        <!-- Tab panes -->
        <div class="tab-content">
            <div class="tab-pane attendanceTableContainer active" id="home" role="tabpanel"
aria-
labelledby="home-tab" tabindex="0">
                <br>
                <!-- Take attendance -->
                <div class="attendanceTable" style="display: block;">
                    <div class="header">
                        <i class='bx bx-receipt'></i>
                        <h3>Show Attendence </h3>
                        <i class='bx bx-filter'></i>
                </div>
            </div>
        <hr><br>

        <div class="container" style="display: flex;">

            <div class="row g-3 align-items-center">
                <div class="col-auto">
                    <label for="inputPassword6" class="col-form-label">&nbsp;Class&nbsp;</label>
                </div>
                <div class="col-auto">

```

```

<select class="form-select" aria-label="Default select example" name="class"
        id="classTakeAttendance">
    <!-- <option selected>12</option>
    <option>11</option>
    <option>10</option>
    <option>9</option>
    <option>8</option>
    <option>7</option>
    <option>6</option>
    <option>5</option>
    <option>4</option>
    <option>3</option>
    <option>2</option>
    <option>1</option>
    <option>pg</option>
    <option>lkg</option>
    <option>ukg</option> -->
    <?php include('partials/select_classes.php') ?>
</select>
</div>
</div>

</div>
<br>
<div class="container" style="display: flex;">
    <div class="row g-3 align-items-center">
        <div class="col-auto">
            <label for="inputPassword6" class="col-form-label">Section </label>
        </div>
        <div class="col-auto">
            <select class="form-select" aria-label="Default select example" name="section"
                    id="sectionTakeAttendance">
                <!-- <option selected>A</option>

                <option>B</option>
                <option>C</option> -->
                <?php include('partials/selection_section.php') ?>
            </select>
        </div>
    </div>
</div>
<br>
<div class="container">
    <a class="find" id="findForAttendance">
        <i class='bx bx-search-alt'></i>
        <span>Find</span>
    </a>
</div>

```

```

        </a>

    </div>
    <br>

    <hr><br>
    <div class="header">
        <i class='bx bx-receipt'></i>
        <h3>Student List </h3>

        <div class="dropdown dropdown-center">
            <a class="notif" data-bs-toggle="dropdown" aria-expanded="false"
id="dropDownListForSubmit">
                <i class='bx bx-filter'></i>
            </a>

            <ul class="dropdown-menu">
                <li><a class="dropdown-item reset-attendance">Reset Attendance</a></li>
                <li><a class="dropdown-item submit-attendance" id="submit_attendance_dropdown"
>Submit Attendance</a></li>
            </ul>
        </div>
    </div>

    <hr>
    <!--table-->
    <table>
        <thead>
            <tr>
                <th>#</th>
                <th>Roll No.</th>
                <th>&nbsp;&nbsp;Name</th>
                <th>Total Days</th>
                <th>Present</th>
                <th>Percentage</th>
            </tr>
        </thead>
        <tbody id="takeAttendanceTable">

```

```

        </tbody>
    </table>
<!--END table-->

<div id="dataNotAvailable">

    <div class="_flex-container box-hide">

        <div class="no-data-box">
            <div class="no-dataicon" id="no-data-icon">

                </div>
                <p id="no-data-msg"></p>
            </div>
        </div>

        </div>
    </div>
    <hr>

    <div id="buttons">
        <div class="d-grid gap-2 d-md-flex justify-content-md-end" id="bottom-btns">
            <button type="button" class="btn btn-outline-warning" id="reset-attendancebtn">&nbsp;&nbsp;Reset&nbsp;&nbsp;</button>
            <button type="button" class="btn btn-outline-success" id="submit-attendancebtn">Submit</button>
        </div>
    </div>

    <!-- end of Take attendance -->
</div>
<div class="tab-pane" id="profile" role="tabpanel" aria-labelledby="profile-tab" tabindex="0">
<div class="showAttendance">
    <br>
    <div class="header">
        <i class='bx bx-receipt'></i>
        <h3>Information </h3>

        <div class="limit">
            <div class="row g-3 align-items-center">

                </div>
        </div>
    </div>

```

```

</div>
<hr>
<br>

<div class="container" style="display: flex;">

    <div class="row g-3 align-items-center">
        <div class="col-auto">
            <label for="inputPassword6" class="col-form-label">&nbsp;Class&nbsp;</label>
        </div>
        <div class="col-auto">
            <select class="form-select" aria-label="Default select example"
id="showAttendanceClass">
                <!-- <option selected>12</option>
                <option>11</option>
                <option>10</option>
                <option>9</option>
                <option>8</option>
                <option>7</option>
                <option>6</option>
                <option>5</option>
                <option>4</option>
                <option>3</option>
                <option>2</option>
                <option>1</option>
                <option>pg</option>
                <option>lkg</option>
                <option>ukg</option> -->
                <?php include('partials/select_classes.php') ?>
            </select>
        </div>
    </div>
</div>

</div>
<br>
<div class="container" style="display: flex;">
    <div class="row g-3 align-items-center">
        <div class="col-auto">

```

```

        <label for="inputPassword6" class="col-form-label">Section </label>
        </div>
        <div class="col-auto">
            <select class="form-select" aria-label="Default select example">
                <!-- <option selected>A</option>
                <option>B</option>
                <option>C</option> -->
                <?php include('partials/selection_section.php') ?>
            </select>
        </div>
    </div>
    <br>

    <div class="container" style="display: flex;">
        <div class="row g-3 align-items-center">
            <div class="col-auto">
                <label for="inputPassword6" class="col-form-label">Date &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</label>
                </div>
                <div class="col-auto">
                    <input type="date" class="form-control" style="width: 400px;" id="dateInput" aria-describedby="emailHelp" data-date-format="DD MMMM YYYY">
                <div class="invalid-feedback invalid-date" id="edit-invalid-file">
                    Please choose date here!
                </div>
            </div>
        </div>
    <br>

    <div class="container">
        <a class="find" id="find-attendance-btn">
            <i class='bx bx-search-alt'></i>
            <span>Find</span>
        </a>
    </div>

```

```

</a>

</div>
<hr>
<!-- Attendance on Specific date -->
<div class="container">
    <br>
    <!-- Take attendance -->
    <div class="attendanceTable" style="display: block;">
        <div class="header">
            <i class='bx bx-receipt'></i>
            <h3>Attendance Sheet</h3>
        <!-- <a href="#" class="excel">
            <i class="fa fa-file-excel-o" aria-hidden="true"></i>
            <span>EXCEL</span>
        </a> -->

        </a>

        <a href="#" class="report">
            <i class='bx bxs-file-pdf'></i>
            <span>PDF</span>
        </a>
    </div>
    <hr class="text-danger">
    <!--table-->
    <table>
        <thead>
            <tr>
                <th>#</th>
                <th>Roll No.</th>
                <th>&nbsp;&nbsp;Name</th>
                <th>Attendance</th>
            </tr>
        </thead>
        <tbody id="showAttendanceTableBody">

```

```

        </tbody>
    </table>
    <div id="boxForNoData">

        </div>
        <!--END table-->
    </div>
    <hr class="text-danger">

    <div class="d-grid gap-2 d-md-flex justify-content-md-end">
        <div class="btn-group" role="group" aria-label="Basic example">
            <button type="button" class="btn btn-secondary" id="prevBtn">prev</button>
<a class="btn btn-secondary disabled" role="button" aria-disabled="true"
id="pageCount">1</a>
            <button type="button" class="btn btn-secondary" id="nextBtn">next</button>
        </div>
    </div>

    </div>
    <!-- Attendance on Specific date -->

    </div>
    </div>

    </div>
</div>

</main>

</div>

```

```
<script src="../assets/js/attendanceShowToAdmin.js"></script>
<!-- <script src="../assets/js/attendance.js"></script> -->

<?php include('partials/_footer.php'); ?>
```

Noticeboard.php :

The screenshot shows the 'Notice Board' section of an ERP application. The left sidebar has a 'Notice Board' item selected, indicated by a green outline. The main content area displays a 'Create Notice' form with fields for 'Notice Title' (containing 'title of notice'), 'Notice Body' (a large text area), 'Any file' (with 'Choose File' and 'No file chosen' buttons), and 'Importance' (with three colored circles: green, yellow, and red).

ERP

Dashboard Teacher Student Subjects Attendance Notice Board Time Table Syllabus Notes Marks Bus Service Settings Logout

Notice Board

Create Notice Notice Board

Create Notice

Notice Title

title of notice

Notice Body

Any file

Choose File No file chosen

Importance

https://schoolimgmtsys.free.nf/admin_panel/dashboard.php

Code :

```
<?php include('partials/_header.php') ?>
<!-- show full notice -->

<div class="modal fade" id="staticBackdrop" data-bs-backdrop="static" data-
bskeyboard="false" tabindex="-1"
aria-labelledby="staticBackdropLabel" aria-hidden="true">
<div class="modal-dialog modal-dialog-scrollable">
<div class="modal-content">
<div class="modal-header">
<h1 class="modal-title fs-5" id="showFullTitle"></h1>
<button type="button" class="close mr-2" data-bs-dismiss="modal"
aria-label="Close"><i
class='bx bx-x'></i></button>
</div>
<div class="modal-body">
<div class="container">
<p id="showFullbody"></p>
</div>
</div>
<div class="modal-footer">
<button type="button" class="btn btn-secondary" data-
bsdismiss="modal">Close</button>
</div>
</div>
</div>
</div>

<!-- end of sho full notice -->
```

```
<div class="modal" style="z-index: 2000;" id="edit-notice" tabindex="-1"
aria-labelledby="exampleModalLabel"
aria-hidden="true">
<div class="modal-dialog modal-dialog-centered">
<div class="modal-content">
<div class="modal-header">
<h1 class="modal-title fs-5" id="exampleModalLabel">Edit Notice</h1>
<button type="button" class="close mr-2" data-bs-dismiss="modal"
aria-label="Close"><i
class='bx bx-x'></i></button>
</div>
<form class="needs-validation" id="edit-notice-form" novalidate>
<div class="modal-body">

<div class="m-3">
<div class="noticeform">
<div class="mb-3">
<label for="title" class="form-label">Notice
Title</label>
<input type="text" class="form-control" id="edit-notice-title"
name="title"
placeholder="title of notice" required>
<div class="invalid-feedback" id="edit-invalid-title">
You must have to add Title!
</div>
</div>

<div class="mb-3">
```

```

<label for="body" class="form-label">Notice
    Body</label>
    <textarea class="form-control" id="edit-notice-body"
name="body" rows="5"></textarea>
        <div class="invalid-feedback" id="edit-invalid-body">
Either Notice Body or Any file is required!
        </div>
    </div>
<div class="mb-3">
    <label for="file" class="form-label">Any file</label><br>
    <div class="btn btn-primary upload-btn">
        <label for="upload-file">
            <i class='mt-1 bx bx-cloud-upload'
style="cursor:pointer;"></i>
        </label>
        <input type="file" id="upload-file" class="edit-upload-file"
style="display: none; width: 100%;">
    </div>

    <a class="mx-3" id="view-current-file" target="_blank">
<div class="btn btn-primary upload-btn edit-view-btn" id="edit-view-
btn">
    <i class='mt-1 bx bx-show-alt' style="color:
black; cursor:pointer;"></i>
    </div>
</a>
<p id="edit-file-errorDisplay"></p>

```

```
<div class="invalid-feedback" id="edit-invalid-file">
File is too large allowed limit is 200 MB!
</div>

</div>

<div class="mb-3">
    <label for="exampleFormControlTextarea1"
class="formlabel">Importance</label>

    <div class="flex-container">
        <label class="importance-disks">
            <input type="radio" name="disks" value="1" id="edit-
check1" checked>
                <span class="checkmark ch1"></span>
            </label>
            <label class="importance-disks">
                <input type="radio" name="disks" value="2"
style="-webkit-text-fill-color: black;" id="edit-check2">
<span class="checkmark ch2"></span>
            </label>
            <label class="importance-disks">
                <input type="radio" name="disks" value="3"
id="editcheck3">
                <span class="checkmark ch3"></span>
            </label>
        </div>
    </div>
```

```
</div>
</div>

</div>
<div class="modal-footer">

    <button type="button" class="btn btn-primary" id="edit-save-
noticebtn">
        <div><span> Save</span></div>
        </button>
    </div>
</form>

</div>
</div>
</div>
<div class="modal fade" id="edit-notice-modal" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Edit notice</h1>
                <button type="button" class="btn-close" data-bs-dismiss="modal"
aria-label="Close"></button>
            </div>
            <div class="modal-body">

            </div>
```

```
<div class="modal-footer">
    <button type="button" class="btn btn-secondary" data-
bsdismiss="modal">Close</button>
    <button type="button" class="btn btn-primary">Edit</button>
</div>
</div>
</div>
<!-- edit notice -->

<!-- end of edit notice -->
<div class="modal fade" id="delete-confirmation-modal" tabindex="-1"
aria-labelledby="exampleModalLabel"
aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                </div>
            <div class="modal-body">
                <strong>Do you really want to delete this Notice?</strong> </div>
            <div class="modal-footer">
                <button type="button" class="btn btn-secondary" data-
bsdismiss="modal">Close</button>
                <button type="button" class="btn btn-danger"
onclick="deleteNotice()">Delete</button>
            </div>
        </div>
    </div>
</div>
```

```
<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="6" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>

    <!-- End of Navbar -->

    <main>
        <div class="header">
            <div class="left">
                <h1>Notice Board</h1>
            </div>
        </div>

        <!-- Body -->
        <div class="bottom-data">

            <div class="orders">
```

```

<!-- Nav tabs -->
<ul class="nav nav-tabs" id="myTab" role="tablist">
    <li class="nav-item" role="presentation">
        <button class="nav-link active" id="createNoticeTab" data-
bstoggle="tab" data-bs-target="#home"
            type="button" role="tab" aria-controls="home"
ariaselected="true">Create
            Notice</button>
    </li>
    <li class="nav-item" role="presentation">
        <button class="nav-link" id="show-notice-tab" data-bs-
toggle="tab" data-bs-target="#profile"
            type="button" role="tab" aria-controls="profile"
ariaselected="false">Notice
            Board</button>
    </li>
</ul>

<!-- Tab panes -->
<div class="tab-content">
    <div class="tab-pane active" id="home" role="tabpanel"
arialabelledby="home-tab" tabindex="0">
        <div class="container">
            <br>
            <!-- Take attendance -->

            <form class="needs-validation" id="notice-form" novalidate>
                <div class="attendanceTable" style="display: block;">
                    <div class="header">
                        <i class='bx bx-receipt'></i>

```

```

<h3>Create Notice </h3>
<i class='bx bx-filter'></i>

</div>
|
<hr><br>
<!-- create notice -->

<div class="center-element">
<div class="noticeform">
<div class="mb-3">
<label for="title" class="form-label">Notice
    Title</label>
<input type="text" class="form-control" id="notice-title"
name="title"
placeholder="title of notice" required>
<div class="invalid-feedback" id="invalid-title">
You must have to add Title!
</div>
</div>
<br>

<div class="mb-3">
<label for="body" class="form-label">Notice
    Body</label>
<textarea class="form-control" id="notice-body"
name="body"
rows="4"></textarea>
<div class="invalid-feedback" id="invalid-body">
Either Notice Body or Any file is required!
</div>
</div>
<br>
<div class="mb-3">

```

```

<label for="file" class="form-label">Any file</label>
<input type="file" class="form-control" accept="" id="notice-file"
      name="file">
<p id="errorDisplay"></p>
<div class="invalid-feedback" id="invalid-file">
File is too large allowed limit is 200 MB!
</div>
</div>
<br>
<div class="mb-3">
    <label for="exampleFormControlTextarea1" class="form-label">Importance</label>

    <div class="flex-container">
        <label class="importance-disks">
            <input type="radio" name="disks" value="1" id="check1" checked>
            <span class="checkmark ch1"></span>
        </label>
        <label class="importance-disks">
            <input type="radio" name="disks" value="2" id="check2">
            <span class="checkmark ch2"></span>
        </label>
        <label class="importance-disks">
            <input type="radio" name="disks" value="3" id="check3">
            <span class="checkmark ch3"></span>
        </label>
    </div>
</div>

```

```

        </div>
        </div>

        <br>
        <!--end create notice-->
        </div>

        <div class="uploadbox" id="uploadbox">
            <div class="progress" id="progress-bar-box"
role="progressbar"
                aria-label="Animated striped example" aria-valuenow="75"
aria-valuemin="0"
                aria-valuemax="100">
                <div class="progress-bar progress-bar-striped progressbar-animated"
                    id="progress-indicator" style="width: 0%;"></div>
            </div>
        </div>
        <small id="status"></small>

        <hr>
        <div class="d-grid gap-2 d-md-flex justify-content-md-end">
            <button type="button" class="btn btn-outline-warning"
id="reset-notice"
                onclick="cleanForm()">&ampnbsp&ampnbspReset&ampnbsp&ampnbsp<
/button>
            <button type="button" class="btn btn-outline-success"
id="post-notice">Post</button>
        </div>
    </form>
    <!-- end of Take attendance -->
</div>
</div>

```

```

<div class="tab-pane" id="profile" role="tabpanel"
aria-labelledby="profile-tab" tabindex="0">
  <div class="container">
    <div>
      <br>

      <div class="attendanceTable" style="display: block;">
        <div class="header">
          <i class='bx bx-clipboard'></i>
          <h3>Notice Board</h3>
          <a href="noticeboard.php"><i style="font-size:30px;fontweight:bold;" class='bx bx-plus'></i></a>
        </div>
        <hr class="text-danger">

        <!--cards of notice-->

        <div class="row row-cols-1 row-cols-md-2 row-cols-lg-2
rowcols-xl-3 row-cols-sm-1 g-4"
      id="notice-box">

          </div>

        <!-- end of card's of notice-->
      <hr class="text-danger">

      <div class="d-grid gap-2 d-md-flex justify-content-md-end">
        <div class="btn-group" role="group" aria-label="Basic
example">
          <button type="button" class="btn btn-light"
id="prevBtn">prev</button>

```

```
<a class="btn btn-secondary disabled" role="button" aria-
disabled="true"
    id="pageNumber">1</a>
    <button type="button" class="btn btn-light"
id="nextBtn">next</button>
</div>
</div>

</div>
<!-- Attendence on Specific date -->

</div>
</div>

</div>
</div>

</div>
</div>

</div>
</div>

<!-- end of body -->

</main>

</div>

<script src="../assets/js/notice.js"></script>
<?php include('partials/_footer.php'); ?>
```

[!\[\]\(4bc69453e9e94d8b7104de7b173c6ea6_img.jpg\) Dashboard](#)[!\[\]\(8fb3d1ae39ecaf2bcdb083cae49bc791_img.jpg\) Teacher](#)[!\[\]\(7eeb667c748853f89162038ea8d0a5b3_img.jpg\) Student](#)[!\[\]\(c037685d9e52a26d61e52a42f5539671_img.jpg\) Subjects](#)[!\[\]\(46b929dba9eb9569040cd01d20993d13_img.jpg\) Attendance](#)[!\[\]\(f95a00775686e957f8d1baf00c4624f2_img.jpg\) Notice Board](#)[!\[\]\(fc3f0dca5d919366f648c7b044a9bf84_img.jpg\) Time Table](#)[!\[\]\(3e35812d32e1f649df06e4f0e693eacf_img.jpg\) Syllabus](#)[!\[\]\(93735b4b1eceee230ed06e71a042e610_img.jpg\) Notes](#)[!\[\]\(15482f9586dc7f26c138df193fe83111_img.jpg\) Marks](#)[!\[\]\(299295a4e0cd8c7d232a7a50c00768ef_img.jpg\) Bus Service](#)[!\[\]\(4ed9a1109859d5d484c21c3a5ea71c11_img.jpg\) Settings](#)[!\[\]\(54d4250b55e3acf99968198012808baa_img.jpg\) Logout](#)

Time Table

Time Table

Class 12 (Commerce)Section A Find

Class 12c A

prev

MONDAY

next

Period start

Period end

Subject

TimeTable.php :

Code :

```
<?php include("../assets/noSessionRedirect.php"); ?>
<?php include("./verifyRoleRedirect.php"); ?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <link rel="icon" type="image/x-icon" href="../images/1.png">
    <link href='https://unpkg.com/boxicons@2.1.4/css/boxicons.min.css' rel='stylesheet'>
    <link rel="stylesheet" href="css/bootstrap.css">
    <link rel="stylesheet" href="style.css">
    <title>School Management</title>
    <link rel="icon" type="image/x-icon" href="images/1.png">

</head>

<body>

    <div class='toast-container position-fixed text-success bottom-0 end-0 p-3'>
        <div id='liveToast' class='toast' role='alert' aria-live='assertive' aria-atomic='true' style='color:black;'>
            <div class='d-flex'>
                <div class='toast-body' id="toast-alert-message">

                    </div>
    
```

```

    <button type='button' class='btn-close me-2 m-auto text-danger' data-
bsdismiss='toast'
        aria-label='Close'></button>
    </div>
</div>
</div>
<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="7" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content"> <!--
    Navbar -->
    <?php include("partials/_navbar.php"); ?>

    <!-- End of Navbar -->

    <main>
        <div class="header">
            <div class="left">
                <h1>Time Table</h1>
            </div>
        </div>

        <!-- Body -->
        <div class="bottom-data">

            <div class="orders">
                <!-- Tab panes -->
                <div class="tab-content">
                    <div class="tab-pane active" id="home" role="tabpanel"
aria-labelledby="home-tab" tabindex="0">

```

```

<div class="container">
    <br>

    <div class="attendanceTable" style="display: block;">
        <div class="header">
            <i class='bx bx-receipt'></i>
            <h3>Time Table</h3>
            <!-- <i class='bx bx-filter'></i>
            <i class='bx bx-search'></i> -->
        </div>
        <hr>

        <!--find time table-->
        <br>
        <div class="container timetable-form">
            <div class="container" style="display: flex;">
                <div class="row g-3 align-items-center">
                    <div class="col-auto">
                        <label for="inputPassword6"
                            class="col-form-
label">&nbsp;&nbsp;Class&nbsp;&nbsp; </label>
                    </div>
                    <div class="col-auto">
                        <select class="form-select" aria-label="Default select
example">
                            <id="search-class">
                                <!-- <option selected>12</option>
                                <option>11</option>
                                <option>10</option>
                                <option>9</option>
                            <option>8</option>
                            <option>7</option>
                            <option>6</option>
                        </select>
                    </div>
                </div>
            </div>
        </div>
    </div>

```

```

<option>5</option>
<option>4</option>
<option>3</option>
<option>2</option>
<option>1</option>
<option>pg</option>
<option>lkg</option>
<option>ukg</option> -->
<?php include('partials/select_classes.php') ?>
</select>
</div>
</div>
</div>

<br>
<div class="container" style="display: flex;">
  <div class="row g-3 align-items-center">
    <div class="col-auto">
      <label for="inputPassword6" class="col-formlabel">Section </label>
    </div>
    <div class="col-auto">
      <select class="form-select" aria-label="Default select example">
        <id="search-section">
          <option selected>A</option>
          <option>B</option>
          <option>C</option>
        </select>
      </div>
    </div>
  </div>
</div>

```

```

<br>

<div class="container">

    <button class="find" id="findTimeTableBtn"
style="border:none;">
        <i class='bx bx-search-alt'></i>
        <span>Find</span>
    </button>
</div>
</div>

<!-- end of find time table-->
<br>
<hr><br>
<!-- Time table -->
<div class="container pt-3 time-table-container"
style="display: flex; flex-direction:column; justify-content:center;align-
item:center;">

    <div class="timeTableHeading">
        <div class="heading">
            <h3 id="timeTableClassSection"></h3>
        </div>
    </div>
    <br>
</div>
<br>
<div class="box100 _flex-container" style="width: 100%;">
    <div class="btn-group row" style="width: 100%;" role="group"
aria-label="Basic example">
        <button type="button" class="btn btn-secondary col-auto"
style="border: none; height: 50px;" id="prev-pagebtn">prev</button>
        <a class="btn btn-primary _flex-container disabled col-auto"
role="button">

```



```

    &nbsp;&nbsp;&nbsp;&nbsp;C&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nb
    sp;&nbsp;H&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;
    </div>

    <div style="position:relative;bottom:50px;">
        <table class="table table-striped scrollTable" style="width:
    100%;">
            <thead>
                <tr style="border:none !important;">
                    <!-- <th scope="col">#</th> -->
                    <th class="invisible" scope="col">Period start</th>
                    <th class="invisible" scope="col">Period end</th>
                    <th class="invisible" scope="col">
                        &nbsp;&nbsp;&nbsp;Subject&nbsp;&nbsp;&nbsp;</th>
                    </tr>
            </thead>
            <tbody id="timeTable_table2">
                </tbody>
            </table>
        <!-- end creating table again -->

        <div id="dataNotAvailable">
            <div class="_flex-container box-hide">
                <div class="no-data-box">
                    <div class="no-dataicon">
                        <i class='bx bx-party'></i>
                    </div>
                    <p>Holiday</p>
                </div>
            </div>
        
```

```
</div>
<br>
<div class="_flex-container">

    <div class="editBtnBox">
        <button class="btn btn-success _flex-container"
id="editBtn">
            <i class='bx bxs-edit'></i> <span>
&nbsp;&nbsp;Edit</span>
        </button>
    </div>

    <div class="saveBtnBox">
        <button class="btn btn-success _flex-container"
id="saveBtn">
            <i class='bx bx-save'></i> <span>
&nbsp;&nbsp;Save</span>
        </button>
    </div>

    <div class="container last-edited">

        <div>
            <p>Last edited by <span id="lastEditor"></span> </p>
            <small id="editingTime"></small>
        </div>
        </div>
    </div>
    <hr>
</div>
</div>
```

</div>

The screenshot shows a web-based ERP system interface. On the left is a sidebar with various menu items: Dashboard, Teacher, Student, Subjects, Attendance, Notice Board, Time Table, Syllabus (which is currently selected and highlighted in green), Notes, Marks, Bus Service, Settings, and Logout. The main content area has a header with a search bar and a 'Syllabus' title. Below this, a sub-header says 'Syllabus'. A dropdown menu shows 'Class I2 (Commerce)'. There is a 'Find' button. A table lists three subjects: 1. Hindi, 2. English, and 3. Commerce. Each row in the table includes a 'Download' button (green with white icon) and an 'Upload' button (blue with white icon).

#	Subject	Syllabus
1.	Hindi	Download Upload
2.	English	Download Upload
3.	Commerce	Download Upload

</div>

</div>

<!-- end of body -->

</main>

</div>

```
<script src="../assets/js/timetable.js"></script>
<?php include('partials/_footer.php'); ?>
```

Syllabus.php :

Code:

```
<?php include('partials/_header.php') ?>

<!-- upload syllabus label-->
<div class="modal" style="z-index: 2000;" id="upload-syllabus"
tabindex="-1" aria-labelledby="exampleModalLabel" aria-
hidden="true">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        <h1 class="modal-title fs-5"
id="exampleModalLabel">Upload Syllabus</h1>
        <button type="button" class="close mr-2" data-
bsdismiss="modal" aria-label="Close"><i
          class='bx bx-x'></i></button>
      </div>
      <form class="needs-validation" id="uploadSyllabusForm"
novalidate>
        <div class="modal-body">
          <div class="container">
            <div class="mb-3">
              <label for="exampleInputEmail1"
class="formlabel">Class</label>
```

```
<div class="col-auto">
    <select class="form-select" aria-label="Default
select example" id="syllabus-class"
        name="class" required>
        <!-- <option selected>12</option>
        <option>11</option>
        <option>10</option>
        <option>9</option>
<option>8</option>                <option>7</option>
        <option>6</option>
<option>5</option>
        <option>4</option>
        <option>3</option>
        <option>2</option>
        <option>1</option>
        <option>pg</option>
        <option>lkg</option>
        <option>ukg</option> -->
        <?php include('partials/select_classes.php') ?>
    </select>
</div>
</div>

<div class="mb-3">
    <label for="exampleInputEmail1"
class="formlabel">Subject</label>
```

```
<select class="form-select" aria-label="Default select example" id="subjectList">
    name="subject" required>
</select>
<div id="validationServer04Feedback"
class="invalid-feedback">
    Please select a valid Subject.
</div>
</div>

<div class="mb-3">
    <label for="formFile" class="form-label">Upload pdf file</label><small class="small">&nbsp;(max-size 200MB)</small>
    <input class="form-control" type="file"
id="formFile" name="file"
        accept=".pdf, .png, .jpg, .jpeg" required>
<div class="invalid-feedback">Please choose a valid file.</div>
</div>

<div class="progress-box mb-0" style="height: 15px;">
    <div class="progress-bar-hider">
        <div class="progress" role="progressbar"
aria-label="Animated striped example">
```

```
        aria-valuenow="75" aria-valuemin="0"
ariavaluemax="100">
    <div class="progress-bar progress-bar-striped
progress-bar-animated">
        id="progress-pointer">
        </div>
        </div>
        </div>
    </div>

</div>
</div>
<div class="modal-footer">
    <button type="button" class="btn btn-primary"
id="uploadSlybusBtn">
        <div><i class='bx bxs-cloud-upload'></i></i><span>
Upload</span></div>
        </button>
    </div>
    </form>
</div>
</div>
</div>
<!-- end of upload syllabus label-->
<!-- upload syllabus label when only file is needed-->
```

```
<div class="modal" style="z-index: 2000;" id="upload-syllabusonlyFile" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
<div class="modal-dialog modal-dialog-centered">
<div class="modal-content">
<div class="modal-header">
<h1 class="modal-title fs-5"
id="exampleModalLabel">Upload Syllabus</h1>
<button type="button" class="close mr-2" data-bsdismiss="modal" aria-label="Close"><i
class='bx bx-x'></i></button>
</div>
<form class="needs-validation" id="change-syllabus-form"
novalidate>
<div class="modal-body">
<div class="container my-3">
<div class="mb-3">
<label for="formFile" class="form-label">Upload pdf file</label><small class="small">&nbsp;(max-size 200MB)</small>
<input class="form-control" type="file"
id="changeFormFile" accept=".pdf, .png, .jpeg, .jpg"
required>
```

```
<div class="invalid-feedback">Please choose a valid  
file!</div>  
    </div>  
  </div>  
  
<div class="container">  
  <div class="progress-box mb-0" style="height: 15px;">  
    <div class="progress-bar-hider" id="change-  
fileprogress-hider">  
      <div class="progress" role="progressbar"  
aria-label="Animated striped example"  
aria-valuenow="75" aria-valuemin="0"  
ariavaluemax="100">  
        <div class="progress-bar progress-bar-striped  
progress-bar-animated"  
id="change-file-progress-pointer">  
        </div>  
      </div>  
    </div>  
  </div>  
  </div>  
</div>  
  
<div class="modal-footer">  
  <button type="button" class="btn btn-primary"  
id="upload-new-syllabus">  
    <div><i class='bx bxs-cloud-upload'></i></i><span>
```

```
Upload</span></div>
</button>
</div>
</form>
</div>
</div>
</div>
<!-- end of upload syllabus label when only file is needed-->
<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="8" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>
    <!-- End of Navbar -->

    <main>
        <div class="header">
            <div class="left">
<h1>Syllabus</h1>
        </div>
```

```
</div>
<div class="bottom-data">

<div class="orders">
    <!-- Tab panes -->
    <div class="tab-content">

        <div class="tab-pane active" id="profile"
role="tabpanel" aria-labelledby="profile-tab"
tabindex="0">
            <div class="showAttendance">
                <br>
                <div class="header">
                    <i class='bx bx-receipt'></i>
                    <h3>Syllabus </h3>

                    <a class="upload-syllabus"
id="openUploadDialog">
                        <i class='bx bx-cloud-upload'></i>
                        <span>Upload Syllabus</span>
                    </a>
                </div>
                <hr><br>
                <div class="container" style="display: flex;">
                    <div class="row g-3 align-items-center">
                        <div class="col-auto">
```

```
<label for="inputPassword6"
class="colform-label">Class </label>
</div>
<div class="col-auto">
    <select class="form-select" aria-
label="Default select example" name=""
        id="selected-class">
        <!--<option selected>12</option>-->
        <!--<option>11</option>-->
        <!--<option>10</option>-->
        <!--<option>9</option>-->
<!--<option>8</option>-->                                <!--
        <option>7</option>-->
        <!--<option>6</option>-->
        <!--<option>5</option>-->
        <!--<option>4</option>-->
        <!--<option>3</option>-->
        <!--<option>2</option>-->
        <!--<option>1</option>-->
        <!--<option>pg</option>-->
        <!--<option>lkg</option>-->
        <!--<option>ukg</option>-->
        <?php
include('partials/select_classes.php') ?>
    </select>
```

```
</div>
</div>

</div>

<div class="container">
    <br>
    <a class="find" id="find-btn">
        <i class='bx bx-search-alt'></i>
        <span>Find</span>
    </a>
</div>

<!-- Attendence on Specific date -->
<div class="container">
    <br>
    <!-- Take attendence -->
    <div class="attendanceTable" style="display:
block;">

        <hr class="text-danger">
        <!--table-->
        <div class="syllabus-table">
<table>
    <tr>
        <th scope="col" class="thead col-
3">#</th>
```

```
<th scope="col" class="thead col-3">Subject</th>
<th scope="col" class="thead col-6">Syllabus</th>
</tr>

<tbody id="syllabusTable">
</tbody>

</table>
</div>
<div id="dataNotAvailable">
<div class="_flex-container box-hide">
<div class="no-data-box">
<div class="no-dataicon">
<i class='bx bx-data'></i>
</div>
<p>No Data</p>
</div>
</div>
</div>
<!--END table-->
</div>
<hr class="text-danger">
```

```
</div>
<!-- Attendence on Specific date -->

</div>
</div>

</div>

</div>

</div>

</main>

</div>

<script src="../assets/js/sllyabus.js"></script>
<?php include('partials/_footer.php'); ?> Notes.php :
```

The screenshot shows a web-based Educational Resource Platform (ERP) interface. The top navigation bar includes a logo, a search bar, and a user profile icon. The left sidebar contains links for Dashboard, Teacher, Student, Subjects, Attendance, Notice Board, Time Table, Syllabus, Notes (which is currently selected), Marks, Bus Service, Settings, and Logout. The main content area is titled 'Notes' and displays a list of notes. Each note card includes the title, creation date, a preview snippet, file download links (with size and type), and edit/delete icons. The notes listed are 'Inn' (01 Mar, 2025) and 'Hindi Homework' (19 Jun, 2024). A green button labeled 'Upload Notes' is visible in the top right of the content area.

Code :

```
<?php include('partials/_header.php') ?>

<!-- upload syllabus label-->
<div class="modal modal-md" style="z-index: 2000;" id="upload-notes"
tabindex="-1" aria-labelledby="exampleModalLabel" aria-
hidden="true">
<div class="modal-dialog modal-dialog-centered">
<div class="modal-content">
<div class="modal-header">
```

```
<h1 class="modal-title fs-5" id="exampleModalLabel">Upload  
Notes</h1>  
    <button type="button" class="close mr-2" data-bs-dismiss="modal"  
aria-label="Close"><i  
        class='bx bx-x'></i></button>  
</div>  
<form class="needs-validation" id="uploadNotesForm" novalidate>  
  
<div class="modal-body">  
    <div class="container my-3">  
  
        <div class="row" style="">  
            <div class="col-md-5">  
                <label for="class" class="form-label">Class</label>  
                <select class="form-select" aria-label="Default select  
example" id="classOptions"  
                    name="class" style="width: 100% !important" required>  
                    <!-- <option selected>12</option>  
                    <option>11</option>  
                    <option>10</option>  
                    <option>9</option>  
<option>8</option>  
                    <option>7</option>  
                    <option>6</option>  
                    <option>5</option>  
                    <option>4</option>  
                    <option>3</option>  
                    <option>2</option>  
                    <option>1</option>  
                    <option>pg</option>
```

```
<option>lkg</option>
<option>ukg</option> -->
<?php include('partials/select_classes.php') ?>
</select>
</div>

<div class="col-md-7">
    <label for="subjectList"
class="formlabel">Subject</label>
    <select class="form-select" aria-label="Default select
example" id="subjectList"
            name="subject" style="width: 100% !important"
required>
    </select>
    <div id="validationServer04Feedback"
class="invalidfeedback">
        Please select a valid Subject.
    </div>
</div>
</div>

<div class="mb-3 mt-3">
    <label for="exampleInputEmail1"
class="formlabel">Title</label>
    <input type="text" class="form-control"
id="exampleInputEmail1" aria-describedby="emailHelp"
            name="title" required>
    <div id="wrong-title" class="invalid-feedback">
Please select a valid Title.

```

```
</div>
</div>

<div class="mb-3">
    <label for="exampleFormControlTextarea1" class="form-label">Comment</label>
        <textarea class="form-control" id="Comment" rows="2" name="comment" required></textarea>
            <div id="wrong-comment" class="invalid-feedback">
                This field is required.
            </div>
        </div>

<div class="mb-2">
    <label for="formFile" class="form-label">Upload file
    &nbsp; <small>(max-size  

        200MB)</small></label>
    <input class="form-control" type="file" id="formFile" name="file"  

        accept=".pdf, .png, .doc, .jpg, .jpeg, .zip, .tar, .gz"  

        required>
        <div id="wrong-comment" class="invalid-feedback filesize-  

        error">
            File is too large allowed limit is 200 MB!
        </div>
    </div>

<div class="progress-box mb-0" style="height: 15px;">
    <div class="progress-bar-hider">
```

```
<div class="progress" role="progressbar"
aria-label="Animated striped example"
    aria-valuenow="75" aria-valuemin="0"
aria-valuemax="100">
    <div class="progress-bar progress-bar-striped progress-
bar-animated"
        id="progress-pointer">
        </div>
    </div>
</div>
</div>
<div class="modal-footer">

    <button type="button" class="btn btn-primary"
id="uploadNotes">
        <div><i class='bx bxs-cloud-
upload'></i>&nbsp;&nbsp;<span> Upload</span></div>
    </button>
</div>

</form>
</div>
</div>
</div>
<!-- end of upload syllabus label--&gt;</pre>
```

```
<div class="modal fade" id="edit-confirmation-modal" tabindex="-1"
aria-labelledby="exampleModalLabel"
aria-hidden="true">
<div class="modal-dialog modal-dialog-centered">
<div class="modal-content">
<div class="modal-header">
</div>
<div class="modal-body">
<strong>Do you really want to Edit this Note?</strong>

<br><br>
<div class="progress-box mb-0" style="height: 15px;">
<div class="progress-bar-hider progress-bar-hider1">
<div class="progress" role="progressbar"
aria-label="Animated striped example"
aria-valuenow="75" aria-valuemin="0"
aria-valuemax="100">
<div class="progress-bar progress-pointer progressbar-striped progress-bar-animated"
id="progress-pointer">
</div>
</div>
</div>
</div>
</div>
<div class="modal-footer">
<button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
```

```
<button type="button" class="btn btn-danger" id="confirm-editbtn">Edit</button>
</div>
</div>
</div>
</div>

<!-- alert to delete subject -->
<div class="modal fade" id="delete-confirmation-modal" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
<div class="modal-dialog modal-dialog-centered">
<div class="modal-content">
<div class="modal-header">
</div>
<div class="modal-body">
<strong>Do you really want to delete this Note?</strong>
</div>
<div class="modal-footer">
<button type="button" class="btn btn-secondary" data-
bsdismiss="modal">Close</button>
<button type="button" class="btn btn-danger"
onclick="deleteNote()">Delete</button>
</div>
</div>
</div>
<!-- end of alert to delete subject -->
<!-- show notes info start-->
```

```
<div class="modal fade" id="showNotesInformation" data-
bsbackdrop="static" data-bs-keyboard="false" tabindex="-1" aria-
labelledby="staticBackdropLabel" aria-hidden="true">
  <div class="modal-dialog modal-dialog-scrollable">
    <div class="modal-content">
      <div class="modal-header">
        <h1 class="modal-title fs-5" id="showFullTitle"></h1>
        <button type="button" class="close mr-2" data-bsdismiss="modal"
aria-label="Close"><i
          class='bx bx-x'></i></button>
      </div>
      <div class="modal-body">
        <div class="container">
          <p id="showFullComment"></p>
          <br>

        </div>
      </div>
      <div class="modal-footer">
        <a class="btn btn-warning view-result-btn" target="_blank"
id="view_file_btn">
          <i class='bx bx-show-alt'></i>
&nbsp;&nbsp;<span>View</span>
        </a>
        <button type="button" class="btn btn-secondary" data-
bsdismiss="modal">Close</button>
      </div>
    </div>
  </div>
</div>
```

```
</div>

<!-- end of show notes info -->
<!-- edit uploaded notes -->
<div class="modal modal-md" style="z-index: 2000;" id="edit-
uploadednotes" tabindex="-1"
    aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered modal-
dialogscrollable">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Edit
uploaded notes</h1>
                <button type="button" class="close mr-2" data-bsdismiss="modal"
aria-label="Close"><i
                    class='bx bx-x'></i></button>
            </div>
            <form class="needs-validation" id="editNotesForm" novalidate>
                <div class="modal-body pb-0">
                    <div class="container my-3">
                        <div class="row" style="">
                            <div class="col-md-5">
                                <label for="class" class="form-label">Class</label>
                                <select class="form-select" aria-label="Default select
example" id="editClassOption"
                                        name="class" style="width: 100% !important" required>
```

```

<!-- <option selected>12</option>
<option>11</option>
<option>10</option>
<option>9</option>
<option>8</option>
    <option>7</option>
    <option>6</option>
    <option>5</option>
    <option>4</option>
    <option>3</option>
    <option>2</option>
    <option>1</option>
    <option>pg</option>
    <option>lkg</option>
    <option>ukg</option> -->
    <?php include('partials/select_classes.php') ?>
</select>
</div>

<div class="col-md-7">
    <label for="subjectList"
class="formlabel">Subject</label>
    <select class="form-select" aria-label="Default select
example" id="editSubjectList"
        name="subject" style="width: 100% !important"
required>
    </select>
    <div id="validationServer04Feedback"
class="invalidfeedback">

```

Please select a valid Subject.

```
</div>
</div>
</div>
```

<div class="mb-3 mt-3">

```
<label for="exampleInputEmail1"
class="formlabel">Title</label>
<input type="text" class="form-control editTitle"
id="editTitle"
aria-describedby="emailHelp" name="title" required>
```

<div id="wrong-title" class="invalid-feedback"> Please
select a valid Title.

```
</div>
</div>
```

<div class="mb-3">

```
<label for="exampleFormControlTextarea1"
class="formlabel">Comment</label>
<textarea class="form-control edited-comment"
id="Comment" rows="2" name="comment"
required></textarea>
```

<div id="wrong-comment" class="invalid-feedback"> This field is required.

```
</div>
</div>
```

<div class="mb-3">

```
<label for="file" class="form-label">File</label><br>
```

```
<div class="btn btn-primary upload-btn"  
id="edit_upload_btn">  
    <label for="upload-file">  
        <i class='mt-1 bx bx-cloud-upload'  
style="cursor:pointer;"></i>  
    </label>  
    <input type="file" class="new-upload-file" id="uploadfile"  
name="file"  
        class="edit-upload-file" accept=".pdf, .png, .doc, .jpg,  
.jpeg, .zip, .tar, .gz"  
        style="display: none; width: 100%;">  
    </div>  
  
    <a class="mx-3" id="view-current-file" target="_blank">  
<div class="btn btn-primary upload-btn edit-view-btn" id="edit-view-  
btn">  
  
        <i class='mt-1 bx bx-show-alt' style="color:  
black; cursor:pointer;"></i>  
    </div>  
    </a>  
    <p id="edit-file-errorDisplay"></p>  
    <div class="invalid-feedback" id="edit-invalid-file">  
File is too large allowed limit is 200 MB!  
    </div>  
  
    </div>  
    <div class="mt-3" style="display: flex; flex-direction:  
row-reverse;">  
        <small class="last-editor mb-0"></small>
```

```
</div>

</div>
</div>
<div class="modal-footer pt-0">

    <button type="button" class="btn btn-primary" id="editNote">
        <div><i class='bx bxs-cloud-upload'></i>&ampnbsp&ampnbsp<span> Edit</span></div>
    </button>
</div>

</form>
</div>
</div>
</div>
<!-- end of edit uploaded notes-->
<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="9" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>
    <!-- End of Navbar -->
```

```

<main>
  <div class="header">
    <div class="left">
      <h1>Notes</h1>
    </div>
  </div>
  <div class="bottom-data">

    <div class="orders">
      <!-- Tab panes -->
      <div class="tab-content">

        <div class="tab-pane active" id="profile" role="tabpanel"
aria-labelledby="profile-tab"
        tabindex="0">
          <div class="showAttendance"> <br>
            <div class="header">
              <i class='bx bx-receipt'></i>
            <h3>Notes </h3>

            <a class="upload-syllabus" id="showUploadDialog">
              <i class='bx bx-cloud-upload'></i>
              <span>Upload Notes</span>
            </a>
        </div>

        <hr><br>
        <div class="container" style="display: flex;">

          <div class="row g-3 align-items-center">

```

```
<div class="col-auto">
    <label for="inputPassword6" class="col-formlabel">Class </label>
    </div>
    <div class="col-auto">
        <select class="form-select" aria-label="Default select example">
```

```
        id="notes-class">
            <!-- <option selected>12</option>
            <option>11</option>
            <option>10</option>
            <option>9</option>
            <option>8</option>
            <option>7</option>
            <option>6</option>
            <option>5</option>
            <option>4</option>
            <option>3</option>
            <option>2</option>
            <option>1</option>
            <option>pg</option>
            <option>lkg</option>
            <option>ukg</option> -->
            <?php include('partials/select_classes.php') ?>
        </select>
    </div>
</div>
</div>
```

```

<br>
<div class="container">
  <a class="find" id="find-notes-btn">
    <i class='bx bx-search-alt'></i>
    <span>Find</span>
  </a>
</div>

<hr class="text-danger">
<!-- Attendence on Specific date -->
<div class="container">
  <br>
  <!-- Take attendence -->
  <div class="attendanceTable" style="display: block;">
    <!--cards of notice-->

      <div class="row row-cols-1 row-cols-md-2 row-cols-lg-3
row-cols-xl-4 row-cols-sm-2 g-4"
id="notes">

        </div>
      </div>
      <!-- end of card's of notice-->
    </div>
    <!-- Attendence on Specific date -->
<hr class="text-danger">

```

```
<div class="d-grid gap-2 d-md-flex justify-content-md-end">
  <div class="btn-group" role="group" aria-label="Basic
example">
    <button type="button" class="btn btn-light"
id="prevBtn">prev</button>
    <a class="btn btn-secondary disabled" role="button"
aria-disabled="true"
      id="pageNumber">1</a>
    <button type="button" class="btn btn-light"
id="nextBtn">next</button>
  </div>
</div>
</div>
</div>
</div>
</div>
</main>
```

```
</div>
<script src="../assets/js/notes.js"></script>
<?php include('partials/_footer.php'); ?>
```

Marks.php :

The screenshot shows the ERP application interface. At the top, there is a header with a logo, the text "ERP", a search bar, and a magnifying glass icon. On the left, a sidebar menu lists various modules: Dashboard, Teacher, Student, Subjects, Attendance, Notice Board, Time Table, Syllabus, Notes, Marks (which is highlighted in green), Bus Service, Settings, and Logout. The main content area is titled "Marks". It contains two buttons: "Upload Marks" (green) and "View Marks" (grey). Below these buttons, the "Upload Marks" section is visible, featuring a large input field and a "Upload Marks" button with a green arrow icon.

Code :

```
<?php include('partials/_header.php') ?>

<!-- start offcanvas marks table -->
<div class="offcanvas offcanvas-end" tabindex="-1" id="markSheerOffcanvas"
aria-labelledby="offcanvasRightLabel">
  <div class="offcanvas-header">
    <h5 class="offcanvas-title" id="offcanvasRightLabel"><i class='bx bx-list-ul'></i>
    &nbsp;Students Result List
    </h5>
    <button type="button" id="closeExamMarkTable" class="close mr-2"><i class='bx bxs-cross-circle'></i></button>
  </div>
  <div class="offcanvas-body scrollable" style="height: 100%;min-height: max-content;overflow-y: scroll;">
    <div>
      <div class="students-table">
        <table class="table table-bordered table-striped border-success">
          <thead>
            <tr>
              <th scope="col">#</th>
              <th scope="col">Roll No.</th>
              <th scope="col">Name</th>
              <th scope="col">Obtained</th>
            </tr>
          </thead>
          <tbody id="resultTable">
            </tbody>
          </table>
        </div>
      <div class="dataNotAvailable" id="noMarksAvailable">
        <div class="_flex-container box-hide">
```

```

<div class="no-data-box">
    <div class="no-dataicon">
        <i class='bx bx-data'></i>
    </div>
    <p>No Record</p>
</div>
</div>

<br><br><br>
</div>

</div>
</div>
<!-- end offcanvas marks table -->

<!--add new student model -->

<div class="modal" style="z-index: 2000;" id="addStudentModel" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
                <h1 class="modal-title fs-5" id="exampleModalLabel">Upload Result</h1>
                <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i
class='bx bx-x'></i></button>
            </div>

            <form class="needs-validation" id="create-exam-form" novalidate>
                <div class="modal-body">
                    <div class="container my-3">

                        <div class="mb-3">
                            <label for="title" class="form-label">Exam Title</label>
                            <input type="text" class="form-control" id="exam-title" name="title"
aria-describedby="emailHelp" required>

```

```
<div class="invalid-feedback invalid-exam-title">
Please choose a exam Title. </div>
</div>
<div class="row mb-3" style="">
<div class="col-md-6">
    <label for="class" class="form-label">Class</label>
    <select class="form-select" aria-label="Default select example" id="exam-class"
name="class" style="width: 100% !important" required>
        <!-- <option selected>12</option>
        <option>11</option>
        <option>10</option>
        <option>9</option>
        <option>8</option>
        <option>7</option>
        <option>6</option>
        <option>5</option>
        <option>4</option>
        <option>3</option>
        <option>2</option>
        <option>1</option>
        <option>pg</option>
        <option>lkg</option>
        <option>ukg</option> -->
        <?php include('partials/select_classes.php') ?>
    </select>
<div class="invalid-feedback invalid-exam-class">
```

Please choose a exam class.

```
</div>
</div>

<div class="col-md-6">
    <label for="section" class="form-label">Section</label>
    <select class="form-select" aria-label="Default select example" id="exam-section"
name="section" style="width: 100% !important" required>
        <option selected>A</option>
        <option>B</option>
        <option>C</option>
```

```

        </select>
        <div id="validationServer04Feedback" class="invalid-feedback invalid-
examsection">
            Please select a exam Subject.
        </div>
    </div>
</div>

<div class="row mb-3" style="">
    <div class="col-md-6">
        <label for="total" class="form-label">Total Marks</label>
        <input type="number" class="form-control" id="total-marks" name="total"
ariadescribedby="emailHelp" required>
        <div class="invalid-feedback invalid-total-marks">
Invalid Total marsks!
        </div>
    </div>
</div>

<div class="col-md-6">
    <label for="passing" class="form-label">Passing Marks</label>
    <input type="number" class="form-control" id="passing-marks"
ariadescribedby="emailHelp" name="passing">
    <div class="invalid-feedback invalid-passing-marks">
Invalid Passing marks!
    </div>
</div>

    <div class="invalid-feedback passingGreaterTotalError">
passing marks must less than total marks!
    </div>
</div>

<div class="mb-3">
    <label for="subject" class="form-label">Subject</label>
    <select class="form-select" name="subject" id="exam-subject-list" arialabel="Default
select example" required>

```

```

        </select>
        <div class="invalid-feedback invalid-exam-subject-list">
Please select exam subject.
        </div>
        </div>
        </div>
    </div>
    <div class="modal-footer">

        <button type="button" class="btn btn-primary" id="continue-btn">
            <div><i class='bx bxs-chevrons-right'></i><span>Continue</span></div>
        </button>
    </div>

    </form>
</div>
</div>
</div>

<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="10" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>

    <!-- End of Navbar -->

    <main>
        <div class="header">
            <div class="left">
                <h1>Marks</h1>
                <!-- <ul class="breadcrumb">

```

```

<li><a href="#">
    </a></li>
</ul> -->
</div>

</div>
<div class="bottom-data">
    <div class="orders">

        <!-- Nav tabs -->
        <ul class="nav nav-tabs" id="myTab" role="tablist">
            <li class="nav-item" role="presentation">
                <button class="nav-link active" id="home-tab" data-bs-toggle="tab" data-bs-target="#home" type="button" role="tab" aria-controls="home" aria-selected="true">Upload Marks</button>
            </li>
            <li class="nav-item" role="presentation">
                <button class="nav-link view-marks-tab" id="profile-tab" data-bs-toggle="tab" data-bs-target="#profile" type="button" role="tab" aria-controls="profile" aria-selected="false">View Marks</button>
            </li>
        </ul>

        <!-- Tab panes -->
        <div class="tab-content">
            <div class="tab-pane active" id="home" role="tabpanel" aria-labelledby="home-tab" tabindex="0">
                <br>
                <!-- Take attendance -->
                <div class="attendanceTable" style="display: block;">
<div class="header">
    <i class='bx bx-receipt'></i>
    <h3>Upload Marks</h3>
    <div class="student-btns">

        <a class="add-btns"> <i class='bx bx-filter'></i></a>

```

```

        </div>
    </div>
    <hr>

    <div class="container add-remove" id="uploadMarksJumboBtn">
        <br>
        <ul class="insights">
            <a class="addlink" data-bs-toggle="modal" data-bs-target="#addStudentModel"
id="showUploadResultDialog">
                <li class="additem">
                    <!-- <i class='bx bx-calendar-check'></i> -->
                    <i class='bx bx-upload'></i>
                    <span class="info">
                        <h3>
                            Upload
                        </h3>
                        <h3>Marks</h3>
                    </span>
                </li>
            </a>
            <!-- model add student -->
        </ul>
    </div>

    <div class="container upload-marks-hider">
        <br>
        <!-- Take attendance -->
        <form class="needs-validation" id="upload-marks-form" novalidate>
            <div class="attendanceTable" style="display: block;">
<div class="header">
            <i class='bx bx-list-ul'></i>
            <h3 id="class-section"></h3>

            <button type="button" class="btn btn-info"
id="backToDialogBtn">Back</button>

```

```

</div>
<hr class="text-danger">
<!--table-->
<div class="students-table">
    <table class="remove-cursor-pointer remove_hover_table">
<thead id="UploadTableHead">
    <tr>
        <th scope="col" class="thead col-1">#</th>
        <th scope="col" class="thead col-2">Roll no</th>
        <th scope="col" class="thead col-4">Name</th>
        <th scope="col" class="thead col-2">Total Marks</th>
        <th scope="col" class="thead col-2">Obtained Marks</th>
    </tr>
</thead>

<tbody id="UploadTable">

    </tbody>
</table>
</div>
<!--END table-->
</div>

<div id="dataNotAvailable">

    <div class="_flex-container box-hide">

        <div class="no-data-box">
            <div class="no-dataicon">
                <i class='bx bx-data'></i>
            </div>
            <p>No Data</p>
        </div>
    </div>

</div>

```

```

<hr>

<div class="_flex-container">
    <button class="btn btn-success" id="save-marks-btn" type="button"><i class='bx bx-save'></i>&ampnbsp&ampnbspSave</button>
</div>
</form>

</div>
<br>
<hr>
</div>

<!-- end of Take attendance -->
</div>
<div class="tab-pane" id="profile" role="tabpanel" aria-labelledby="profile-tab" tabindex="0">
    <div class="showAttendance">
        <br>
        <div class="header">
            <i class='bx bx-receipt'></i>
            <h3 id="h1">Information </h3>
        </div>
        <br>
        <div class="container" style="display: flex;">
            <div class="row g-3 align-items-center">
                <div class="col-auto">
                    <label for="inputPassword6" class="col-form-label">&ampnbspClass&ampnbsp</label>
                </div>
                <div class="col-auto">
                    <select class="form-select" aria-label="Default select example" name="class" id="examClass_find">
                        <!-- <option selected>12</option>
                        <option>11</option>

```

```

<option>10</option>
<option>9</option>
<option>8</option>
<option>7</option>
<option>6</option>
<option>5</option>
<option>4</option>
<option>3</option>
<option>2</option>
<option>1</option>
<option>pg</option>
<option>lkg</option>
<option>ukg</option> -->
<?php include('partials/select_classes.php') ?>
</select>
</div>
</div>
</div>
<br>
<div class="container" style="display: flex;">
  <div class="row g-3 align-items-center">
    <div class="col-auto">
      <label for="inputPassword6" class="col-form-label">Section </label>
    </div>
    <div class="col-auto">
      <select class="form-select" aria-label="Default select example"
name="section" id="examSection_find">
        <option selected>A</option>
        <option>B</option>
        <option>C</option>
      </select>
    </div>
  </div>
</div>
<br>

<div class="container" style="display: flex;">
  <div class="row g-3 align-items-center">

```

```

<div class="col-auto">
    <label for="inputPassword6" class="col-form-label">Session </label>
</div>
<div class="col-auto">
    <select class="form-select" aria-label="Default select example"
name="section" id="select-session">

        </select>
    </div>
</div>
</div>
<br>

<div class="container">
    <a class="find" id="exam_findBtn">
        <i class='bx bx-search-alt'></i>
        <span>Find</span>
    </a>
</div>
<br>

<hr>

<br>
<div class="header">
    <i class='bx bx-receipt'></i>
    <h3>Exams</h3>
</div>

<hr>
<!-- <div class="accordion exam-titles"> -->
<div class="accordion accordion-flush" id="Exam-Titles">

</div>
<!-- </div> -->

```

```

<div class="dataNotAvailable" id="noRecordAvailable">

    <div class="_flex-container box-hide">

        <div class="no-data-box">
            <div class="no-dataicon">
                <i class='bx bx-data'></i>
            </div>
            <p>No Record</p>
        </div>
    </div>

    </div>
    <hr>

    </div>
</div>

    </div>
</div>

</div>

</main>

</div>
<span id="hiddenBOX" style="display:none;width:0px;height:0px;"></span>

<script src="../assets/js/marks.js"></script>
<?php include('partials/_footer.php'); ?>

```

Bus.php :

Code :

```
<?php include('partials/_header.php') ?>
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="11" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>

    <!-- End of Navbar -->
```

The screenshot shows a web-based school management system. The left sidebar has a 'Bus Service' link highlighted. The main content area displays a 'Bus service' page. It shows a list of buses under 'Bus Requests' and a timeline for 'Bus Root' with stops at different times.

Bus Requests:

- Bus 1
- Bus 2
- Another bus

Bus Root Timeline:

- Stop 1: 06:50 AM
- Stop 2: 07:00 AM
- Stop 3: 07:10 AM

```
<div class="left">
    <h1>Bus service</h1>
    <ul class="breadcrumb">
```

```

<li><a href="#">
  </a></li>
</ul>

<div class="d-flex mx-3 mb-3" style="grid-gap: 10px; flex-wrap: wrap;">
  <button type="button" class="btn btn-primary" id="bus-request" data-bs-toggle="modal" data-bs-target="#exampleModal">
    <i class="fas fa-bus"></i> Bus Requests
  </button>

  <button type="button" class="btn btn-success" id="bus-request" data-bs-toggle="modal" data-bs-target="#exampleModal2">
    <i class="fas fa-bus"></i> Accepted Requests
  </button>
</div>

<!-- Modal -->
<div class="modal fade" id="exampleModal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
  <div class="modal-dialog modal-dialog-scrollable">
    <div class="modal-content">
      <div class="modal-header">
        <h1 class="modal-title fs-5" id="exampleModalLabel">Request for bus</h1>
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <div class="modal-body" id="request">

      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
      </div>
    </div>
  </div>
</div>

<!-- Modal 2 -->
<div class="modal fade" id="exampleModal2" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
  <div class="modal-dialog modal-dialog-scrollable">
    <div class="modal-content">
      <div class="modal-header">
        <h1 class="modal-title fs-5" id="exampleModalLabel">Requests Accepted by Admin</h1>

        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <div class="form-outline" style="margin-left: 20px; margin-right: 20px; margin-bottom: 20px;" data-mdb-inputinit>
```

```

<input type="search" id="search" class="form-control" placeholder="Search From Name or id " aria-label="Search" />
</div>
<div class="modal-body" id="request-accept">

</div>
</div>
<div class="modal-footer">
  <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
  </div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>
<div class="container display-buses-card">
  <div class="row g-4 bus-card-row">

    <div class="col col-lg-5 col-md-6 col-sm-12 mb-30">
      <div class="card" style="border-radius: 10px;">
        <div class="card-body">
          <div class="d-flex justify-content-between">
            <h5 class="card-title mb-4 d-flex align-items-center">
              <i class='bx bxs-bus me-1'></i>
              Buses
            </h5>
            <span id="open-add-bus-dailog"><i class='bx bx-plus icon-hover-circle'></i></span>
          </div>
        <div class="px-1">
          <div class="accordion accordion-flush" id="accordion-bus-list">

            </div>
          </div>
        <div class="dataNotAvailable" id="No-Buses">

          <div class="_flex-container box-hide">

            <div class="no-data-box">
              <div class="no-dataicon">
                <i class='bx bxs-bus'></i>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>

```

```

        <p>No Buses</p>
    </div>
</div>
<br>
</div>
</div>
</div>
</div>

<div class="col col-lg-7 col-md-6 col-sm-12 mb-30">
    <div class="card" style="border-radius: 10px;">
        <div class="card-body">
            <div class="d-flex justify-content-between">
                <h5 class="card-title mb-4 d-flex align-items-center" id="busRootHeading">
                    <i class='bx bxs-map me-1'></i>
                    Bus Root
                </h5>
            </div>
<?php include("partials/bus-shared/bus-root-gui.php"); ?>

            <div class="dataNotAvailable" id="No-Bus-selected">

                <div class="_flex-container box-hide">

                    <div class="no-data-box">
                        <div class="no-dataicon">
                            <i class='bx bxs-bus-school'></i>
                        </div>
                        <p>No Bus Root</p>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>
<br><br>
</main>
</div>

<script type="text/javascript">
```

```

$(document).ready(function(){
  $.ajax({
    url: "partials/bus-
requests.php",
    method: "post",
    success: function(data){
      $("#request").html(data);
    }
  });
  $.ajax({
    url: "partials/load-
bus.php",
    method: "post",
    success: function(data){
      $("#request-accept").html(data);
    }
  });
});
document.getElementById("search").addEventListener("keyup", function() {
var val = this.value; // Retrieve the value of the input field

// Create a FormData object to send data to the server
var formData = new FormData();
formData.append("val", val);

// Make a fetch request
fetch("partials/search-bus.php", {
method: "POST",
body: formData // Set the body of the request to the FormData object
})
.then(response => response.text()) // Parse the response as text
.then(data => {
  // Update the content of the element with the id "request-accept"      document.getElementById("request-
accept").innerHTML = data;
})
.catch(error => {
  console.error("Error:", error); // Log any
errors to the console
});
});
});

</script>
<script src="../assets/js/bus.js"></script>
<script src="js/date-picker.min.js"></script>
<script> const newArrival = new
DatePicker({
  el: '#arrival-time-
new-picker',
  toggleEl: '#new-
arrival-toggler',
  inputEl: '#arrival-
time-new',
  type: 'HOUR'
}

```

});

```
const editArrival = new DatePicker({
el: '#arrival-time-edit-picker',
toggleEl: '#edit-arrival-toggler',
inputEl: '#arrival-time-edit',    type:
'HOUR'
});
</script>
<?php include('partials/_footer.php'); ?>
```

Setting.php :

Code :

```
<?php include("../assets/noSessionRedirect.php"); ?>
```

The screenshot shows a mobile application interface for an ERP system. At the top, there is a navigation bar with a logo, the text "ERP", a search bar, and a magnifying glass icon. On the left, a vertical sidebar menu lists various options: Dashboard, Teacher, Student, Subjects, Attendence, Notice Board, Time Table, Syllabus, Notes, Marks, Bus Service, Settings (which is currently selected), and Logout. The main content area is divided into two sections. On the left, there is a "Profile Image" section containing a circular placeholder image of a building, a blue "Upload" button, and a note: "For best results, use an image at least 128px by 128px in .jpg format". Below this are two blue buttons: "Change Password" and "Edit Profile". On the right, there is a "Profile info" section displaying the following details: UID - A9876543210, Name - Admin Kumar, BirthDay - 12/11/2024, Email - admin@gmail.com, Phone - 1234567890, Gender - Male, and Address - Patna.

Profile Info
UID - A9876543210
Name - Admin Kumar
BirthDay - 12/11/2024
Email - admin@gmail.com
Phone - 1234567890
Gender - Male
Address - Patna

```

<?php include("./verifyRoleRedirect.php"); ?>
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link href='https://unpkg.com/boxicons@2.1.4/css/boxicons.min.css' rel='stylesheet'>
    <link rel="icon" type="image/x-icon" href="images/1.png">
    <title>School Management</title>

    <link rel="icon" type="image/x-icon" href="..//images/1.png">
    <!-- <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" -->

    <link rel="stylesheet" href="css/bootstrap.css">

    <link href="https://unpkg.com/gijgo@1.9.14/css/gijgo.min.css" rel="stylesheet" type="text/css" />
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css" />
    <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.10.4/font/bootstrap-icons.css" />
    <link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-awesome.min.css" rel="stylesheet" />

    <script src="https://code.jquery.com/jquery-3.3.1.min.js"></script>
    <script src="https://unpkg.com/gijgo@1.9.14/js/gijgo.min.js" type="text/javascript"></script>

    <link rel="stylesheet" href="style.css">
    <link rel="stylesheet" href="settings-style.css">

</head>

<body>

<div class="modal fade" id="edit-confirmation-modal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-dialog-centered">
        <div class="modal-content">
            <div class="modal-header">
            </div>
            <div class="modal-body">

```

```

<strong>Do you want to edit your profile.</strong>
</div>
<div class="modal-footer">
  <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">No</button>
  <button type="button" class="btn btn-danger" id="EditProfileBtn">Yes</button>
</div>
</div>
</div>

<div class='toast-container position-fixed text-success bottom-0 end-0 p-3' style="z-index: 9000;">
  <div id='liveToast' class='toast' role='alert' aria-live='assertive' aria-atomic='true' style="color:black;">
    <div class='d-flex'>
      <div class='toast-body' id="toast-alert-message">

        </div>
        <button type='button' class='btn-close me-2 m-auto text-danger' data-bs-dismiss='toast'
aria-label='Close'></button>
      </div>
    </div>
  </div>
</div>

<!-- edit profile model -->
<div class="modal" style="z-index: 2000;" id="edit-profile-modal" tabindex="-1"
aria-labelledby="exampleModalLabel"      aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered modal-dialog-scrollable">
    <div class="modal-content">
      <div class="modal-header">
        <h1 class="modal-title fs-5" id="exampleModalLabel">Edit Profile</h1>
        <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i
class='bx bx-x'></i></button>      </div>

      <form class="needs-validation" id="editProfileForm" novalidate>
        <div class="modal-body">
          <div class="container">
            <div class="mb-2">
              <label for="fullname" class="form-label">Full Name</label>
              <div class="row">
                <div class="col">
                  <input type="text" class="form-control" placeholder="First name"
aria-label="First name" id="eidtFname" name="fname" required>
                  <div class="invalid-feedback">
                    required!
                  </div>
                </div>
              </div>
            </div>
          </div>
        </div>
      </form>
    </div>
  </div>
</div>

```

```

</div>
<div class="col">
  <input type="text" class="form-control" placeholder="Last name"
    aria-label="Last name" id="editLname" name="lname" required>
  <div class="invalid-feedback">
required!
  </div>
</div>
</div>
</div>

```



```

<div class="mb-2">
  <label for="editEmail" class="form-label">Email</label>
  <input type="email" class="form-control" id="editEmail" name="email"
    aria-describedby="emailHelp" required>
  <div class="invalid-feedback">
invalid email!
  </div>
</div>

<div class="mb-2">
  <div class="row">
    <div class="col-6">
      <label for="dob" class="form-label">Date of Birth</label>
      <input type="date" class="form-control" id="editDOB" accept="" aria-describedby="emailHelp"
        name="dob" required>
      <div class="invalid-feedback">
required!
      </div>
    </div>
    <div class="col-6 student-image">
      <label for="gender" class="form-label">Gender</label>
      <select class="form-select" id="editGender" name="gender" style="width:100%;" required>
        <option selected disabled value="">--select--</option>
        <option value="Male">Male</option>
        <option value="Female">Female</option>
        <option value="Other">Other</option>
      </select>
      <div class="invalid-feedback">
required!
      </div>
    </div>
  </div>

```

```

        </div>
        </div>
    </div>

    <div class="mb-2">
        <label for="editPhone" class="form-label">Phone Number</label>
    <input type="tel" class="form-control" id="editPhone" name="phone"
placeholder="Enter phone number" required>
        <div class="valid-feedback">
        </div>
        <div class="invalid-feedback" id="phone-mdg">
            Please enter a valid 10-digit phone number.
        </div>
    </div>

    <div class="mb-2">
        <label for="editAddress" class="form-label">Address</label>
        <textarea class="form-control" id="editAddress" name="address" rows="2" required></textarea>
        <div class="invalid-feedback">
            this field can't be empty!
        </div>
    </div>

        </div>
    </div>
    <div class="modal-footer">

        <button type="button" class="btn btn-primary" id="saveChangesBtn"><i></i><span>
            <small>Save Changes</small></span>
        </button>
    </div>

        </form>
    </div>
    </div>
</div>
</div>

<!-- end of edit profile model--&gt;

<!--change pswd--&gt;</pre>

```

```

<div class="modal" style="z-index: 2000;" id="change-password" tabindex="-1" aria-labelledby="exampleModalLabel" aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        <h1 class="modal-title fs-5" id="exampleModalLabel">Change Password</h1>
        <button type="button" class="close mr-2" data-bs-dismiss="modal" aria-label="Close"><i class="bx bx-x"></i></button>
      </div>
      <form class="needs-validation" id="changePasswordForm" novalidate>
        <div class="modal-body">
          <div class="container my-3">
            <div class="mb-3">
              <label for="currentPass" class="form-label">Current Password</label>
              <input type="text" class="form-control" id="currentPass" name="currentPassword" required>
              <div class="invalid-feedback invalidCurrentPassword">
required!
              </div>
            </div>
          </div>

          <div class="mb-3">
            <label for="newPass" class="form-label">New Password</label>
            <input type="text" class="form-control" id="newPass" name="newPassword" required>
            <div class="invalid-feedback invalidNewPassword">
required!
            </div>
          </div>

          <div class="mb-3">
            <label for="confirmPass" class="form-label">Confirm Password</label>
            <input type="text" class="form-control" id="confirmPass" name="confirmPassword" required>
            <div class="invalid-feedback invalidConfirmPassword">
required!
            </div>
          </div>

          <div class="invalid-feedback notSamePasswords">
            new Password and confirm password must be same!
          </div>
        </div>
      </form>
    </div>
  </div>

```

```

</div>
<div class="modal-footer">

    <button type="button" class="btn btn-primary" id="savePasswordBtn">
        <div><i class='bx bxs-chevrons-right'></i><span> Save</span></div>
    </button>
</div>
</form>
</div>
</div>
</div>

<!-- end of change password-->

<!-- Sidebar -->
<?php include('partials/_sidebar.php') ?>
<input type="hidden" value="12" id="checkFileName">
<!-- End of Sidebar -->

<!-- Main Content -->
<div class="content">
    <!-- Navbar -->
    <?php include("partials/_navbar.php"); ?>

    <!-- End of Navbar -->

    <main>
        <div class="header">
            <div class="left">
                <h1>Settings</h1>
                <ul class="breadcrumb">
                    <li><a href="#">
                        </a></li>
                    </ul>
            </div>
        </div>
        <div class="bottom-data">
            <div class="orders">

```

```

<!-- Tab panes -->
<div class="tab-content">
  <div class="tab-pane active" id="home" role="tabpanel" aria-labelledby="home-tab" tabindex="0">
    <br>
    <!-- Take attendance -->
    <div class="attendanceTable" style="display: block;">
      <div class="header">
        <i class='bx bx-receipt'></i>

        <h3>Profile Settings</h3>
        <div class="student-btns">

          <div class="dropdown dropdown-center">
            <a class="notif" data-bs-toggle="dropdown" aria-expanded="false" id="dropDownListForSubmit">
              <i class='bx bx-filter'></i>
            </a>

            <ul class="dropdown-menu">
              <li><a class="dropdown-item submit-attendance" id="remove_pic" onclick="removeProfilePic()">Remove Profile Picture</a></li>
              <li><a class="dropdown-item reset-attendance" id="_change_password" >Change Password</a></li>
                <li><a class="dropdown-item reset-attendance" id="_change_profile" >Edit Profile</a></li>
            </ul>
          </div>
        </div>
      </div>
      <hr>
      <!-- general profile settinds -->

      <div class="container p-0">
        <div class="row">
          <div class="col-md-5 col-xl-4">

            <div class="card">
              <div class="card-header" id="settings-card-header">
                <h5 class="card-title mb-0">Profile Image</h5>
              </div>

```

```

<div class="text-center mt-3 mb-3">

    <div id="profileImageBox">
        
    </div>
    <div class="mt-1 btn-container">
        <div class="btn btn-primary upload-btn" style="cursor: default;">
            <label for="upload-file">
                <i class='bx bx-cloud-upload' style="cursor: pointer;"></i>
            </label>
            <input type="file" id="upload-file" style="display: none; width: 50px; height:
50px; cursor: pointer;" accept=".png, .jpeg, .jpg">
        </div>
    </div>
    <small class="mb-3">For best results, use an image at
least 128px by 128px in .jpg
format</small>
    <br>
</div>
<div class="list-group list-group-flush" role="tablist">

    </div>
</div>

    <div class="setting-function-btns mt-8 mb-5">
        <button class="btn btn-primary mb-3" id="passwordDialogBtn" ><i
class='bx bxs-key'></i>&nbsp;<div>Change Password</div>
        </button>

        <button class="btn btn-primary mb-3" id="showEditDialogBtn" > <i
id="showEditDialogBtn" alt='<i>&nbsp;Edit Profile</i>'>
        </div>
    </div>

    <div class="col-md-7 col-xl-8 ">

        <div class="card" id="profile-data">
            <div class="card-header" id="settings-card-header">
<h5 class="card-title mb-0">Profile info</h5>
            </div>
            <div class="card-body">

```

```

<form>
  <div class="row">
    <div class="col-md-10">

      <div class="user-info ">
        <h4 class=" _flex-container"><i class='bx bxs-cuboid'></i>&nbsp;&nbsp;UID </h4>
        <h3>-</h3>
        <p id="teacher_id">_ _ _ _</p>
      </div>

      <div class="user-info ">
        <h4 class=" _flex-container"><i class='bx bxs-user-rectangle'></i>
&nbsp;&nbsp;Name</h4>
        <h3>-</h3>
        <p id="userName">_ _ _ _</p>
      </div>
      <div class="user-info">
        <h4 class=" _flex-container"><i class='bx bxs-calendar'></i>&nbsp;&nbsp;BirthDay
      </h4>
        <h3>-</h3>
        <p id="userDOB">_ _ _ _</p>
      </div>

      <div class="user-info">
        <h4 class=" _flex-container"><i class='bx bx-envelope'></i>&nbsp;&nbsp;Email
      </h4>
        <h3>-</h3>
        <p id="userEmail">_ _ _ _</p>
      </div>

      <div class="user-info">
        <h4 class=" _flex-container"><i class='bx bx-phone-call'>
      </h4>&nbsp;&nbsp;Phone</h4>
        <h3>-</h3>
        <p id="userPhone">_ _ _ _</p>
      </div>

      <div class="user-info">
        <h4 class=" _flex-container"><i class='bx bx-male-female'>
      </h4>&nbsp;&nbsp;Gender </h4>
        <h3>-</h3>
        <p id="userGender">_ _ _ _</p>
      </div>
    </div>
  </div>
</form>

```

```

        </div>

        <div class="user-info">
            <h4 class="_flex-container"><i class='bx bxs-home-alt-2'>
></i>&nbsp;&nbsp;Address</h4>
            <h3></h3>
            <p id="userAddress">_ _ _ _</p>
        </div>
        </div>
        <!-- <div class="col-md-4">

            </div> -->
        </div>
        <br>
        </form>
    </div>
</div>

        </div>
        </div>

    </div>

    <!-- end of general profile settinds -->
    <hr>
</div>

        <!-- end of Take attendance -->
</div>

        </div>

    </div>

```

```
</div>

</main>

</div>

<script src="../assets/js/settings.js"></script>

<?php include('partials/_footer.php'); ?>
```

Teacher panel (leave.php):

Code :

```
<?php include('partials/_header.php') ?>
```

The screenshot shows a web application interface. At the top left is a logo with the letters 'ERP'. To its right is a search bar with a magnifying glass icon. On the far right are a toggle switch and a user profile icon. The main content area has a title 'Leaves' at the top. On the left, there's a sidebar with icons and labels: Dashboard, Student, Attendance, Notice Board, Time Table, Syllabus, Notes, Marks, Leaves (which is highlighted with a green rounded rectangle), Settings, and Logout. The main content area contains a form titled 'New Leave' with fields for 'Leave Type' (a dropdown menu showing '--select--'), 'Leave Description' (a text area), 'Start Date' (a date input field), and 'End Date' (another date input field). A blue 'SUBMIT' button is at the bottom right of the form. To the right of the form is a section titled 'Leaves' with a yellow icon containing a document symbol and the text 'No Leaves'.

```
<!-- Sidebar -->
```

```
<?php include('partials/_sidebar.php') ?>
```

```
<input type="hidden" value="9" id="checkFileName">
```

```
<!-- End of Sidebar -->
```

```
<!-- Main Content -->
```

```
<div class="content">
```

```
    <!-- Navbar -->
```

```
    <?php include("partials/_navbar.php"); ?>
```

```
    <!-- End of Navbar -->
```

```

<main>
  <div class="header">
    <div class="left">
      <h1>Leaves</h1>
      <ul class="breadcrumb">
        <li><a href="#">
          </a></li>
        </ul>
    </div>
  </div>

  <div class="container">
    <div class="row g-4">
      <div class="col-lg-5 col-md-6 col-sm-12 mb-30">
        <div class="card" style="border-radius: 10px;">
          <div class="card-body">
            <h5 class="card-title mb-4">
              <?php if (isset($_GET['id'])) {
echo "Edit Leave";
} else {
echo "New Leave";
} ?>
            </h5>
            <?php if (!isset($_GET['id'])) { ?>
              <div>
                <form class="needs-validation" id="leave-form" action="#" method="post">
                  <div class="px-3">
                    <div class="mb-3">

```

```

        <label for="leave-type" class="form-label">Leave Type</label>
<select class="form-select" style="width: 100%;" name="leave-type" id="leave-type"
required>
    <option selected disabled value="">--select--</option>
    <option>Casual Leave</option>
    <option>Medical Leave</option>
    <option>Maternity Leave</option>
    <option>Marriage Leave</option>
    <option>Paternity Leave</option>
    <option>Other Leave</option>
</select>
<div class="invalid-feedback">
required!
</div>
</div>
<div class="mb-3">
    <label for="leave-desc" class="form-label">Leave Description </label>
    <textarea class="form-control" name="leave-desc" id="leave-desc"
rows="3" required></textarea>
    <div class="invalid-feedback">
required!
</div>
</div>

<div class="mb-3">
    <label for="start-date" class="form-label">Start Date</label>
    <input type="date" class="form-control" name="start-date" id="start-date"
placeholder="dd/mm/yyyy" required>
    <div class="invalid-feedback start-date-invalid-feedback">
required!
</div>
</div>
<div class="mb-3">
    <label for="end-date" class="form-label">End Date</label>
    <input type="date" class="form-control" name="end-date" id="end-date"
placeholder="dd/mm/yyyy" required>
    <div class="invalid-feedback">
required!

```

```

        </div>
    </div>

    <div class="d-flex w-100 mt-4">
        <button type="submit" id="submit-leave-btn" class="btn btn-primary ms-auto submit-leave-btn">
            SUBMIT
        </button>
    </div>

</div>
</form>
</div>
<?php } else {
    error_reporting(1);
    $id = $_GET['id'];
    $fetchDataQuery = "SELECT * FROM `leaves` WHERE `leaves`.`s_no` = ? AND
`leaves`.`sender_id` = ? AND `leaves`.`status` = ?;";
    $pending = "pending";
    $stmt1 = mysqli_prepare($conn, $fetchDataQuery);
    mysqli_stmt_bind_param($stmt1, "iss", $id, $uid, $pending);
    mysqli_stmt_execute($stmt1);
    $result1 = mysqli_stmt_get_result($stmt1);

    if(!mysqli_num_rows($result1) > 0){
echo "<script>window.location = 'leaves.php';</script>";
die();
    }

    $dataRow = mysqli_fetch_assoc($result1);
mysqli_stmt_close($stmt1);

?>
<div>
    <form class="needs-validation" id="leave-form" action="#" method="post">
        <div class="px-3">

```

```

<div class="mb-3">
    <label for="leave-type" class="form-label">Leave Type</label>
<select class="form-select" style="width: 100%;" name="leave-type" id="leave-type" required>
    <option selected disabled value="">--select--</option>
    <option <?php selectdCheck($dataRow['leave_type'],'Casual Leave'); ?>>Casual Leave</option>
    <option <?php selectdCheck($dataRow['leave_type'],'Medical Leave'); ?>>Medical Leave</option>
    <option <?php selectdCheck($dataRow['leave_type'],'Maternity Leave'); ?>>Maternity Leave</option>
    <option <?php selectdCheck($dataRow['leave_type'],'Marriage Leave'); ?>>Marriage Leave</option>
    <option <?php selectdCheck($dataRow['leave_type'],'Paternity Leave'); ?>>Paternity Leave</option>
    <option <?php selectdCheck($dataRow['leave_type'],'Other Leave'); ?>>Other Leave</option>
</select>
<div class="invalid-feedback">
required!
</div>
</div>
<div class="mb-3">
    <label for="leave-desc" class="form-label">Leave Description </label>
    <textarea class="form-control" name="leave-desc" id="leave-desc" rows="3" required><?php echo $dataRow['leave_desc']; ?></textarea>
    <div class="invalid-feedback">
required!
</div>
</div>

<div class="mb-3">
    <label for="start-date" class="form-label">Start Date</label>
    <input type="date" class="form-control" name="start-date" id="start-date" placeholder="dd/mm/yyyy"
value="<?php echo date('Y-m-d',strtotime($dataRow["start_date"])); ?>" required>

```

```


required!


```

</div>

</div>

<div class="mb-3">

<label for="end-date" class="form-label">End Date</label>

<input type="date" class="form-control" name="end-date" id="end-date" placeholder="dd/mm/yyyy" value="<?php echo date('Y-m-d', strtotime(\$dataRow['end_date'])) ?>" required>

required>

<div class="invalid-feedback">

required!

</div>

</div>

<div class="d-flex w-100 mt-4">

<input type="hidden" name="s_no" value="<?php echo \$dataRow['s_no']; ?>">

?>">

<button type="submit" class="btn btn-primary ms-auto submit-leavebtn">

UPDATE

</button>

</div>

</div>

</div>

<?php } ?>

</div>

</div>

</div>

<div class="col-lg-7 col-md-6 col-sm-12 mb-30">

<div class="card display-leave-card" style="border-radius: 10px;">

<div class="card-body">

<h5 class="card-title mb-4 d-flex align-items-center"><i class='bx bxs-hourglassstop'></i> Leaves</h5>

```
<div class="px-3" id="available-leaves">

    <div class="accordion accordion-flush" id="leave-accordion">

        </div>

        <div class="d-grid gap-2 d-md-flex justify-content-md-end leave-pagination">
            <div class="btn-group" role="group" aria-label="Basic example">
                <button type="button" class="btn btn-secondary" id="prev-pagebtn">prev</button>
                <a class="btn btn-secondary disabled" role="button" aria-disabled="true" id="page-number">1</a>
                <button type="button" class="btn btn-secondary" id="next-pagebtn">next</button>
            </div>
            </div>
        </div>
        <div class="dataNotAvailable" id="No-leaves">

            <div class="_flex-container box-hide">

                <div class="no-data-box">
                    <div class="no-dataicon">
                        <i class='bx bxs-file'></i>
                    </div>
                    <p>No Leaves</p>
                </div>
            </div>

            </div>
        </div>
    </div>
</div>
```

```

<br><br>
</main>

</div>

<div class="modal fade" id="delete-confirmation-modal" tabindex="-1"
aria-labelledby="exampleModalLabel" aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        </div>
      <div class="modal-body">
        <strong>Do you really want to delete this Leave?</strong>
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
        <button type="button" class="btn btn-danger" onclick="deleteLeave()">Delete</button>
      </div>
    </div>
  </div>
</div>

<script src="../assets/js/teacher-leave.js"></script>
<?php include('partials/_footer.php'); ?>

<?php
// helper function function
selectdCheck($value1,$value2)
{
  if ($value1 == $value2)
  {

```

```

echo 'selected="selected"';
} else
{

```

The screenshot shows the Student Panel interface with the following sections:

- Attendance:** A pie chart titled "Student Attendance All time" showing two categories: "Absent" (red) and "present" (blue).
- Syllabus:** A section stating "Syllabus not uploaded yet!"
- Monthly Attendance:** A search bar labeled "Search for Date..." and two tabs: "Date" and "Attendance".
- Notice:** A list of notices:
 - Ghs Vdb (with a download icon)
 - Holiday notice: enjoy your holidays (with a download icon)
 - Title 2 body 2 (with a download icon)
- Feedbacks:** A section stating "No Feedbacks" (with a feedback icon).

```

echo ";
}
return;
}
?>

```

Student Pannel (Verifyrole.php) :

```

Code : <?php
    error_reporting(0);
    include('../assets/config.php');
    if(isset($_SESSION['uid'])){
        $userId = $_SESSION['uid'];
        $sql = 'SELECT `role` FROM `users` WHERE `users`.`id`=? ;';

        $stmt = mysqli_prepare($conn, $sql);
        mysqli_stmt_bind_param($stmt, "s", $userId);
        mysqli_stmt_execute($stmt);
        $result = mysqli_stmt_get_result($stmt);

        $row = mysqli_fetch_assoc($result);
        if($row['role'] == 'student'){
            }else{
                include('../assets/logout.php');
                header("Location: ../login.php");
                exit();
            }
        }
    ?>

```

Timetable.php :

The screenshot shows a web-based ERP system interface. At the top, there is a navigation bar with the following items:

- ERP** (with a logo)
- Home**
- Time Table** (highlighted with a blue border)
- Examination**
- Workspace**
- Change Password**

Below the navigation bar, the main content area displays a table for the **Monday** schedule. The table has three columns: **Start Time**, **End Time**, and **Subject**. The data rows are as follows:

Start Time	End Time	Subject
08:00 AM	09:00 AM	ENGLISH
09:15 AM	10:00 AM	HINDI
10:05 AM	11:00 AM	PHYSICS
LUNCH		
11:15 AM	12:00 PM	BIOLOGY
12:05 PM	01:00 PM	CHEMISTRY

Code :

```

<?php include('../assets/config.php');
$response = array(); session_start();

if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $id = $_SESSION['uid'];
    $sql = "SELECT `class`, `section` FROM `students` WHERE `id`='$id'";
    
```

```

$result = mysqli_query($conn, $sql);
$row = $result->fetch_assoc();

$class = $row['class'];
$section = $row['section'];

$query = "SELECT * FROM `time_table` WHERE `class` = '$class' AND `section` = '$section'";
$result2 = mysqli_query($conn, $query);

$daysOfWeek = array('mon', 'tue', 'wed', 'thu', 'fri', 'sat');
$response['status'] = "success";
$timetable = array();

while ($row2 = $result2->fetch_assoc()) {
foreach ($daysOfWeek as $day) {
    $timetable[$day][] = array(
        "start_time" => $row2['start_time'],
        "subject" => $row2[$day],
        "end_time" => $row2['end_time']

    );
}
}

$response['data'] = $timetable;
} else {
    $response['status'] = "error";
}

echo json_encode($response);
?>

```

Examination.php :

Code :

```
<?php include("../assets/noSessionRedirect.php"); ?>
```

The screenshot shows a web-based student management system. At the top, there's a header with a logo, 'ERP', and navigation links for 'Home', 'Time Table', 'Examination' (which is highlighted in blue), 'Workspace', 'Change Password', and 'Logout'. Below the header, there are two main sections: 'Exam Result' and 'Progress Report'. A search bar is located above a table. The table displays student marks for two entries:

Date	Subject	Title	Obtain Marks	Total Marks	Grade
31-03-2025	ALL	Final	405	600	Fail
31-03-2025	ALL	Internal 2024-25	382	600	Fail

```
<?php include("./verifyRoleRedirect.php");
$id = $_SESSION['uid'];
// error_reporting(1);
?>
```

```
<!DOCTYPE html>
<html lang="en">
```

```
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Student Dashboard</title>
```

```
<link href="https://fonts.googleapis.com/icon?family=Material+Icons+Sharp" rel="stylesheet">
<link rel="shortcut icon" href="../images/1.png">
<link rel="stylesheet" href="style.css">
<script src="https://code.jquery.com/jquery-3.7.1.js" integrity="sha256-eKhysi8LEQwp4NKxN+CfCh+3qOVUtJn3QNzOTciWLP4=" crossorigin="anonymous"></script>
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.4.1/jquery.min.js">
</script>
```

```
<style>  body {
overflow: hidden;
}
```

```

header {
    position: relative;
}

.cursor-pointer{
cursor: pointer;
}

.exam {      display: flex;
align-items: center;      /*
justify-content: center; */
flex-direction: column;
height: 80vh;      width: 80%;
margin: auto;
}

#gfg {
    background-image: url('search.svg');
/* Add a search icon to input */
background-position: 5px 2px;      /*
Position the search icon */
background-repeat: no-repeat;      /* Do
not repeat the icon image */      width:
90%;      /* Full-width */      font-size:
16px;      /* Increase font-size */
padding: 12px 20px 12px 40px;      /* Add
some padding */      border: 1px solid
#ddd;
/* Add a grey border */
margin-bottom: 12px; /* Add some
space below the input */ border-
radius: 40px; position: relative;
}

@media only screen and (max-width: 768px) {

```

```
#gfg      {
width:    100%;
margin: 0%;

}

.subjective-result-btn{
padding: 5px 15px;
background-color: #c9eff6;
cursor: pointer;
}

.dark-theme .subjective-result-btn{
color: black;
}

.exam {
height: fit-content;
}

.vertical-elements {
display: flex;    flex-
direction: column;
}

table {
margin-bottom: 3rem;
}

.hide {    display: none
!important;
}

body{
-ms-overflow-style: none; /* Internet Explorer 10+ */
scrollbar-width: none;
/* Firefox */
}
```

```

body::-webkit-scrollbar {
display: none;
/* Safari and Chrome */
}
</style>
</head>

<body style="overflow-y: scroll;">
<header>
<div class="logo">

<h2>E<span class="danger">R</span>P</h2>
</div>
<div class="navbar">
<a href="index.php">
<span class="material-icons-sharp">home</span>
<h3>Home</h3>
</a>
<a href="timetable.php" onclick="timeTableAll()">
<span class="material-icons-sharp">today</span>
<h3>Time Table</h3>
</a>
<a href="exam.php" class="active">
<span class="material-icons-sharp">grid_view</span>
<h3>Examination</h3>
</a>
<a href="workspace.php">
<span class="material-icons-sharp">description</span>
<h3>Workspace</h3>
</a>
<a href="password.php">
<span class="material-icons-sharp">password</span>
<h3>Change Password</h3>
</a>
<a href="logout.php">
<span class="material-icons-sharp">logout</span>
<h3>Logout</h3>

```

```

        </a>
    </div>
    <div id="profile-btn" style="display: none;">
        <span class="material-icons-sharp">person</span>
    </div>
    <div class="theme-toggler">
        <span class="material-icons-sharp active">light_mode</span>
    <span class="material-icons-sharp">dark_mode</span>
    </div>
</header>

<main>
    <div class="exam timetable">
        <h2>Exam Result </h2>
        <h2><?php echo "<a href='progress.php'>Progress Report</a>"; ?></h2>

        <table class="allResultTable" id="allResultList">
            <thead>
                <tr>
                    <th>Date</th>
                    <th>Subject</th>
                    <th>Title</th>
                    <th>Obtain Marks</th>
                    <th>Total Marks</th>
                    <th>Grade</th>
                </tr>
            </thead>
            <input id="gfg" class="marks-table-search-box" type="text" placeholder="Search for Title
,Date ,Subjects or Grade">
            <tbody id="geeks">
                <?php

                    $query2 = "SELECT DISTINCT(`exam_id`) FROM `marks` WHERE `student_id` = ?
ORDER BY `s_no` DESC LIMIT 50";
                    $stmt2 = $conn->prepare($query2);
                    $stmt2->bind_param("s", $id);
                    $stmt2->execute();
                    $result2 = $stmt2->get_result();

```

```

if ($result2->num_rows > 0) {
    while ($row2 = $result2->fetch_assoc()) {
$examId = $row2['exam_id'];

$query3 = "SELECT * FROM `exams` WHERE `exam_id` = ?";
$stmt3 = $conn->prepare($query3);
$stmt3->bind_param("s", $examId);
$stmt3->execute();
$result3 = $stmt3->get_result();
$row3 = $result3->fetch_assoc();

$dateDB = $row3['timestamp'];
$formattedDate = date("d-m-Y", strtotime($dateDB));

$status = "";

if ($row3['subject'] == "ALL") {
    $sql = "SELECT * FROM `marks` WHERE `exam_id` = ? AND `student_id` = ?";
$stmt4 = $conn->prepare($sql);
$stmt4->bind_param("ss", $row3['exam_id'], $id);
$stmt4->execute();
$marksResult = $stmt4->get_result();

$totalGainMarks = 0;
$subjectCount = 0;
$isFail = false;
while ($tempRow = $marksResult->fetch_assoc()) {
    $totalGainMarks += (int)$tempRow['marks'];
$subjectCount++;

if ((int)$tempRow['marks'] < (int)$row3['passing_marks']) {
    $isFail = true;
}
}

$status = $isFail ? "<td style='color:red;text-align:center;'>Fail</td>" : "<td
style='color:green;text-align:center;'>Pass</td>";

```

```

echo " <td>$formattedDate</td>
      <td><a class='no-submit subjective-result-btn cursor-pointer' id='hit'
onClick='handleShowAllSubjectMarks(`" . $row3['exam_id'] . ``')>" . $row3['subject'] . "</a></td>
      <td>" . $row3['exam_title'] . "</td>
      <td style='text-align:center;'>$totalGainMarks</td>
      <td style='text-align:center;'>" . ($subjectCount * $row3['total_marks']) . "</td>
      $status
    </tr>";
} else {
  $sql = "SELECT * FROM `marks` WHERE `exam_id` = ? AND `student_id` = ? AND
`subject`=? LIMIT 1";
  $stmt4 = $conn->prepare($sql);
  $stmt4->bind_param("sss", $row3['exam_id'], $id, $row3['subject']);
$stmt4->execute();
$marksResult = $stmt4->get_result();
$marksResultRow = $marksResult->fetch_assoc();
$mark = $marksResultRow['marks'];

$status = ((int)$mark >= (int)$row3['passing_marks']) ? "<td style='color:green;text-
align:center;'>Pass</td>" : "<td style='color:red;textalign:center;'>Fail</td>";
echo
"
      <td>$formattedDate</td>
      <td>" . $row3['subject'] . "</td>
      <td>" . $row3['exam_title'] . "</td>
      <td style='text-align:center;'>$mark</td>
      <td style='text-align:center;'>" . $row3['total_marks'] . "</td>
      $status
    </tr>";
}

$stmt3->close();
if (isset($stmt4)) {
  $stmt4->close();
}
}
}else{
  echo '<td colspan="6" style="text-align:center;padding-top: 3rem;">No Data</td>';

```

```

    }

$stmt2->close();

?>
</tbody>
</table>

<div class="vertical-elements" id="subjectiveResultTable">

</div>

<script>
$(document).ready(function() {
  $("#gfg").on("keyup", function() {
    var value = $(this).val().toLowerCase();
    $("#geeks tr").filter(function() {
      $(this).toggle($(this).text()
        .toLowerCase().indexOf(value) > -1)
    });
  });
});
</script>

</div>
</main>

</body>

<script src="app.js"></script>

</html>

```

Workspace.php :

The screenshot shows a web application interface. At the top, there is a navigation bar with icons for Home, Time Table, Examination, Workspace (which is highlighted in blue), Change Password, and Logout. Below the navigation bar is a search bar with the placeholder "Search for Subject". A magnifying glass icon is positioned next to the search bar. The main content area displays a table with a single row of data. The table has four columns: "Subject" (English), "Title" (Indian Civilization and Culture), "Downloads" (a blue "Download" button), and "Date" (31-03-2025). The table header is black, and the data row is white.

Subject	Title	Downloads	Date
English	Indian Civilization and Culture	Download	31-03-2025

Code :

```
<?php include("../assets/noSessionRedirect.php"); ?>

<?php include("./verifyRoleRedirect.php"); ?>

<?php

    // session_start();
include('../assets/config.php'); error_reporting(0);
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Student Dashboard</title>
    <link href="https://fonts.googleapis.com/icon?family=Material+Icons+Sharp" rel="stylesheet">
    <link rel="shortcut icon" href="./images/1.png">
    <link rel="stylesheet" href="style.css">

<style>
    body{overflow: hidden;}
    header{position: relative;}
```

```

.exam{      display:
flex;      align-items:
center;      justify-
content: center;
flex-direction: column;
height: 80vh;
width: 80%;      margin:
auto;
}
.btn {
background-color: DodgerBlue;
border: none; color: white;
padding: 10px 20px; cursor:
pointer; font-size: 10px;
border-radius: 3px; text-
decoration: none;
}

body {
-ms-overflow-style: none; /* Internet Explorer 10+ */ scrollbar-
width: none; /* Firefox */
}
body::-webkit-scrollbar {
display: none; /* Safari and Chrome */
}

/* Darker background on mouse-over */
.btn:hover {
background-color: RoyalBlue;
}

.btn a{ color:
white; font-
size: 20px;
}
#myInput { background-image: url('search.svg'); /* Add a search icon
to input */ background-position: 5px 2px; /* Position the search icon
*/ background-repeat: no-repeat; /* Do not repeat the icon image */
width: 80%; /* Full-width */ font-size: 16px; /* Increase font-size */
padding: 12px 20px 12px 40px; /* Add some padding */ border: 1px

```

```

solid #ddd; /* Add a grey border */ margin-bottom: 12px; /* Add
some space below the input */ margin-top: 30px;
margin-left: 150px;
}

#myTable { border-collapse: collapse; /*
Collapse borders */ width: 80%; /* Full-width */
border: 1px solid #ddd; /* Add a grey border */
font-size: 18px; /* Increase font-size */ border:
#bdc3c7 1px solid; margin-left: 150px;
}

#myTable th, #myTable td {
text-align: left; /* Left-align text */
padding: 10px; /* Add padding */
}

#myTable tr {
/* Add a bottom border to all table rows */ border-
bottom: 1px solid #ddd;
}
#myTable th, #myTable td.theme-toggler {
text-align: left; /* Left-align text */
padding: 10px; /* Add padding */
background-color: black; color: white;
}

#myTable tr.theme-toggler { /* Add a
bottom border to all table rows */ border-
bottom: 1px solid #ddd; background-
color: #363949;
}

#myTable tr:hover{ background-
color: #779ca6;
}
@media only screen and (max-width: 768px){
#myTable {
width: 100%;
margin: 0%; font-
size: 12px; flex:
auto; position:
absolute;
}

```

```

#myInput{
    width: 100%;
    margin: 0%;
}
}

</style>
</head>
<body style="overflow-y: scroll;">
    <header>
        <div class="logo">
            
            <h2>E<span class="danger">R</span>P</h2>
        </div>
        <div class="navbar">
            <a href="index.php">
                <span class="material-icons-sharp">home</span>
                <h3>Home</h3>
            </a>
            <a href="timetable.php" onclick="timeTableAll()">
                <span class="material-icons-sharp">today</span>
                <h3>Time Table</h3>
            </a>
            <a href="exam.php">
                <span class="material-icons-sharp">grid_view</span>
                <h3>Examination</h3>
            </a>
            <a href="workspace.php" class="active">
                <span class="material-icons-sharp">description</span>
                <h3>Workspace</h3>
            </a>
            <a href="password.php">
                <span class="material-icons-sharp">password</span>
                <h3>Change Password</h3>
            </a>
            <a href="logout.php">
                <span class="material-icons-sharp">logout</span>
                <h3>Logout</h3>
            </a>
        </div>
        <div id="profile-btn" style="display: none;">
            <span class="material-icons-sharp">person</span>
        </div>
        <div class="theme-toggler">

```

```

<span class="material-icons-sharp active">light_mode</span>
<span class="material-icons-sharp">dark_mode</span>
</div>
</header>
<input type="text" id="myInput" onkeyup="myFunction()" placeholder="Search for Subject.">

<div class="scrollableBox" >
<table id="myTable" >
<tr class="header">
<th>Subject</th>
<th>Title</th>
<th>Downloads</th>
<th>Date</th>
</tr>
<tr>
<?php
$uid = $_SESSION['uid'];

$sql = "SELECT * FROM students WHERE id='$id'";
$result2=mysqli_query($conn,$sql);
$row=$result2->fetch_assoc();
$class = $row['class'];

$query="select * from notes where class='".$class."' order by s_no desc";
$result=mysqli_query($conn,$query);      if($result-
>num_rows>0){
while($rows=$result->fetch_assoc()) {

$dateDB = $rows['timestamp'];
$formattedDate = date("d-m-Y", strtotime($dateDB));


echo "<td>".$rows['subject']."</td>
<td>".$rows['title']."'</td>
<td><button class='btn'><a href='..//notesUploads/".$rows['file']."'"
download=".$rows['file']."'>Download</a></button></td>
<td>".$formattedDate."</td>
</tr>";
}
}

?>

</table>
</div>

```

```
<br><br><br>
<!-- <script src="timeTable.js"></script> -->
```

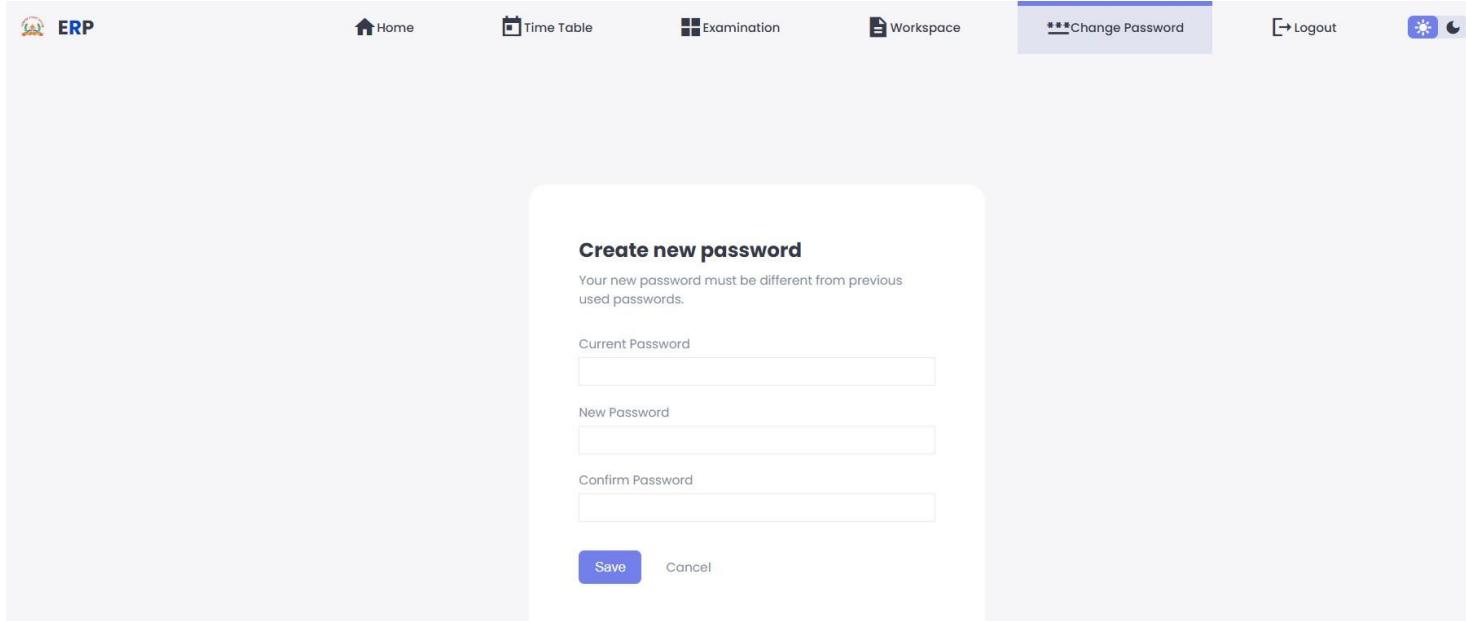

```
<script src="app.js"></script>
</body>
</html>
```

ChangePassword.php :

Code :

```
<?php include("../assets/noSessionRedirect.php"); ?>
<?php include("./verifyRoleRedirect.php"); ?>
<?php

    $id = $_SESSION['uid'];

?>
<!DOCTYPE html>
<html lang="en">
```

```
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Student Dashboard</title>
  <link href="https://fonts.googleapis.com/icon?family=Material+Icons+Sharp"
rel="stylesheet">
  <link rel="shortcut icon" href="./images/1.png">
  <link rel="stylesheet" href="style.css">

<style>
  header{position: relative;}      .change-password-
  container{
    display: flex;
    align-items: center;
    justify-content: center;      width:
  100%;
    height: 90vh;
  }
  .change-password-container form{
    display: flex;      flex-
    direction: column;      justify-
    content: center;
    border-radius: var(--border-radius-2);
    padding : 3.5rem;
    background-color: var(--color-white);
    box-shadow: var(--box-shadow);
    width: 95%;
    max-width: 32rem;
  }
  .change-password-container form:hover{box-shadow: none;}
  .change-password-container form input[type=password]{
    border: none;      outline: none;
```

```
    border: 1px solid var(--color-light);
background: transparent;
height: 2rem;
width: 100%;
padding: 0 .5rem;
}
.change-password-container form .box{ padding:
.5rem 0;
}
.change-password-container form .box p{ line-
height: 2;
}
.change-password-container form h2+p{margin: .4rem 0 1.2rem 0;}
.btn{
background: none;
border: none;
border: 2px solid var(--color-primary) !important;
border-radius: var(--border-radius-1); padding:
.5rem 1rem; color: var(--color-white);
background-color: var(--color-primary);
cursor: pointer;
margin: 1rem 1.5rem 1rem 0;
margin-top: 1.5rem;
}
.btn:hover{
color: var(--color-primary);
background-color: transparent;
}
</style>

</head>
<body>
<header>
```

```
<div class="logo">
  
  <h2>E<span class="danger">R</span>P</h2>
</div>
<div class="navbar">
  <a href="index.php">
    <span class="material-icons-sharp">home</span>
    <h3>Home</h3>
  </a>
  <a href="timetable.php" onclick="timeTableAll()">
    <span class="material-icons-sharp">today</span>
    <h3>Time Table</h3>
  </a>
  <a href="exam.php">
    <span class="material-icons-sharp">grid_view</span>
    <h3>Examination</h3>
  </a>
  <a href="workspace.php">
    <span class="material-icons-sharp">description</span>
    <h3>Workspace</h3>
  </a>
  <a href="password.php" class="active">
    <span class="material-icons-sharp">password</span>
    <h3>Change Password</h3>
  </a>
  <a href="logout.php">
    <span class="material-icons-sharp">logout</span>
    <h3>Logout</h3>
  </a>
</div>
<div id="profile-btn" style="display: none;">
  <span class="material-icons-sharp">person</span>
</div>
```

```
<div class="theme-toggler">
  <span class="material-icons-sharp active">light_mode</span>
  <span class="material-icons-sharp">dark_mode</span>
</div>
</header>

<div class="change-password-container">
  <form action="#" method="post">
    <h2>Create new password</h2>
    <p class="text-muted">Your new password must be different from previous used passwords.</p>
    <div class="box">
      <p class="text-muted">Current Password</p>
      <input type="password" id="currentpass" name="current">
    </div>
    <div class="box">
      <p class="text-muted">New Password</p>
      <input type="password" id="newpass" name="new">
    </div>
    <div class="box">
      <p class="text-muted">Confirm Password</p>
      <input type="password" id="confirmmpass" name="repeat">
    </div>
    <div class="button">
      <input type="submit" value="Save" class="btn" name="submit">
    <a href="index.php" class="text-muted">Cancel</a>
    </div>
    <!--<a href="#"><p>Forget password?</p></a>-->
  </form>
<?php
```

```

$password=$_POST['current'];
$newpassword=$_POST['new'];
$confirmnewpassword=$_POST['repeat'];
$result = mysqli_query($conn,"SELECT password_hash FROM users WHERE id='".$id"");
if($result->num_rows > 0){
    $row = $result->fetch_assoc();

    $pass = $row['password_hash'];
    if(isset($_POST['submit'])){
        if(password_verify($password, $pass)){
            if($newpassword == $confirmnewpassword){
                $newpasswordhash=password_hash($newpassword,
PASSWORD_DEFAULT);
                if(mysqli_query($conn,"UPDATE users SET
password_hash='$newpasswordhash' where id='".$id"")){
                    echo "<script>alert('Password Updated')</script>";
                }else{
                    echo "<script>alert('unable to update')</script>";
                }
            }else{
                echo "<script>alert('new password and confirm passsword are not
same')</script>";
            }
        }
    }
} else{
    echo "<script>alert('wrong current password...');</script>";
}
}

// if(!$result)
// {
// echo "<script>alert('The username you entered does not exist')</script>";

```

```
// }
// else if($password!= $result->num_row)
// {
```



```
// echo "<script>alert('You entered an incorrect password')</script>";
// }
```

```
?>
</div>
</body>
<script src="app.js"></script>

</html>
```

OwnerPanel (Interface) :

Code :

```
<?php include("../assets/noSessionRedirect.php");
include('./fetch-data/verfyRoleRedirect.php');
```

```

error_reporting(0);
?>
<?php
    session_start();
    $uid=$_SESSION['id'];
?>
<!DOCTYPE html>
<html> <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <link rel="icon" type="image/x-icon" href="../images/1.png">
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet"
integrity="sha384-T3c6CoLi6uLrA9TneNEoa7RxnatzcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2H
N" crossorigin="anonymous">
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js" integrity="sha384-C6RzsynM9kWDrMNeT87bh95OGNyZPhcTNXj1NW7RuBCsyN/o0jlpcV8Qyq46cDfL"
crossorigin="anonymous"></script>
    <link rel="stylesheet" type="text/css" href="style.css">
    <!-- <link rel="stylesheet" type="text/css" href="css/style.css" -->
    <title>ERP - owner</title>
</head>
<body>
    <div class="header">
        <nav class="navbar navbar-expand-lg navbar-light bg-light">
<div class="container-fluid">
    <a class="navbar-brand" href="index.php">SCHOOL MANAGEMENT</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-
bstarget="#navbarSupportedContent" aria-controls="navbarSupportedContent"
aria-expanded="false" aria-label="Toggle navigation">
        <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarSupportedContent">
        <ul class="navbar-nav me-auto mb-2 mb-lg-0">
            <li class="nav-item">
                <a class="nav-link active" aria-current="page" href="index.php">Home</a>

```

```

</li>
<li class="nav-item">
  <a class="nav-link" href="notices.php">Notice</a>
</li>
<li class="nav-item dropdown">
  <a class="nav-link dropdown-toggle" href="#" id="navbarDropdown" role="button" data-bstoggle="dropdown" aria-expanded="false">
    Fee Pay
  </a>
  <ul class="dropdown-menu" aria-labelledby="navbarDropdown">
    <li><a class="dropdown-item" href="make-payment.php">PAYROLL</a></li>
    <li><a class="dropdown-item" href="see-payment.php">See Payment</a></li>
    <li><hr class="dropdown-divider"></li>
    <li><a class="dropdown-item" href="#">Something else here</a></li>
  </ul>
</li>
<li class="nav-item">
  <a class="nav-link" href="change-password.php">Change-Password</a>
</li>
<li class="nav-item">
  <a class="nav-link" href="logout.php">Logout</a>
</li>
</ul>
<form class="d-flex">
  <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
  <button class="btn btn-outline-success" type="submit">Search</button>
</form>
</div>
</div>
</nav>
</div>
<?php
$sql = "SELECT COUNT(*) as total_rows FROM users WHERE role='teacher'";
$result = mysqli_query($conn, $sql);
if(mysqli_num_rows($result) > 0) {
  $row = mysqli_fetch_assoc($result);
?>

```

```

<div class="main">
  <div class="card1">
    <div class="card" style="width: 18rem;">
      
      <div class="card-body">
        <?php
        echo "<h5 class='card-title'>Total Teachers: ".$row['total_rows']. "</h5>";
        <p class='card-text'>Some quick example text to build on the card title and make up the
        bulk of the card's content.</p>
        <a href='teacher-list.php' class='btn btn-primary'>See Teachers List</a>";
      }
      ?>
    </div>
  </div>
</div>
<?php
$sql_1 = "SELECT COUNT(*) as total_row FROM users WHERE role='student'";
$result1 = mysqli_query($conn, $sql_1);
if(mysqli_num_rows($result1) > 0) {
  $rows =
  mysqli_fetch_assoc($result1);
}
<div class="card2">
  <div class="card" style="width: 18rem;">
    
    <div class="card-body">
      <h5 class="card-title">Total Students: <?php echo $rows['total_row'];?></h5>
      <p class="card-text">Some quick example text to build on the card title and make up the
      bulk of the card's content.</p>
      <a href="student-list.php" class="btn btn-primary">See Students List</a>
    </div>
  </div>
</div>
<div class="text-center bg-body-tertiary">
<!-- Grid container -->

<!-- Copyright -->

```

```

<!-- <div class="text-center p-3" style="background-color: rgba(0, 0, 0, 0.05);">
© <?php echo date('Y'); ?> Copyright:
    <a class="text-body" target="_blank"
    href="https://www.github.com/ProjectsAndPrograms">ProjectsAndPrograms</a>
</div> -->
<!-- Copyright -->

</footer>

<script type="text/javascript">      import {
Ripple, initMDB } from "mdb-ui-kit";

    initMDB({ Ripple });

</script>

</body>

</html>

```

See_teachers.php :

Code :

```

<?php include("../assets/noSessionRedirect.php");
include('./fetch-data/verfyRoleRedirect.php');

```

```
error_reporting(0);
```

```
?>
```

```
<!DOCTYPE html>
```

SUNRISE PUBLIC SCHOOL Home Notice Fee Pay ▾ Change-Password Logout

Sr_NO	NAME	Gender	MORE DETAILS
1	teacher kumar	Male	<button>View More</button>
2	Roshan Kumar	Male	<button>View More</button>
3	Shiv Kumar	Male	<button>View More</button>
4	Adarsh Raj	Male	<button>View More</button>

```
<html>
<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="icon" type="image/x-icon" href="../images/1.png">
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet"
integrity="sha384-T3c6Coli6uLrA9TneNEoa7RxnatzcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
crossorigin="anonymous">
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js" integrity="sha384-C6RzsnyM9kWDrMNeT87bh95OGNyZPhcTNXj1NW7RuBCsyN/ooJlpcV8Qyq46cDfL"
crossorigin="anonymous"></script>
<link rel="stylesheet" type="text/css" href="style.css">
<link rel="stylesheet" type="text/css" href="css/style.css">
<script src="https://code.jquery.com/jquery-3.7.1.js"
integrity="sha256eKhayi8LEQwp4NKxN+CfCh+3qOVUtJn3QNzOTciWLP4=" crossorigin="anonymous"></script>
<title>ERP</title>
<style type="text/css">
.card{
    position: absolute;
    margin-top: 5%;
}
.detail{
    height: auto;
    width: 100%;
    display: flex; justify-
    content: center; flex-
    direction: row;
```

```

        }
    .card{
width: 40%;
}
@media (max-width: 700px){
    .card{
        width: 80%;
}
}

```

</style>

</head>

<body>

<div class="header">

 <nav class="navbar navbar-expand-lg navbar-light bg-light">

 <div class="container-fluid">

 SCHOOL MANAGEMENT

 <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">

 </button>

 <div class="collapse navbar-collapse" id="navbarSupportedContent">

 <ul class="navbar-nav me-auto mb-2 mb-lg-0">

 <li class="nav-item">

 Home

 <li class="nav-item">

 Notice

 <li class="nav-item dropdown">

 Fee Pay

 <ul class="dropdown-menu" aria-labelledby="navbarDropdown">

 Make Payment

 See Payment

 <hr class="dropdown-divider">

 Something else here

 <li class="nav-item">

 Change-Password

```

</li>
<li class="nav-item">
    <a class="nav-link" href="logout.php">Logout</a>
</li>
</ul>
<form class="d-flex">
    <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
    <button class="btn btn-outline-success" type="submit">Search</button>
</form>
</div>
</div>
</nav>
</div>
<div class="detail" id="details">
    <?php
    $data = "";
    $sql="SELECT * FROM teachers where id = '{$_GET['id']}'";
    $result=mysqli_query($conn,$sql);
    if(mysqli_num_rows($result)>0){
        while($row=mysqli_fetch_assoc($result)){
            $data .= "<div class='card'>
                <img src='../teacherUploads/".$row['image']."' class='card-img-top' alt='profile image of teacher'/>
                <div class='card-body'>
                    <h5 class='card-title'></h5>
                    <p class='card-text'>Some quick example text to build on the card title and make up the bulk of the card's content.</p>
                </div>
                <ul class='list-group list-group-light list-group-small'>
                    <li class='list-group-item px-4'>Name: ".$row['fname']." ".$row['lname']."'</li>
                    <li class='list-group-item px-4'>Email : ".$row['email']."'</li>
                    <li class='list-group-item px-4'>Phone: ".$row['phone']."'</li>
                    <li class='list-group-item px-4'>D-O-B: ".$row['dob']."'</li>
                    <li class='list-group-item px-4'>Address: ".$row['address']."'</li>
                    <li class='list-group-item px-4'>city: ".$row['city']."'</li>
                    <li class='list-group-item px-4'>state: ".$row['gender']."'</li>
                    <li class='list-group-item px-4'>Father Name: ".$row['father']."'</li>
                </ul>
                <div class='card-body'>
                    <a href='teacher-list.php' class='card-link' style='text-decoration: none; background-color: black; padding: 10px; border-radius: 8px; color: white;'>Back</a>
                    <a href='index.php' class='card-link' style='text-decoration: none; background-color: brown; padding: 10px; border-radius: 8px; color: white; margin-left: 2%;'>Main Page</a>
                </div>
            </div>";
    }
}

```

```

        }
        echo $data;
    }
?>
</div>
<br><br>
</body>
</html>

```

SeeStudent.php :

SUNRISE PUBLIC SCHOOL			
Home Notice Fee Pay ▾ Change-Password Logout			
Select Class			
Sr_NO	NAME	Class & Section	MORE DETAILS
1	Student kumar	12c A	View More
3	Md Talib Anwar	12s B	View More
4	Rahul Jha	12s A	View More

Code :

```

<?php include("../assets/noSessionRedirect.php");
include('../fetch-data/verfyRoleRedirect.php');
error_reporting(0);
?>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="icon" type="image/x-icon" href="../images/1.png">
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-T3c6CoIi6uLrA9TneNEoa7RxnatzcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN" crossorigin="anonymous">
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js" integrity="sha384-C6RzsynM9kWDrMNeT87bh95OGNyZPhcTNXj1NW7RuBCsyN/ooJlpcV8Qyq46cDfL" crossorigin="anonymous"></script>
<link rel="stylesheet" type="text/css" href="style.css">
<link rel="stylesheet" type="text/css" href="css/style.css">
<title>ERP</title>
<style type="text/css">
    .card{

```

```

        position: absolute;
        margin-top: 5%;
    }
    .detail{
        height: auto;
        width: 100%;
        display: flex; justify-
content: center; flex-
direction: row;

    }
    .card{
        width: 40%;
    }
    @media (max-width: 700px){
        .card{
            width: 80%;
        }
    }

```

</style>

</head>

<body>

<div class="header">

 <nav class="navbar navbar-expand-lg navbar-light bg-light">

 <div class="container-fluid">

 SCHOOL MANAGEMENT

 <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">

 </button>

 <div class="collapse navbar-collapse" id="navbarSupportedContent">

 <ul class="navbar-nav me-auto mb-2 mb-lg-0">

 <li class="nav-item">

 Home

 <li class="nav-item">

 Notice

 <li class="nav-item dropdown">

 Fee Pay


```

<ul class="dropdown-menu" aria-labelledby="navbarDropdown">
    <li><a class="dropdown-item" href="make-payment.php">Make Payment</a></li>
    <li><a class="dropdown-item" href="see-payment.php">See Payment</a></li>
    <li><hr class="dropdown-divider"></li>
    <li><a class="dropdown-item" href="#">Something else here</a></li>
</ul>
</li>
<li class="nav-item">
    <a class="nav-link" href="change-password.php">Change-Password</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="logout.php">Logout</a>
</li>
</ul>
<form class="d-flex">
    <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
    <button class="btn btn-outline-success" type="submit">Search</button>
</form>
</div>
</div>
</nav>
</div>
<div class="detail">
    <?php
    $data = "";
    $sql="SELECT * FROM students where id = '$_GET['id']]'";
    $result=mysqli_query($conn,$sql);
    if(mysqli_num_rows($result)>0){
        while($row=mysqli_fetch_assoc($result)){
            $data .= "<div class='card'>
                <img src='../studentUploads/".$row['image']."' class='card-img-top' alt='profile image of teacher'/>
                <div class='card-body'>
                    <h5 class='card-title'></h5>
                    <p class='card-text'>Some quick example text to build on the card title and make up the bulk of the card's content.</p>
                </div>
                <ul class='list-group list-group-light list-group-small'>
                    <li class='list-group-item px-4'>Name: ".$row['fname']."' ".$row['lname']."'</li>
                    <li class='list-group-item px-4'>Email : ".$row['email']."'</li>
                    <li class='list-group-item px-4'>Father Name: ".$row['father']."'</li>
                    <li class='list-group-item px-4'>Gender : ".$row['gender']."'</li>
                    <li class='list-group-item px-4'>Phone: ".$row['phone']."'</li>
                    <li class='list-group-item px-4'>D-O-B: ".$row['dob']."'</li>
                </ul>
            </div>
        }
    }
    </?php"

```

```

<li class='list-group-item px-4'>Address: ".$row['address']."'</li>
<li class='list-group-item px-4'>city: ".$row['city']."'</li>
<li class='list-group-item px-4'>state: ".$row['state']."'</li>
</ul>
<div class='card-body'>
    <a href='student-attendance.php?id=".$row['id']."' class='card-link'><button id='fee' data-id='".$row['id']."' style='height: 35px; width: 100px; background-color: green; color: white; border: none; border-radius: 8px; text-decoration: none;'>Fee Status</button></a>
        <a href='student-attendance.php?id=".$row['id']."' class='card-link'><button id='attendance' dataid='".$row['id']."' style='height: 35px; width: 100px; background-color: #4f4446; color: white; border: none; border-radius: 8px; text-decoration: none;'>Attendance</button></a>
    </div>
</div>;
}
echo $data;
?>
</div>
<br><br>
</body>
</html> Qr.php
:

```

Payment Info

Enter Teacher ID:

[Submit](#)

Received Teacher ID: **T1738461273**



See payment.php :

SCHOOL MANAGEMENT Home Notice Fee Pay ▾ Change-Password Logout

Title:Salary

Teacher's Name : Roshan Kumar

Amount: 6000

Date of Payment: 20/feb/2025

Paid Successfully

Teacher's Name : Aditya Kumar

Amount: 7000

Date of Payment: 20/feb/2025

Paid Successfully

Code :

```
<?php
include("../assets/noSessionRedirect.php");
include('./fetch-data/verfyRoleRedirect.php');

error_reporting(0);
?>

<!DOCTYPE html>
<html> <head>
    <meta charset="utf-8">
```

```

<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="icon" type="image/x-icon" href="../images/1.png">
<link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-T3c6CoIi6uLrA9TneNEoa7RxnatzcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN"
crossorigin="anonymous">
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-C6RzsynM9kWDrMNeT87bh95OGNyZPhcTNXj1NW7RuBCsyN/ooJlpcV8Qyq46cDfL"
crossorigin="anonymous"></script>
<link rel="stylesheet" type="text/css" href="style.css">
<!-- <link rel="stylesheet" type="text/css" href="css/style.css"> -->
<title>ERP</title>
<style type="text/css">
.see-payment{ height: auto;
width: 80%; display: flex;
position: absolute; border:
.2px solid lightgray; flex-
direction: column; margin-
left: 10%; margin-top: 3%;
border-radius: 5px;
padding: 10px;
background-color: ghostwhite;

}
#paid{
height: 50px;
width: 150px;
background-color: lightgreen;
color: black;
border: none;

```

```


border-radius: 5px;
}
</style>
</head>
<body>
<div class="header">
<nav class="navbar navbar-expand-lg navbar-light bg-light">
<div class="container-fluid">
<a class="navbar-brand" href="index.php">SCHOOL MANAGEMENT</a>
<button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">
<span class="navbar-toggler-icon"></span>
</button>
<div class="collapse navbar-collapse" id="navbarSupportedContent">
<ul class="navbar-nav me-auto mb-2 mb-lg-0">
<li class="nav-item">
<a class="nav-link active" aria-current="page" href="index.php">Home</a>
</li>
<li class="nav-item">
<a class="nav-link" href="notices.php">Notice</a>
</li>
<li class="nav-item dropdown">
<a class="nav-link dropdown-toggle" href="#" id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-expanded="false">
Fee Pay
</a>
<ul class="dropdown-menu" aria-labelledby="navbarDropdown">
<li><a class="dropdown-item" href="make-payment.php">PAYROLL</a></li>
<li><a class="dropdown-item" href="see-payment.php">See Payment</a></li>
<li><hr class="dropdown-divider"></li>
<li><a class="dropdown-item" href="#">Something else here</a></li>
</ul>

```

```

</li>
<li class="nav-item">
  <a class="nav-link" href="change-password.php">Change-Password</a>
</li>
<li class="nav-item">
  <a class="nav-link" href="logout.php">Logout</a>
</li>
</ul>
<form class="d-flex">
  <input class="form-control me-2" type="search" placeholder="Search"
arialabel="Search">
  <button class="btn btn-outline-success" type="submit">Search</button>
</form>
</div>
</div>
</nav>
</div>
<div class="see-payment">
  <div class="notice-body">
    <h2>Title:Salary </h2>
    <h5>Teacher's Name : Roshan Kumar</h5>
    <h5>Amount: 6000</h5>
    <p>Date of Payment: 20/feb/2025</p>
    <button id="paid">Paid Successfully</button>
      <h5>Teacher's Name : Aditya Kumar</h5>
      <h5>Amount: 7000</h5>
      <p>Date of Payment: 20/feb/2025</p>
      <button id="paid">Paid Successfully</button>
    </div>
  </div>
</body>
</html>

```

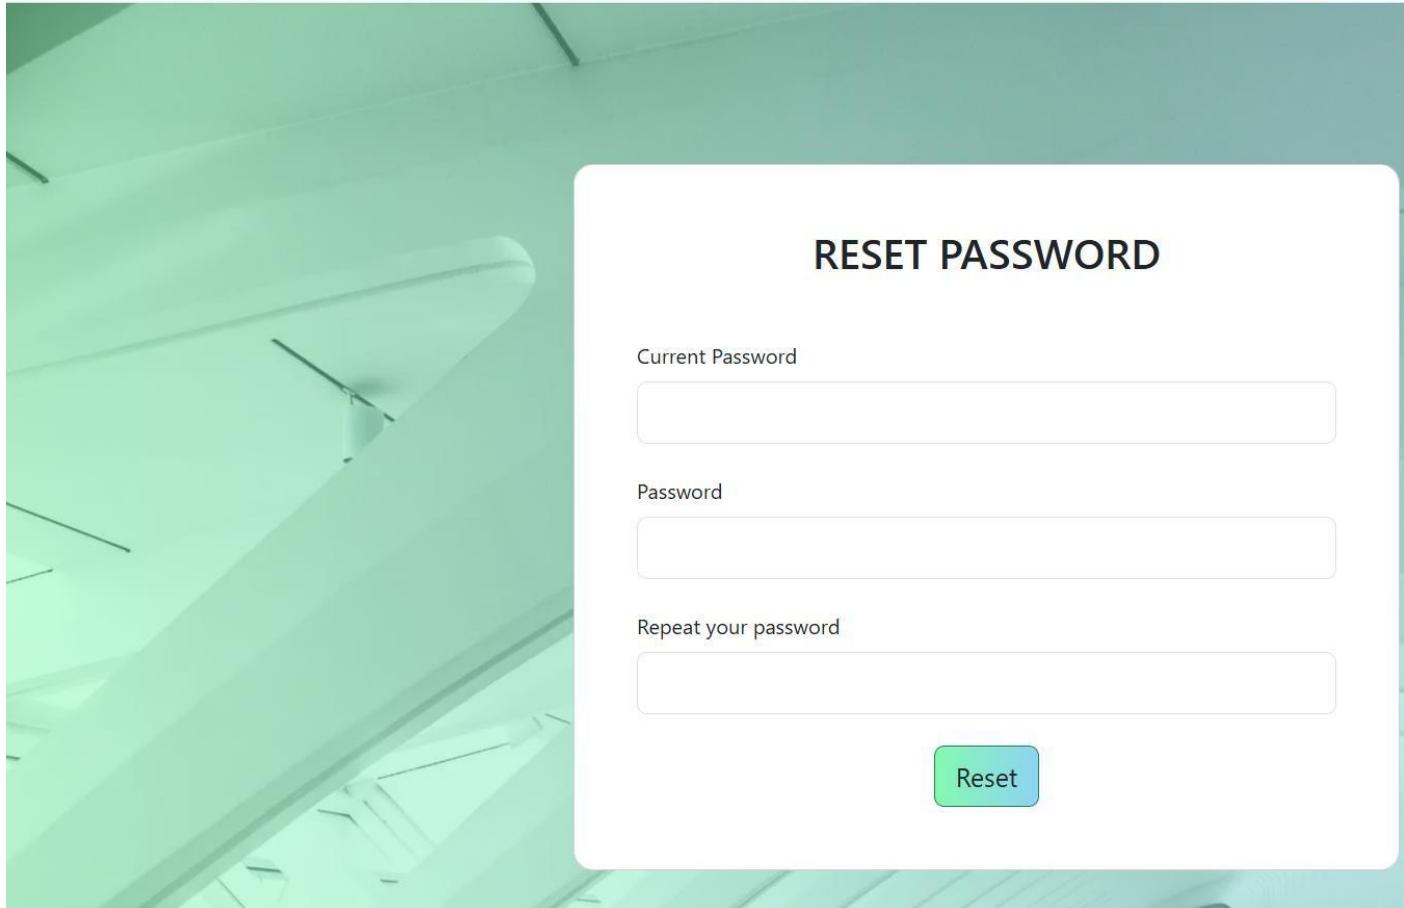

Resetpassword.php :

Code :

```
<?php include("../assets/noSessionRedirect.php");
include('./fetch-data/verfyRoleRedirect.php');

$nid=$_SESSION['uid'];

error_reporting(0);
?>
```

```

<!DOCTYPE html>
<html>
<head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1" > <link rel="icon" type="image/x-icon" href="../images/1.png">
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-T3c6CoLi6uLrA9TneNEoa7RxnatzcDSCmG1MXxSR1GAsXEV/Dwwykc2MPK8M2HN" crossorigin="anonymous">
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js" integrity="sha384-C6RzsynM9kWDrMNeT87bh95OGNyZPhcTNXj1NW7RuBCsyN/ojlpV8Qyq46cDfL" crossorigin="anonymous"></script>

    <link rel="stylesheet" type="text/css" href="style.css">
    <!-- <link rel="stylesheet" type="text/css" href="css/style.css" > -->
    <title>ERP - owner</title>
    <style type="text/css">
        .gradient-custom-3 {
            /* fallback for old browsers */ background:
            #84fabo;

            /* Chrome 10-25, Safari 5.1-6 */ background: -webkit-linear-gradient(to right, rgba(132, 250, 176, 0.5), rgba(143, 211, 244, 0.5));

            /* W3C, IE 10+/ Edge, Firefox 16+, Chrome 26+, Opera 12+, Safari 7+ */ background:
            linear-gradient(to right, rgba(132, 250, 176, 0.5), rgba(143, 211, 244, 0.5))
        }
        .gradient-custom-4 {
            /* fallback for old browsers */ background:
            #84fabo;

            /* Chrome 10-25, Safari 5.1-6 */ background: -webkit-linear-gradient(to right, rgba(132, 250, 176, 1), rgba(143, 211, 244, 1));

            /* W3C, IE 10+/ Edge, Firefox 16+, Chrome 26+, Opera 12+, Safari 7+ */
            background: linear-gradient(to right, rgba(132, 250, 176, 1), rgba(143, 211, 244, 1))
        }
    </style>
</head>
<body>

```

```

<div class="header">
    <nav class="navbar navbar-expand-lg navbar-light bg-light">
<div class="container-fluid">
    <a class="navbar-brand" href="index.php">SCHOOL MANAGEMENT</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-
target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false"
aria-label="Toggle navigation">
        <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarSupportedContent">
        <ul class="navbar-nav me-auto mb-2 mb-lg-0">
            <li class="nav-item">
                <a class="nav-link active" aria-current="page" href="index.php">Home</a>
            </li>
            <li class="nav-item">
                <a class="nav-link" href="notices.php">Notice</a>
            </li>
            <li class="nav-item dropdown">
                <a class="nav-link dropdown-toggle" href="#" id="navbarDropdown" role="button" data-
bstoggle="dropdown" aria-expanded="false">
                    Fee Pay
                </a>
                <ul class="dropdown-menu" aria-labelledby="navbarDropdown">
                    <li><a class="dropdown-item" href="make-payment.php">Make Payment</a></li>
                    <li><a class="dropdown-item" href="see-payment.php">See Payment</a></li>
                    <li><hr class="dropdown-divider"></li>
                    <li><a class="dropdown-item" href="#">Something else here</a></li>
                </ul>
            </li>
            <li class="nav-item">
                <a class="nav-link" href="change-password.php">Change-Password</a>
            </li>
            <li class="nav-item">
                <a class="nav-link" href="logout.php">Logout</a>
            </li>
        </ul>
    </div>
    <form class="d-flex" method="post">
        <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
        <button class="btn btn-outline-success" type="submit">Search</button>
    </form>
</div>

```

```

</div>
</nav>
</div>

<section class="vh-100 bg-image" style="background-image: url('https://mdcdn.bootstrapcdn.com/Photos/new-templates/searchbox/img4.webp');">
  <div class="mask d-flex align-items-center h-100 gradient-custom-3">
    <div class="container h-100">
      <div class="row d-flex justify-content-center align-items-center h-100">
        <div class="col-12 col-md-9 col-lg-7 col-xl-6">
          <div class="card" style="border-radius: 15px;">
            <div class="card-body p-5">
              <h2 class="text-uppercase text-center mb-5">Reset Password</h2>

              <form action="#" method="post">

                <div class="form-outline mb-4">
                  <label class="form-label" for="cpassword">Current Password</label>
                  <input type="text" id="cpassword" name="current" class="form-control form-control-lg" />
                </div>

                <div class="form-outline mb-4">
                  <label class="form-label" for="newpassword">Password</label>
                  <input type="password" id="newpassword" name="new" class="form-control form-control-lg" />
                </div>

                <div class="form-outline mb-4">
                  <label class="form-label" for="retypepassword">Repeat your password</label>
                  <input type="password" id="retypepassword" name="repeat" class="form-control form-control-lg" />
                </div>
              </form>
            </div>
          </div>

          <div class="d-flex justify-content-center">
            <input type="submit" class="btn btn-success btn-block btn-lg gradient-custom-4 text-body" name="submit" value="Reset">
          </div>
        </div>
      </div>
    </div>
  </div>
</section>

```

```

        </form>
<?php
    include('config.php');

$password=$_POST['current'];
$newpassword=$_POST['new'];
$confirmnewpassword=$_POST['repeat'];
$result = mysqli_query($conn,"SELECT password_hash FROM users WHERE id='$id'");
if($result->num_rows > 0){
    $row = $result->fetch_assoc();

    $pass = $row['password_hash'];
    if(isset($_POST['submit'])){
        if(password_verify($password, $pass)){
            if($newpassword == $confirmnewpassword){
                $newpasswordhash=password_hash($newpassword,           PASSWORD_DEFAULT);
                if(mysqli_query($conn,"UPDATE users SET password_hash='$newpasswordhash' where id='$id')"){
                    echo "<script>alert('Password Updated')</script>";
                }else{
                    echo "<script>alert('unable to update')</script>";
                }
            }else{
                echo "<script>alert('new password and confirm passsword are not same')</script>";
            }
        }
    }
    else{
        echo "<script>alert('wrong current password...');</script>";
    }
}
?> </div>
</div>

</div>
</div>

```

```
</section>
</body>
</html>
```

BIBLIOGRAPHY

- Computer Applications : Roshan Kumar
- My sql : The Complete Reference : Stack Overflow •
Git- hub : <https://github.com/roshan-92/SchoolMgmt>

g e