

Appendix

Ian & Rosie

April 20, 2018

Visual Tests

Here, we'll perform some visual tests allowing the user to ensure that `stat440pkg` is returning sane results.


`gen.imp.resp`

Let's make sure `gen.imp.resp` is returning somewhat normally-distributed data.

```
library(stat440pkg)
library(tidyr)
library(ggplot2)

imp.resp <- gen.imp.resp(data = multiis, num.iter = 5)
gathered.data <- gather(imp.resp)
p <- ggplot(gathered.data) +
  geom_histogram(aes(x = value), binwidth = 0.25) +
  facet_wrap(~ key)

plot(p)
```

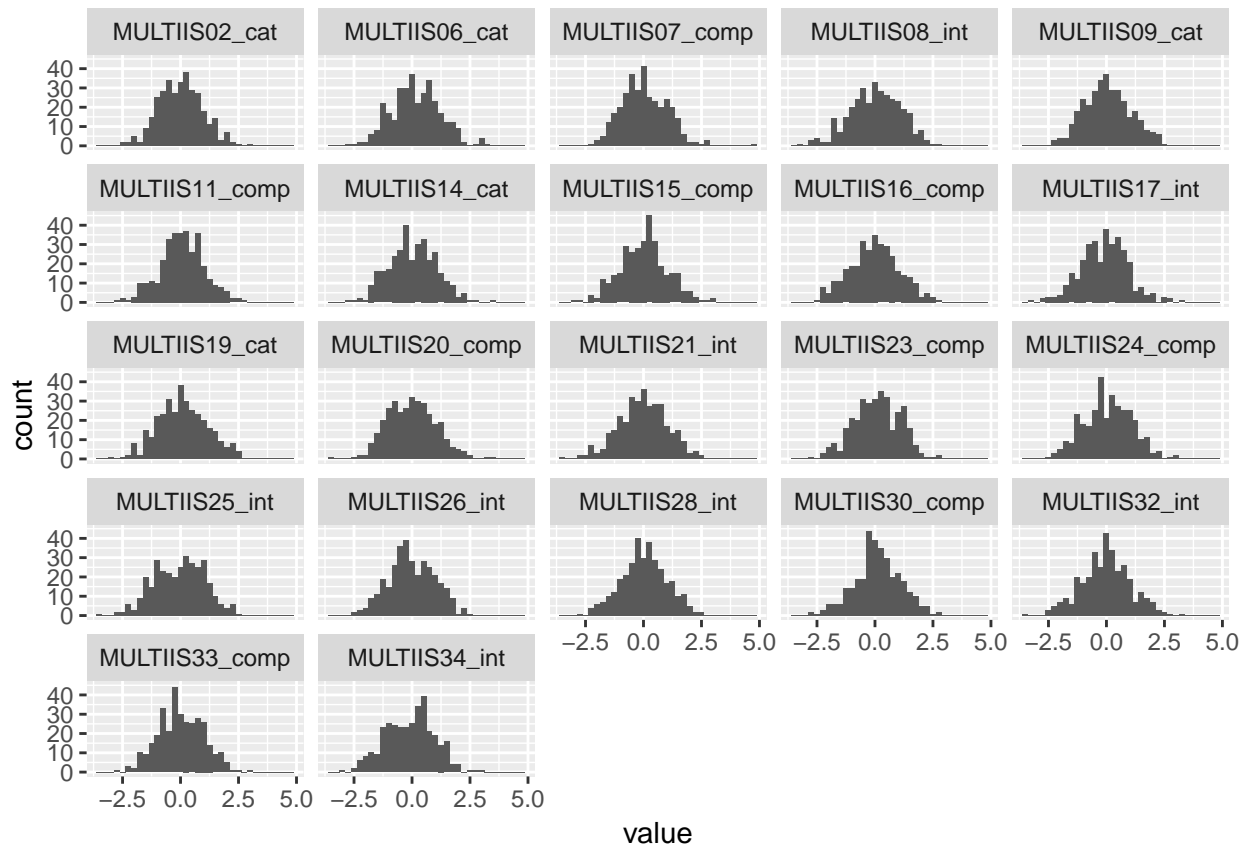


gen.latent.vars

Let's make sure `gen.latent.vars` is returning somewhat normally-distributed data. First we'll do so for Bartlett scores, then Thompson regression scores.

Bartlett factor scores

```
grp.indicator <- sapply(names(multiis), FUN =  
  function(x){strsplit(x, split = "_")[[1]][2]})  
  
lv <- gen.latent.vars(data = multiis, grp.indicator = grp.indicator, num.iter = 5, scores = "Bartlett")  
  
gathered.data <- gather(lv)  
p <- ggplot(gathered.data) +  
  geom_histogram(aes(x = value), binwidth = 0.25) +  
  facet_wrap(~ key)  
  
plot(p)
```

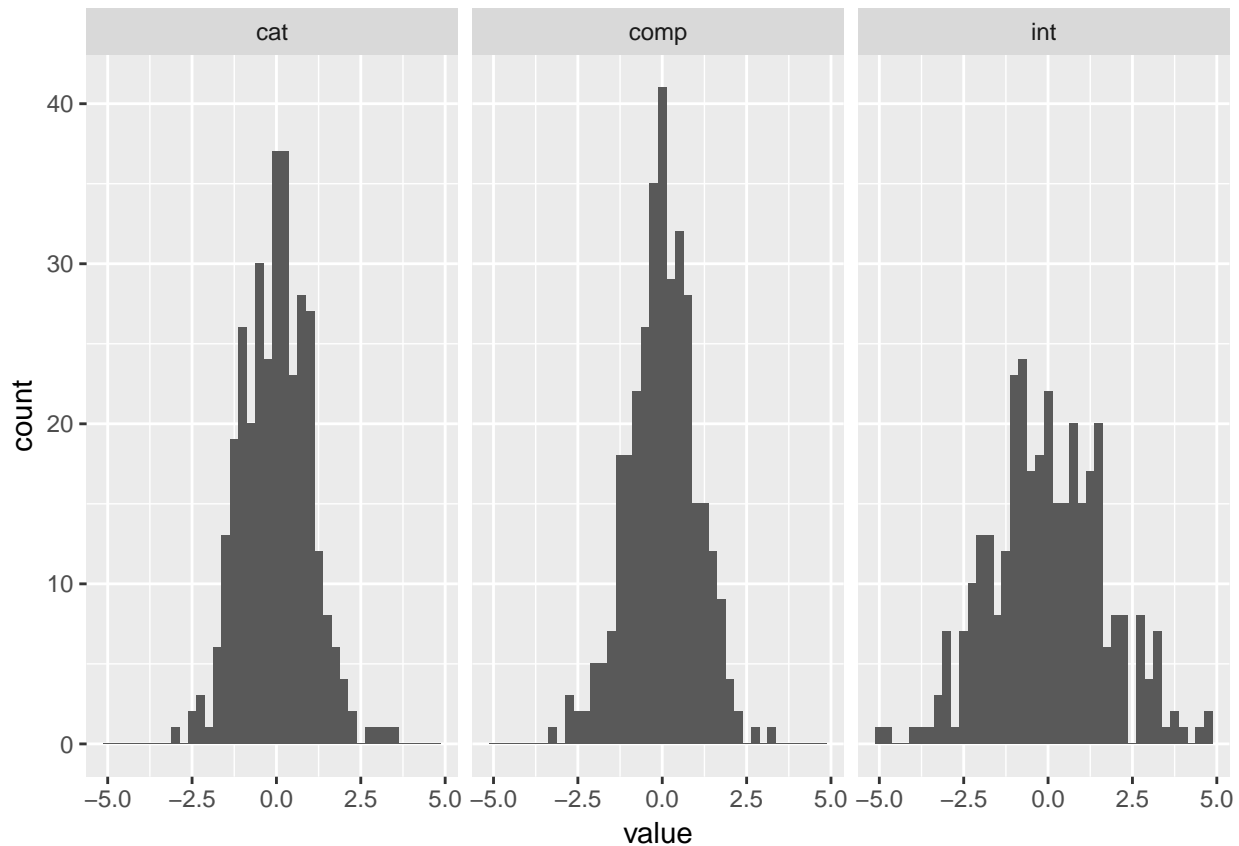


Thompson factor scores

```
grp.indicator <- sapply(names(multiis), FUN =  
  function(x){strsplit(x, split = "_")[[1]][2]})
```

```
lv <- gen.latent.vars(data = multiis, grp.indicator = grp.indicator, num.iter = 5, scores = "regression")

gathered.data <- gather(lv)
p <- ggplot(gathered.data) +
  geom_histogram(aes(x = value), binwidth = 0.2) +
  facet_wrap(~ key)

plot(p)
```

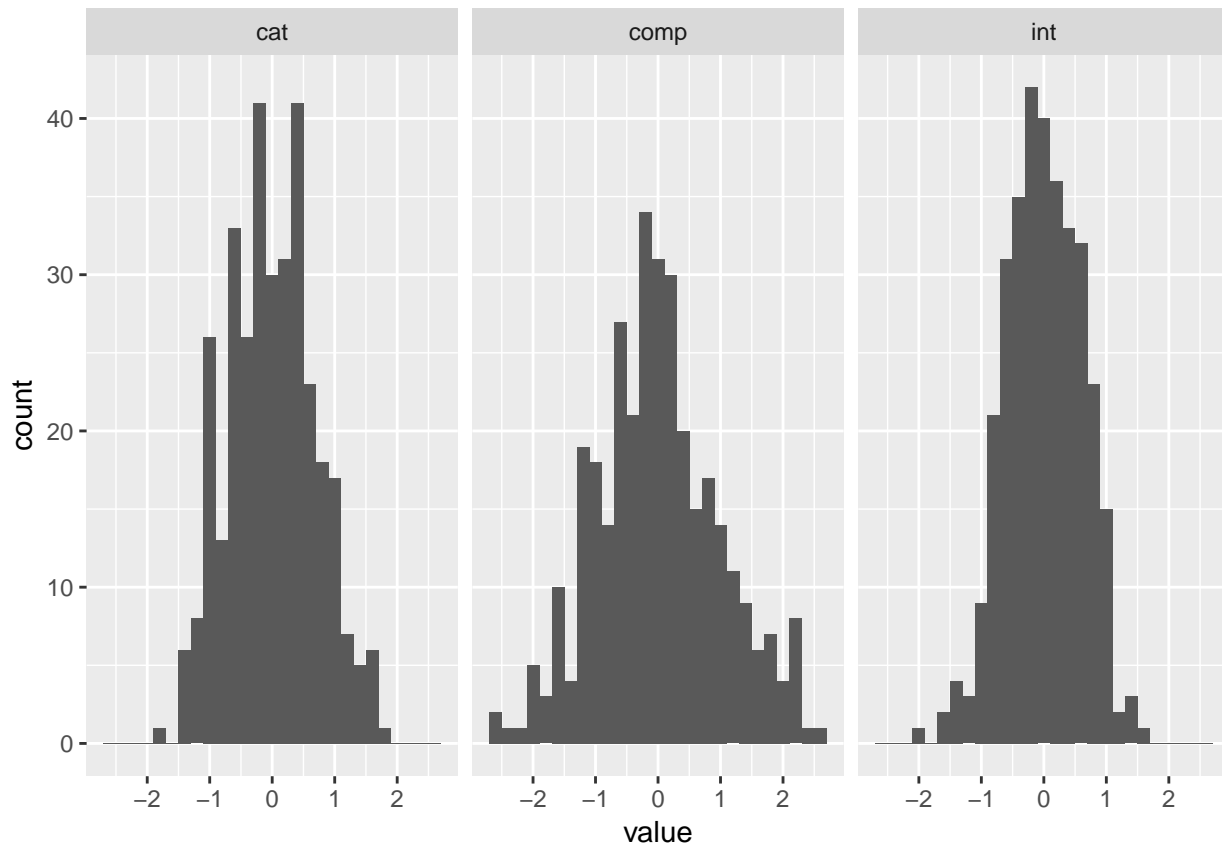

Results using Thompson scores for latent variables

Here, we'll create the similar plots to those that appear in the Results section of the report, but using Thompson scores.

```
M <- 50
latent.datasets <- gen.latent.datasets(M, multiis, grp.indicator = grp.indicator, num.iter = 5, scores = "thompson")

pooled.add1 <- pool.analyses(latent.datasets, cat~comp + int, lm)
pooled.add2 <- pool.analyses(latent.datasets, comp~cat + int, lm)
pooled.add3 <- pool.analyses(latent.datasets, int~comp + cat, lm)

signif(pooled.add1$hypothesis.test, digits = 3)
```

| ## | Estimate | Std. Error | p value |
|----------------|-----------|------------|----------|
| ## (Intercept) | -3.54e-18 | 0.00652 | 1.000000 |
| ## comp | 6.18e-02 | 0.01710 | 0.000298 |

```
## int          -2.74e-02    0.01690 0.105000
```

```
signif(pooled.add2$hypothesis.test, digits = 3)
```

```
##              Estimate Std. Error  p value
## (Intercept)  2.05e-18    0.00566 1.00e+00
## cat          3.91e-02    0.01390 5.00e-03
## int          -7.92e-02    0.01700 3.06e-06
```

```
signif(pooled.add3$hypothesis.test, digits = 3)
```

```
##              Estimate Std. Error  p value
## (Intercept) -5.45e-20    0.00598 1.00e+00
## comp         -7.75e-02    0.01720 6.43e-06
## cat          -1.68e-02    0.01500 2.62e-01
```

```
library(scatterplot3d)
```

```
add <- function(x) Reduce("+", x)
```

```
averaged <- add(latent.datasets)/M
```

```
fit <- lm(int~comp + cat, data = averaged)
```

```
scplot <- scatterplot3d(averaged$comp, averaged$cat, averaged$int,
```

```
  main="3D Scatterplot of Latent Variables\n with Regression Plane for Int ~ Comp + Cat",
```

```
  xlab = "compartmentalization", ylab = "categorization", zlab = "integration",
```

```
  col.grid = "lightgrey", pch = 19, color = "lightblue")
```

```
scplot$plane3d(fit, lty = "dotted")
```

```
orig <- scplot$xyz.convert(averaged$comp, averaged$cat, averaged$int)
```


```
plane <- scplot$xyz.convert(averaged$comp, averaged$cat, fitted(fit))
```

```
i.negpos <- 1 + (resid(fit) > 0)
```

```
segments(orig$x, orig$y, plane$x, plane$y,
```

```
  col = c("blue", "red")[i.negpos], lty = (2:1)[i.negpos])
```

3D Scatterplot of Latent Variables with Regression Plane for Int ~ Comp + Cat

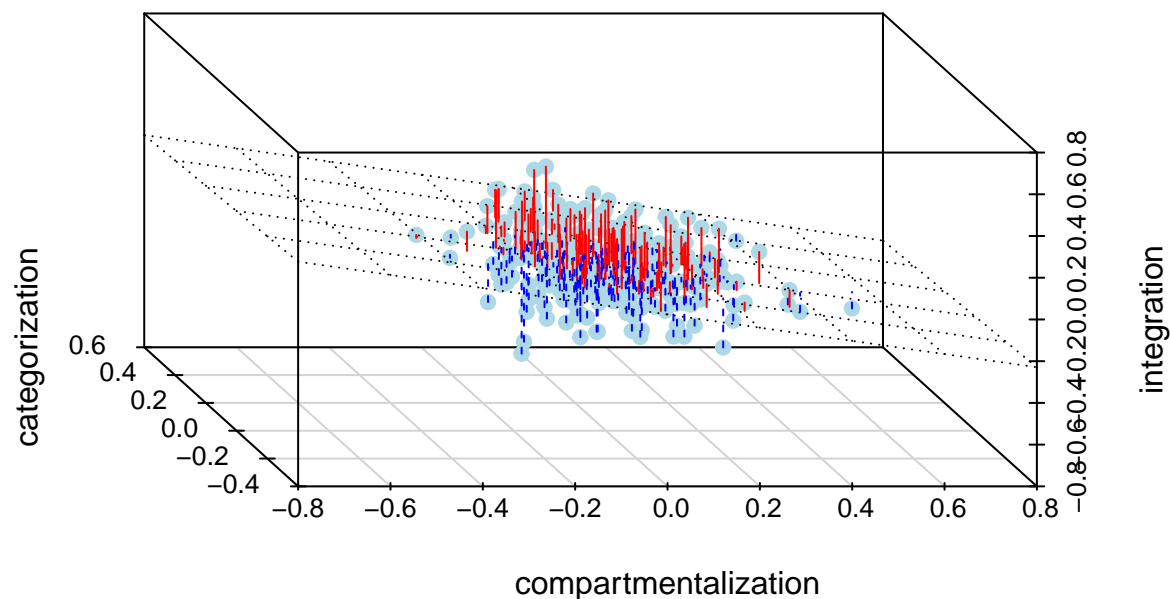

```
# ggplot2 pairs plot
library(ggplot2)
library(GGally)

ggpairs(averaged)
```

