
How the copies are stored

One entry per row per ancestor, sorted within each node.

The resource tree

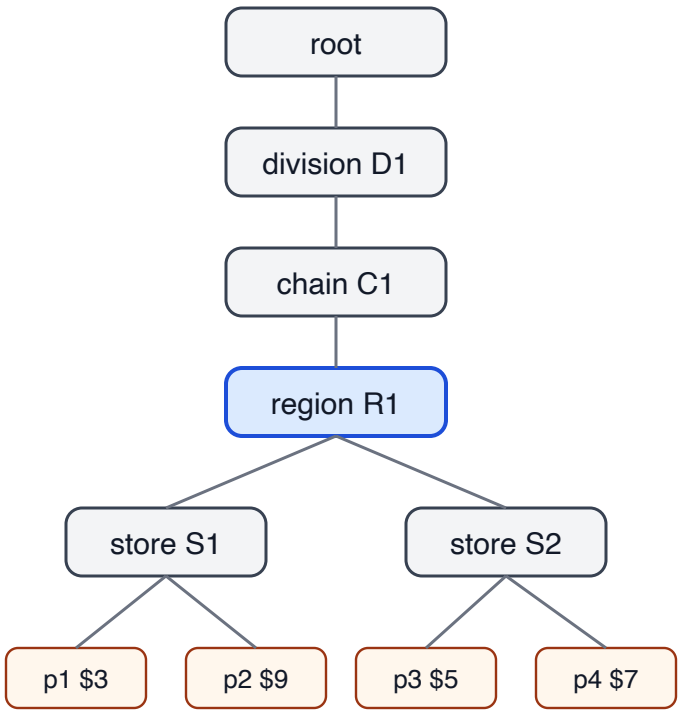

Each product's ResourceId names its store.
A grant on R1 (highlighted) reaches p1, p2, p3 and p4.

Products (the application's table, unchanged)

Id	Price	ResourceId
p1	3	S1
p2	9	S1
p3	5	S2
p4	7	S2

Only ResourceId comes from the library: no other columns, triggers or indexes.

The copy: SqlOSFgaPage_Products_Price, in SqlOS's own schema

NodeId	Price	RowKey
S1	3	p1
S1	9	p2
S2	5	p3
S2	7	p4
R1	3	p1
R1	5	p3
R1	7	p4
R1	9	p2
C1, D1, root: the same four entries each		

R1's rows, already in price order
one index seek finds them

The entry rule

(X, r) is an entry exactly when X is r's own resource or an active ancestor of it.
Primary key (NodeId, Price, RowKey). Five entries per product here;
six in the benchmark, where each product is its own resource.