



Why the dilemma is unavoidable: a straight log(LR+) line cannot pass through all four Bayesian targets simultaneously ACMG-Bayes connects the dots exactly (kinks); Tavgitian stays straight (misses the dots at priors $\neq 0.10$)


log(LR+) vs T at prior $p = 0.05$
Straight line = additive · Dots = Bayesian targets

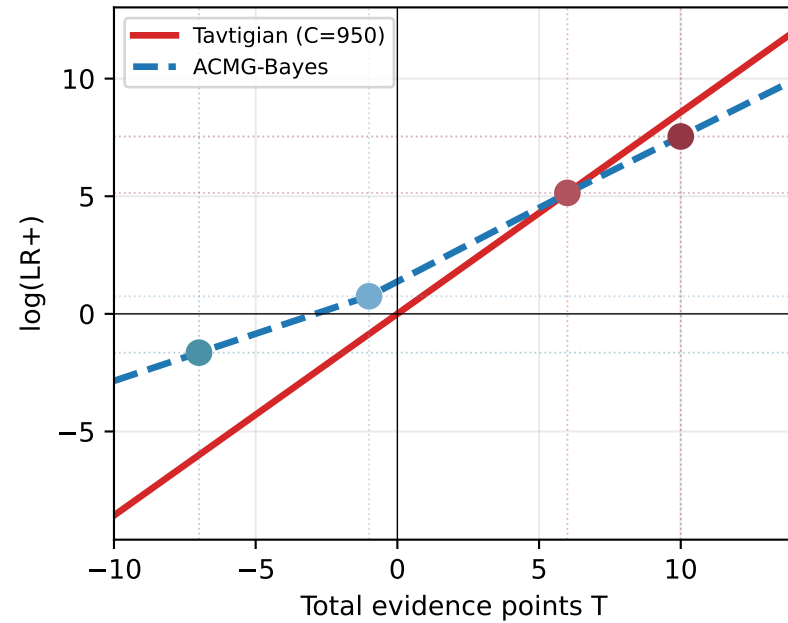


log(LR+) vs T at prior $p = 0.10$
Straight line = additive · Dots = Bayesian targets

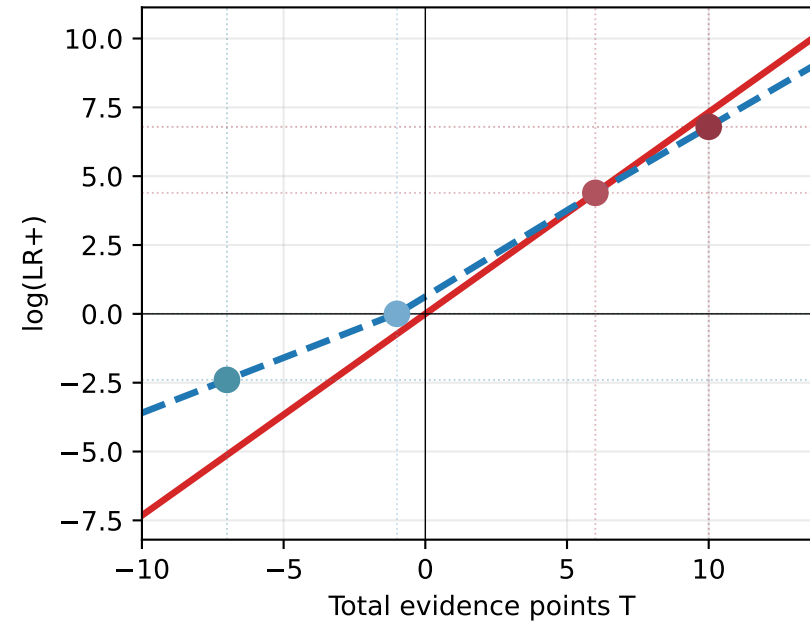


log(LR+) vs T at prior $p = 0.25$
Straight line = additive · Dots = Bayesian targets

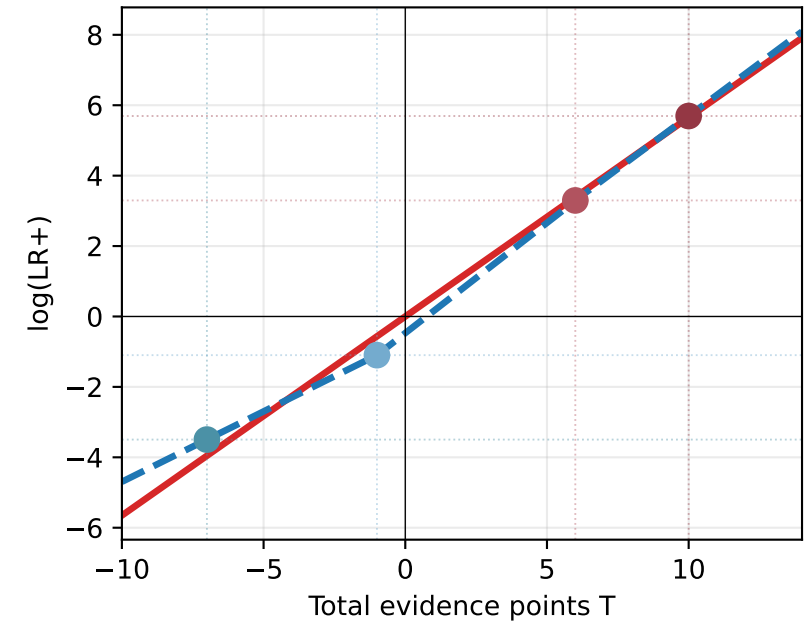

Classification posterior $p = 0.05$
ACMG-Bayes hits ACMG boundaries exactly · Tavgitian misses at $p \neq 0.10$

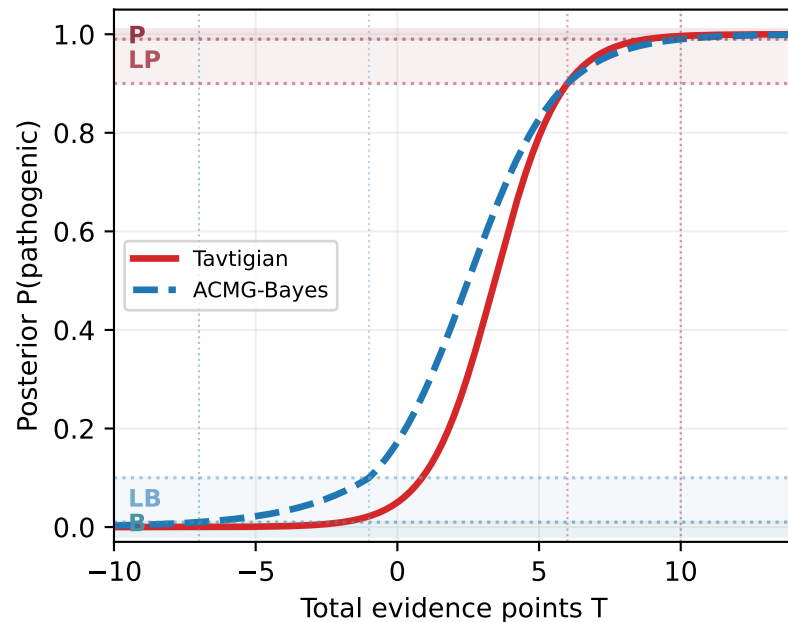

Classification posterior $p = 0.10$
ACMG-Bayes hits ACMG boundaries exactly · Tavgitian misses at $p \neq 0.10$

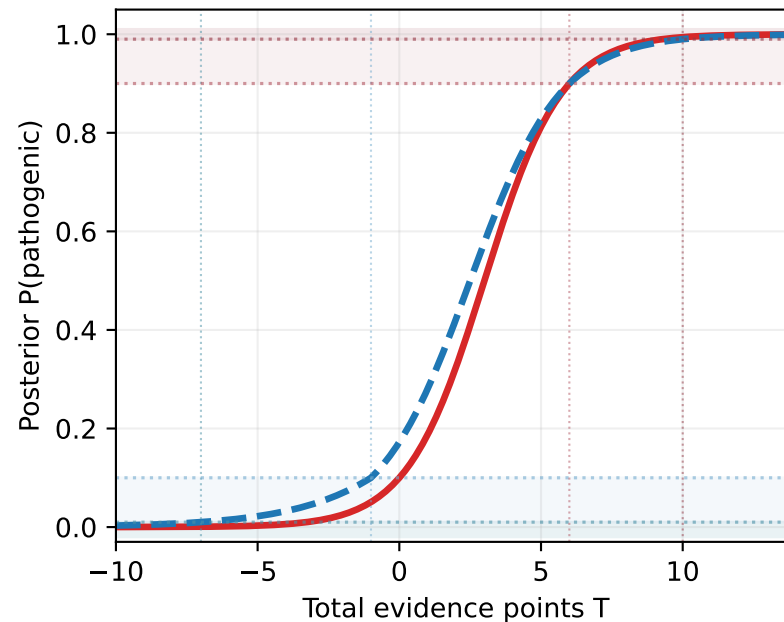

Classification posterior $p = 0.25$
ACMG-Bayes hits ACMG boundaries exactly · Tavgitian misses at $p \neq 0.10$

