

VINFAST – VDD



2026 MONTHLY REPORT



VINFAST

New Technology

MAR - 26

Contents

FEATURE TRACKING FOR MAR 2026	Error! Bookmark not defined.
EXECUTIVE SUMMARY.....	3
COMPETITOR / MARKET SCAN	3
1. New Vehicle Launches & Technology Trends	3
2. New Vehicle Feature Study - LEAPMOTOR B10.....	5
3. New Vehicle Benchmarking - Lynk & Co 900 Unique Features	6
4. Market Watch - Ride-Hailing & Taxi Vehicles (BYD Linghui).....	8
TECHNOLOGY WATCH.....	9
1. Tech In Focus: Active cleaning camera module.....	9
2. Tech In Focus: In-cabin Monitoring.....	11
TECHNOLOGY DEEP-DIVE	14
1. Predictive Adaptive Cruise Control.....	14
2. ECO+ mode for maximum range	15
3. Benchmark Study on Seatbelt Pretensioner Requirement to Achieve Euro NCAP 5-Star Rating	16
VDD NEW TECHNOLOGY – STATUS	18
1. New Technology Ideas (from TFS)	18
2. POC Projects	19

EXECUTIVE SUMMARY

Starting this month, the New Technology report format is modified to be more purposeful.

- COMPETITOR / MARKET SCAN – reviews new launches and tech trends.
- TECHNOLOGY WATCH – summarizes study of technologies of interest to Vinfast
- TECHNOLOGY DEEP-DIVE – Deep dive study of select technologies and roadmap
- VDD NEW TECHNOLOGY STATUS – New Technology initiative updates (POC, ...)

COMPETITOR / MARKET SCAN

1. New Vehicle Launches & Technology Trends

March was an eventful month for several key NEV launches demonstrating the continued push for energy efficiency with EVs now breaching the 900 km range threshold (2027 BMW i3, Xiaomi SU7) and a 9-minute, 10-97% fast charging (BYD Song Ultra EV).


Some noteworthy EV launches and key technologies below.

OEM	Model	Region	Technical Highlight
BYD	Seal 07	China	800V Architecture; 10–80% in 9 mins.
BYD	Song Ultra	China	Blade Battery 2.0; 1,500 kW Flash Charging support.
Xiaomi	SU7 Refresh	China	902 km CLTC range ; CTB battery; Digital Chassis 2.0.
Volkswagen	ID. UNYX 08	China	VW-XPeng joint model. Premieres the VLA2.0 ADAS from Xpeng capable of L4
Mercedes	VLE-Class	Global	VAN.EA platform; Tri-Agent AI, 10.3 deg Rear Axle Steer, Cinema mode with 31.3 in 8K rear infotainment screen
BMW	i3 (Neue Klasse)	Global	800V Gen6 eDrive; 900 km range. "Heart of Joy" super brain.
Mahindra	XEV 9e Cineluxe	India	79kWh battery; triple-screen; "PawPal" pet-mode HVAC. (Competes with VF7 in India)
Tata	Sierra EV	India	Acti.ev platform; 60kWh AWD; iconic Alpine Glass roof – (Competes with VF6/7 in India)
Toyota	Urban Cruiser Ebella	India	49/61kWh LFP packs; 543 km range. Toyota's first India EV based on Suzuki eVitara (Competes with VF6 in India)

The technology landscape is buzzing with the following prominent trends.

Technology Trend	Who?	Takeaway for Vinfast
EV range of 700km becomes standard, touching 900km	Many	Recommend Deep-dive. Target powertrain efficiency as a key attribute for Vinfast NP cars.
Ultra-Fast Charging plans to go global - 10-70% in 7 minutes - 10-95% in <10 minutes	BYD with Blade 2.0 (almost nullifies NIO's battery swap)	Recommend deep-dive of charge time competitiveness and prepare roadmap to be among the best.
Sodium-Ion Batteries Approach Commercial Deployment	CATL, BYD	Evaluate and complete POC for Sodium Ion for Entry level segment models.
SDV & Compute Architecture moving to mass segment	Leapmotor B10	Evaluate EEA 3.0 scale-down as part of roadmap.
ADAS with VLA 2.0 roll out is gaining traction – more penetration of reasoning models	Li-Auto, Xpeng, Leapmotor	Evaluate different architectures for competitiveness & scalability

Besides Sodium-ion technology, the EV battery technology frontier is progressing on multiple fronts with the first Semi-solid battery introduced MG4 Urban, with an energy density of 180 Wh/kg. This technology is clearly in its early stages but is expected to enhance up to 300 Wh/kg and feature in more cars next year. With a gel-based electrolyte, this battery can pass nail penetration without ignition. This is MUST-WATCH technology.

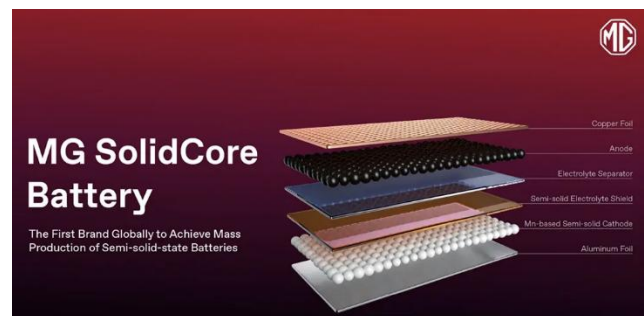

AI-Defined vehicles is also a major trend that is being ushered in by Chinese OEMs, the one to watch out for in the upcoming Beijing Auto show next month.

2. New Vehicle Feature Study - LEAPMOTOR B10

Executive Summary

The Leapmotor B10 is a **C-segment** fully electric SUV designed for global markets, with strong emphasis on affordability, structural efficiency, digital cockpit experience, and high-value engineering. Built on the LEAP 3.5 EV platform, the model integrates **CTC 2.0 (Cell-to-Chassis) technology** that enhances stiffness, interior space, packaging, and safety performance. The French variant—focus of this study—achieves **Euro NCAP 5-star rating** while maintaining competitive pricing and feature richness.

Key performance figures include:

- 160 kW PMS rear motor, 240 Nm torque
- 0–100 km/h ~8 sec, top speed 170 km/h
- Battery options: 56.2 / 67.1 kWh (LFP), WLTP up to 434 km
- DC fast charge 140–168 kW (20 min, 30–80%)

With its RWD layout, centralized E/E architecture, advanced thermal management, and high digitalization, the B10 delivers a premium EV experience at a lower cost than most competitors.



For more information, please refer to [Appendix 06](#)

Vehicle Engineering Overview

Platform & Architecture

The B10's **LEAP 3.5 skateboard EV platform** emphasizes mass centralization, reduced structural redundancies, and integrated battery design. Its **CTC structural battery** improves interior packaging, rigidity, and weight optimization—positioning it ahead of many legacy automakers still using pack-on-frame designs.

Benefits include:

- Lower body weight despite larger dimensions vs competition
- Higher NVH performance and crashworthiness
- Better weight distribution (~50:50) and handling stability



Key Differentiating Features

- **LiDAR** in China top end variants
- **V2L** capability (3.3 kW)
- **Heat pump** for efficiency improvement
- OTA-centric software architecture
- Dedicated **oil-cooling** system for E-motor system
- Integrate battery into vehicle structure (**CTC**)
- Panoramic roof integration with **power sunshade**
- Lightweight structural optimization for BIW (Kerb Weight 1670 – 1845 kg)

Technical Specifications & Trim Comparison

The B10 strategy varies by region:

China – “Technology Leader + Price Disruptor”

- 5 trims, dual motor tuning options
- Optional LiDAR, larger feature set
- Aggressive pricing: **\$14.5k– \$18.8k**

Europe (France) – “Simplified + Compliance + Premium Perception”

- 3 trims only, STD 160 kW motor
- Higher price: **€28,400+** (~\$32,750)

Dimensions remain constant across markets (LXBXH): **4515 mm, 1885 mm, 1655 mm**, WB: **2735 mm**.

Competitor Landscape

Key comparisons (Europe pricing):

Vehicle	Price	Power	Range
Leapmotor B10	€35,000	160 kW	~470 km
BYD Atto 3	€38,990	150 kW	~420 km
Tesla Model Y	€39,990	220+ kW	~455 km
MG ZS EV	€33,990	130 kW	~440 km
VW ID.4	€41,500	150–220 kW	~520 km

Conclusion

The Leapmotor B10 succeeds not only due to cost competitiveness but because of **system-level engineering maturity**. It demonstrates:

- A **clean-sheet EV platform**
- High structural efficiency & lightweighting
- Centralized E/E architecture enabling SDV transformation
- Strong digital cockpit experience and charging performance
- Value-rich feature offering despite aggressive pricing

In summary, **B10 is engineered intelligently from the ground up**, illustrating how focused EV architecture and China-driven integration strategies can outperform heavier legacy designs.

3. New Vehicle Benchmarking - Lynk & Co 900 Unique Features



Key Exterior Features

Electric Pedal / Retractable Side Footstep

- Reduces step-in height from **469.4 mm to 235.8 mm**.
- Potential for **Lac Hong** and **VF8/MPV9 Top trims**.



Smart Electric Trailer Hitch (2 Ton capacity)

- Motorized deploy/retract, automatic locking & trailer detection.

Split Tailgate and Lower Tailgate as seating (300 kg Capacity)

- Useful for camping, fishing; common in E-segment SUVs.



Air Suspension Convenience & Comfort Features

Speed-Sensing Height Adjustment

- High ride height: 0–40 km/h
- Normal height: 40–90 km/h
- Low height (–20 to –40 mm): >90 km/h
- Benefits: aerodynamics, stability, comfort, efficiency.




Convenient Step-In / Step-Out (–40 mm)

- Improves accessibility, luxury feel.

Trunk Loading Mode (–55 mm)


- Easier cargo loading/unloading.



Interior Features & Commonization Opportunities

Identical Air Vent Design & Parts (8 locations)

- Lynk & Co 900 uses identical Air vents at 8 locations – optimizes part diversity & tooling. In contrast, VF8 NP uses 4 distinct vents designs & parts → potential commonization.

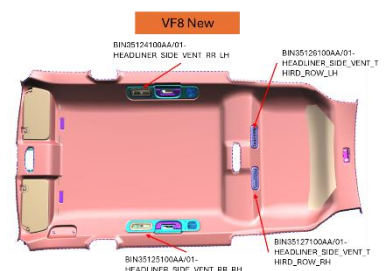


Storage & Convenience Elements

- Retractable rear storage pouch at front seat back (premium 3D shape).
- Bag hooks at multiple locations.
- Seat-side storage box/phone holder + charging port (useful for MPV).

3-Piece Floor Carpet

- Better material utilization and easier logistics.



Technical & Benchmark Observations

Seat Belt Lower Anchor Design

- Lynk & Co 900 uses a lower anchor directly mounted on the seat frame with a single retractor.
- VF8 NP uses a floor-mounted lower anchor with a pretensioner and retractors.



Simplified Wheel Hub Cap

- 2D chrome lettering (no 3D emblem).

Doorstep Bezel

- Generic branding → candidate for optional accessory.



For more information, please refer to [Appendix 07](#)

4. Market Watch - Ride-Hailing & Taxi Vehicles (BYD Linghui)

Executive Summary

BYD launched Linghui in 2026 as a dedicated sub-brand for ride-hailing, taxi, and corporate fleets. The brand separates high-mileage commercial vehicles from BYD's consumer lineup while leveraging shared platforms to reduce development cost and optimize operational durability.

For more details, please refer to [Appendix 03](#)



Product Lineup

1. **e5** – based on Qin Plus EV
2. **e7** – based on BYD e7
3. **e9** – based on Han EV
4. **M9** – based on eMax 9 DM-I



Positioning & Strategy

Linghui targets fleet operators through B2B channels and focuses on durability, low TCO, and simplified feature sets. The strategy preserves BYD's consumer brand image by isolating commercial usage.

Engineering Focus

- Durable fleet-grade interiors and materials
- Simplified ADAS, trim, and infotainment to reduce maintenance
- Optimized for high charging frequency and long battery cycle life
- LFP Blade batteries used for stability and longevity

Key Model Highlights

- **M9**: Slightly extended body (~5200 mm); simplified exterior; shared hybrid powertrain
- **e9**: Lower motor output (135–150 kW); smaller battery (~60–64 kWh); 535–605 km CLTC
- **e7**: Optional 100/130 kW motor; flash charging; fleet-focused updates
- **e5**: Slightly longer/taller than Qin Plus EV; simplified for fleet duty

Manufacturing & Capacity

Linghui models share BYD production lines in Changsha, Hefei, and Shenzhen, supporting up to 300,000 units/year.

Fleet Optimization

Designed for 200–400 km/day and 80,000–120,000 km/year, Linghui vehicles emphasize uptime via durable components, fast-charging compatibility, and simplified maintenance.

TECHNOLOGY WATCH

1. Tech In Focus: Active cleaning camera module

Overview

In the context of the rapid development of ADAS driver-assistance technologies and autonomous vehicles, the need for clean cameras to ensure accurate object detection has become extremely essential. Traditional washer systems currently face many limitations, such as occupying installation space, suboptimal water flow, and causing “sensor blindness,” which forces the driver to intervene or the system to perform an emergency stop.

The breakthrough All-in-One solution from LG Innotek enables camera cleaning in under one second. By integrating a micro-rotation actuator and a surface heater directly into the camera body, the system uses AI to automatically detect dirt and activate a dry-cleaning process. Applying this solution to proof-of-concept (POC) projects will help establish a leading technological advantage over competitors in the same segment

For more information, please refer to [Appendix 01](#)

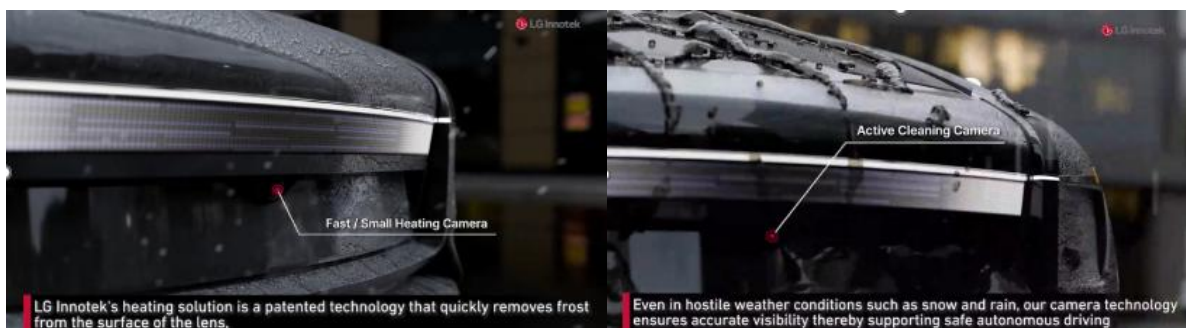


Figure 1: Conventional camera cleaning solution - Separate Spray module

Key technical highlights

Optimized All-in-One Design

Integrates a VCM (Voice Coil Motor) actuator for precise micrometer-level lens rotation and a PTC (Positive Temperature Coefficient) heater located directly beneath the lens to maintain the ideal temperature. This design is approximately 20% more compact than conventional solutions.



Dual-Action Cleaning Mechanism

- Lens rotation: Removes water and debris adhering to the surface.

- Heating: Low power consumption (~4W) enables quick drying and instant de-icing (<1s).



Figure 2: Integrated All-in-one cleaning & heater module

The software analyzes real-time images to classify contaminants (water, dust, ice) and determine the appropriate cleaning action, then rechecks image quality to ensure clarity.

Reliable Operation with Efficiency

Maintains stable performance for Level 3+ autonomous vehicles even in heavy rain, muddy environments, or heavy snowfall (down to -30°C).

Unlike competitors such as Valeo, Continental, or Bosch, which still rely on washer fluid, LG Innotek's solution is a fully dry-cleaning system, saving 100% of cleaning liquid.



Conclusion


LG Innotek's Active Cleaning Camera system is an important improvement in solving the common limitations of optical sensors in smart vehicles. It can restore camera visibility in less than one second, which is among the fastest on the market, and it removes the need for complex components such as fluid tanks or spray nozzles. This makes it a practical and efficient solution for OEMs looking to improve ADAS performance and ensure higher safety in autonomous driving. By keeping the camera view clear, the system also helps reduce unwanted emergency braking and improves overall reliability.

As Vinfast prepares for ADAS L2++ / L4 Roadmap, a competitive and cost-effective solution for camera cleaning is a key consideration. As agreed during the technology council meeting on 14/Mar/26, the LG Innotek's solution will be studied for packaging & suitability in the New LH800S/900S program.

2. Tech In Focus: In-cabin Monitoring


Overview

In modern automotive interior design, meeting safety standards such as Euro NCAP often requires highly complex multi-sensor architecture. Since each traditional sensor performs best within a limited spatial range, manufacturers must distribute them across the cabin: cameras mounted on the A-pillar or steering column for driver monitoring systems (DMS), and radar or ToF sensors installed on the headliner for occupant monitoring systems (OMS) and child presence detection (CPD). This combination of multiple hardware components not only increases costs and power consumption, but also reduces the clean and minimal aesthetic of the vehicle interior.

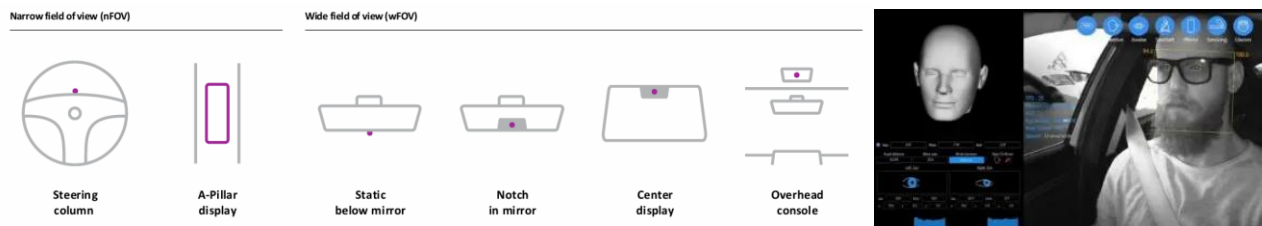

The solution developed by Smart Eye and Airy3D represents a breakthrough by replacing the bulky multi-sensor setup with a single, unified system. By leveraging passive 3D technology, the system can reconstruct a full three-dimensional understanding of the cabin using only a single sensor.

With just one installation point and a wide field of view (wFOV), it can effectively perform all key functions, from driver gaze tracking to occupant position analysis. This enables significant hardware simplification, reduces power consumption to below 2W, and still maintains high safety performance.

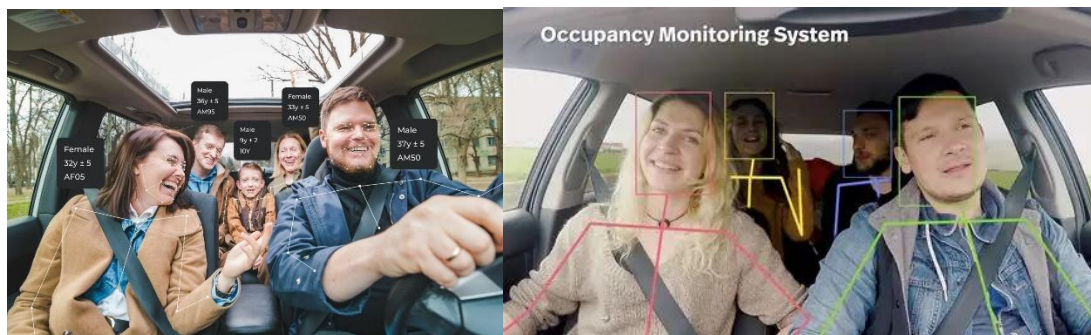


For more information, please refer to [Appendix 02](#)

Key technical highlights


Single sensor

This solution uses only a single CMOS RGB-IR sensor with a wide field of view. By consolidating all functions into one point, it eliminates redundancy in both hardware components and installation space (BOM). More importantly, it solves the “complex calibration” challenge—rather than synchronizing multiple sensors, engineers only need to manage a single data source, resulting in faster and more accurate vehicle production.

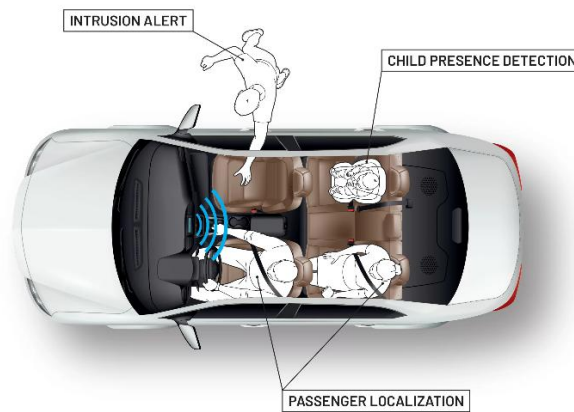

Passive 3D Technology (DepthIQ)

Conventional 3D systems, such as ToF, require infrared emitters to project light and measure reflection time. This leads to higher power consumption, heat generation, and increased hardware size. By using Passive DepthIQ technology, the system extracts depth information (depth volume) directly from image data through software algorithms.

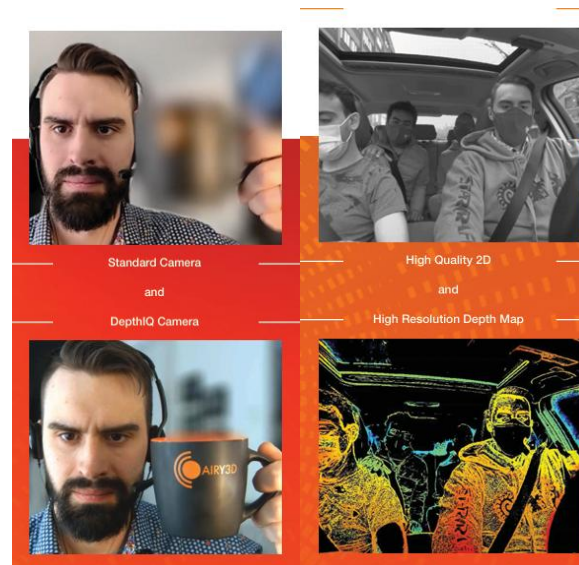

Without the need for emitters, power consumption is significantly reduced (<2W). The module becomes extremely compact and lightweight, enabling integration into thermally and spatially sensitive areas such as under-display positions—locations that are not feasible for traditional emitter-based systems.

Extreme sunlight robustness

Systems based on near-infrared (NIR) often fail under direct sunlight due to sensor saturation. But this maintains stable operation even under illumination levels of up to 100,000 lux (equivalent to bright midday sunlight). This is critical for safety applications, as it ensures accurate gaze tracking with very low error (RMSE <3°) under all lighting conditions, something that lower-cost multi-sensor systems often struggle to achieve.

Optimized aesthetics and flexible installation

With its wide FoV and concealed integration (e.g., behind glass or display surfaces), the sensor is no longer a visible protrusion on the steering wheel or A-pillar. Drivers and passengers are largely unaware

of the camera's presence. This enables designers to achieve a seamless interior design language, where safety technology is fully integrated within the vehicle cabin.



Conclusion

The transition from a multi-sensor to a single-sensor approach is not merely a reduction in component count, but a comprehensive upgrade of the vehicle's electrical and electronic architecture. By adopting 3D computer vision, VinFast can also gain richer data on driver gaze and facial expressions—capabilities that radar-based systems cannot provide as effectively. With its ability to perform passive 3D reconstruction and deliver a wide field of view, this solution serves as a strong alternative to conventional systems. It is more cost-efficient, consumes less power, offers greater robustness under strong sunlight, and improves overall interior aesthetics.

With multiple use-cases such as Occupant Monitoring, Child Presence Detection, Gesture Recognition, etc., an integrated In-cabin monitoring solution enhanced by AI can be an effective option. This is already being studied as part of the New LH800S/900S program.

TECHNOLOGY DEEP-DIVE

1. Predictive Adaptive Cruise Control

Overview

This feature is an enhancement over the conventional ACC offered with ADAS L2 system. The conventional ACC system maintains the target speed and adjusts it based on the obstacle detected in front. However, the system does not reduce speed based on speed limit changes coming from navigation or based on upcoming road curvature changes. This is where the Predictive ACC offers a step up by regulating speed automatically. This reduces driver's workload and results in smoother assisted behavior enhancing comfort. This new feature can serve as a differentiator for all Vinfast car models equipped with ADAS L2 system.

For more information, please refer to [Appendix 04](#)

Deep-Dive Findings

Originally the Predictive ACC was considered for ADAS L2++ system which includes advanced features such as NOP (Navigation On Pilot). During the deep dive done by ADAS team, the team identified this feature could be offered with minor limitations to ADAS L2 system.

By co-working with suppliers like Vietmap, Predictive ACC can be calibrated for ADAS L2 system as well. Since this effort is already considered for the ADAS L2++ system, the EDD effort to implement this for ADAS L2 system would be minimal, which brings great value for Vinfast and our customers.

Next Steps & Conclusion

During the technology council review on 14/Mar/26, it was recommended to be taken up for implementation in Vinfast New Platform cars equipped with ADAS L2 (Autobrain).

In terms of timeline, this will be implemented in the same timeline as ADAS L2++ system.

Predictive ACC – Roadmap

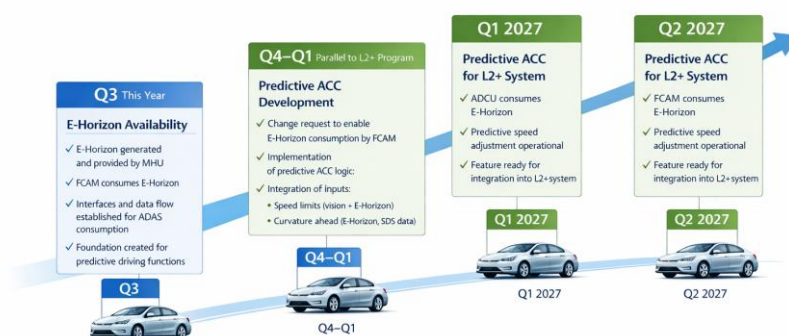


Figure 3: Predictive ACC Launch Roadmap (ADAS Team)

2. ECO+ mode for maximum range

Overview

The feature is about introducing a new drive mode ECO+ on BEVs aimed at optimizing the HV energy consumption to enable the user to maximize the range of the car. Commonly available on many competitor models ranging from BYD, Geely to Mercedes, this mode is to be enabled by the user when they are running low on battery (20%). This mode becomes a one-touch and optimizes various pre-determined settings such as limiting drive torque, optimizing regen setting, turning off the HVAC compressor, and optimizing LV load.

Deep-Dive Findings

Based on the decision at the Technology Council, this feature was taken up for deep dive by the vehicle performance team to evaluate settings and the corresponding reduction in energy consumption. The evaluation found that the ECO+ mode can achieve up to 25% reduction in energy consumption by optimizing various settings as illustrated below. Real-world consumption will vary depending on the actual driving cycle and vehicle itself.

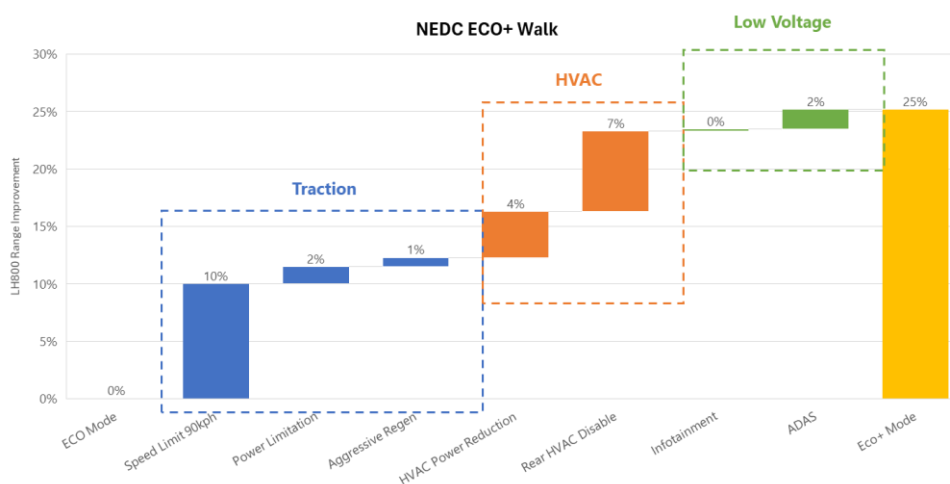


Figure 4: ECO+ Mode energy walk study (Vehicle Performance Team)

Next Steps & Conclusion

During the technology council review on 14/Mar/26, it was recommended to be taken up for implementation for all the BEV models. This new feature will be added to all Vinfast BEV models.

Further study will be conducted to finalize the settings to be programmed for ECO+ Mode. The timing for roll-out will be ascertained as part of the CCB study.

3. Benchmark Study on Seatbelt Pretensioner Requirement to Achieve Euro NCAP 5-Star Rating

Overview

This study evaluates whether achieving a Euro NCAP 5-star rating requires a lower anchor (buckle) pretensioner in the front restraint system. 23 C–E segment vehicles tested between 2023–2026 across global OEMs are considered for the benchmark study. The analysis compares restraint architectures, safety performance and weight to assess the necessity of buckle pretensioners.

For more details, please refer to [Appendix 08](#)

Benchmark Dataset Summary

The vehicle list includes models from Global OEMs, all of which achieved a **5-star Euro NCAP rating**.

- Below vehicles adopt **dual pretensioner systems** (retractor + lower anchor/buckle pretensioner).

					
Brand	BYD	Leapmotor	Tesla	Audi	Volkswagen
Model	BYD Seal 6	Leapmotor B10	Tesla Model Y	Audi SQ6 e-tron	Volkswagen Tiguan
EURO NCAP Score	5 Star	5 Star	5 Star	5 Star	5 Star
EURO NCAP Testing Year	2025	2025	2025	2024	2024
Segment	D	C	D	E	C
Market of destination	France	France	China	Germany	Germany
Body style	Sedan	SUV	SUV	SUV	SUV
Number of airbags	7	7	7	9	9
Anchor Pre-tensioner	Available	Available	Available	Available	Available
Mounting Location	On Seat Frame	On BIW	On Seat Frame	On BIW	No Information
Quantity of Parts	1	1	1	1	
Quantity of Fasteners	3	1	2	3	
Part(s) Weight (kg)	0.552	0.71	0.496	0.622	No Information

- Below vehicles rely solely on **single retractor** yet still achieve 5-star ratings.

					
Brand	Smart	BMW	Polestar	Volvo	Hyundai
Model	Smart #5	BMW X3	Polestar 4	Volvo EX90	Hyundai Santa Fe
EURO NCAP Score	5 Star	5 Star	5 Star	5 Star	5 Star
EURO NCAP Testing Year	2025	2025	2025	2025	2024
Segment	D	D	D	E	D
Market of destination	France	Germany	Germany	United States of America	United States of America
Body style	SUV	SUV	SUV	SUV	SUV
Number of airbags	7	7	7	10	6
Anchor Pre-tensioner	Not Available	Not Available	Not Available	Not Available	Not Available

This diversity shows that high safety ratings are not dependent on one specific pretensioner type but on **overall restraint system performance**.

Pretensioner Architecture Types

Configuration A — Dual Pretensioner System

This system includes a **retractor pretensioner** and a **lower anchor/buckle pretensioner**. Examples include Tesla Model Y and BYD Seal 6 with **key characteristics**:

- Mounted at seat frame or B-pillar base (0.52–0.65 kg typical).
- Pyrotechnic actuation with direct SRS connection.




Benefits:

- Strong improvement in pelvis restraint
- Reduced risk of submarining
- Faster belt-slack reduction

Configuration B — Single Pretensioner System

Vehicles such as Smart #5, Polestar 4, Hyundai Santa Fe use **only a retractor pretensioner**, usually at the B-pillar.

This simplifies components, reduces weight and cost, and relies on complementary technologies for occupant protection.

**Key Benchmark Findings**

- Based on the dataset, it is clear that Euro NCAP 5-star rating does not require a lower anchor/buckle pretensioner.
- Euro NCAP focuses on injury criteria, not the presence of any single restraint feature.
- If a vehicle's restraint and crash structure keep injury values within acceptable limits, it earns 5 stars regardless of hardware configuration.

Technologies Enabling 5 Stars Without a Buckle Pretensioner

Vehicles using only single pretensioners compensate through a combination of advanced restraint and structural engineering technologies such as Multi-Stage Load Limiters, Optimized Seat Geometry, Advanced Airbag Systems, Strong Crash Structure, Together, these technologies enable 5-star performance even without a buckle pretensioner.

Pretensioner Weight Benchmarking

Teardown weight for Lower anchor pretensioner is between range of **0.52–0.73 kg**, with some outliers as low as **0.38 kg** (Lucid Air). This indicates that buckle pretensioners add modest mass, but also more complexity compared to single-pretensioner designs.

Cost Impact of Buckle Pretensioner Adoption

Buckle pretensioners add an estimated \$20–\$40 per vehicle; deleting them offers meaningful cost savings, especially at high production volumes.

Conclusion

The benchmark clearly demonstrates:

1. Euro NCAP 5-star safety rating does not require a buckle/lower anchor pretensioner as a requirement.
2. Vehicles using **only retractor pretensioners** can still achieve top safety ratings through:
 - Advanced load limiter tuning
 - Advanced airbag systems
 - Optimized seat geometry
 - Strong crash structure
3. The choice between **single vs dual pretensioner architecture** is primarily driven by:
 - Cost targets
 - OEM safety philosophy
 - Packaging constraints

In summary, dual pretensioners enhance occupant control and robustness, but single pretensioner systems are sufficient to achieve 5-star ratings with optimized restraint system.

VDD NEW TECHNOLOGY – STATUS

1. New Technology Ideas (from TFS)

The system is designed to manage and track new technology ideas, supplier proposals, and innovation opportunities in a structured way. It provides a centralized platform where teams can submit, review, evaluate, and follow up on new technical concepts or solutions proposed by internal teams or external suppliers. By organizing information such as proposal details, evaluation status, responsible teams, and implementation potential, the system helps improve transparency, accelerate decision-making, and ensures that promising technologies are systematically assessed and not overlooked.

How to use it?

To submit a new idea, please follow this link: [Summary - Overview](#)

To familiarize new users on submitting idea, a Wiki has been created accessible through [Here](#).

New Ideas added / evaluated in March 2026

For New technology, we have recorded total 47 new ideas in March 2026:

- 8 ideas pre-study completed
- 9 ideas deep dive completed and discussed in Tech Council
- Out of 9 deep dived ideas – 4 approved for addition to product roadmap.

Overall ideas on TFS:

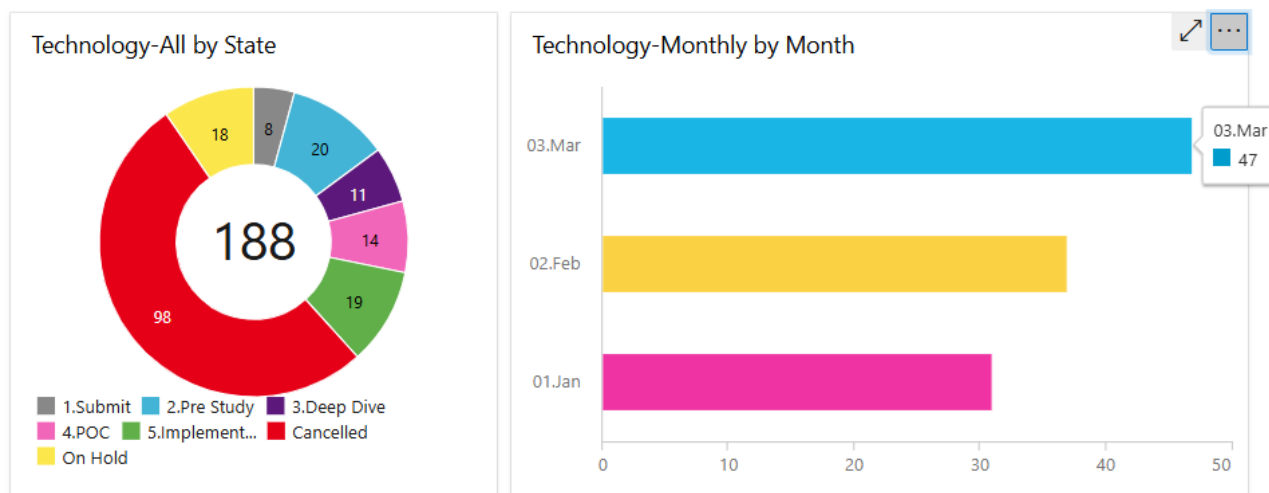


Figure 5: New Technology – Status on TFS (Status: 31/Mar/26)

2. POC Projects

New Smart Digital Technologies 01 (POC1)

Technology Name	Brief Description	Target VF vehicles
Digital IRVM (Electronic Rearview Mirror)	Replaces the traditional rearview mirror with a display fed by a rear camera, providing a clearer and unobstructed view → Requires smooth, low-latency, and high-resolution image rendering.	New LH800s, LH900s (already considered) In considering for MPV9
Digital ORVM (Electronic Side Mirrors)	Replaces traditional side mirrors with cameras and in-cabin displays (mounted near the A-pillar and doors). → Reduces blind spots, enhances safety, and offers a modern design → Comply with European safety standards (ECE R46).	Potential for New LH800s, LH900s
LC Glass (Switchable Smart Glass)	Window glass that can switch from transparent to tinted electronically. → Reduces glare, increases privacy, and enhances premium experience.	New LH800s, LH900s (already considered)
360° Camera System (AVM – Around View Monitor)	Combines multiple camera feeds to create a 360-degree view around the vehicle. → Assists in parking and maneuvering. → Requires smooth and accurate image stitching.	New LH800s, LH900s (already considered) Potential for MPV9, VF8N, VF Wild, VF7N
Immersive Pillar-to-Pillar Display (Full Dashboard Screen)	A continuous display stretching across the entire dashboard. → Supports multi-information display (infotainment, driving data, etc.). → POC will display vehicle info and new features, with two additional rear screens for interaction	Potential for MPV9
ICC (Integrated Cabin Communication / Audio System)	Reduces cabin noise, filters unwanted sounds, and enhances voice clarity during calls or voice commands. → Improves audio experience and voice control performance.	New LH800s, LH900s (already considered) Potential for MPV9, VF8N
AI Karaoke & Vocal Separation	Enables in-car karaoke with AI separating vocals from background music. → Creates a new entertainment experience. → Must ensure low latency and ease of use.	New LH800s, LH900s (already considered) Potential for MPV9, VF8N
Console Refrigerator (Center Console Cooling Compartment)	Built-in cooling compartment in the center console. → Keeps drinks and food chilled during travel. → Requires mechanical and electrical redesign.	VF8N, MPV9, New LH800s, LH900s (already considered) Potential for Wild
Ambient Light Embedded in Headliner	Decorative lighting is integrated into the vehicle headliner, capable of displaying logos, text, or lighting effects. → Enhances premium feel and personalization.	Potential for MPV9, VF8N, Wild
Hidden Power Air Vents	Air vents integrated seamlessly into the dashboard and controlled electronically. → Provides a clean, modern design and improved user experience.	Potential for MPV9, VF8N, Wild

Status:

Overall, the project remains on track.

- A Limogreen car will be modified and used as the demonstrator. The car is already built and ready.
- TA gate is passed with all critical deliverables completed. All pending deliverables by 15/04.
- Parts have been ordered with all parts availability targeted by end April. Vehicle build by 2nd week of May.
- Testing completion and showcase by end of June (On Track)

New Smart Digital Technologies 02 (POC2)

Technology	Brief Description	Target VF Vehicles
Smart Wiper System	Wipers with integrated water channels and spray nozzles, hidden parking position under the hood. → Wider wiping angle, smoother operation, and reduced noise.	Potential for MPV9, VF8, Wild, VF7
Active Road Noise Cancellation (ARNC)	Uses microphones and speakers to generate inverse sound waves that cancel out unwanted noise inside the cabin. → The vehicle “creates sound to eliminate noise,” resulting in a quieter cabin. → Reduces road, tire, and engine noise, enhances premium experience, improves clarity for music and calls	Potential for MPV9, VF8

Status:

Overall, the project remains on track.

- A VF9 Plus car will be modified and used as the demonstrator.
- ARNC demonstration will mainly focus on elimination of road noise and won't cover the full media playback experience due to limitations of the legacy system.
- Vehicle retrofit will start in May. Demo is targeted by end of June.