


Ears and a voice

Telegram in. Your existing brain in the middle. A real voice
note back.

CLASS 4


September 2, 2026

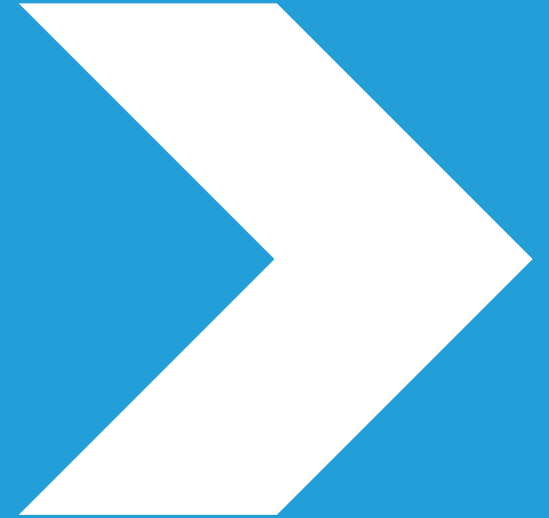

NO REAL TOKENS
NO REAL ACCOUNT SCREENS

Class 3 stays untouched

Class 4 adds transport and audio around the existing /ask webhook.

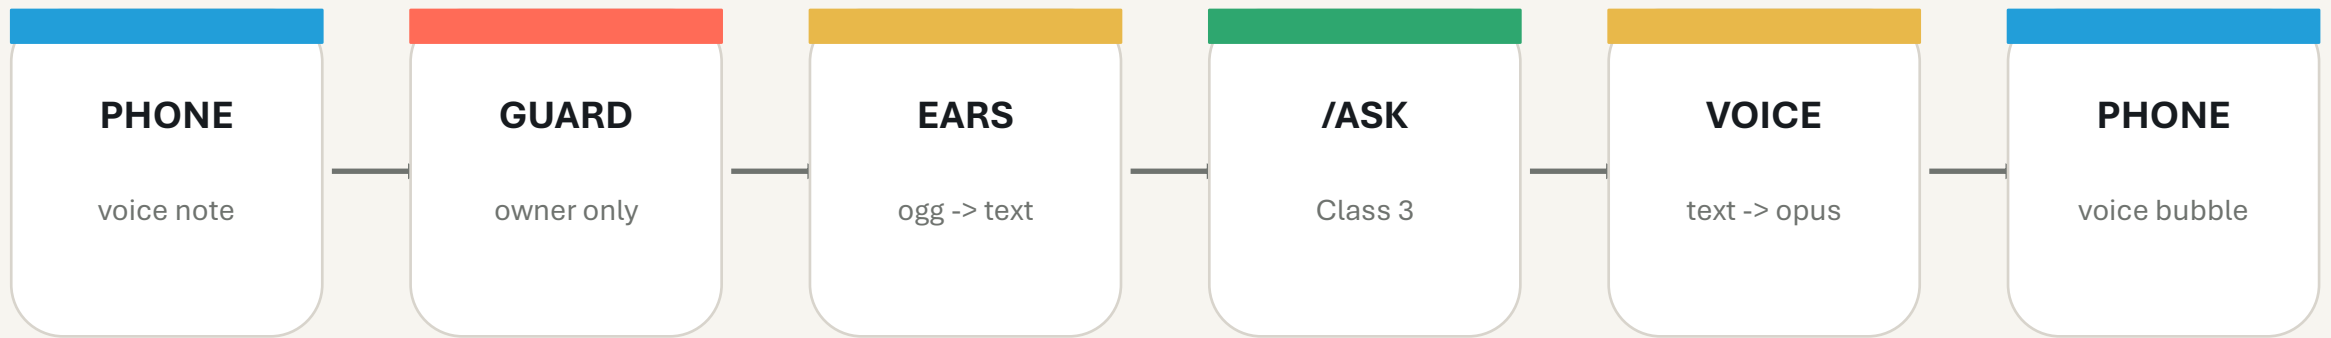


Fast fault isolation

**Ask tab works? Debug Class 4.
Ask tab fails? Repair Class 3 first.**

A public username in front of private documents

The guard must run before downloads, OpenRouter calls, or document answers.

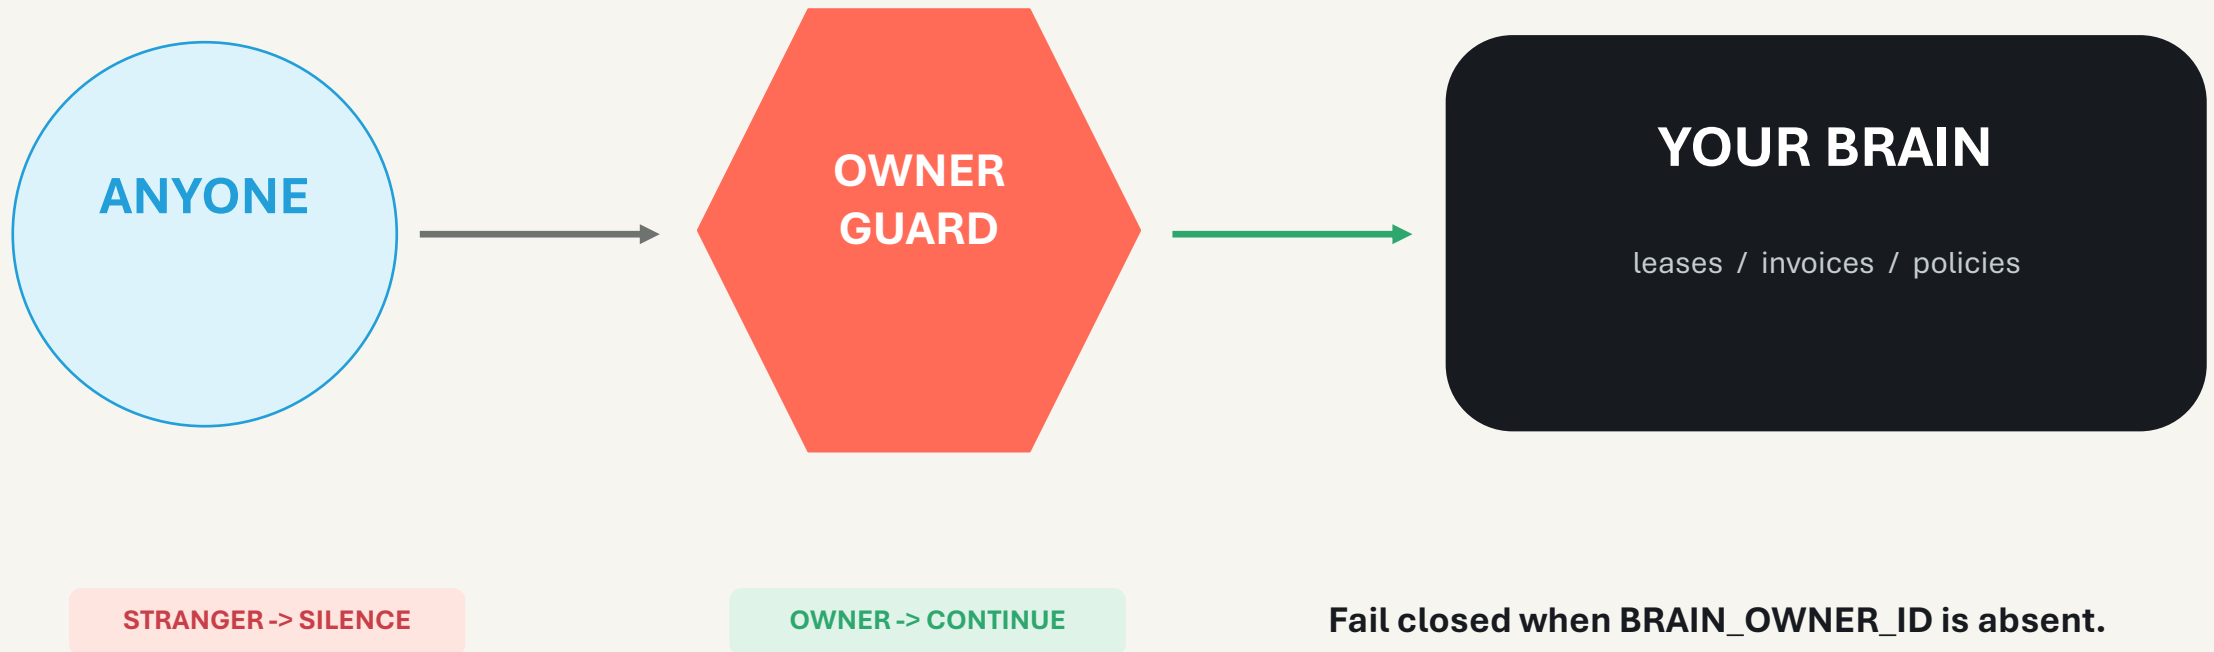

Four hard gates

Do not activate the Telegram Trigger until every gate is green.

01

Class 3 /ask

answers and refuses

OK

02

Public HTTPS

reaches this n8n

OK

03

ffmpeg + libopus

runtime check passes

OK

04

Separate bot

not Content Mate

OK

localhost is not a webhook address Telegram can reach

Create a separate Brain bot

Use this mock conversation on screen; keep the real account private.

Telegram - @BotFather (mock)

/newbot

Choose a name for your bot.

My Brain

Choose a username ending in bot.

yourname_brain_bot

LOCK IT DOWN

- 1 **/setjoingroups** Disable
- 2 **/setprivacy** Enable
- 3 **/setdescription** Keep it generic
- 4 **/revoke** After any leak

TOKEN SHOWN AS [HIDDEN]

Keep this slide on screen

The next command runs in a terminal that is not captured by the class recording.

PRIVATE TERMINAL - NOT SHARED

```
$ bash setup-telegram-private.sh --stack ~/brain
```

```
Public HTTPS URL: [input hidden]  
BotFather token:  [input hidden]  
Telegram owner ID: [input hidden]
```

600

private file mode

0

secret values
printed

1

clipboard handoff

Paste credential -> save -> clear
clipboard

.env is not container environment

Two common commands looked reasonable and still left both variables empty.

BEFORE

.env

```
BRAIN_BOT_TOKEN=...  
BRAIN_OWNER_ID=...
```

---> n8n

not mapped

AFTER

private env_file


————> n8n

Compose
override

```
docker compose up -d --force-recreate n8n
```

409 is temporary

Telegram supports one delivery mode at a time: webhook or getUpdates polling.

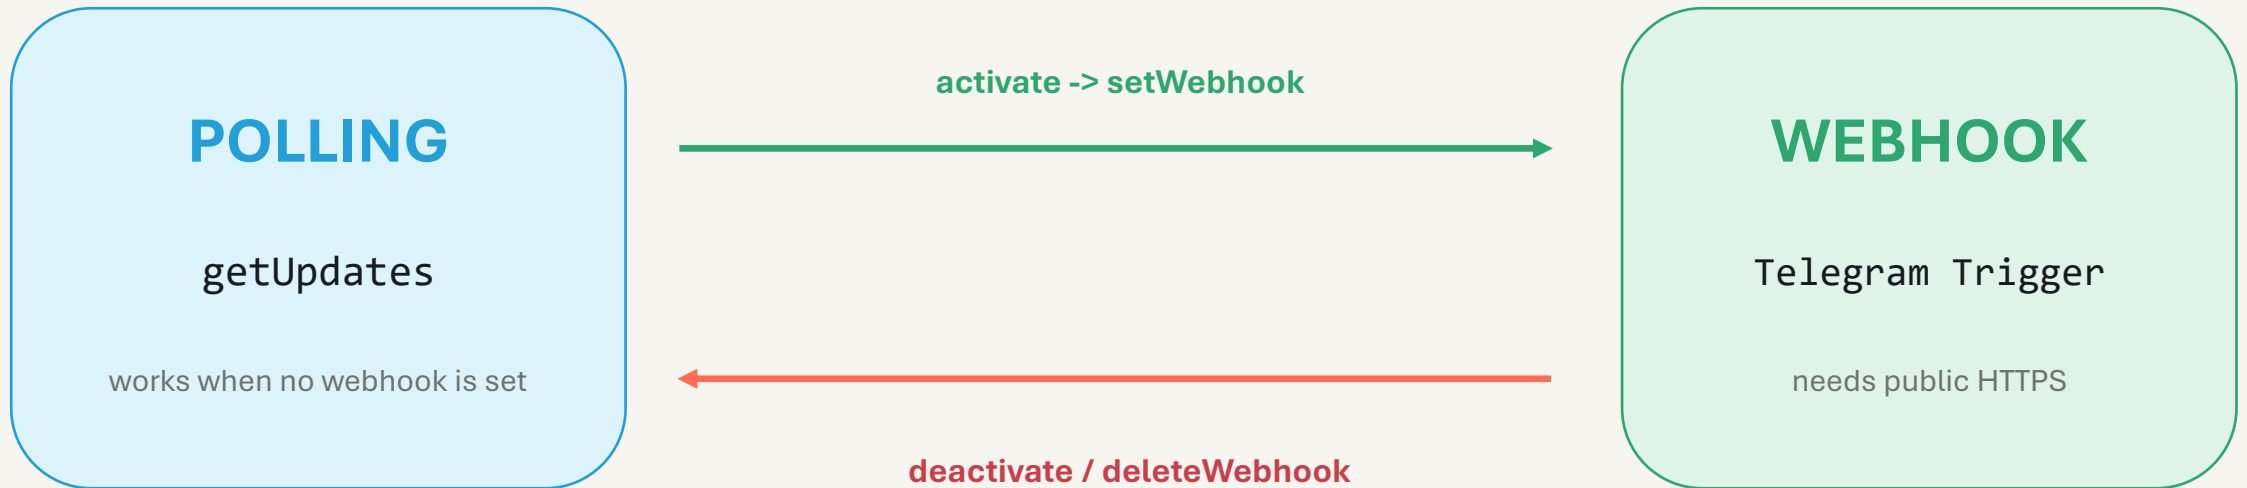

409 means: polling attempted while the webhook is active

Create the credential on a shared screen, safely

The Access Token field is a password field. The terminal, BotFather and the reveal icon stay off screen.

n8n - New credential (mock)

Credential type

Telegram API

Credential name

Brain Bot (Telegram)

Access Token

..... (masked)

SAVE

1

Copy token`--copy-token`

2

Paste + save`n8n form`

3

Clear`--clear-clipboard`

NEVER TYPE A TOKEN INTO A WORKFLOW
NODE

Three milestones, one guarded path

The pre-class JSON is a study copy. Import inactive until the live gate passes.

P1 EARS

- 1 Telegram Trigger
- 2 **Owner guard**
- 3 Download ogg
- 4 ffmpeg -> mp3
- 5 Transcribe

P2 ASK

- 1 Read transcript
- 2 POST /ask
- 3 Shape answer
- 4 Send text
- 5 Honor refusal


P3 VOICE

- 1 Stream speech
- 2 Parse SSE
- 3 Save PCM
- 4 ffmpeg -> opus
- 5 sendVoice

UNVERIFIED STUDY COPY

Activate, inspect, attack

A green owner test is not enough; deliberately test the refusal boundary.

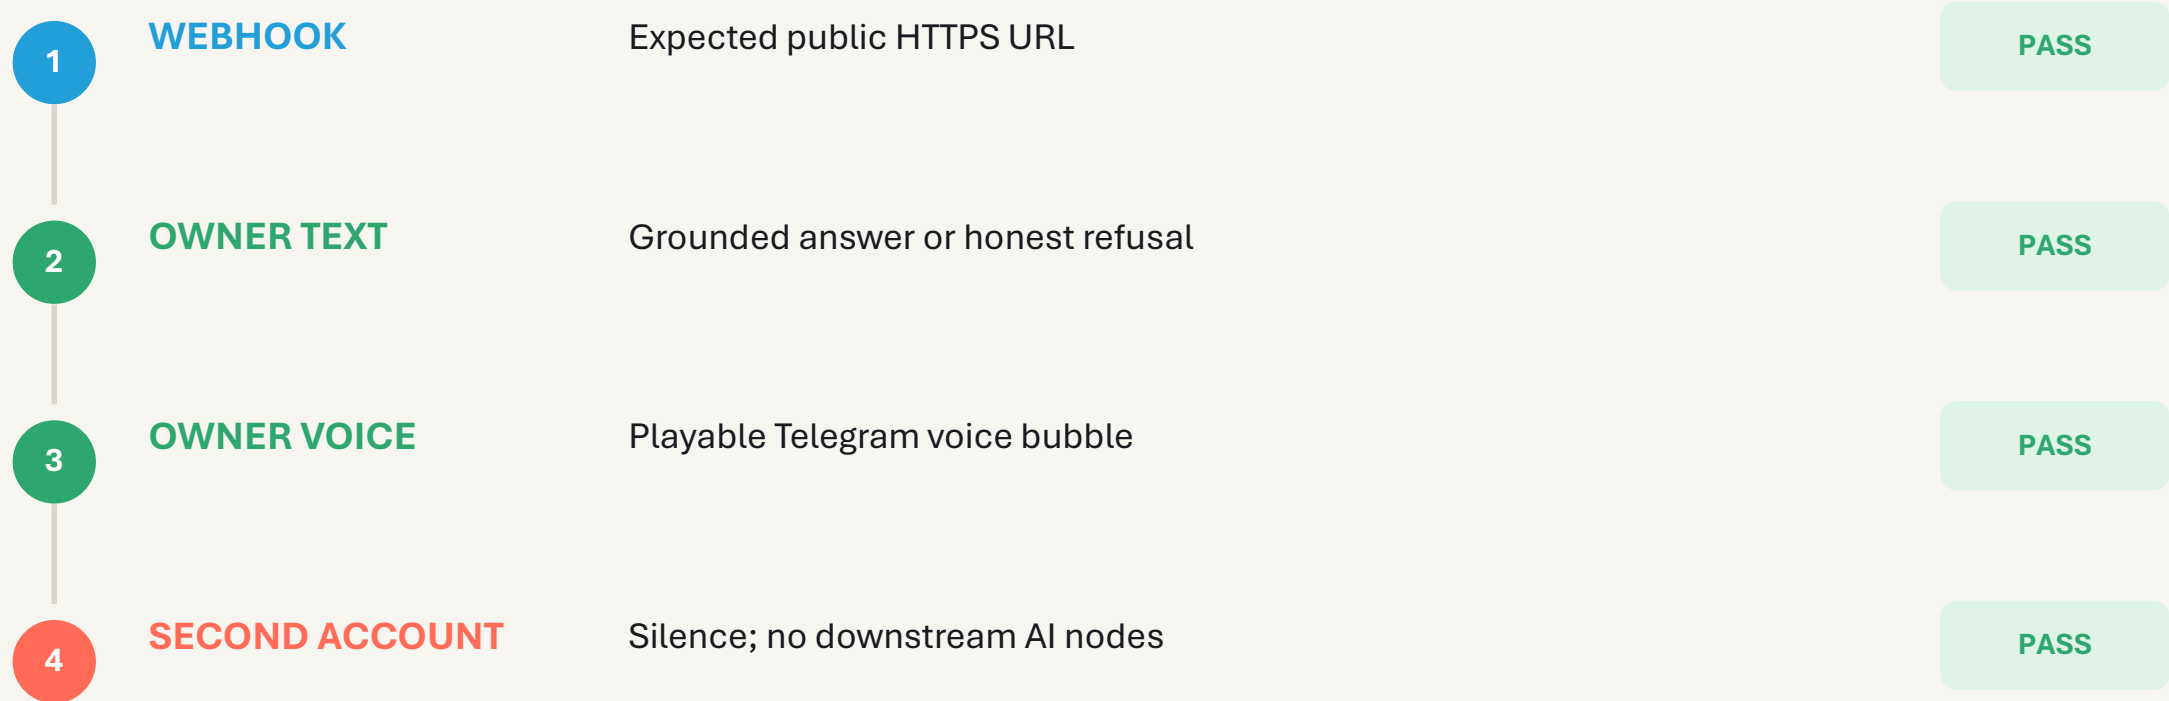

If the second account gets any answer: deactivate immediately.

The status code tells you where to look

Do not rotate tokens or rebuild nodes until the failing boundary is identified.

SIGNAL	BOUNDARY	MEANING	NEXT MOVE
409	getUpdates	Webhook active	Deactivate or deleteWebhook
401	Telegram	Token wrong / revoked	Copy the current BotFather token
404	sendVoice	Empty token made /bot/sendVoice	Run setup script with --status
404	OpenRouter	Model slug moved	Check live models API
0 frames	Speech SSE	Wrong response shape	Inspect data: lines

THE FINISH LINE

**Speak one real question.
Hear one grounded answer.**

-  Public HTTPS webhook
-  Owner guard proven
-  Secrets stayed private
-  Voice note plays

**SAFE TO
SHARE**

Slides + notes +
UNVERIFIED study workflow

NO CREDENTIAL VALUES