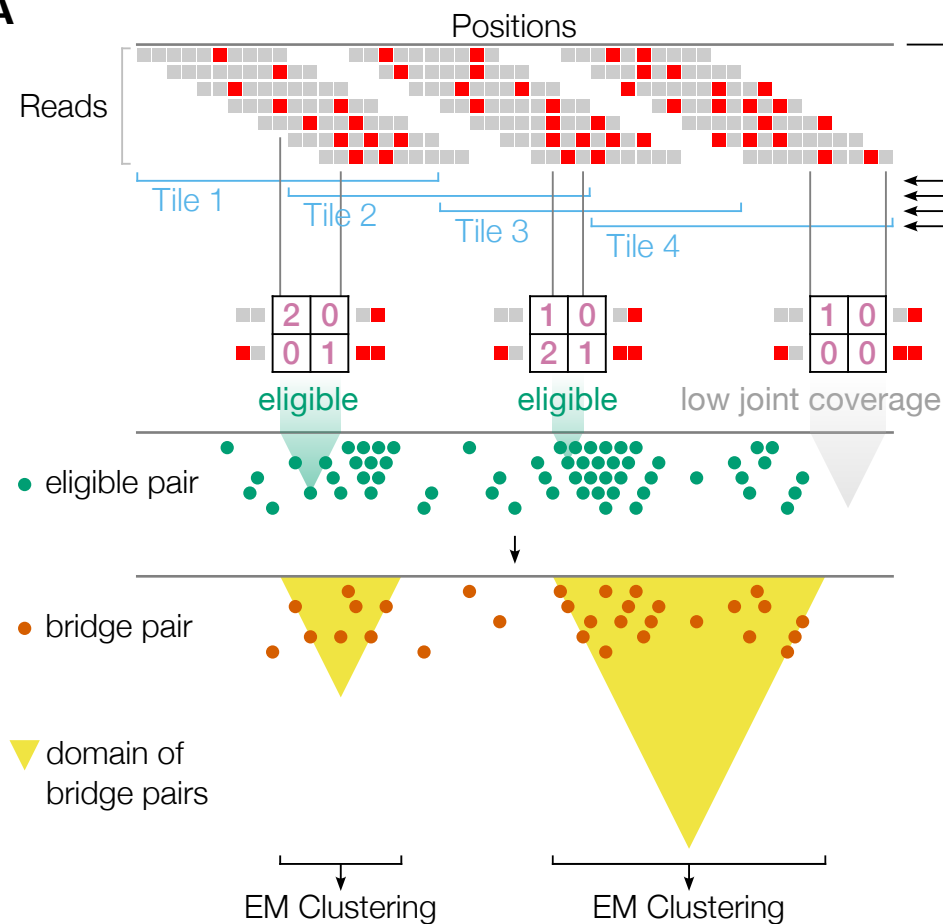


A

■ Match ■ Mutation

Divide the reference into overlapping tiles, each 2x the median read length.

For each pair of positions (A, B) in each tile, **count** how many reads are mutated at A, B, both, or neither.

Merge counts from all tiles; consider pairs with sufficient joint coverage and expected mutations to be "eligible".

Identify eligible pairs with significant anti-correlations and sufficient fold-change as "bridge pairs".

Find "domains" where bridge pairs are dense.

Cluster every domain.

B