


How to collect HMC report when there is no direct access to HMC IP address.

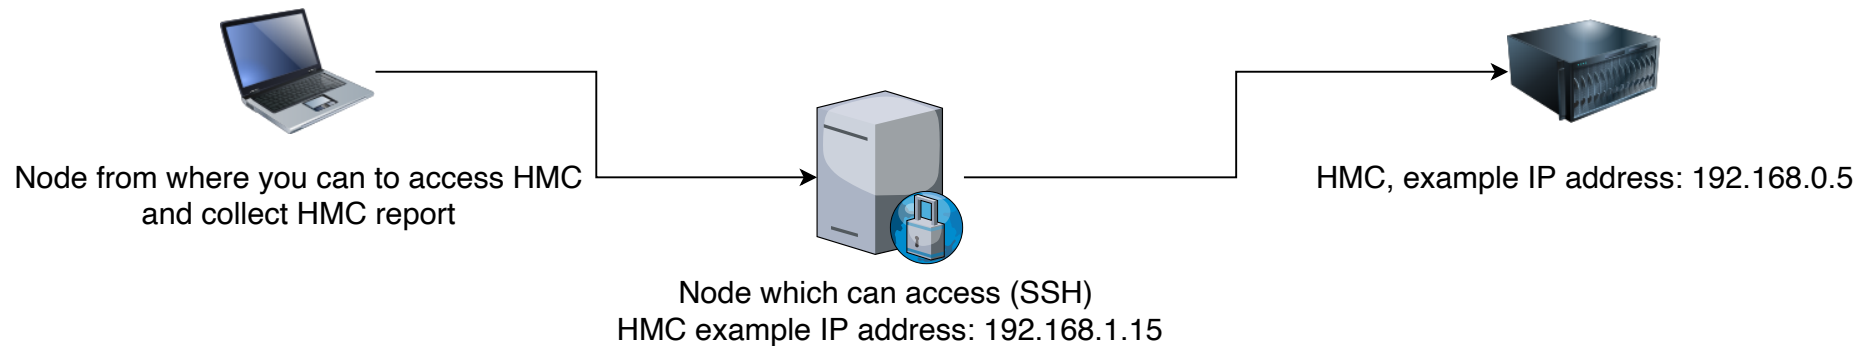

Step 1

Open forwarder from your machine (laptop example):

```
# ssh -D 127.0.0.1:5555 user@192.168.1.5
```

You will supply "user" password and open SSH connection.

Same then on your node (laptop) you will have port 5555 listening

Step 2

Run HMC Scanner command with SOCKS5

```
# bash hmcScanner.ksh 192.168.0.5 hscpe -p PASSWORD -proxy socks5 localhost 5555
```

HMC scanner should run and collect report as usual