

Winning Space Race with Data Science

Bertilla Rozario Anthony
12 Aug 2024



Outline

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

Executive Summary

- Summary of methodologies
 - Data Collection through API
 - Data Collection with Web Scraping
 - Data Wrangling
 - Exploratory Data Analysis with SQL
 - Exploratory Data Analysis with Data Visualization
 - Interactive Visual Analytics with Folium
 - Machine Learning Prediction
- Summary of all results
 - Exploratory Data Analysis result
 - Interactive analytics in screenshots
 - Predictive Analytics result

Introduction

- Project background and context

SpaceX's Falcon 9 rocket is notably cost-effective, at \$62 million per launch compared to \$165 million for other providers, due to its reusable first stage. Predicting the success of the first stage landing is crucial for determining launch costs and competing effectively.

In this capstone project, the goal is to predict the success of the Falcon 9 first stage landing. SpaceX's ability to reuse this stage significantly reduces launch costs. Accurately predicting the landing success will help determine launch costs and informed decision making.

- Problems you want to find answers

- What factors influence the successful landing of a rocket? These encompass the interaction of various elements that affect the landing success rate.
- What operational conditions are required to ensure the success of a landing program?

Section 1

Methodology

Methodology

Executive Summary

- Data collection methodology:
 - Data was collected using SpaceX API and web scraping from Wikipedia.
- Perform data wrangling
 - One-hot encoding was applied to categorical features
- Perform exploratory data analysis (EDA) using visualization and SQL
- Perform interactive visual analytics using Folium and Plotly Dash
- Perform predictive analysis using classification models
 - How to build, tune, evaluate classification models

Data Collection

- The data was collected using various methods
 - Data collection was done using get request to the SpaceX API.
 - Next, we decoded the response content as a Json using `.json()` function call and turn it into a pandas dataframe using `.json_normalize()`.
 - We then cleaned the data, checked for missing values and fill in missing values where necessary.
 - In addition, we performed web scraping from Wikipedia for Falcon 9 launch records with BeautifulSoup.
 - The objective was to extract the launch records as HTML table, parse the table and convert it to a pandas dataframe for future analysis.

Data Collection – SpaceX API

- We used the get request to the SpaceX API to collect data, clean the requested data and did some basic data wrangling and formatting.
- The link to the notebook is https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module_1_Lab_1_Complete_the_Data_Collection_API.ipynb

1. Get request for rocket launch data using API

```
In [6]: spacex_url="https://api.spacexdata.com/v4/launches/past"
```

```
In [7]: response = requests.get(spacex_url)
```

2. Use json_normalize method to convert json result to dataframe

```
In [12]: # Use json_normalize method to convert the json result into a dataframe  
# decode response content as json  
static_json_df = res.json()
```

```
In [13]: # apply json_normalize  
data = pd.json_normalize(static_json_df)
```

3. We then performed data cleaning and filling in the missing values

```
In [30]: rows = data_falcon9['PayloadMass'].values.tolist()[0]  
  
df_rows = pd.DataFrame(rows)  
df_rows = df_rows.replace(np.nan, PayloadMass)  
  
data_falcon9['PayloadMass'][0] = df_rows.values  
data_falcon9
```

Data Collection - Scraping

- We applied web scrapping to webscrap Falcon 9 launch records with BeautifulSoup
- We parsed the table and converted it into a pandas dataframe.
- The link to the notebook is
[https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module 1 Lab 2 Complete the Data Collection with Web Scraping.ipynb](https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module%201%20Lab%202%20Complete%20the%20Data%20Collection%20with%20Web%20Scraping.ipynb)

```
1. Apply HTTP Get method to request the Falcon 9 rocket launch page
```

```
In [4]: static_url = "https://en.wikipedia.org/w/index.php?title=List_of_Falcon_9_and_Falcon_Heavy_launches&oldid=1027686922"
```

```
In [5]: # use requests.get() method with the provided static_url
# assign the response to a object
html_data = requests.get(static_url)
html_data.status_code
```

```
Out[5]: 200
```

```
2. Create a BeautifulSoup object from the HTML response
```

```
In [6]: # Use BeautifulSoup() to create a BeautifulSoup object from a response text content
soup = BeautifulSoup(html_data.text, 'html.parser')
```

```
Print the page title to verify if the BeautifulSoup object was created properly
```

```
In [7]: # Use soup.title attribute
soup.title
```

```
Out[7]: <title>List of Falcon 9 and Falcon Heavy launches - Wikipedia</title>
```

```
3. Extract all column names from the HTML table header
```


```
In [10]: column_names = []

# Apply find_all() function with 'th' element on first_launch_table
# Iterate each th element and apply the provided extract_column_from_header() to get a column name
# Append the Non-empty column name ('if name is not None and len(name) > 0') into a list called column_names

element = soup.find_all('th')
for row in range(len(element)):
    try:
        name = extract_column_from_header(element[row])
        if (name is not None and len(name) > 0):
            column_names.append(name)
    except:
        pass
```

```
4. Create a dataframe by parsing the launch HTML tables
5. Export data to csv
```



Data Wrangling

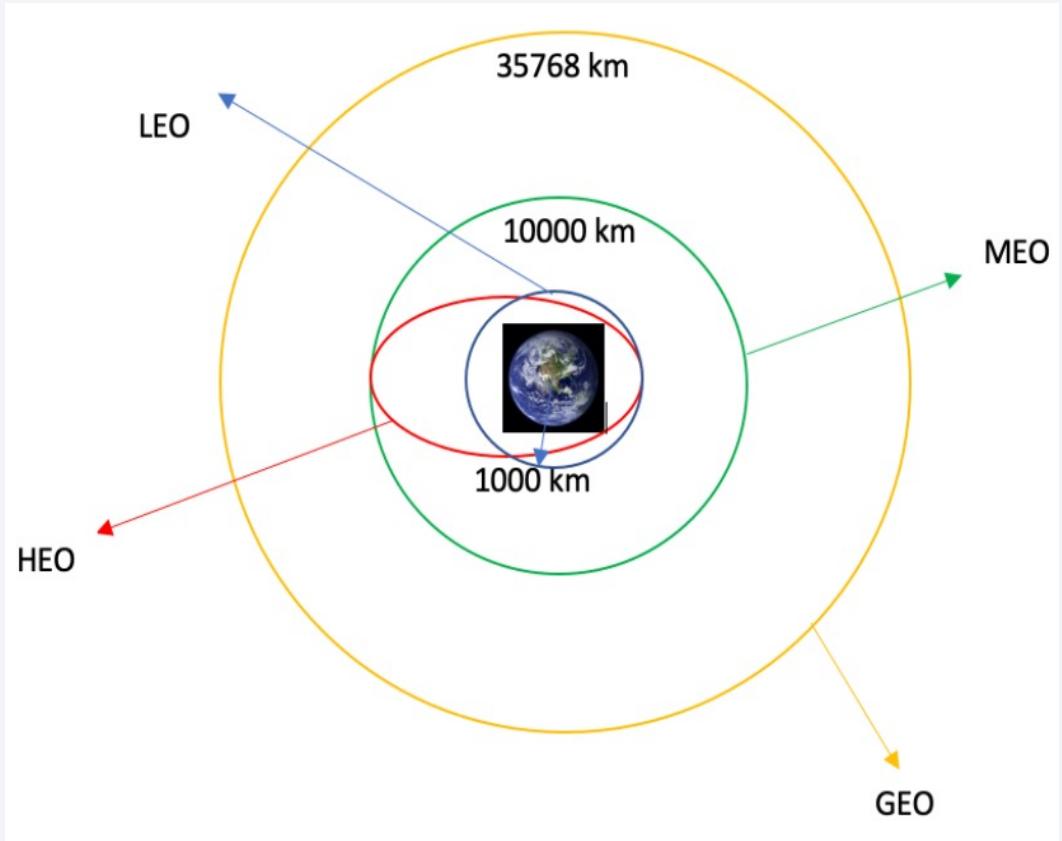

- We performed exploratory data analysis and determined the training labels.
- We calculated the number of launches at each site, and the number and occurrence of each orbits
- We created landing outcome label from outcome column and exported the results to csv.
- The link to the notebook is
https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module_1_lab_3_Data_Wrangling.ipynb

EDA with Data Visualization

- We explored the data by visualizing the relationship between flight number and launch Site, payload and launch site, success rate of each orbit type, flight number and orbit type, the launch success yearly trend.

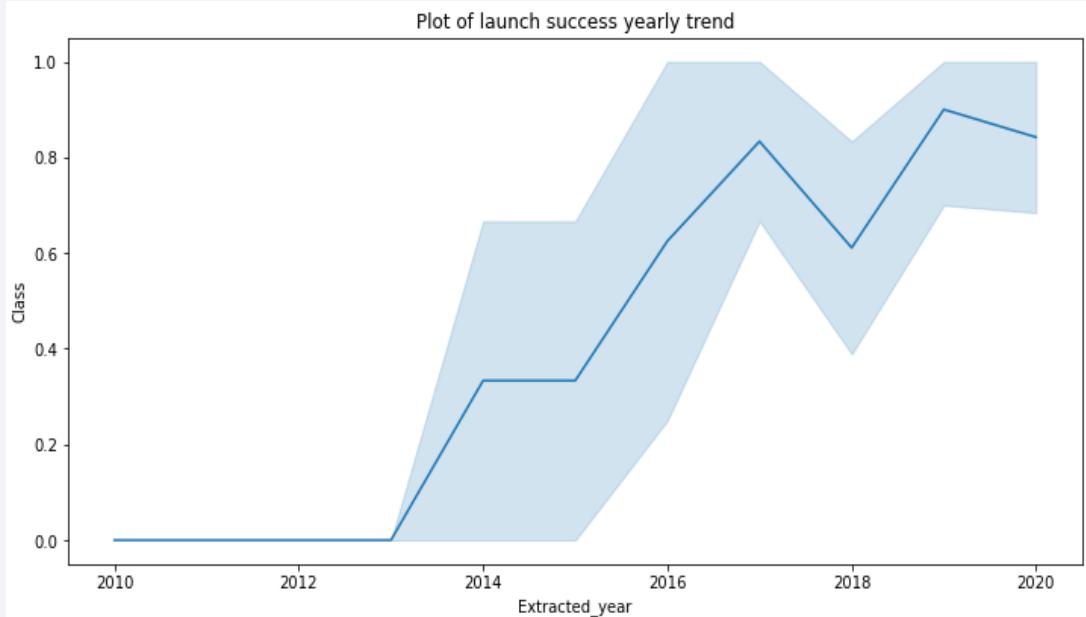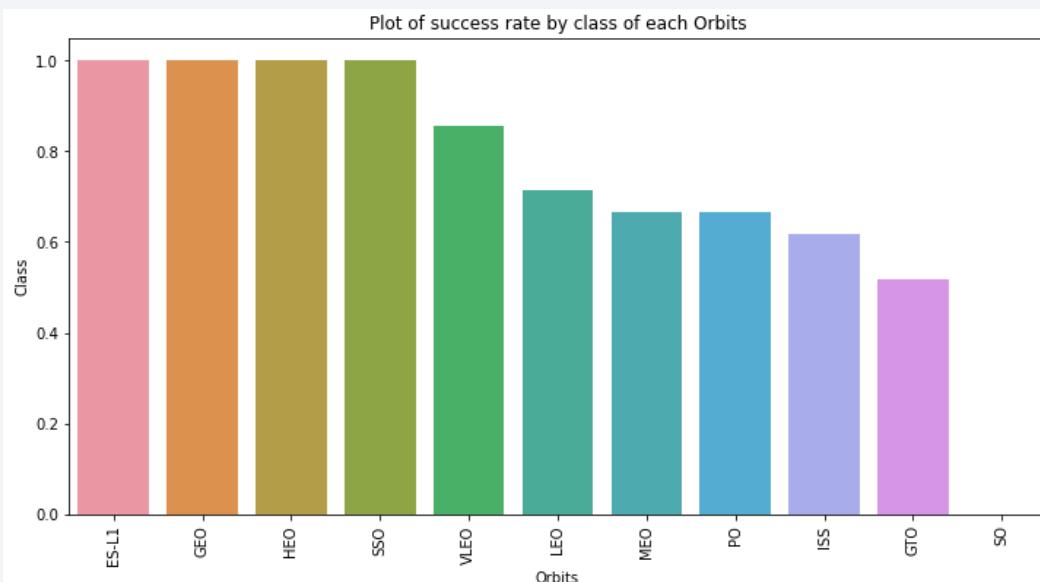

- The link to the notebook is
[https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module 2 EDA with Visualization Lab.ipynb](https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module%202%20EDA%20with%20Visualization%20Lab.ipynb)

EDA with SQL

- We loaded the SpaceX dataset into a PostgreSQL database without leaving the jupyter notebook.
- We applied EDA with SQL to get insight from the data. We wrote queries to find out for instance:
 - The names of unique launch sites in the space mission.
 - The total payload mass carried by boosters launched by NASA (CRS)
 - The average payload mass carried by booster version F9 v1.1
 - The total number of successful and failure mission outcomes
 - The failed landing outcomes in drone ship, their booster version and launch site names.
- The link to the notebook is
[https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module 2 Lab 1 Complete the EDA with SQL.ipynb](https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module%202%20Lab%201%20Complete%20the%20EDA%20with%20SQL.ipynb)

Build an Interactive Map with Folium

- We marked all launch sites, and added map objects such as markers, circles, lines to mark the success or failure of launches for each site on the folium map.
- We assigned the feature launch outcomes (failure or success) to class 0 and 1.i.e., 0 for failure, and 1 for success.
- Using the color-labeled marker clusters, we identified which launch sites have relatively high success rate.
- We calculated the distances between a launch site to its proximities. We answered some question for instance:
 - Are launch sites near railways, highways and coastlines.
 - Do launch sites keep certain distance away from cities.
- The link to the notebook is
https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module_3_Lab_1_Interactive_Visual_Analytics_with_Folium%20.ipynb

Build a Dashboard with Plotly Dash


- We built an interactive dashboard with Plotly dash
- We plotted pie charts showing the total launches by a certain sites
- We plotted scatter graph showing the relationship with Outcome and Payload Mass (Kg) for the different booster version.
- The link to the notebook is
https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/spacex_dash_app.py

Predictive Analysis (Classification)

- We loaded the data using numpy and pandas, transformed the data, split our data into training and testing.
- We built different machine learning models and tune different hyperparameters using GridSearchCV.
- We used accuracy as the metric for our model, improved the model using feature engineering and algorithm tuning.
- We found the best performing classification model.
- The link to the notebook is
https://github.com/rozariosofia/testCapstone/blob/10755472659125e839bbe2f167a517c5ab7a1291/Module_4_Lab_1_Complete_the_Machine_Learning_Prediction.ipynb

Results

- Exploratory data analysis results
- Interactive analytics demo in screenshots
- Predictive analysis results

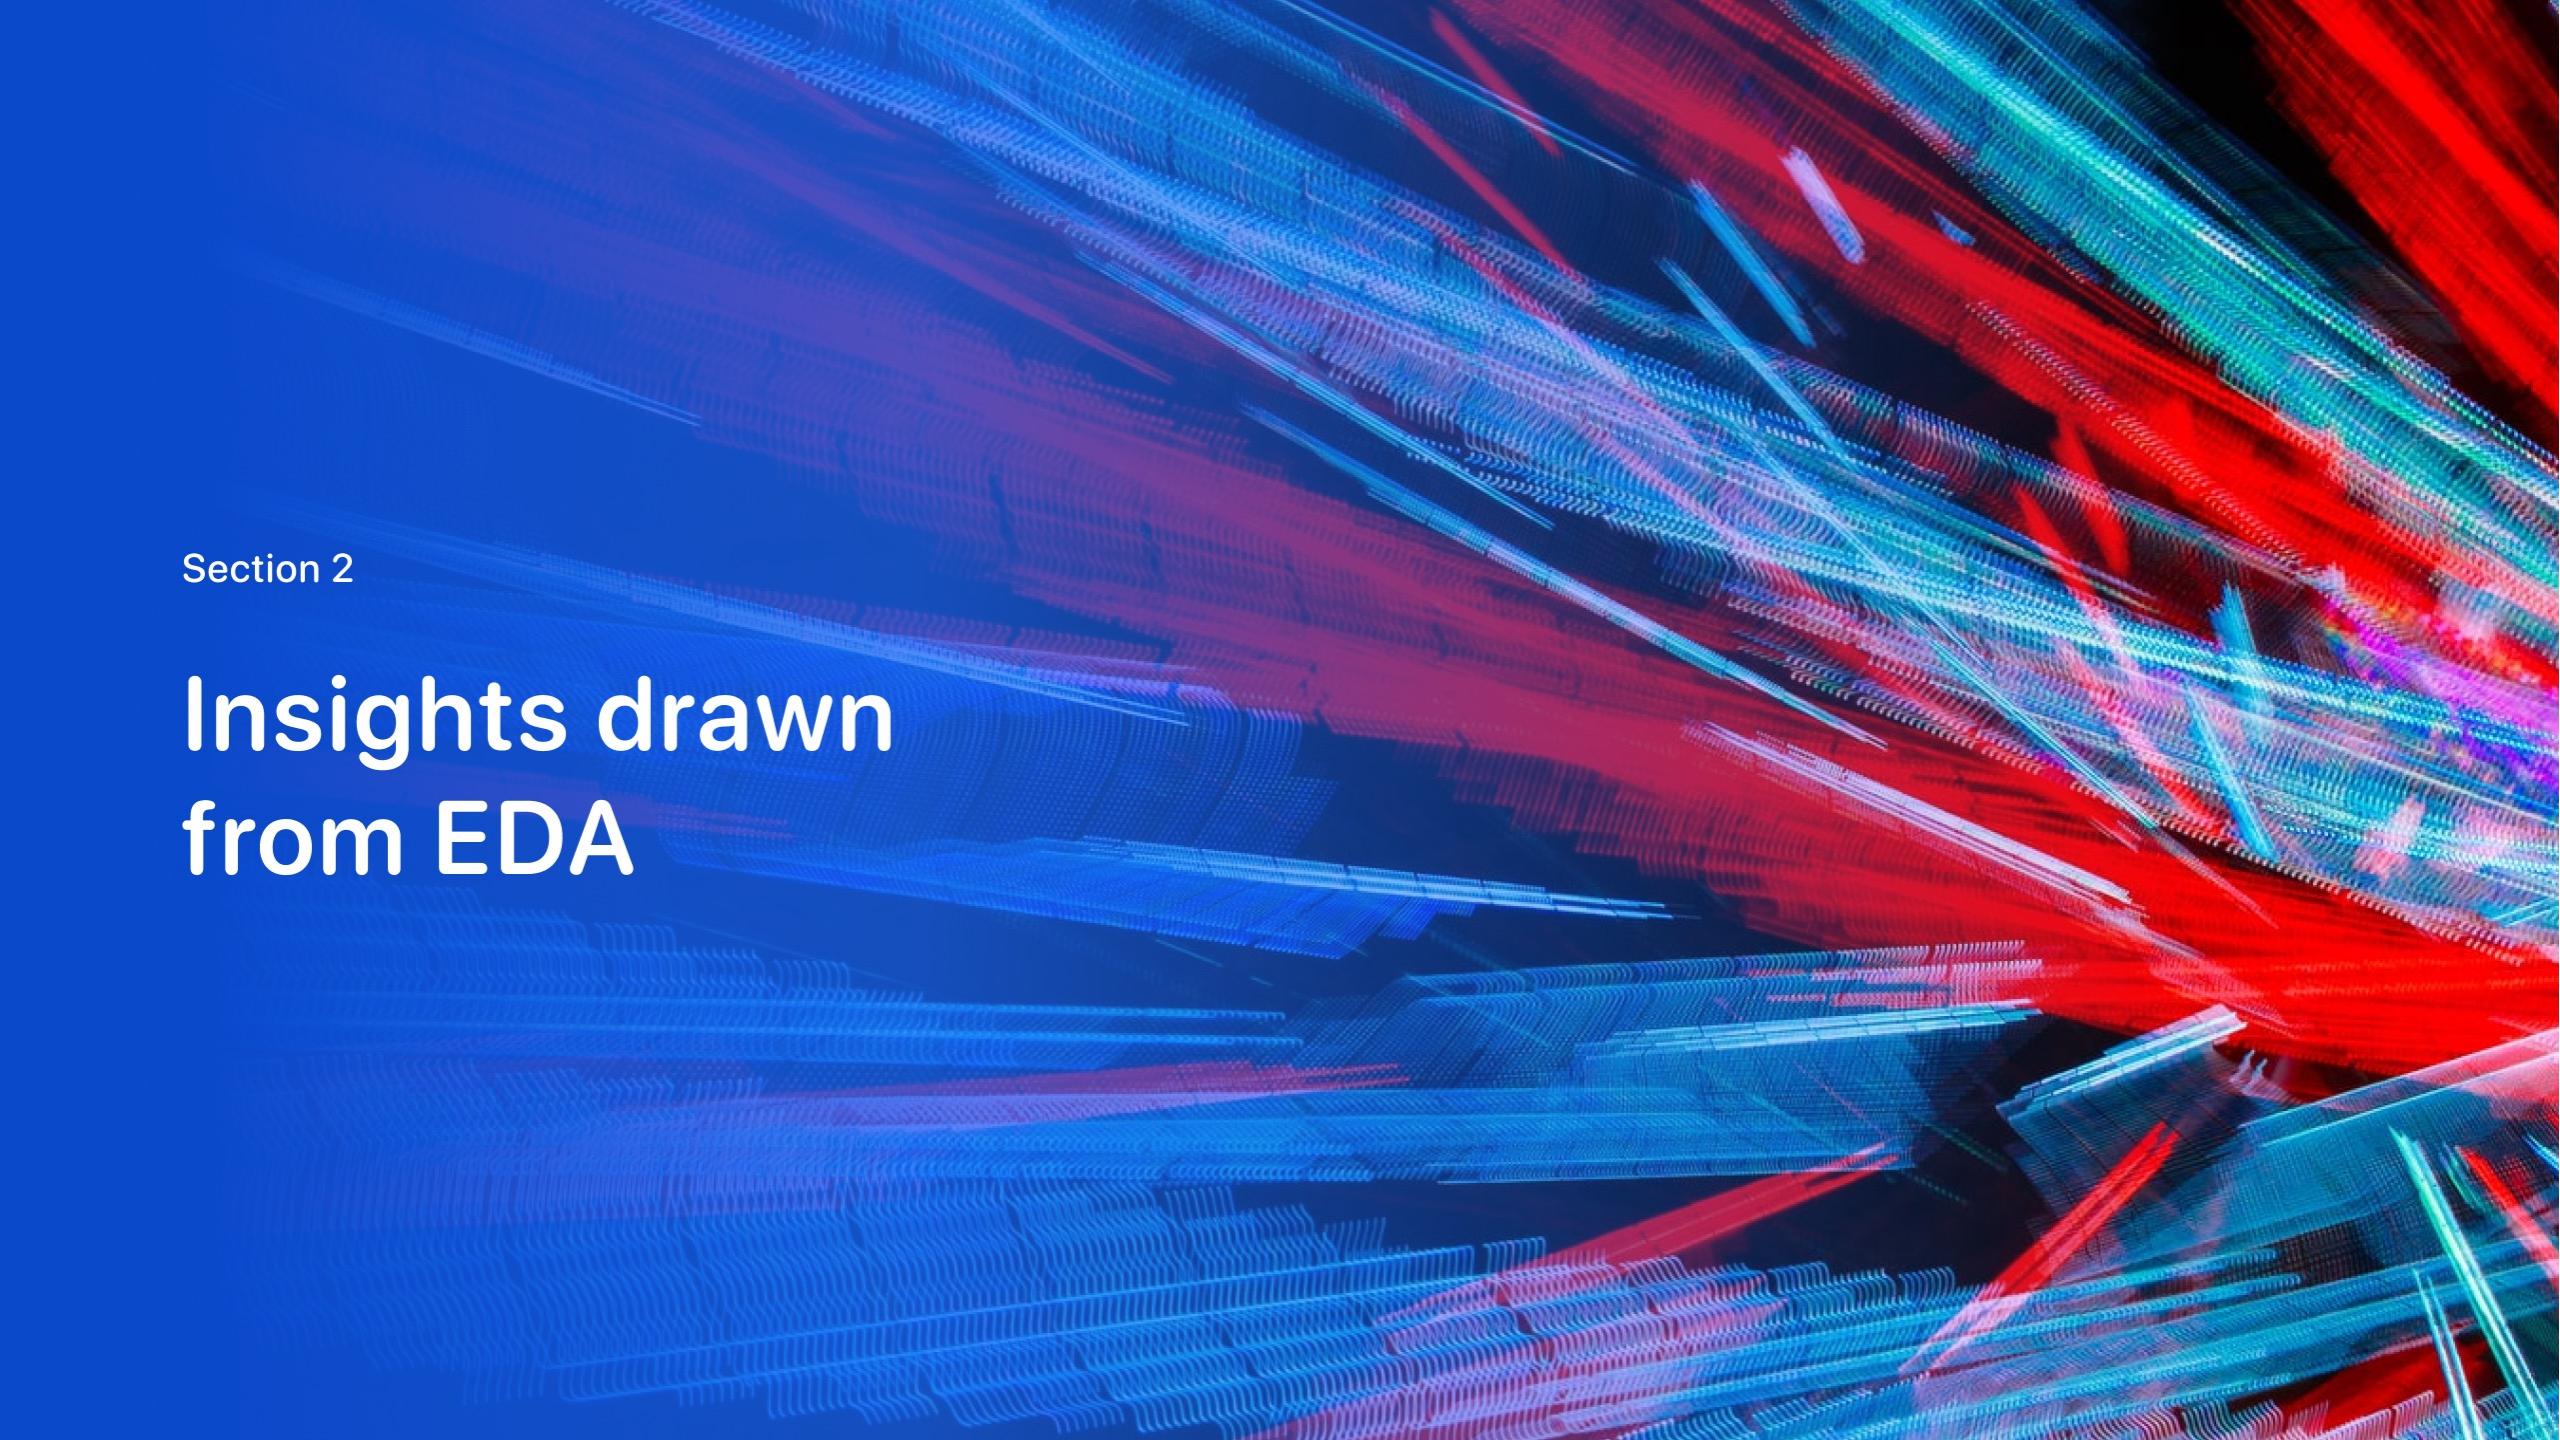
The background of the slide features a complex, abstract digital visualization. It consists of numerous thin, glowing lines that create a sense of depth and motion. The lines are primarily blue and red, with some green and purple highlights. They form a grid-like structure that curves and twists across the frame, resembling a three-dimensional space or a network of data points. The overall effect is futuristic and dynamic.

Section 2

Insights drawn from EDA


Flight Number vs. Launch Site

- Visualize the relationship between Flight Number and Launch Site
- From the plot, we found
 - The CCAFS SLC 40 has more flights and has the nest success rate compared to other sites

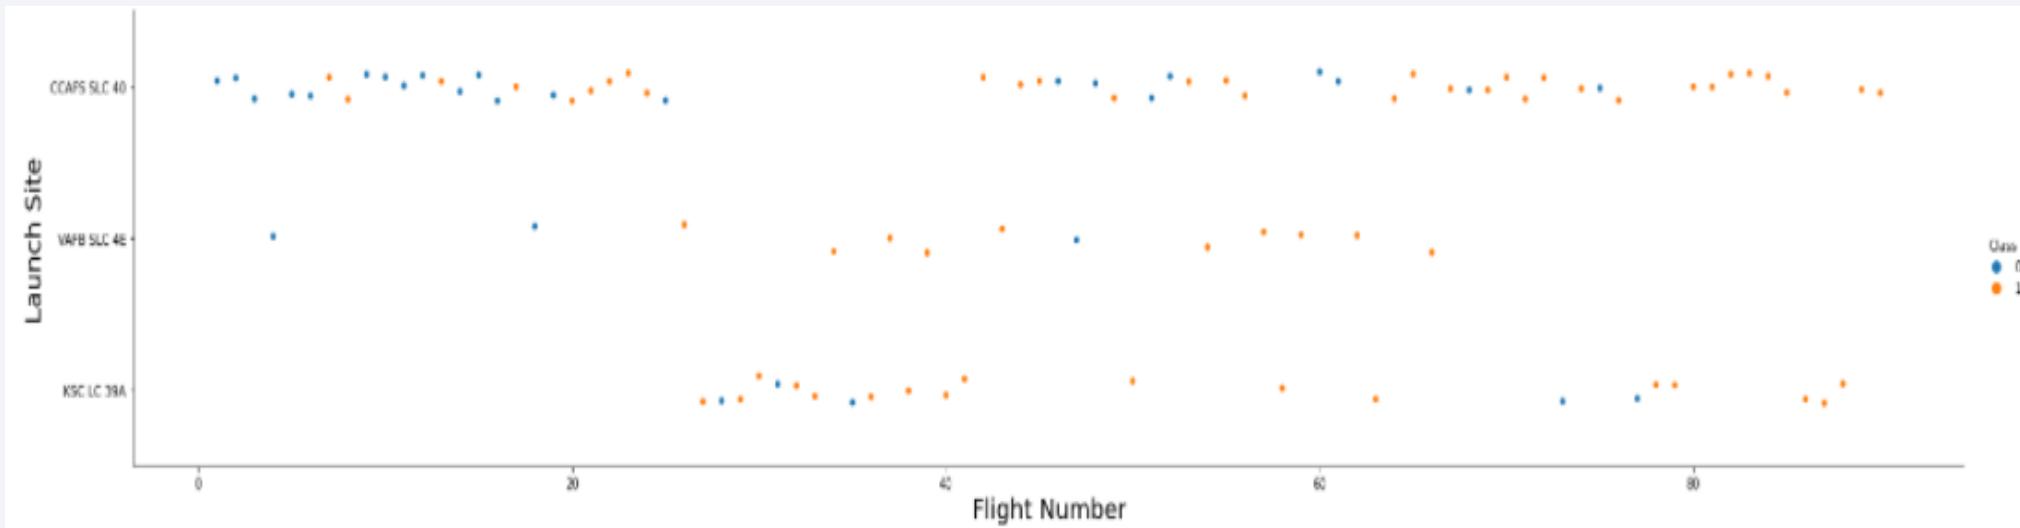


Payload Mass vs. Launch Site

- Visualize the relationship between Payload Mass and Launch Site
- From the plot, we found
 - The CCAFS SLC 40 has handled higher payload mas and has the nest success rate compared to other sites

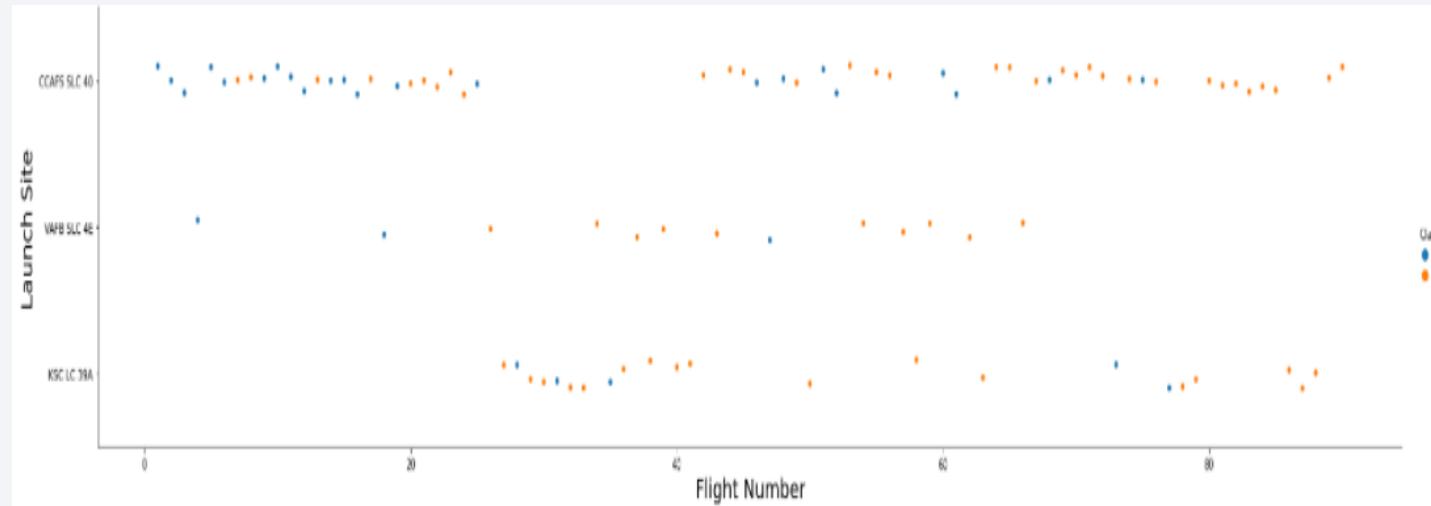


Success Rate vs. Orbit Type

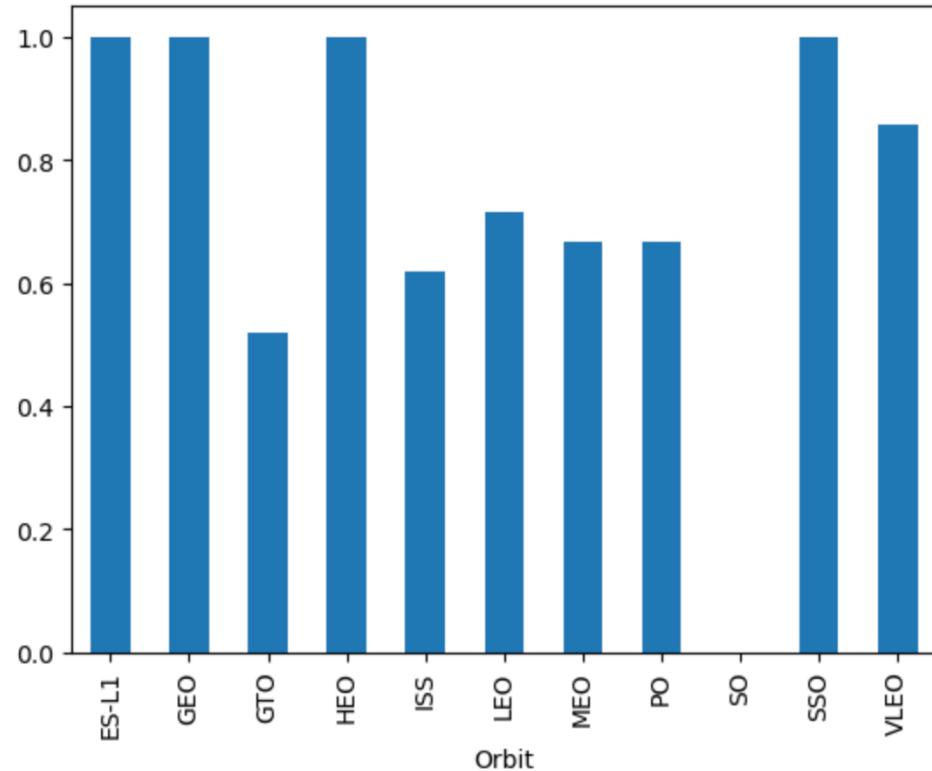

- From the plot, we can see that ES-L1, GEO, HEO, SSO, VLEO had the most success rate.


Flight Number vs. Orbit Type

- Visualize the relationship between FlightNumber and Orbit type
- From the plot, we found
 - We observe that in the LEO orbit, success is related to the number of flights whereas in the GTO orbit, there is no relationship between flight number and the orbit.

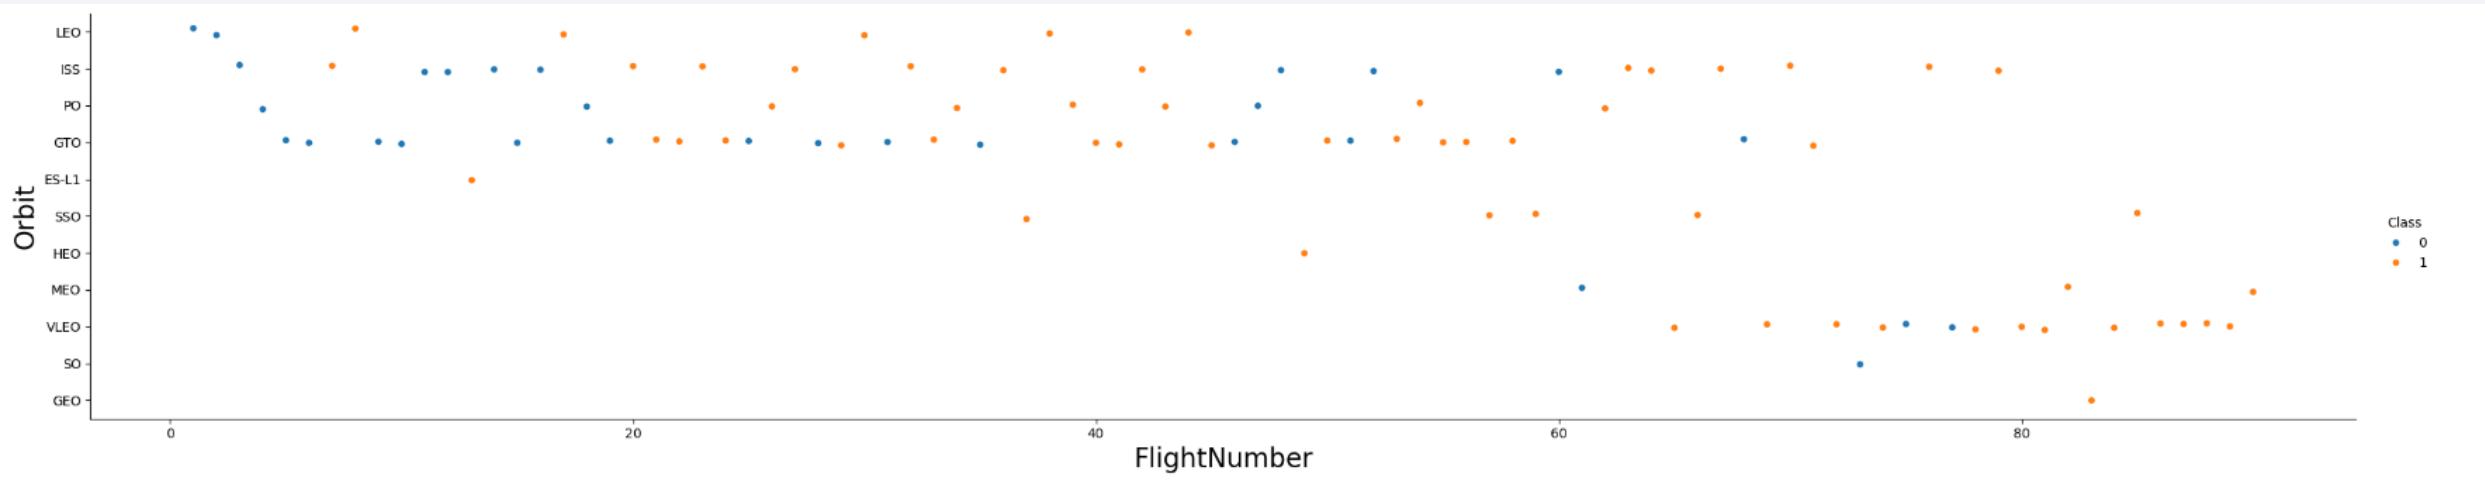


Payload vs. Orbit Type

- We can observe that with heavy payloads, the successful landing are more for PO, LEO and ISS orbits.

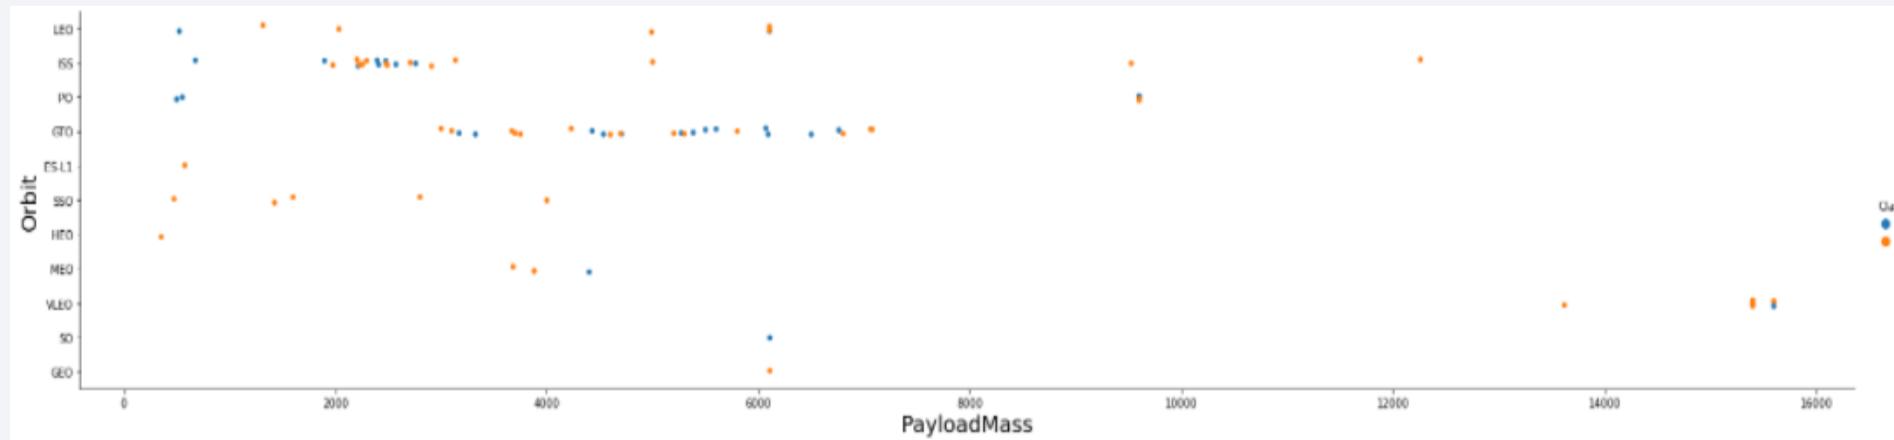

Launch Success Yearly Trend

- From the plot, we can observe that success rate since 2013 kept on increasing till 2020.

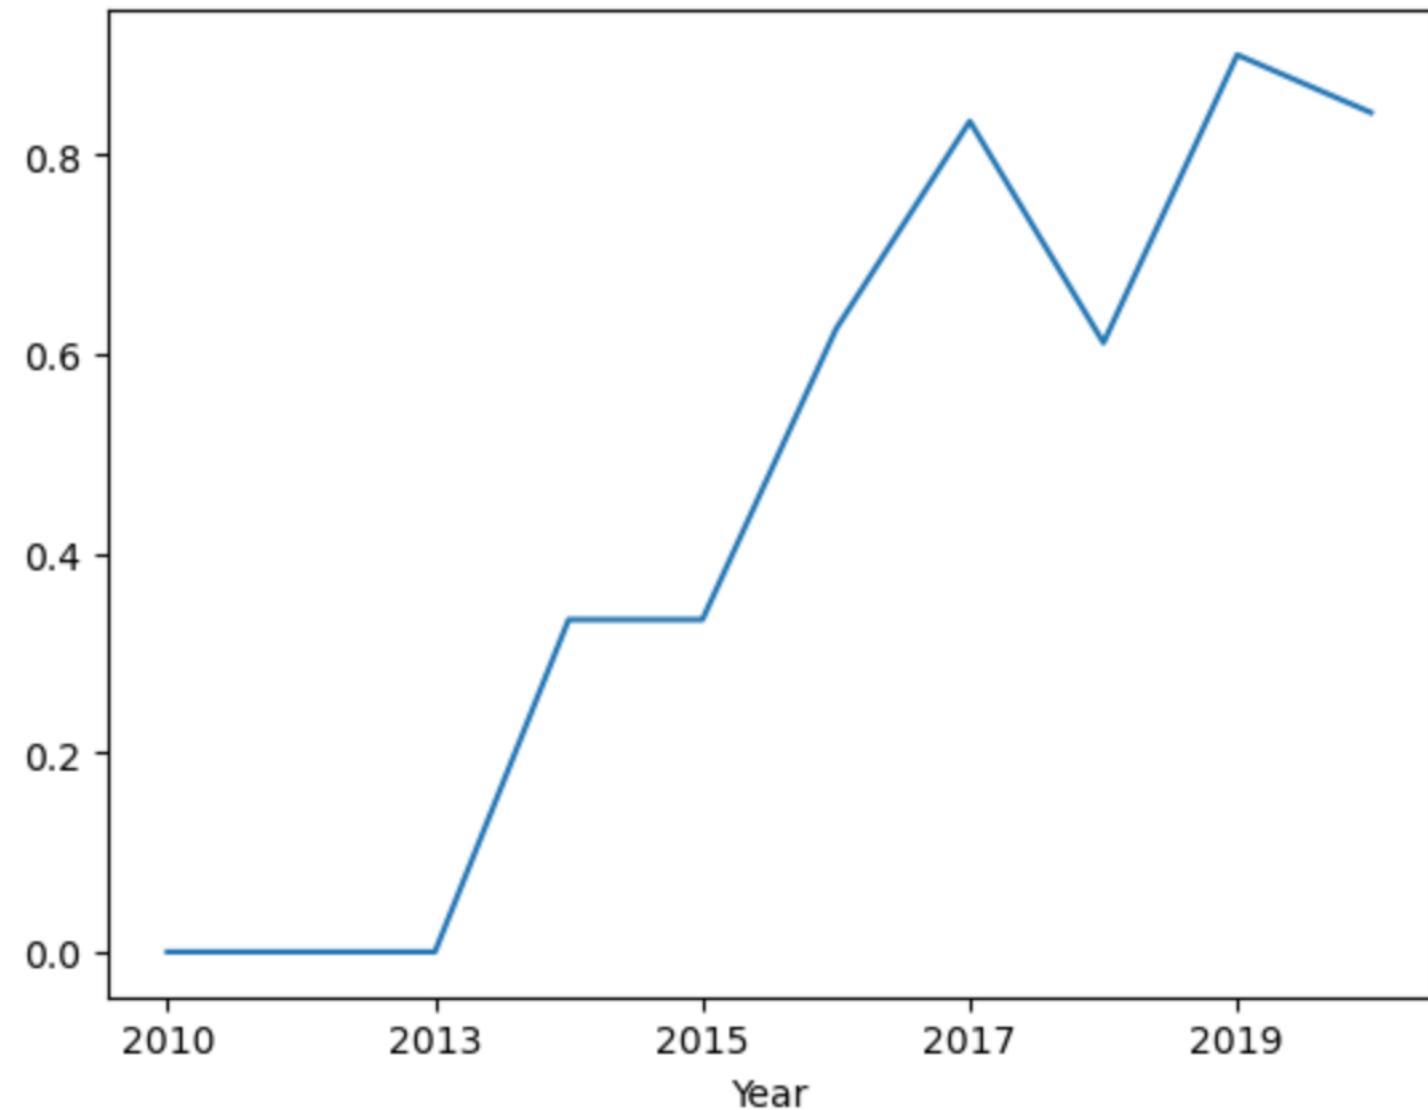

All Launch Site Names

- We used the key word **DISTINCT** to show only unique launch sites from the SpaceX data.

In [10]:

Display the names of the unique launch sites in the space mission

```
task_1 = ...  
        SELECT DISTINCT LaunchSite  
        FROM SpaceX  
...  
create_pandas_df(task_1, database=conn)
```

Out[10]:

	launchsite
0	KSC LC-39A
1	CCAFS LC-40
2	CCAFS SLC-40
3	VAFB SLC-4E

Launch Site Names Begin with 'CCA'

Display 5 records where launch sites begin with the string 'CCA'

```
In [11]: task_2 = """
    SELECT *
    FROM SpaceX
    WHERE LaunchSite LIKE 'CCA%'
    LIMIT 5
"""
create_pandas_df(task_2, database=conn)
```

Out[11]:

	date	time	boosterversion	launchsite	payload	payloadmasskg	orbit	customer	missionoutcome	landingoutcome
0	2010-04-06	18:45:00	F9 v1.0 B0003	CCAFS LC-40	Dragon Spacecraft Qualification Unit	0	LEO	SpaceX	Success	Failure (parachute)
1	2010-08-12	15:43:00	F9 v1.0 B0004	CCAFS LC-40	Dragon demo flight C1, two CubeSats, barrel of...	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2	2012-05-22	07:44:00	F9 v1.0 B0005	CCAFS LC-40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
3	2012-08-10	00:35:00	F9 v1.0 B0006	CCAFS LC-40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
4	2013-01-03	15:10:00	F9 v1.0 B0007	CCAFS LC-40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt

- We used the query above to display 5 records where launch sites begin with 'CCA'

Total Payload Mass

- We calculated the total payload carried by boosters from NASA as 45596 using the query below

```
Display the total payload mass carried by boosters launched by NASA (CRS)

In [12]: task_3 = '''
            SELECT SUM(PayloadMassKG) AS Total_PayloadMass
            FROM SpaceX
            WHERE Customer LIKE 'NASA (CRS)'
            '''
create_pandas_df(task_3, database=conn)

Out[12]: total_payloadmass
          0      45596
```

Average Payload Mass by F9 v1.1

- We calculated the average payload mass carried by booster version F9 v1.1 as 2928.4

Display average payload mass carried by booster version F9 v1.1

In [13]:

```
task_4 = """
    SELECT AVG(PayloadMassKG) AS Avg_PayloadMass
    FROM SpaceX
    WHERE BoosterVersion = 'F9 v1.1'
"""

create_pandas_df(task_4, database=conn)
```

Out[13]:

avg_payloadmass

0	2928.4
---	--------

First Successful Ground Landing Date

- We observed that the dates of the first successful landing outcome on ground pad was 22nd December 2015

In [14]:

```
task_5 = """
    SELECT MIN(Date) AS FirstSuccessfull_landing_date
    FROM SpaceX
    WHERE LandingOutcome LIKE 'Success (ground pad)'
    """

create_pandas_df(task_5, database=conn)
```

Out[14]:

firstsuccessfull_landing_date

0	2015-12-22
---	------------

Successful Drone Ship Landing with Payload between 4000 and 6000

In [15]:

```
task_6 = """
    SELECT BoosterVersion
    FROM SpaceX
    WHERE LandingOutcome = 'Success (drone ship)'
        AND PayloadMassKG > 4000
        AND PayloadMassKG < 6000
    ...
create_pandas_df(task_6, database=conn)
```

Out[15]:

	boosterversion
0	F9 FT B1022
1	F9 FT B1026
2	F9 FT B1021.2
3	F9 FT B1031.2

- We used the **WHERE** clause to filter for boosters which have successfully landed on drone ship and applied the **AND** condition to determine successful landing with payload mass greater than 4000 but less than 6000

Total Number of Successful and Failure Mission Outcomes

List the total number of successful and failure mission outcomes

In [16]:

```
task_7a = """
    SELECT COUNT(MissionOutcome) AS SuccessOutcome
    FROM SpaceX
    WHERE MissionOutcome LIKE 'Success%'
"""

task_7b = """
    SELECT COUNT(MissionOutcome) AS FailureOutcome
    FROM SpaceX
    WHERE MissionOutcome LIKE 'Failure%'
"""

print('The total number of successful mission outcome is:')
display(create_pandas_df(task_7a, database=conn))
print()
print('The total number of failed mission outcome is:')
create_pandas_df(task_7b, database=conn)
```

The total number of successful mission outcome is:

successoutcome
0 100

The total number of failed mission outcome is:

Out[16]: failureoutcome

failureoutcome
0 1

- We used wildcard like '%' to filter for **WHERE** MissionOutcome was a success or a failure.

Boosters Carried Maximum Payload

- We determined the booster that have carried the maximum payload using a subquery in the WHERE clause and the MAX() function.

List the names of the booster_versions which have carried the maximum payload mass. Use a subquery

In [17]:

```
task_8 = """
    SELECT BoosterVersion, PayloadMassKG
    FROM SpaceX
    WHERE PayloadMassKG = (
        SELECT MAX(PayloadMassKG)
        FROM SpaceX
    )
    ORDER BY BoosterVersion
"""

create_pandas_df(task_8, database=conn)
```

Out[17]:

	boosterversion	payloadmasskg
0	F9 B5 B1048.4	15600
1	F9 B5 B1048.5	15600
2	F9 B5 B1049.4	15600
3	F9 B5 B1049.5	15600
4	F9 B5 B1049.7	15600
5	F9 B5 B1051.3	15600
6	F9 B5 B1051.4	15600
7	F9 B5 B1051.6	15600
8	F9 B5 B1056.4	15600
9	F9 B5 B1058.3	15600
10	F9 B5 B1060.2	15600
11	F9 B5 B1060.3	15600

2015 Launch Records

- We used combinations of the WHERE clause, LIKE, AND, and BETWEEN conditions to filter for failed landing outcomes in drone ship, their booster versions, and launch site names for year 2015

```
List the failed landing_outcomes in drone ship, their booster versions, and launch site names for in year 2015
```

In [18]:

```
task_9 = """
    SELECT BoosterVersion, LaunchSite, LandingOutcome
    FROM SpaceX
    WHERE LandingOutcome LIKE 'Failure (drone ship)'
        AND Date BETWEEN '2015-01-01' AND '2015-12-31'
    ...
    create_pandas_df(task_9, database=conn)
```

Out[18]:

	boosterversion	launchsite	landingoutcome
0	F9 v1.1 B1012	CCAFS LC-40	Failure (drone ship)
1	F9 v1.1 B1015	CCAFS LC-40	Failure (drone ship)

Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

Rank the count of landing outcomes (such as Failure (drone ship) or Success (ground pad))

In [19]:

```
task_10 = """
    SELECT LandingOutcome, COUNT(LandingOutcome)
    FROM SpaceX
    WHERE DATE BETWEEN '2010-06-04' AND '2017-03-20'
    GROUP BY LandingOutcome
    ORDER BY COUNT(LandingOutcome) DESC
    """
create_pandas_df(task_10, database=conn)
```

Out[19]:

	landingoutcome	count
0	No attempt	10
1	Success (drone ship)	6
2	Failure (drone ship)	5
3	Success (ground pad)	5
4	Controlled (ocean)	3
5	Uncontrolled (ocean)	2
6	Precluded (drone ship)	1
7	Failure (parachute)	1


- We selected Landing outcomes and the COUNT of landing outcomes from the data and used the WHERE clause to filter for landing outcomes BETWEEN 2010-06-04 to 2010-03-20.
- We applied the GROUP BY clause to group the landing outcomes and the ORDER BY clause to order the grouped landing outcome in descending order.

The background of the slide is a photograph taken from space at night. It shows the curvature of the Earth against a dark blue-black void of space. City lights are visible as numerous small white and yellow dots, primarily concentrated in the lower right quadrant where a large, brightly lit urban area is visible. In the upper right, there are greenish-yellow bands of light, likely the Aurora Borealis or Australis. The overall atmosphere is dark and mysterious.


Section 4

Launch Sites Proximities Analysis

All launch sites global map markers

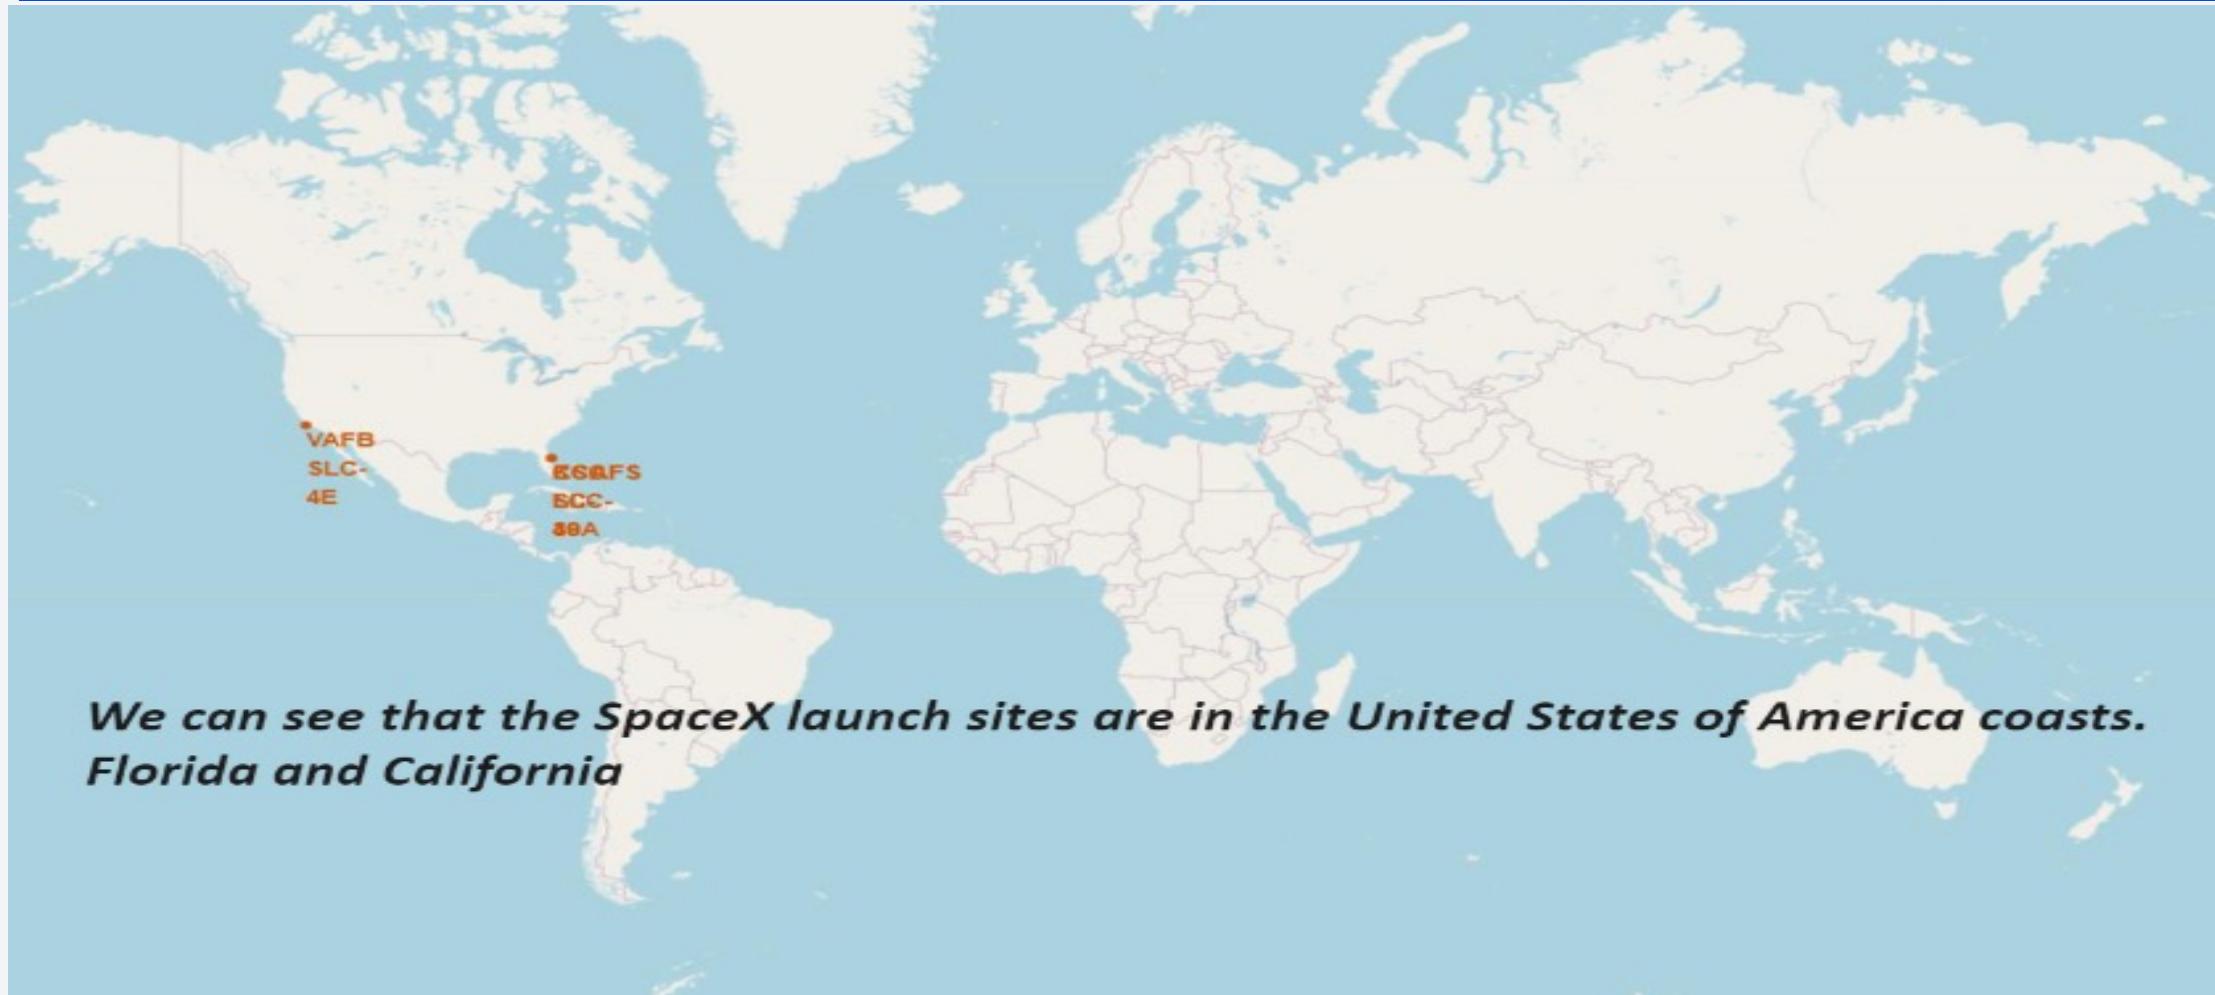

Markers showing launch sites with color labels

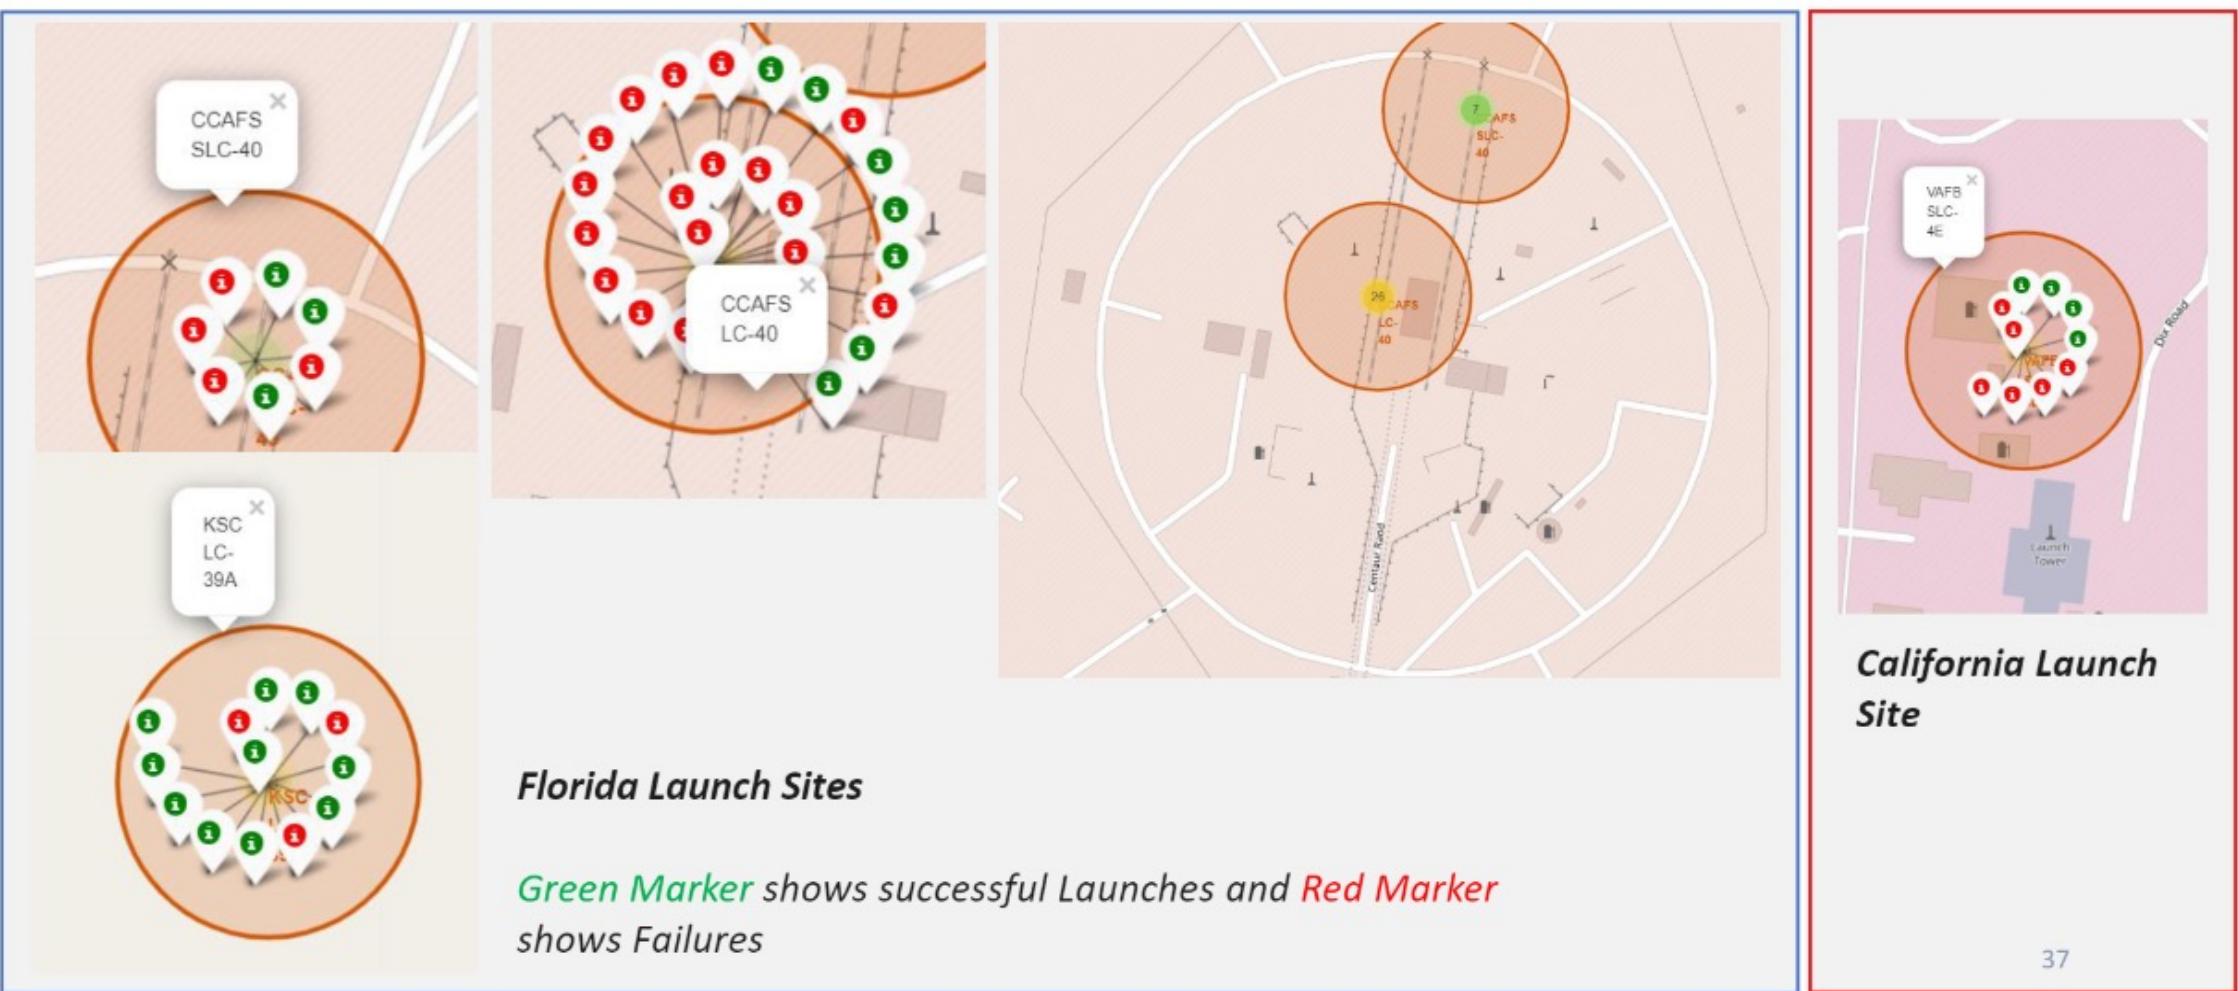

37

36

Launch Site distance to landmarks



- Are launch sites in close proximity to railways? No
- Are launch sites in close proximity to highways? No
- Are launch sites in close proximity to coastline? Yes
- Do launch sites keep certain distance away from cities? Yes


Section 5

Build a Dashboard with Plotly Dash




Pie chart showing the success percentage achieved by each launch site

Total Success Launches By all sites

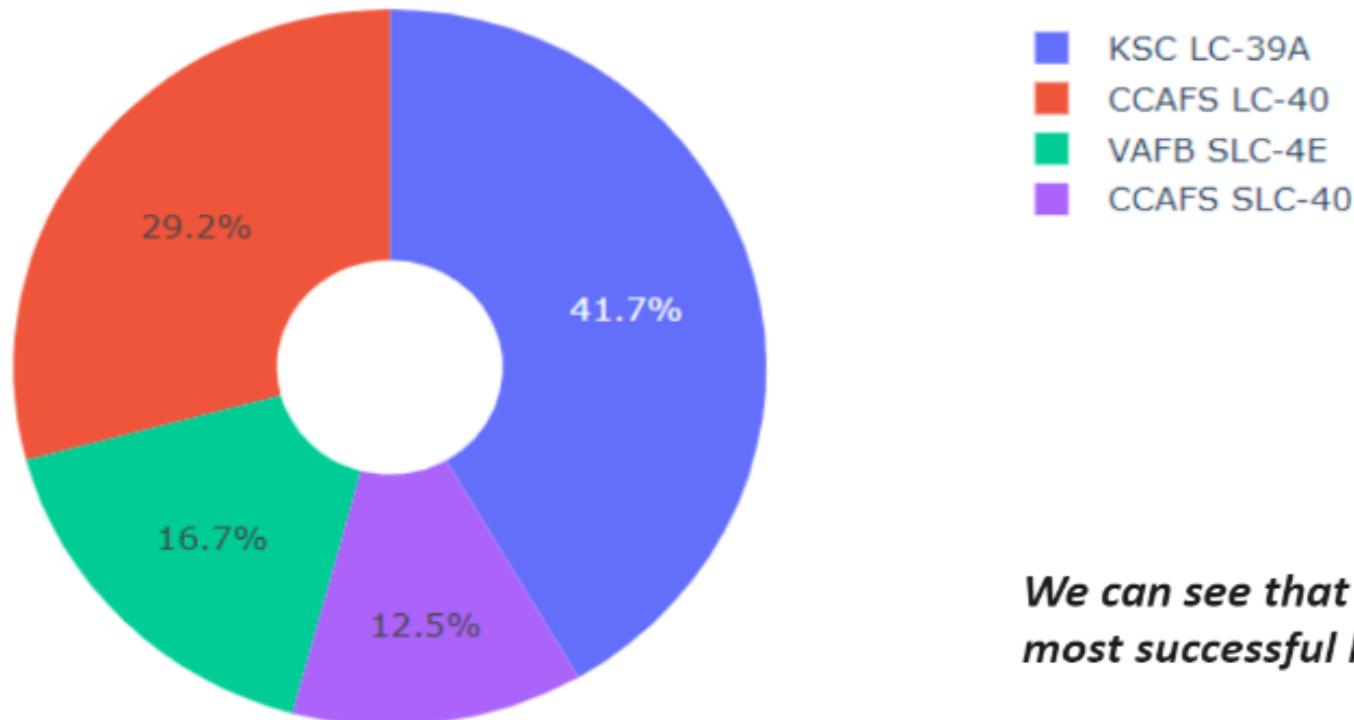



We can see that KSC LC-39A had the most successful launches from all the sites

Pie chart showing the Launch site with the highest launch success ratio

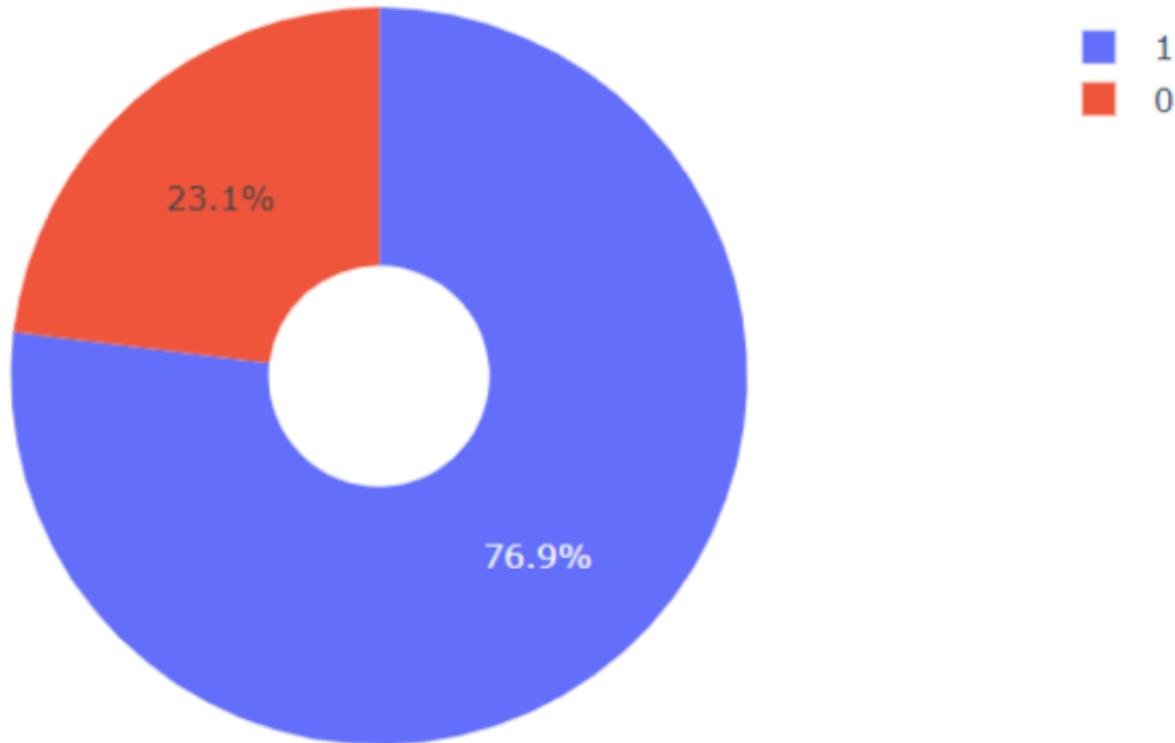

KSC LC-39A achieved a 76.9% success rate while getting a 23.1% failure rate

Scatter plot of Payload vs Launch Outcome for all sites, with different payload selected in the range slider

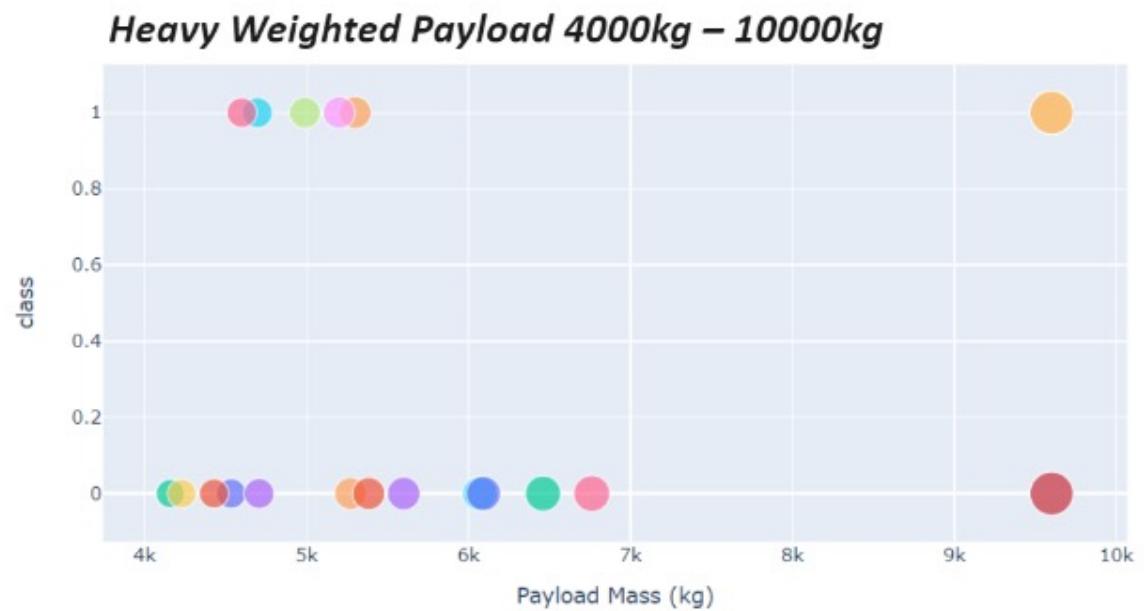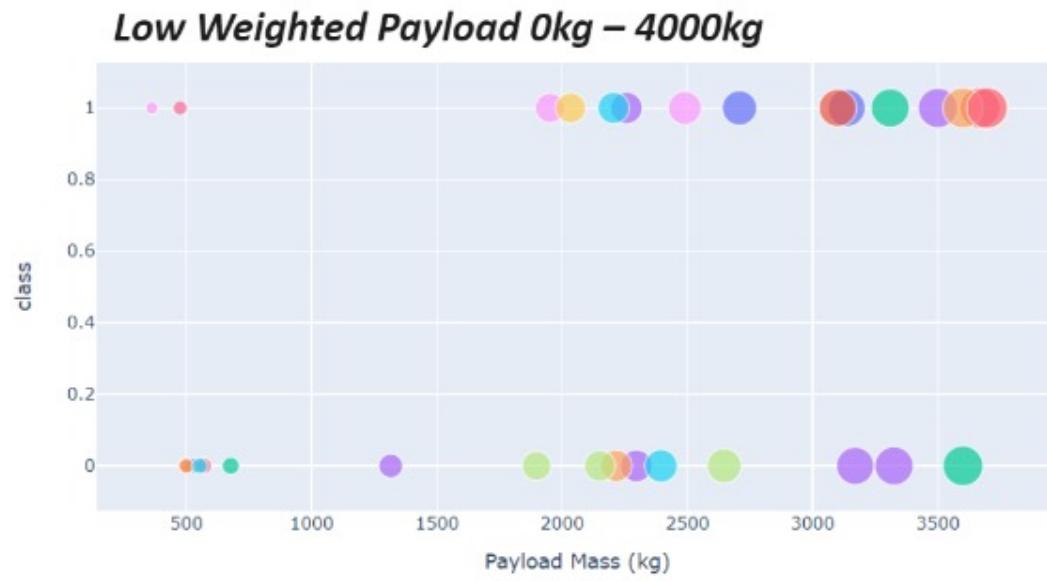

We can see the success rates for low weighted payloads is higher than the heavy weighted payloads

Section 6

Predictive Analysis (Classification)

Classification Accuracy


- The decision tree classifier is the model with the highest classification accuracy

```
models = {'KNeighbors':knn_cv.best_score_,  
          'DecisionTree':tree_cv.best_score_,  
          'LogisticRegression':logreg_cv.best_score_,  
          'SupportVector': svm_cv.best_score_}  
  
bestalgorithm = max(models, key=models.get)  
print('Best model is', bestalgorithm, 'with a score of', models[bestalgorithm])  
if bestalgorithm == 'DecisionTree':  
    print('Best params is :', tree_cv.best_params_)  
if bestalgorithm == 'KNeighbors':  
    print('Best params is :', knn_cv.best_params_)  
if bestalgorithm == 'LogisticRegression':  
    print('Best params is :', logreg_cv.best_params_)  
if bestalgorithm == 'SupportVector':  
    print('Best params is :', svm_cv.best_params_)
```

```
Best model is DecisionTree with a score of 0.8732142857142856  
Best params is : {'criterion': 'gini', 'max_depth': 6, 'max_features': 'auto', 'min_samples_leaf': 2, 'min_samples_split': 5, 'splitter': 'random'}
```

Confusion Matrix

- The confusion matrix for the decision tree classifier shows that the classifier can distinguish between the different classes. The major problem is the false positives .i.e., unsuccessful landing marked as successful landing by the classifier.

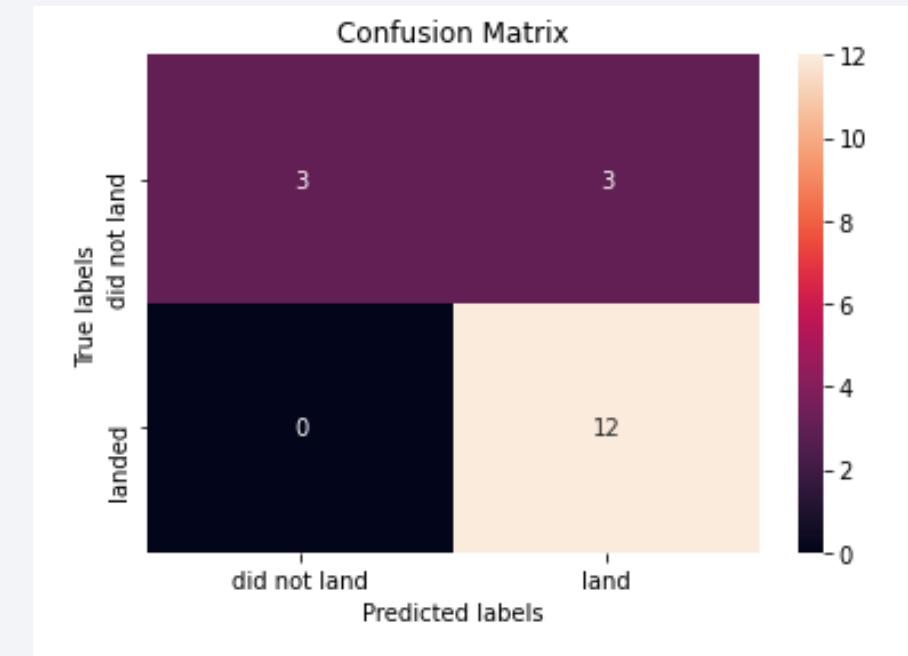

Conclusions

We can conclude that:

- The larger the flight amount at a launch site, the greater the success rate at a launch site.
- Launch success rate started to increase in 2013 till 2020.
- Orbits ES-L1, GEO, HEO, SSO, VLEO had the most success rate.
- KSC LC-39A had the most successful launches of any sites.
- The Decision tree classifier is the best machine learning algorithm for this task.

Thank you!

