



Aalto University  
School of Science  
and Technology

# Mining temporal networks

Aristides Gionis<sup>1</sup> Polina Rozenshtein<sup>2</sup>

<sup>1</sup> Aalto University, Finland

<sup>2</sup> Nordea Data Science Lab, Finland

KDD 2019 tutorial

August 4, 2019

# tutorial website

<https://rozenbsp.github.io/KDD19-tutorial-temporal>

# agenda

Part I : introduction and motivation

Part II : models of temporal networks

Part III : group work

Part IV : algorithmic frameworks

Part V : data mining problems

Part VI : future challenges


Part VII : group work

# part I

## introduction and motivation


# interconnected world

- networks model **objects** and their **relations**
- many different **network types**
  - social
  - informational
  - technological
  - biological
  - ...

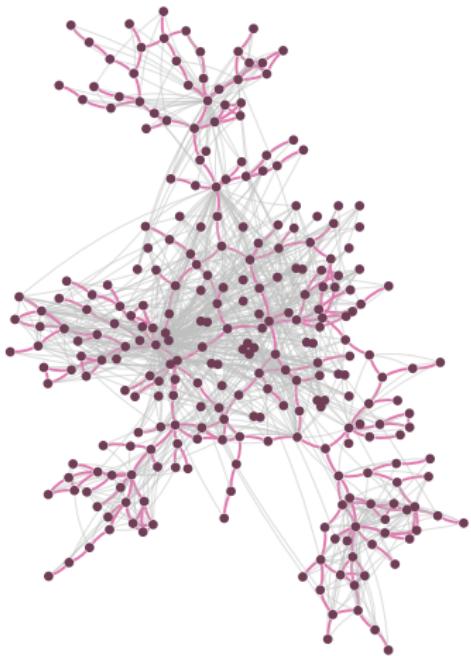

# impact of network science

- online communication networks and social media
  - implications in
    - knowledge creation
    - information sharing
    - education
    - democracy
    - society as a whole

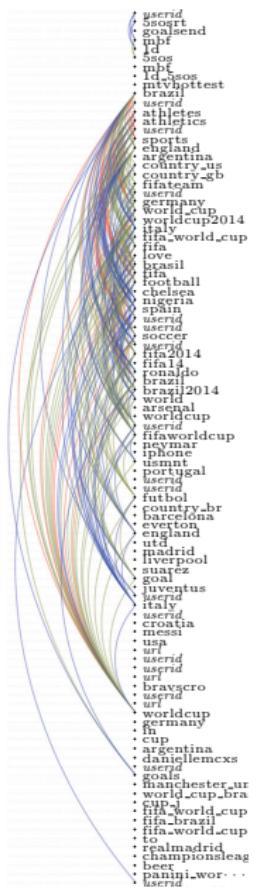

# research questions in network science

- structure discovery
  - communities, summarization, events, role mining
- study complex dynamic phenomena
  - evolution, information diffusion, opinion formation, structural prediction
- develop novel applications
- design efficient algorithms

## traditional view


- networks represented as pure graph-theory objects
  - no additional vertex / edge information
- emphasis on static networks
- dynamic settings model structural changes
  - vertex / edge additions / deletions

# temporal networks


- ability to collect and store large volumes of network data
- available data have **fine granularity**
- lots of **additional information** associated to vertices/edges
- network topology is **relatively stable**, while lots of **activity** and **interaction** is taking place
- giving rise to **new concepts**, **new problems**, and **new computational challenges**

# modeling activity in networks


1. network nodes **perform actions** (e.g., posting messages)

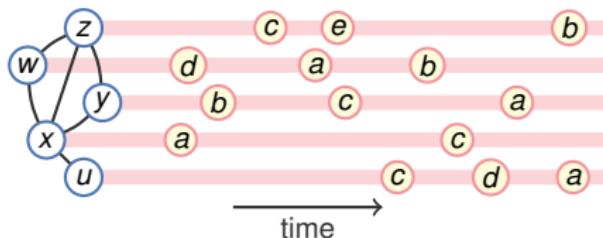


2. network nodes **interact** with each other  
(e.g., a “like”, a repost, or sending a message to each other)

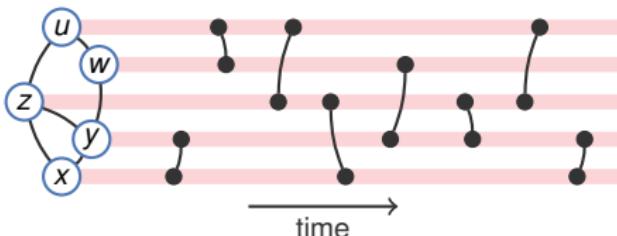


# many novel and interesting concepts

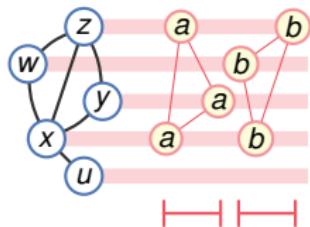


new pattern types

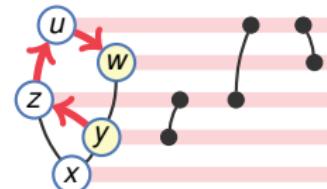

temporal information paths

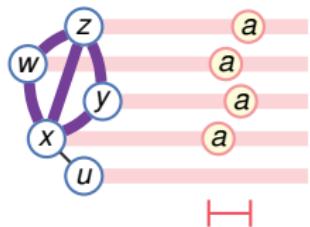

new types of events

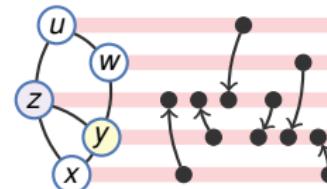

network evolution

## temporal networks — objectives

- identify new concepts and new problems
- develop algorithmic solutions
- demonstrate relevance to real-world applications

# terminology

- we use term “**temporal networks**”, but terminology is not standardized
- term “**X Y**” can be encountered in the literature, where

**X :**

temporal  
dynamic  
(time-)evolving  
time-varying  
time-dependent  
evolutionary

**Y :**

networks  
graphs

- some combinations have distinct meaning, but not always

# examples of temporal networks

[Holme, 2015]

- human communication networks
  - phone, email, text messages, etc.
- human proximity networks
  - recorded by various sensors and devices
  - bluetooth, wifi, etc.
  - patient-referral networks, i.e. how patients are transferred between wards of a hospital system
  - sexual contact networks
- animal proximity networks
  - obtained via RFID devices
  - livestock or wildlife

## examples of temporal networks — cnt'd

[Holme, 2015]

- bibliographic networks
  - collaboration and citation networks
- economic networks
  - credit card transactions
  - trade networks of countries
  - bitcoin transactions
- travel and transportation networks
  - airline connections, bus transport, bike-sharing systems

## examples of temporal networks — cnt'd

[Holme, 2015]

- brain networks
  - temporal correlations of the oxygen levels of brain regions as measured by fMRI scanning
- biological networks
  - genes involved in different interactions that change over time
  - current challenges, as, one cannot measure precisely when two proteins interact with each other, but technology is improving

# agenda

Part I : introduction and motivation

Part II : models of temporal networks

Part III : group work

Part IV : algorithmic frameworks

Part V : data mining problems

Part VI : future challenges

Part VII : group work

## part II

# models of temporal networks

# representation of temporal networks


## 1. sequence of interactions

- a temporal network is represented as  $G = (V, E)$ 
  - with set of nodes  $V$ , and
  - set of edges  $E = \{(u, v, t)\}$ , with  $u, v \in V$  and  $t \in \mathbb{R}$
  - if interactions have duration, then  $E = \{(u, v, t, \delta)\}$
- this is a lossless representation — no information is lost
- also known as sequence of contacts, or sequence of (temporal) edges

# representation of temporal networks

## 1. sequence of interactions

- visual representation of a temporal network as a sequence of interactions

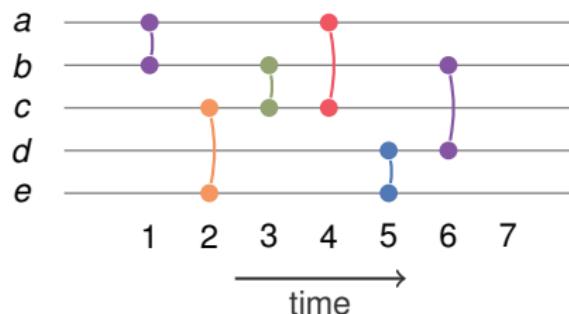

# representation of temporal networks


## 2. sequence of static graphs

- sequence  $G_1, \dots, G_T$ 
  - where  $G_t = (V_t, E_t)$ , with  $t = 1, \dots, T$
  - typically assume that nodes are fixed, i.e.,  $V_t = V$
  - $E_t$  are the edges that occur in time interval  $t$
- advantages: static graph analysis methods can be applied
- disadvantages: the representation assumes quantization into time intervals
  - thus, representation depends on quantization parameters, e.g., seconds, minutes, hours, days, etc.
  - coarse resolution may lead to information loss
  - fine resolution may lead to sparse (or even empty) static graphs

# representation of temporal networks

## 2. sequence of static graphs

- visual representation of a temporal network as a sequence of static graphs

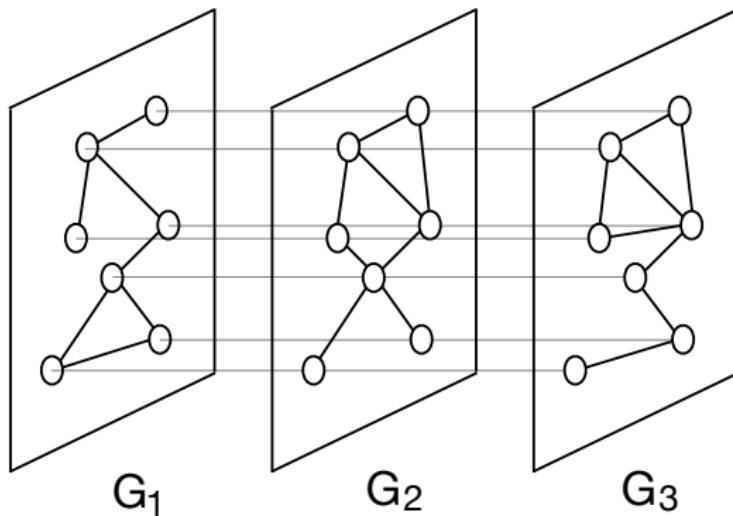

# representation of temporal networks

## 3. time series of contacts

- a time-series for each pair of nodes in the network
- equivalent representation with sequence of interactions

## 4. tensor representation

- tensor representing node  $\times$  node  $\times$  time information
- can apply powerful tensor-algebra techniques
- a complication is that time is directed, while tensor algebra assumes that indices can be relabeled (breaking the time ordering)

# representation of temporal networks

[Casteigts et al., 2012]

5. time-varying graphs defined as  $G = (V, E, T, p, \lambda)$ ,

where

- $V$ : set of nodes
- $E \subseteq V \times V$ : set of edges
- $T$ : a time domain
- $p : E \times T \rightarrow \{0, 1\}$ : a presence function
- $\lambda : E \times T \rightarrow \mathbb{R}$ : a latency function

- general definition that can be used to model graph datasets in different applications
  - transportation networks, communication networks, social networks

# representation of temporal networks

## 6. stream graphs and link streams [Latapy et al., 2018]

- a formalization for modeling interactions over time
- a stream graph is defined as  $G = (T, V, W, E)$ , where
  - $T$ : a time domain
  - $V$ : a set of nodes
  - $W \subseteq T \times V$ : a set of temporal nodes
  - $E \subseteq T \times V \times V$ : a set of links
    - s.t.,  $(t, u, v) \in E$  implies  $(t, u) \in W$  and  $(t, v) \in W$
- formalization is **self-consistent** : relations between concepts are preserved
  - e.g., can define clustering coefficient using density
- formalization generalizes usual concepts of graph theory
  - e.g., line graphs, k-cores, cliques, density, centralities

# temporal networks vs. dynamic graphs

- **dynamic graphs** is a standard model typically studied in theoretical computer science
  - e.g., [Henzinger et al., 1999, Thorup, 2000]
- dynamic graphs are represented as a **sequence** of **edge additions** and/or **edge deletions**
- $G_0$  is the initial graph, and  $G_i$  is the graph resulting after the  $i$ -th edge addition/deletion operation
- **objective:** efficient maintenance of graph properties
  - e.g., connectivity, shortest paths, spanners, etc.

## temporal networks vs. dynamic graphs

- in dynamic-graph studies, the properties of interest refer to **individual graph snapshots**  $G_i$ , not considering the whole **graph evolution**
- emphasis on **computational efficiency**
  - computation time **per operation**
  - e.g., cost of maintaining a minimum spanning tree per edge additions/deletions
  - or, cost of maintaining a data structure that allows to answer short-path queries
- **dynamic graph** model captures **topological changes**, not interactions
  - e.g., dynamic graphs can be used to model friendship additions/deletions in a social network, but not discussions or other interactions

# temporal networks vs. dynamic graphs

- dynamic graphs resemble sequence of interactions model
- main difference lies on which graph properties we study
- for dynamic graphs we typically consider properties on graph snapshots
  - i.e., minimum spanning tree on the current snapshot
- for temporal graphs we typically consider properties that span a time interval
  - i.e., a temporal pattern
- disclaimer: in this tutorial we do not consider dynamic graphs
  - however, it is a well-developed area with rich literature

# dynamic networks

- in the context of graph generation models, we consider dynamic networks
  - e.g., Barabási-Albert, forest-fire, copying model, etc.
- similar to dynamic graphs, as data are seen as a sequence of node/edge additions (typically no deletions)
- node/edge addition are governed by a probabilistic model, not arbitrary, or worst case, as in algorithmic models
- emphasis again on network topology, i.e., how certain network structures emerge
  - e.g., scale-free distribution, small world, etc.
- disclaimer: in this tutorial we do not consider dynamic networks

# graph streams

- setting inspired by **data streams**  
[Muthukrishnan et al., 2005]
- recall the **data-stream model**:
  - data are presented as a **sequence of data items** (potentially infinite)
  - assume a **small number of passes** typically constant or just one pass
  - assume **small memory** compared to data size e.g., poly-logarithmic
  - assume **fast computation** per data item processed e.g., constant or poly-logarithmic

## graph streams

- a graph stream is a graph dataset in the data-stream model  
e.g., sequence of interactions (temporal network), or  
sequence of edge additions/deletions (dynamic graph)
- thus, a graph stream is not a representation model, instead  
it refers to the underlying computational model
- thus, we can study questions of mining temporal networks  
in the graph-stream model


## dynamic graph algorithms on streaming model

- well-studied model
- extensive survey [McGregor, 2014]
- different settings considered
  - node/edge additions (**incremental**)
  - node/edge additions/deletions (**fully-dynamic**)
  - updating weights/labels is a special case of the fully-dynamic model
  - **sliding-window setting**: consider only edges from latest interval of fixed length
  - algorithms can be **deterministic** or randomized

## time-respecting paths

- a fundamental concept in analysis of temporal networks
  - used in studies of information propagation, or epidemics spreading
- a time-respecting path is a sequence of temporal edges, such that
  - consecutive edges share a common node, and
  - time stamps of temporal edges are non-decreasing
- intuitively, a piece of information (or disease) can propagate in the network only over time-respecting paths

## time-respecting paths — example

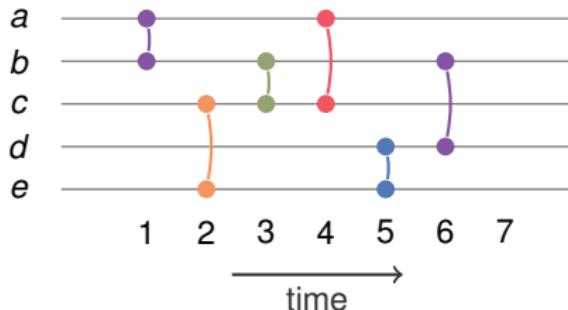


$(c, e, 2), (e, d, 5), (d, b, 6)$  is a time-respecting path from *e* to *b*  
 $(c, b, 3), (b, a, 1)$  is not a time-respecting path

## static expansion of a temporal network


- a transformation of a temporal network to a directed (static) network so that time-respecting paths in the temporal network correspond to directed (static) paths in the directed (static) network
- how to create such a transformation?
  1. create a copy of each node for each time instance
  2. create a directed edge from the  $(t - 1)$ -th copy of  $u$  to the  $t$ -th copy of  $u$ , for all nodes  $u$ , and all time instances  $t$
  3. create directed edges for the temporal edges

# static expansion of a temporal network

example

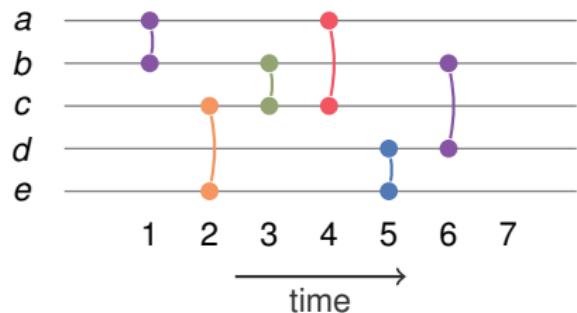


(a) representation of a temporal network

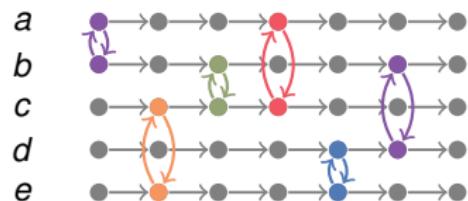


(b) static expansion of temporal network

# static expansion of a temporal network

example

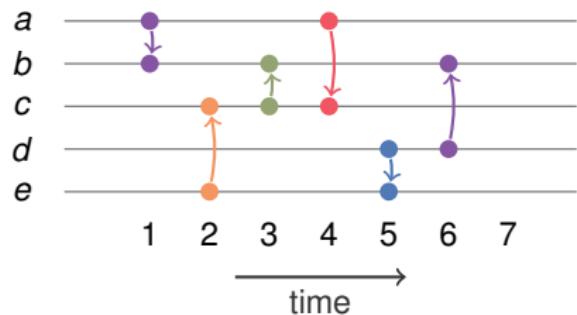


(a) representation of a temporal network

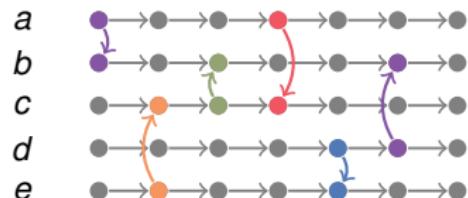


(b) static expansion of temporal network; directed edges

# static expansion of a temporal network

example

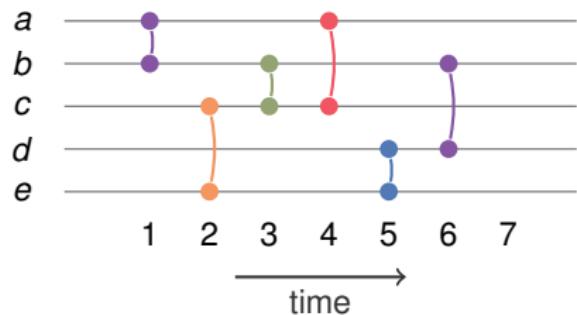

(a) representation of a temporal network

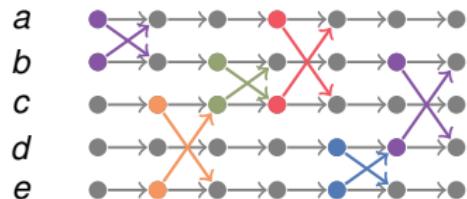

(b) static expansion of temporal network; delays

# reachability, connectivity, and connected components

- defined as in static graphs, but using time-respecting paths
- **reachability**:
  - used to study infection spreading and information cascades
- **connectivity**: as in directed (static) graphs is not symmetric
  - distinguish strong and weak connectivity
  - in addition, we can define transitive connectivity:  
a subgraph is transitively connected if time-respecting paths from  $u$  to  $v$  and  $v$  to  $w$  imply a time-respecting path from  $u$  to  $w$

## minimum temporal paths

different notions of minimum temporal paths rely on time-respecting paths

- earliest-arrival path : a path from  $x$  to  $y$  with earliest arrival time
- latest-departure path : a path from  $x$  to  $y$  with latest departure time
- fastest path : path from  $x$  to  $y$  with minimum elapsed time
- shortest path : fastest path from  $x$  to  $y$  in terms of overall traversal time required on edges

[Wu et al., 2014]

## diameter, network efficiency

- **diameter**: shortest latency of time-respecting paths over connected pairs [Chaintreau et al., 2007]
  - restricted on connected pairs, as real data have many disconnected pairs
- **network efficiency**: the harmonic mean of latency over all pairs [Tang et al., 2009]
  - **discussion**: what is the motivation for **harmonic mean**?

## diameter, network efficiency

- **diameter**: shortest latency of time-respecting paths over connected pairs [Chaintreau et al., 2007]
  - restricted on connected pairs, as real data have many disconnected pairs
- **network efficiency**: the harmonic mean of latency over all pairs [Tang et al., 2009]
  - **discussion**: what is the motivation for **harmonic mean**?
  - it combines average latency and reachability ratio

## centrality measures

- many centrality measures on static graphs use distances
- closeness centrality :  $C_c(u) = \frac{n-1}{\sum_{v \neq u} d(u,v)}$
- betweenness centrality :  $C_b(u) = \frac{\sum_{v \neq u \neq w} p_u(v,w)}{\sum_{v \neq u \neq w} p(v,w)}$
- for temporal networks we replace distance with shortest latency time-respecting path
- analogues of Katz centrality and PageRank have also been defined
- discussion : how do these centrality measures on temporal networks compare with their static analogues?




# temporal motifs

- temporal motif counting

[Paranjape et al., 2017, Kovanen et al., 2013]:

- temporal motif is a small subgraph with temporally ordered edges (and/or interval or delay constraints)

# temporal motifs

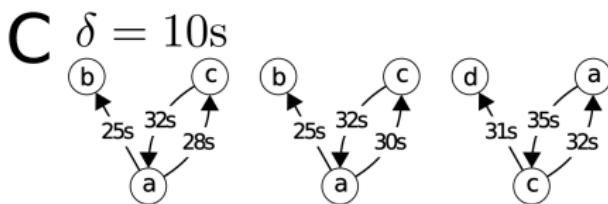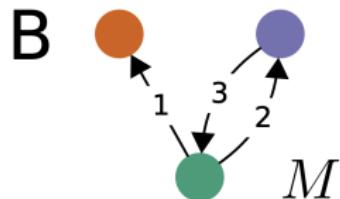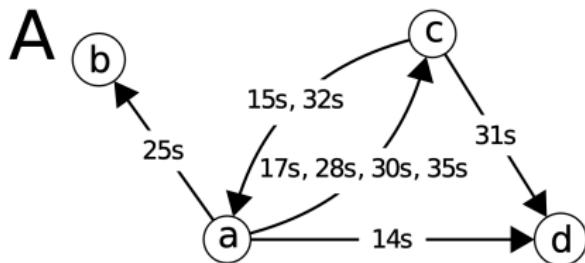

$\delta$ -temporal motif: a sequence of directed temporally ordered edges which appear within a time window  $\delta$

[Paranjape et al., 2017]

# agenda

Part I : introduction and motivation

Part II : models of temporal networks

Part III : group work

Part IV : algorithmic frameworks

Part V : data mining problems

Part VI : future challenges

Part VII : group work

# part III

## group work

## group work : minimum spanning tree

- task : develop your definition and algorithm for minimum spanning tree on temporal networks
  - be clear on which temporal-network model you are working
  - what is your definition of minimum spanning tree?
  - design an algorithm for the problem you defined
  - what is the running time of your algorithm?
- work by yourself [7 min]
- work in pairs, discuss your solutions [7 min]

# agenda

Part I : introduction and motivation

Part II : models of temporal networks

Part III : group work

Part IV : algorithmic frameworks

Part V : data mining problems

Part VI : future challenges

Part VII : group work

## part IV

algorithmic frameworks for temporal network  
analysis


# frameworks

adopted traditional frameworks

- static expansion graphs
- dynamic graphs
- time-series
- labeled graphs

# static expansion graphs


- static graph of time-stamped nodes and time-forwarding edges  $G_e = (V_e, E_e)$
- $V_e = \{(v, t) \mid v \in V, t \in T\}$ , where  $T$  is the set of all possible timestamps
- edges  $E_e$  : interactions between the temporal nodes  $V_t$

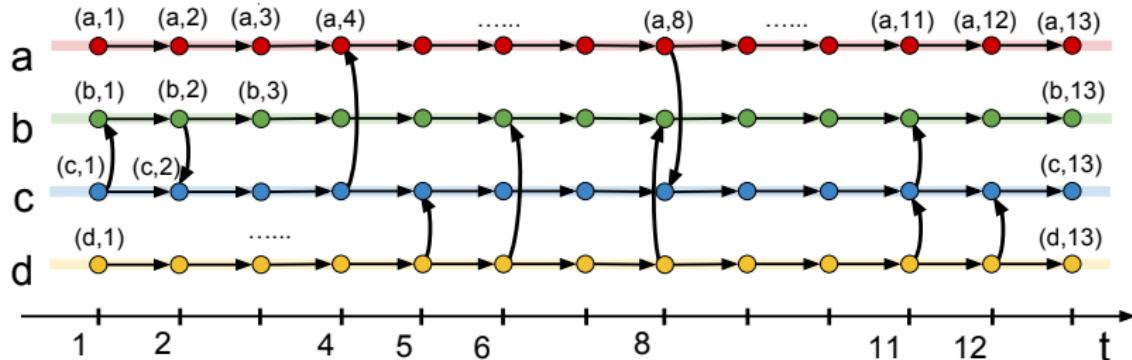


# static expansion graphs

- static expansion graph is a **directed acyclic graph (DAG)**
- **standard graph algorithms** (BFS, DFS, Dijkstra, Bellman-Ford) can be adopted for finding:
  - fastest temporal paths,  
shortest temporal paths, and  
weighted combinations
  - journeys and walks
- **upstream**, **downstream** reachability sets

## time-respecting paths

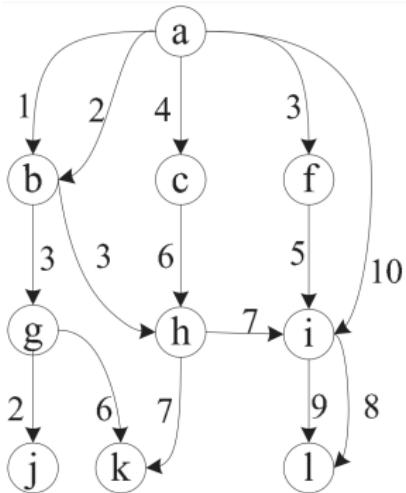

(a) Temporal Graph

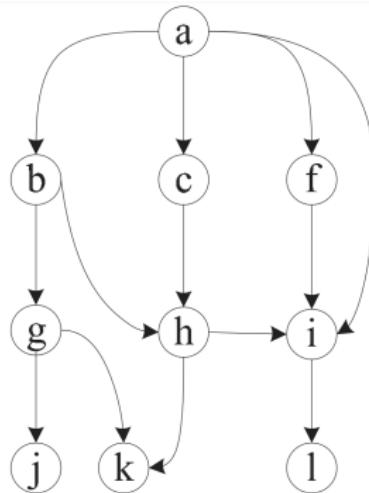

(b) Static Graph

- some paths in the static graph **are not meaningful** in the temporal graph
- e.g.,  $a-b-g-j$  is not time-respecting path
- what is the shortest path from  $a$  to  $\ell$ ?

## minimum temporal paths

different notions of minimum temporal paths rely on time-respecting paths

- earliest-arrival path : a path from  $x$  to  $y$  with earliest arrival time
- latest-departure path : a path from  $x$  to  $y$  with latest departure time
- fastest path : path from  $x$  to  $y$  with minimum elapsed time
- shortest path : fastest path from  $x$  to  $y$  in terms of overall traversal time required on edges

[Wu et al., 2014]

## earliest-arrival path

- temporal graph  $G = (V, E)$
- source vertex  $x$ , starting time  $t_s$
- array  $T$  of size  $|T|$  to record arrival times to each node
- $T[x] = t_s$  and  $T[v] = \infty$ , for nodes other than source
- process edges  $(u, v, t, \lambda)$  in temporal order
  - if  $t \geq T[u]$  ( $u$  is already reached from  $x$ )
    - check if current edge creates earliest path from  $x$  to  $v$
    - if yes, update  $T[v] = \min(T[v], t + \lambda)$

[Wu et al., 2014]

## latest-departure path

- temporal graph  $G = (V, E)$
- sink vertex  $x$ , ending time  $t_s$
- same process as for earliest-arrival path, but
- process edges in reversed temporal order
- add new interaction to the path if it does not violate temporal order

[Wu et al., 2014]

## dominating path

- source vertex  $x$  and sink  $v$
- define  $(a[v], s[v])$ , where
  - $a[v]$  : time of arrival to  $v$
  - $s[v]$  : time of departure from  $x$
- consider another path  $(a'[v], s'[v])$
- if  $(s'[v] > s[v] \& a'[v] \leq a[v])$  or  $(s'[v] = s[v] \& a'[v] < a[v])$ 
  - then path  $(a'[v], s'[v])$  dominates path  $(a[v], s[v])$
- if there is a path  $(u_1, u_2)$  in interval  $[t_s, t_e]$  with duration  $d$ , which includes  $(a[v], s[v])$ ,
  - then there is path  $(u_1, u_2)$  in  $[t_s, t_e]$ , which is not slower and includes  $(a'[v], s'[v])$

[Wu et al., 2014]

## fastest path

- source vertex  $x$ , list  $L_v$  to keep track on path candidates
- define  $(a[v], s[v])$ , where
  - $a[v]$  : time of arrival to  $v$
  - $s[v]$  : time of departure from  $x$
- array  $T$  to record fastest-path duration for each node
  - $T[x] = 0$  and  $T[v] = \infty$ , for nodes other than source
- process edges  $(u, v, t, \lambda)$  in temporal order
  - if  $u = x$ , insert  $(t, t)$  into  $L_x$
  - take  $(a'[u], s'[u])$  from  $L_u$  with the latest arrival time  $a'[u]$ , so that  $a'[u]$  is before  $t$
  - this means we found a new path:
    - $a[v] = t + \lambda$  and  $s[v] = s'[u]$
    - insert this path into  $L_v$
  - remove all dominated paths from  $L_v$
  - update  $T[v]$  if this new path is faster than seen so far



## shortest path

- similar to algorithm for fastest path
- but keep track on the number of interactions, instead of the duration

[Wu et al., 2014]

# minimum spanning trees

- $\text{MST}_a$  : minimum spanning tree with earliest-arrival times  
each temporal path from the root to the node is the earliest arrival path
- $\text{MST}_w$  : minimum spanning tree with smallest total weight  
or with the smallest number of hops: directed Steiner tree.

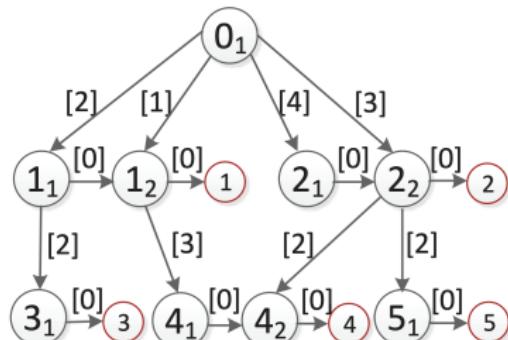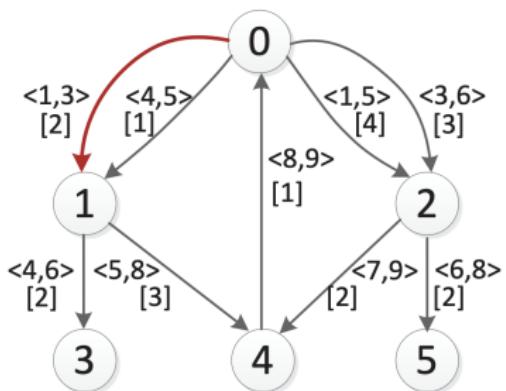


[Huang et al., 2015]

# applications of temporal paths


- temporal reachability problems
  - diffusion simulation, centrality measures
- directed spanning or Steiner trees
  - reconstruction of diffusion
- **drawback**: large size of expansion graph may lead to high computational complexity and large memory consumption
- **challenge**: scalable algorithms and approximations

# applications — transportation temporal networks

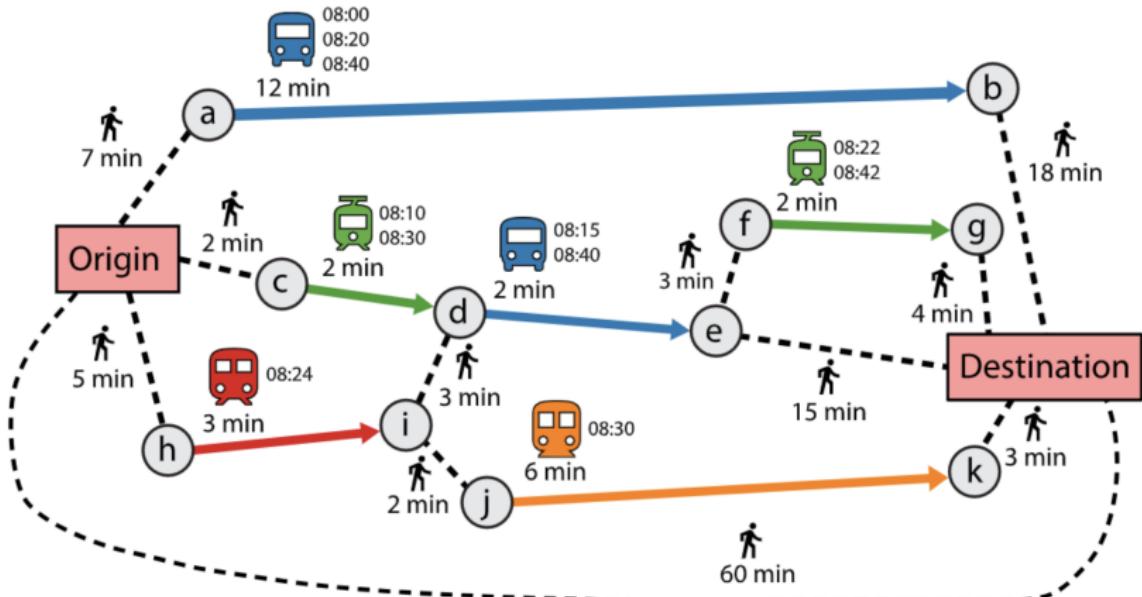


[Kujala et al., 2018]

## Pareto-optimal journeys

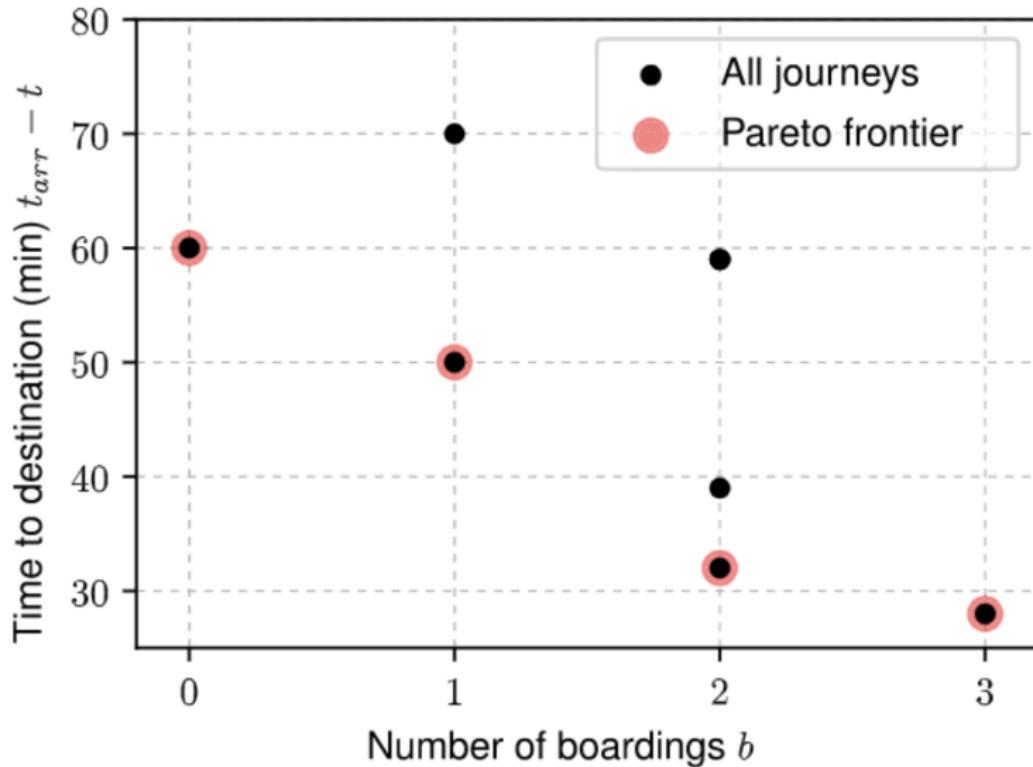

# Boarding-count-augmented temporal-distance profiles

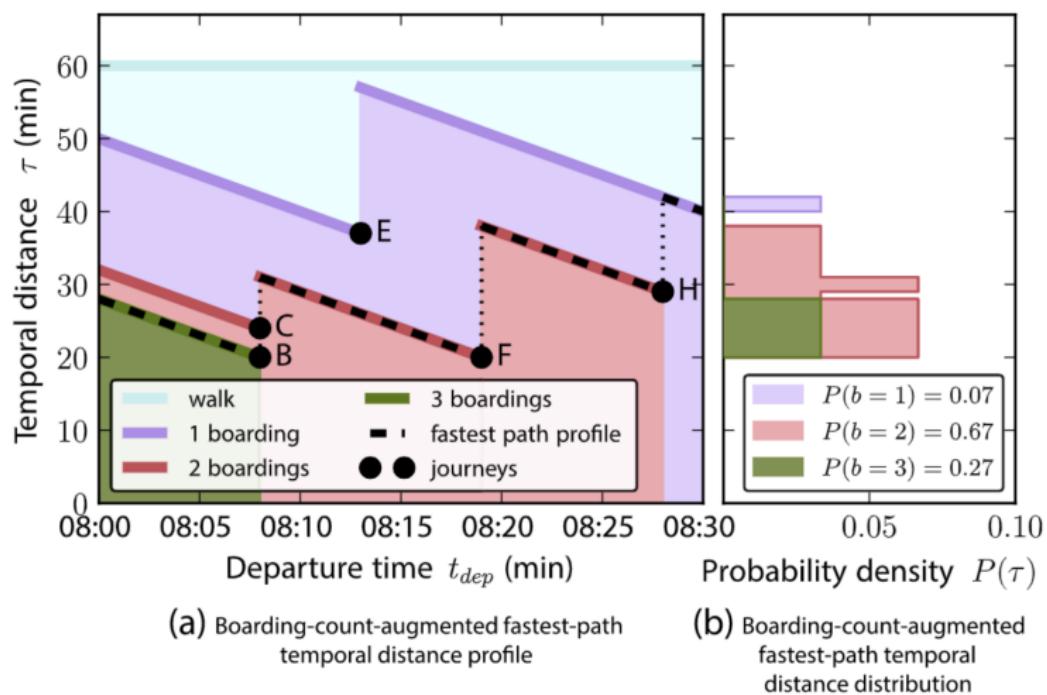

## dynamic graph algorithms on streaming model

- well-studied model
- extensive survey [McGregor, 2014]
- different settings considered
  - node/edge additions (**incremental**)
  - node/edge additions/deletions (**fully-dynamic**)
  - updating weights/labels is a special case of the fully-dynamic model
  - **sliding-window setting**: consider only edges from latest interval of fixed length
  - algorithms can be **deterministic** or randomized

# dynamic graph algorithms on streaming model

[McGregor, 2014]

	Insert-Only	Insert-Delete	Sliding Window (width $w$ )
Connectivity	Deterministic [27]	Randomized [5]	Deterministic [22]
Bipartiteness	Deterministic [27]	Randomized [5]	Deterministic [22]
Cut Sparsifier	Deterministic [2, 8]	Randomized [6, 31]	Randomized [22]
Spectral Sparsifier	Deterministic [8, 46]	Randomized $\tilde{O}(n^{5/3})$ space [7]	Randomized $\tilde{O}(n^{5/3})$ space [22]
$(2t - 1)$ -Spanners	$O(n^{1+1/t})$ space [11, 23]	Only multiple pass results known [6]	$O(\sqrt{w}n^{(1+1/t)})$ space [22]
Min. Spanning Tree	Exact [27]	$(1 + \epsilon)$ -approx. [5] Exact in $O(\log n)$ passes [5]	$(1 + \epsilon)$ -approx. [22]
Unweighted Matching	2-approx. [27] 1.58 lower bound [42]	Only multiple pass results known [3, 4]	$(3 + \epsilon)$ -approx. [22]
Weighted Matching	4.911-approx. [25]	Only multiple pass results known [3, 4]	9.027-approx. [22]

Table 1: Single-Pass, Semi-Streaming Results: Algorithms use  $O(n \text{ polylog } n)$  space unless noted otherwise.

# sliding-window neighborhood profiles

- temporal network  $G = (V, E)$
- stream of edges  $E = \langle (u_1, v_1, t_1), (u_2, v_2, t_2), \dots \rangle$   
with  $t_1 \leq t_2 \leq \dots$
- sliding window length  $w$
- snapshot network  $G(t, w)$  at time  $t$  contains all edges  
with time-stamps in  $(t - w, t]$

problem :

given node  $u$ , window length  $w$ , and distance  $r$ , how many  
nodes in  $G(t, w)$  are within distance  $r$  from  $u$  at time  $t$ ?

[Kumar et al., 2015]

## proposed online algorithms


1. an exact but memory-inefficient streaming algorithm
2. an approximate memory-efficient streaming algorithm
  - approximate algorithm uses logic of exact algorithm, combined with hyperloglog sketches
  - if number of buckets in the HLL counter is  $k$  then the worst case complexity changes to
  - update time :

$$\mathcal{O}(rm2^k \log^2 n) \quad \text{from} \quad \mathcal{O}(rmn \log n)$$


- space complexity :

$$\mathcal{O}(rn2^k \log n) \quad \text{from} \quad \mathcal{O}(rn^2)$$

## empirical evaluation — running time

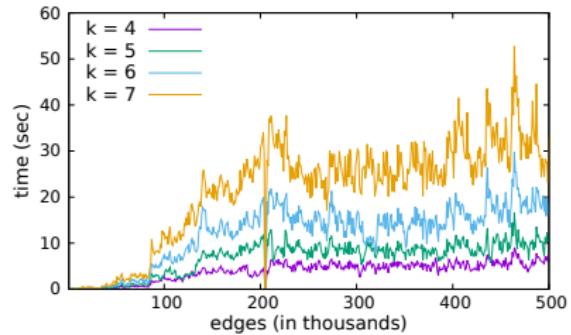

(c) Higgs

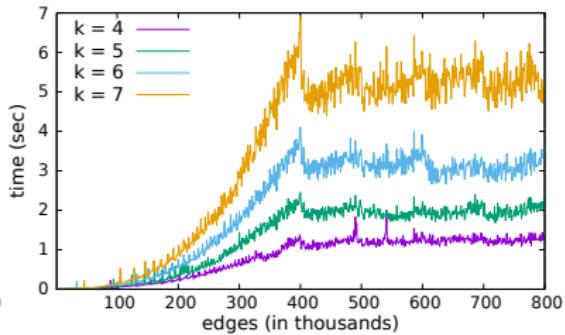

(d) DBLP

### contrast (DBLP)

- offline HyperANF : 3.6 sec / sliding window
- proposed approach : 0.003 sec / sliding window

[Kumar et al., 2015]

## time-series analysis


- view a temporal network as a multivariate time series
- calculate distance between adjacent snapshots and analyze the resulting time series
- distance: edit distance, node-profile distances, vector-space distance
- applications in change-point detection, anomaly detection, evolutionary pattern mining

# event detection in time series

- given a sequence of graphs  $G_t$
- a function to calculate the vertex affinity matrix  $S$ , where  $s_{ij}$  indicates the influence vertex  $i$  has on vertex  $j$
- a set of time points for detected events is  
$$\{t \in T \mid d(G_t, G_{t+1}) \geq \delta\}$$

where

$$d(G_t, G_{t+1}) = \sqrt{\sum_{i=1}^n \sum_{j=1}^n (\sqrt{s_{t,ij}} - \sqrt{s_{t+1,ij}})^2}$$

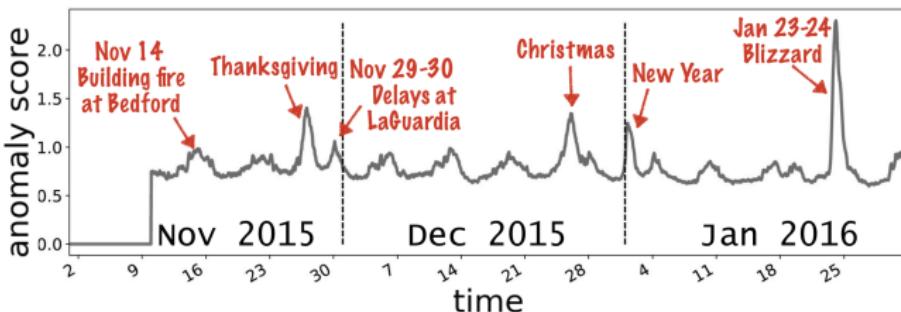

## time-series analysis

- anomaly detection survey [Ranshous et al., 2015]
- approach does not solve all the problems, as it does not capture the network topology
- **possible work-around:** use more topology embeddings metrics (larger neighborhoods, influence measures, eigenvectors, . . . )

# labeled graphs

- edges are labeled with occurrence timestamps
- applications of classic graph-theoretical problems
  - coloring, routing, network flow, covering, etc.
- “any property of a graph labeled from a discrete set of labels corresponds to some temporal property if interpreted appropriately”[Michail, 2016]

## labeled graphs

- for example, consider a **proper edge coloring**
  - a coloring of the edges in which no two adjacent edges share a common color
- corresponds to a temporal network where no two adjacent edges share a common time-label
  - i.e., no two adjacent edges ever appear at the same time
- **limitation:** labels are independent, timestamps are not

# theoretical aspects of temporal graphs

- how is the complexity of classic combinatorial optimization problems changes when time is added?
- some old results: the max-flow min-cut theorem holds with unit capacities for time-respecting paths [Berman, 1996]
- a number of recent attempts
  - sliding window vertex cover [Akrida et al., 2018]
  - sliding window graph coloring [Mertzios et al., 2018]
  - maximal matching [Mertzios et al., 2019]
- etc.

## theoretical aspects of temporal graphs

- there are many models for abstracting temporal networks
- challenge: which models are most general and most useful?

# agenda

Part I : introduction and motivation

Part II : models of temporal networks

Part III : group work

Part IV : algorithmic frameworks

Part V : data mining problems

Part VI : future challenges

Part VII : group work

# part V

## data mining problems

# data mining problems

- community detection
- event detection
- finding important nodes
- epidemics analysis and influence spreading
- network summarization
- ...

community detection

# community detection in static graphs

- static graphs: extensive survey [Fortunato and Hric, 2016]
- standard community definitions
  - a community is a set of nodes, which are closer to each other than to the rest of the network
  - a community is a dense network subgraph
- general definition [Coscia et al., 2011]
  - a community in a complex network is a set of entities that share some closely correlated sets of actions with the other entities of the community
- typical problem settings
  - a single community vs. network partition
  - overlapping vs. non-overlapping communities

# community detection in static graphs

## partition measures

- modularity : the difference between the actual number of edges and the expected
- cut : number of edges between a community and the rest of the graph
- ratio cut : cut normalized by the number of edges of community nodes
- ...

## single-community measures

- average degree :  $\frac{|E(S)|}{2|S|}$
- density :  $\frac{2|E(S)|}{|S|(|S|-1)}$
- conductance :  $\frac{\text{cut}(S, \bar{S})}{\min\{\text{vol}(S), \text{vol}(\bar{S})\}}$
- ...

# community detection in temporal networks

temporal information gives rise to several issues

- **temporal localization**: concise time interval or intervals, whole time history
- **behaviour**: single-appearance, recurring, persistent, evolutionary patterns, smoothness
- partition of the **topology network** vs. partition of the **time history**
- **online** vs. **offline**
- application-specific settings

# community detection in temporal networks

- proposed taxonomies
  - [Aynaud et al., 2013]
  - [Aggarwal and Subbian, 2014]
  - [Enugala et al., 2015]
  - [Renaud and Naoki, 2016]
  - [Hartmann et al., 2016]
  - [Rossetti and Cazabet, 2018]
  - [Dakiche et al., 2019]
  - ...

## temporal communities : temporal assumptions

prior model, which describes what is the temporal behavior of interesting community structures, e.g.,

- small/large covering intervals of community interactions
- frequent patterns
- persistent patterns

# evolutionary patterns : vocabulary

evolutionary patterns of communities in the network

[Dakiche et al., 2019]

- birth
- death
- growth
- contraction
- merge
- split
- continue
- resurgence




## temporal communities: taxonomy

we follow a recent survey on community detection




[Dakiche et al., 2019]

- independent community detection and matching
  - first detect communities at each timestamp
  - then match them across different timestamps




# independent community detection and matching

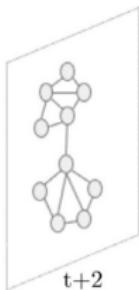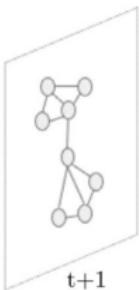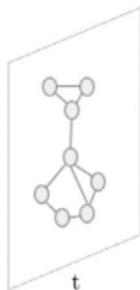

(1) A dynamic network consisting of three snapshots

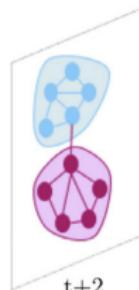
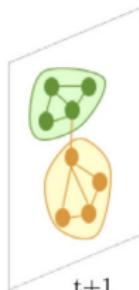
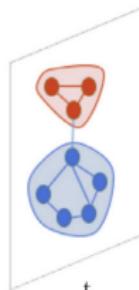


(2) Community detection in each snapshot

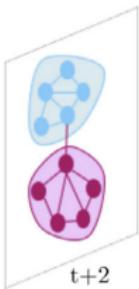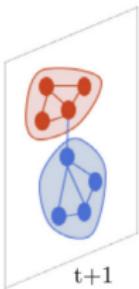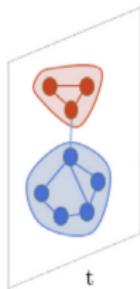

(3) Match communities of t and t+1

$$\begin{array}{c} \bullet = \bullet \\ \bullet = \bullet \end{array}$$

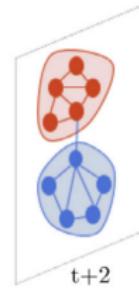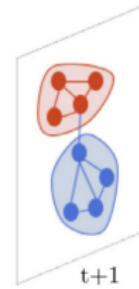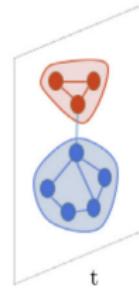

(4) Match communities of t+1 and t+2

$$\begin{array}{c} \bullet = \bullet \\ \bullet = \bullet \end{array}$$

# independent community detection and matching

Reference	Method	Key elements
Hopcroft et al. (2004)	Agglomerative hierarchical clustering	Similarity between two communities
Asur et al. (2009)	Matching approach	Community membership matrices
Palla et al. (2007)	Joint graphs	Auto-correlation, stationary parameter
Van Nguyen et al. (2012)	Life-cycle model	Jaccard coefficient, minimum community size
Wang et al. (2008)	Life-cycle model (CommTracker framework)	Common core nodes between communities
Chen et al. (2010)	Community core evolution	Maximal cliques, core nodes
Greene et al. (2010)	Step communities	Time step $t$ , Jaccard similarity
Takaffoli et al. (2010, 2011)	Event-based model	Community similarity
Bródka et al. (2013)	Group evolution discovery	Inclusion measure
Tajeuna et al. (2016, 2015)	Event-based model	Mutual transition measure
Sun et al. (2015)	Correlation matrix	Communities union
Zhu et al. (2016)	Event-based framework	Community attributes

[Dakiche et al., 2019]

# typical evolutionary patterns



$t$


$t + \tau$

a) Growth



$t + \tau$

b) Contraction



$t$

$t + \tau$

$C_1(t)$

$C_1(t + \tau)$

c) merging



$t + \tau$

d) splitting

$C_1(t)$

$t$

$C_1(t + \tau)$

$t + \tau$

e) Birth

$C_1(t)$


$t$

$C_1(t + \tau)$

$t + \tau$

f) Death

# procedure

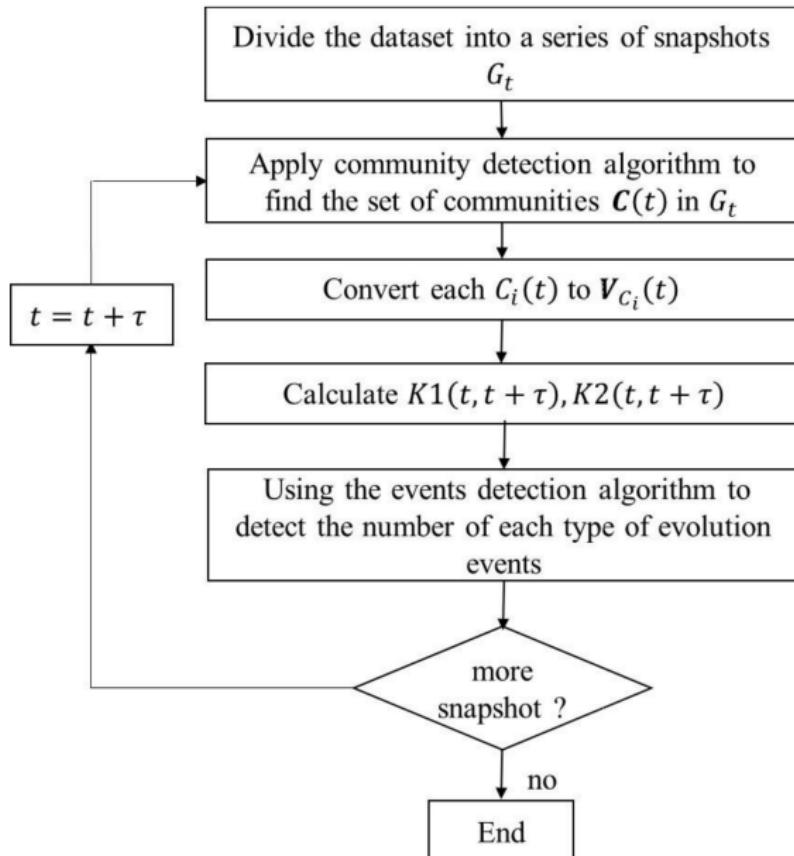


## possible issues

- most of approaches investigate the similarity between communities at consecutive time stamps  $t_i$  and  $t_{i+1}$
- such an approach may yield a community that does not share any nodes with the initially-observed community
- need to capture temporal relationship

[Tajeuna et al., 2015, Tajeuna et al., 2016]


# possible issues

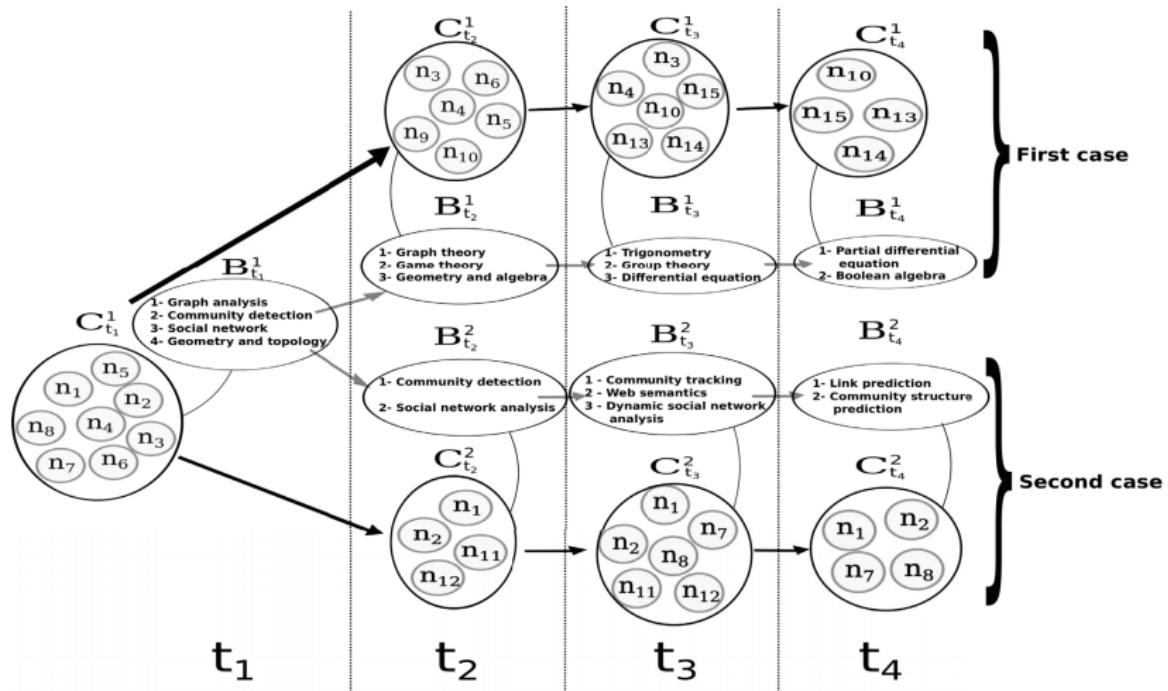

[Tajeuna et al., 2015, Tajeuna et al., 2016]

# similarity matrix

- $B = A^T \times A$  : temporal community similarity matrix (contingency matrix)
- row-normalized : transition matrix, similarity threshold applied
- similarity matrix can be used to track evolution

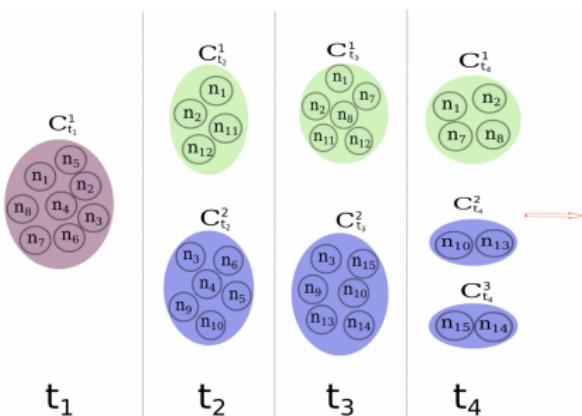

(a) Community detection at different snapshots.

	$t_1$		$t_2$		$t_3$			$t_4$		
	$C_{t_1}^1$	$C_{t_1}^2$	$C_{t_2}^1$	$C_{t_2}^2$	$C_{t_3}^1$	$C_{t_3}^2$	$C_{t_4}^1$	$C_{t_4}^2$	$C_{t_4}^3$	
n <sub>1</sub>	1	1	0	1	0	1	0	0	0	
n <sub>2</sub>	1	1	0	1	0	1	0	0	0	
n <sub>3</sub>	1	0	1	0	1	0	0	0	0	
n <sub>4</sub>	1	0	1	0	0	0	0	0	0	
n <sub>5</sub>	1	0	1	0	0	0	0	0	0	
n <sub>6</sub>	1	0	1	0	0	0	0	0	0	
n <sub>7</sub>	1	0	0	1	0	1	0	0	0	
n <sub>8</sub>	1	0	0	1	0	1	0	0	0	
n <sub>9</sub>	0	0	1	0	1	0	0	0	0	
n <sub>10</sub>	0	0	1	0	1	0	1	0	0	
n <sub>11</sub>	0	1	0	1	0	0	0	0	0	
n <sub>12</sub>	0	1	0	1	0	0	0	0	0	
n <sub>13</sub>	0	0	0	0	1	0	1	0	0	
n <sub>14</sub>	0	0	0	0	1	0	0	0	1	
n <sub>15</sub>	0	0	0	0	1	0	0	0	1	

(b) Binary membership matrix.

# independent community detection and matching

## advantages

- reuses unmodified traditional community detection methods
- possible to use existing similarity measures

## disadvantages

- instability of community-detection algorithms

# temporal communities: taxonomy




[Dakiche et al., 2019]

- **dependent community detection**




detect communities at time  $t$  based on

- network topology at  $t$ , and
- communities at time  $t - 1$

# dependent community detection

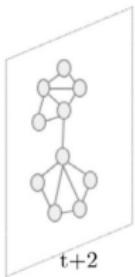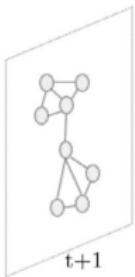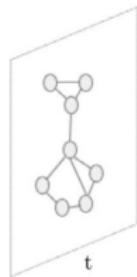


(1) A dynamic network consisting of three snapshots

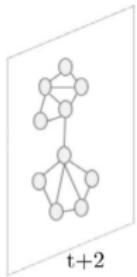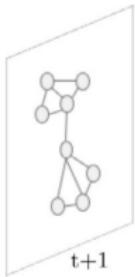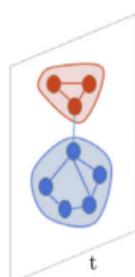


(2) Community detection in the first snapshot




and

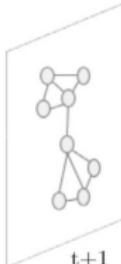


→

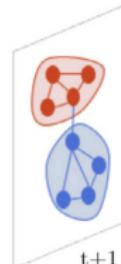


(3) Community detection at  $t+1$  using graph of  $t+1$  and communities of  $t$



and

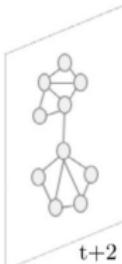

→

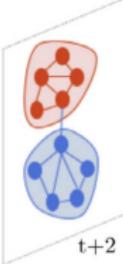

(4) Community detection at  $t+2$  using graph of  $t+2$  and communities of  $t+1$

# dependent community detection

Reference	Method	Key elements
He and Chen (2015)	Dynamicity in the Louvain algorithm	Time $t$
Aynaud and Guillaume (2010b)	Dynamicity in the Louvain algorithm	Time $t$ , communities of $t - 1$
Chong and Teow (2013)	Dynamicity in the Louvain algorithm	New nodes
Wang and Fleury (2010)	Dynamicity in the Louvain algorithm	Time $t$ , core nodes of $t - 1$
Dinh et al. (2009)	Modularity maximization for dynamic networks	Change in graph snapshot, community structure at time $t$
Chakrabarti et al. (2006)	Evolutionary clustering	Snapshot quality, history quality
Lin et al. (2009)	Iterative algorithm	Snapshot cost, temporal cost
Yang et al. (2011)	Bayesian inference	Community assignments
Kim and Han (2009)	Nano-communities, quasi-clique-by-clique	Temporal cost, snapshot cost
Chi et al. (2007)	Evolutionary spectral clustering	Temporal cost, snapshot cost
Sun et al. (2007)	Graph encoding	Community structure of last segment
Folino and Pizzuti (2014)	Multiobjective genetic algorithm	Community score, NMI
Rozenshtein et al. (2014)	Iterative method	Time-interval set
Guo et al. (2014)	Attribute information based method	Increments
Gao et al. (2016)	EvoLeaders-based method	Leader nodes

## Louvain algorithm

- a fast greedy approach based on modularity optimization
- two phases repeated iteratively
  - initially, each node in network is a community
  - then, for each node  $i$ , consider its neighbor  $j$  and compute the gain of modularity of putting  $i$  into the community of  $j$
  - node  $i$  is placed into the community with the largest gain, if the gain is positive

[Blondel et al., 2008]

## Louvain algorithm

- on the **second phase**, each community is considered as a super-node
  - the edges between these super-nodes are contracted and re-weighted by the number of edges between them
- the two phases are repeated until there is **no improvement** in modularity
- the algorithm is **extremely fast**

[Blondel et al., 2008]

## history-dependent approach


### idea

- for two consecutive time steps, there only few edges that affect the community structure
- if the connections of all the nodes in the same community at time step  $t - 1$  keep unchanged at time step  $t$ , they are still in the same community at time step  $t$
- thus, no need to break that super-node

[He and Chen, 2015]

## history-dependent approach


- find all communities in snapshot  $t = 1$
- for  $t = 2$ :
  - if a node's connection change, then remove it from its super-node and add as single node
  - leave all other nodes inside the super-node
  - re-weight the edges

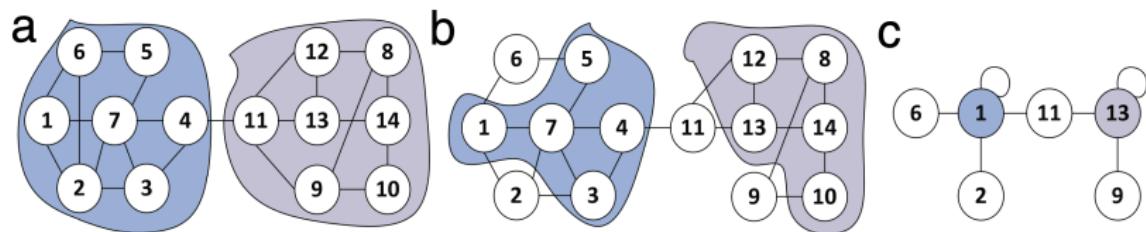

[He and Chen, 2015]

# history-dependent approach

- continue Louvain from that point to find communities
- continue in this fashion for  $t = 3$  using the communities at  $t = 2$ , and so on

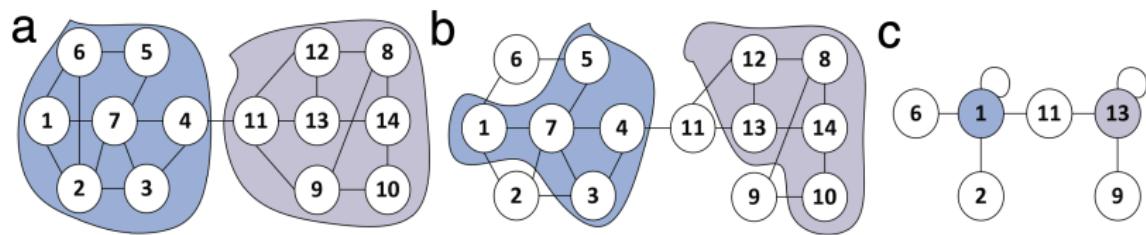

[He and Chen, 2015]

# dependent community detection

## advantages

- a solution for the problem of instability
- improved computational complexity

## disadvantages

- traditional community detection methods are no longer directly applicable


## temporal communities: taxonomy

[Dakiche et al., 2019]


simultaneous community detection on all snapshots

- construct a static expansion graph
  - add edges between instances of nodes in different timestamps
- run a standard community detection on the resulting graph

# simultaneous community detection on all snapshots

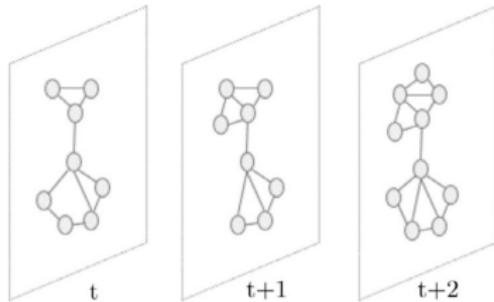

(1) A dynamic network consisting of three snapshots

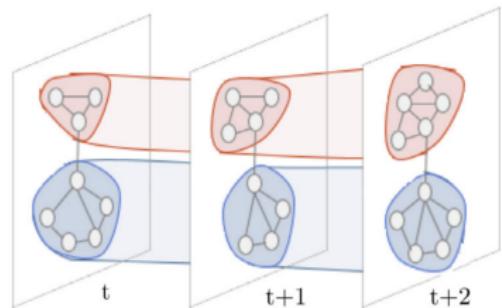

(2) Community detection on all snapshots

[Dakiche et al., 2019]

# simultaneous community detection on all snapshots

Reference	Method	Key elements
Tantipathananandh et al. (2007); Tantipathananandh and Berger-Wolf (2011)	Graph coloring problem, heuristics	Individual cost, group cost, c-cost
Jdidia et al. (2007)	Coupling graph clustering	Group membership
Mucha et al. (2010)	Coupling graph clustering	Modularity measure
Mitra et al. (2012)	Evolution in one graph	Modularity measure
Aynaud and Guillaume (2010a)	Modularity maximization	Average modularity measure

[Dakiche et al., 2019]

## simultaneous community detection

- algorithm based on some basic assumptions about individual behavior and group membership
- assumptions
- gradual changes : nodes change community affiliation infrequently
  - reliable true positive : members of the same community mostly interact with each other
  - negligible false positive : members of different communities rarely interact with each other

[Tantipathananandh and Berger-Wolf, 2011]

# simultaneous community detection

## costs


- switching cost: each node  $u$  incurs cost  $C_{sw}$  when changing community affiliation
- false negative cost: two nodes incur cost  $C_{fn}$  when belong to the same community but do not interact
- false positive cost: two nodes incur cost  $C_{fp}$  when belong to different communities but do interact

## resulting problem

- find a partition into clusters that minimizes the total cost of switching, false negative, and false positive

[Tantipathananandh and Berger-Wolf, 2011]

# simultaneous community detection

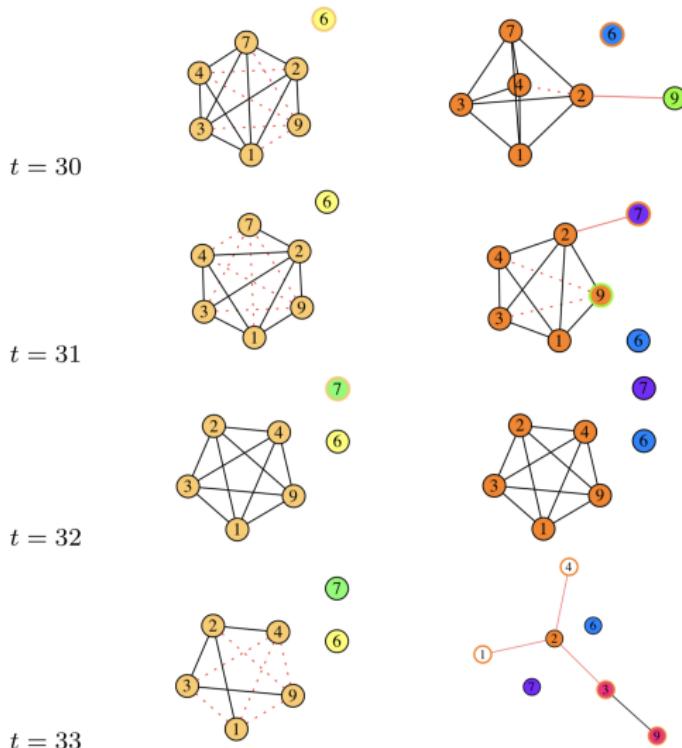

$$(C_{sw}, C_{fn}, C_{fp}) = (5, 1, 5) \text{ vs. } (C_{sw}, C_{fn}, C_{fp}) = (1, 1, 5)$$

[Tantipathananandh and Berger-Wolf, 2011]

## simultaneous community detection on all snapshots

### advantages

- provides a solution for the problem of instability

### disadvantages

- no possibility to track community evolution in a network evolving in real time


## temporal communities: taxonomy

[Dakiche et al., 2019]


### dynamic community detection

- update previously discovered communities according to network modifications


# dynamic community detection

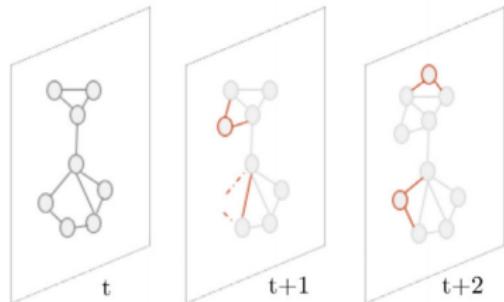


(1) Temporal network: an initial snapshot and sequence of modifications

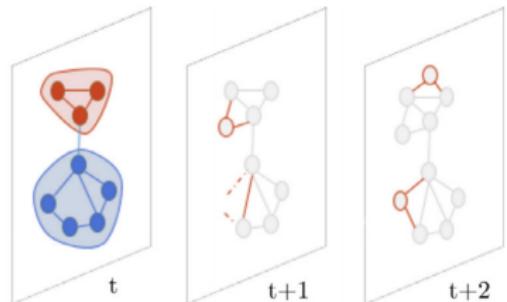

(2) Community detection on first snapshot

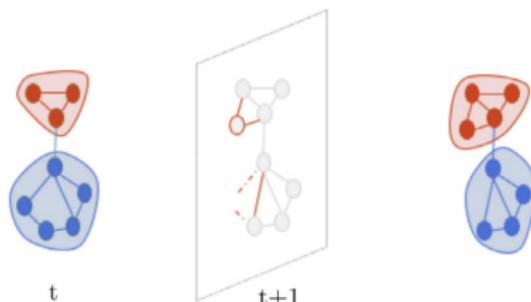

(3) Update communities of t according to modifications of t+1

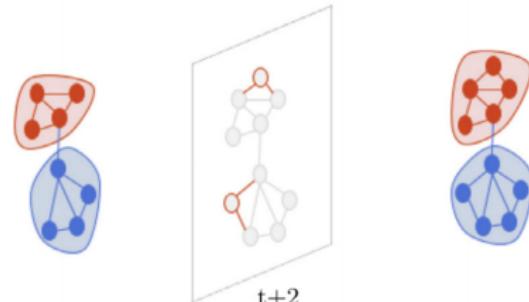

(4) Update communities of t+1 according to modifications of t+2

# dynamic community detection

Reference	Method	Key elements
Li et al. (2012)	Rule-based	Node's number of edges with communities
Shang et al. (2012)	Rule-based	Modularity measure
Cazabet et al. (2010)	iLCD (intrinsic Longitudinal Community Detection)	Path lengths
Nguyen et al. (2011b)	QCA (Quick community adaptation)	Nodes, edges
Nguyen et al. (2011a)	AFOCS	Nodes, edges
Qi et al. (2013)	A probabilistic approach	Trajectory information
Xu et al. (2013)	Rule-based	Edges
Xie et al. (2013a)	Label propagation	Labels of changed nodes
Anita and Bader (2016); Zakrzewska and Bader (2015)	Dynamic seed set expansion	Nodes, fitness score
Lee et al. (2014)	Evolution operations	Bulk updates
Rossetti et al. (2017)	Label propagation	Edges
Bhat and Abulaish (2015)	Novel density-based approach	Core nodes
Cordeiro et al. (2016)	Modularity-based	Nodes, edges
Held and Kruse (2016)	Detection based on high-connected hubs	Nodes, edges
Guo et al. (2016)	Local interaction model	Increments


# TILES

- stream processing
- uses **label propagation** to diffuse the changes to the node surroundings and adjust neighbors' community memberships
- a node can belong to a community with two different levels of involvement: **peripheral membership** and **core membership**
- only core nodes can spread community membership to their neighbors
- edges have a life span threshold, old are removed
- finds **overlapping communities**, i.e., each node can belong to different communities which can represent the different spheres of the social world of an individual


# TILES




(a)

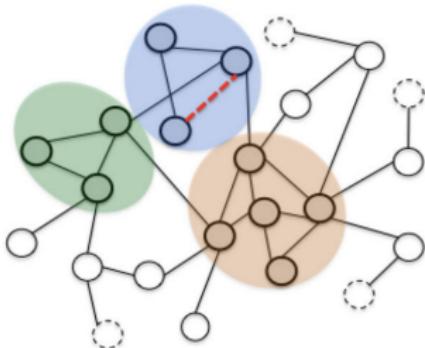

(b)

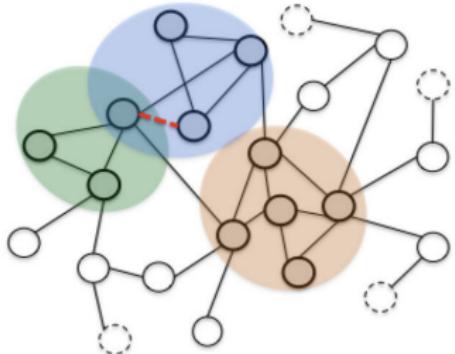


(c)

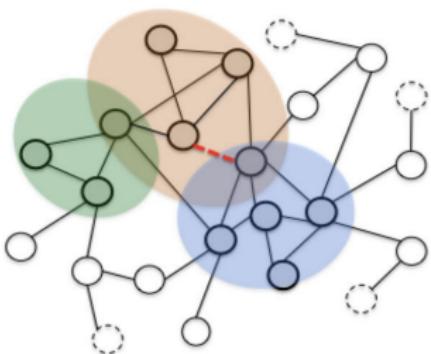

(d)

# TILES

- example of community life cycle extracted from WEIBO
- each community is represented by a circle and identified by an ID
- events of different types
  - (B) birth, (M) merge, (A) absorption, (S) split, (D) death

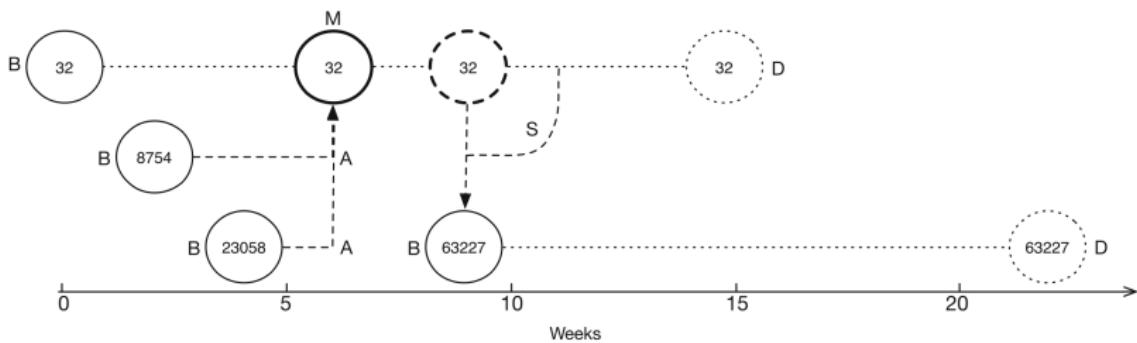

[Rossetti et al., 2017]

# dynamic community detection

## advantages

- provides a solution for the problem of instability
- light-weight methods to track communities

## disadvantages

- possibility to drift towards invalid communities

event detection

## event detection

- given a network representing some kind of activity
  - network of social interactions
  - social-media feed
  - transportation network
- an event can be generally defined as an activity with some prominent **qualitative** or **quantitative difference** from the **background activity**
  - bursting news about major natural disasters
  - abnormally high traffic in the city
  - an emerging new discussion topic in social media

## applications

- news spread in social media faster than in traditional news media [Sakaki et al., 2010, Dou et al., 2012]
- weather or traffic condition warning systems
- early notification about influential social events
- understanding causal relations, semantics, and dynamics of what is happening

comprehensive survey on event detection in dynamic networks  
[Ranshous et al., 2015]

## temporal event detection

- identify **atypical** time intervals and/or time instances
- temporal records
  - time sequences (time-ordered records) or
  - time series (equally-spaced in time sequences)
- number of interactions, tweets, reposts, purchases, check-ins, or some other measures in absolute values or aggregated per time unit

## temporal event detection

- time series may represent a temporal network
  - topological characteristics of each snapshot
  - distance between two consecutive graph snapshots

# temporal event detection: standard approaches

## abnormality score

- the likelihood that an interval contains an event can be estimated by comparing an abnormality score on the interval

[Heins and Stern, 2014]

## predictive models

- learn a predictive model and find intervals and time points whose behavior differ from the predicted one


[Hunter and McIntosh, 1999, Gensler and Sick, 2017]

## Netsimile

- an event exists in  $G_{j+1}$ , if  $G_{j+1}$  is very different than  $G_j$
- for each node calculate 7 local and egonet-based measures
  - degree
  - clustering coefficient
  - average degree of neighbours
  - average clustering coefficient of neighbours
  - number of edges in the egonet
  - number of edges outgoing from the egonet
  - number of neighbours of the egonet
- combine into a signature vector and compare

[Berlingerio et al., 2012]

# Netsimile algorithm

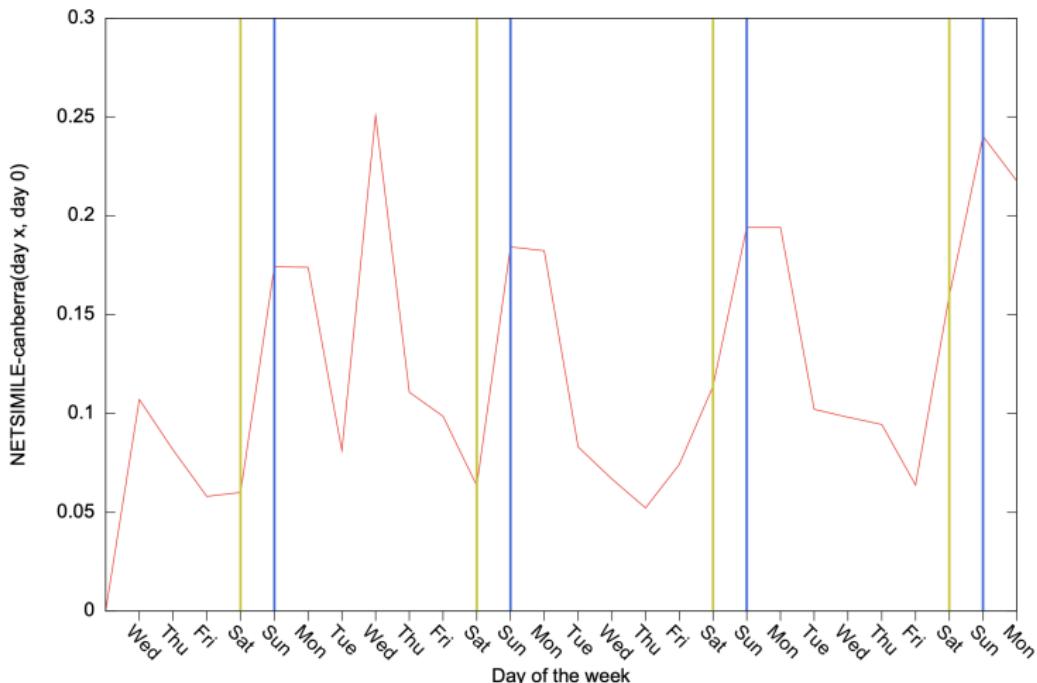

(a) NetSimile between each day and day 0 in Yahoo! IM

## bursting events

- an influential work by Kleinberg observed that events are characterized by bursting activity
  - [Kleinberg, 2003]
    - e.g., people discuss a topic intensively during the short period of time
- recent works rely on this connection
  - [Abdelhaq et al., 2013, Kunneman and van den Bosch, 2014]

## hierarchical events

- time intervals of the events
- events are not isolated
- they have different importance
  - local and global events can happen simultaneously
  - a large event may consist of several smaller events
- thus, hierarchical event models are meaningful

[Dong et al., 2015, Li et al., 2014]

# temporal event detection

we want to detect

- additional structural features, e.g.,
  - periodicity [Kunneman and Van den Bosch, 2015]
  - meta-information, e.g., text or tags of messages

most practical event-detection tools

- are application specific
  - breaking news or trends on twitter  
[Batal et al., 2012, Aggarwal and Subbian, 2012]
  - use multiple time sequence analysis techniques as building blocks  
[Rayana and Akoglu, 2016]

# spatiotemporal event detection

detailed survey [Shi and Pun-Cheng, 2019]


- consider time and the (geo-)location of an event
- sources of spatial data
  - GPS devices / smart phones
  - geo-tagged messages in online social networks
- typical approaches model the data as a set of geo-locations associated with activity measurements
- given a set of locations with activity measures, we want to find a subset of locations that are close to each other and have abnormal activity pattern
- in spatiotemporal setting, one is also interested in finding the time interval (moment) of an event

## spatiotemporal event detection: scan statistics

- a classic family of methods is **spatial** and **spatiotemporal scan statistics**
- scan over the space and time windows to identify regions of data generated by a non-random process

# spatiotemporal event detection: scan statistics


- a seminal paper : **spatial scan statistics** [Kulldorff, 1997]
- scan a circular spatial window and test the non-randomness of data against Poisson or Bernoulli baseline process

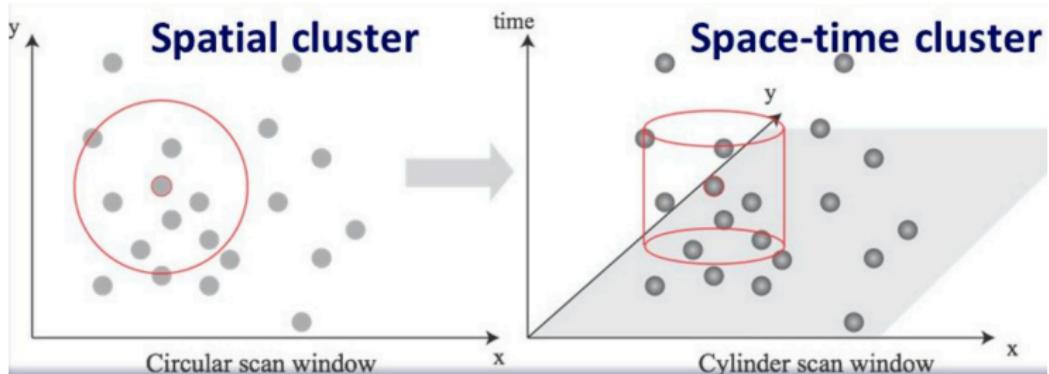

[Takahashi et al., 2004]

## spatiotemporal event detection: scan statistics

- later the approach was extended to spatiotemporal scans with cylindric windows
- similar works explore other types of statistics and tests [Neill, 2006, Qian et al., 2014].

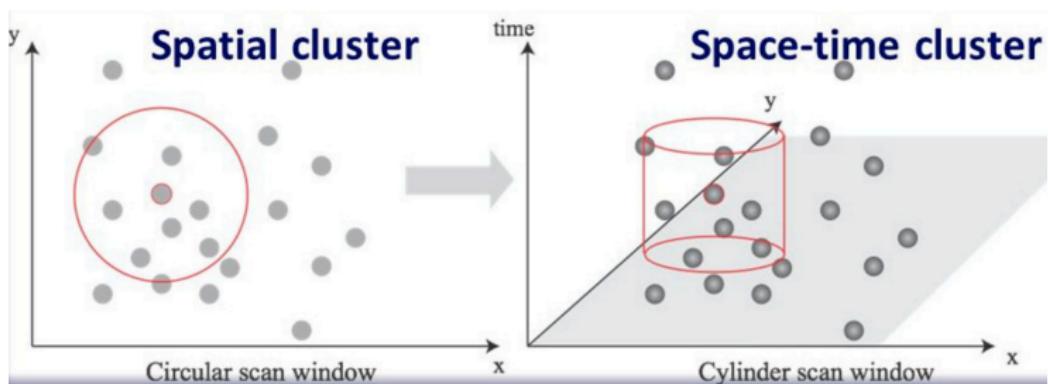

[Takahashi et al., 2004]


## flexible scans

- flexible spatial scan-statistics
- first, divide the entire area into many small regions
  - the location of each region is the administrative population centroid
- next, the set of irregularly shaped windows: concentric circles and connected regions
  - $k$  is a pre-specified maximum length of cluster
- similar idea is used in the flexible space-time scan statistics
- both of these are fitted to a small cluster size


[Takahashi et al., 2008]

# flexible scans

simulated disease maps in the Tokyo Metropolitan area

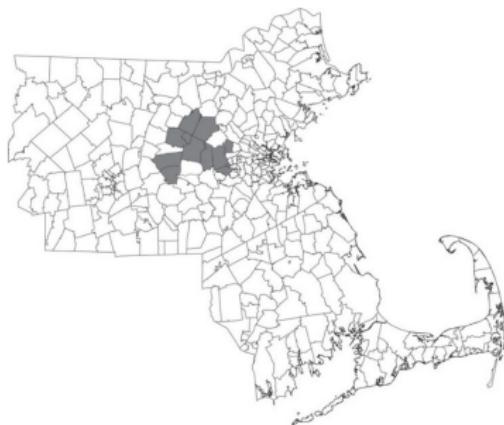

(c) Respiratory (flexible on Aug.12)

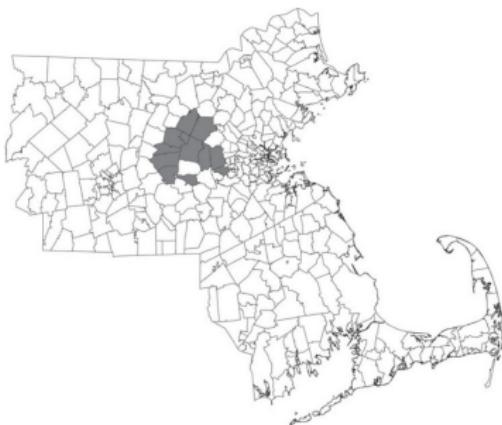

(d) Respiratory (flexible on Aug.15)

[Takahashi et al., 2008]

## structural event

- structural event
  - set of interconnected abnormal nodes
  - no assumptions on geo-desic distances
- e.g., the edge weights represent similarity of nodes
  - similarities between twitter users in preferences, language, frequently visited locations, etc.
- scan extension to graph model [Liu et al., 2016b]
- scan through a graph neighborhood — a set of interconnected nodes
- dense subgraph detection
  - e.g., [Charikar, 2000, Khuller and Saha, 2009]

## semantic event detection

- define event as an emerging/bursting/unusual topic in social media, or
- use textual information to supplement and support event detection
  - meaning of the event
  - more robust event detection
- simplest use of textual information monitor the frequencies of separate key words [Lappas et al., 2012]
- efficient for predefined events, vocabulary is known
- more general approach: topic modeling to identify the event vocabulary
- combine with other event-related information
  - e.g., the geo-tags of tweets



[Hong et al., 2012, Kling et al., 2014]

## ETree

- aggregate semantically similar (based on  $n$ -grams) tweets into information blocks
- model an event in twitter as a tree of information hierarchy, where nodes are subtopics
- each subtopic is a directed graph of information blocks, where edges are potential causal relationships
- the causal estimates rely on content similarity and temporal relevance
- assemble a topic tree by greedy heuristic

[Gu et al., 2011]

# ETree

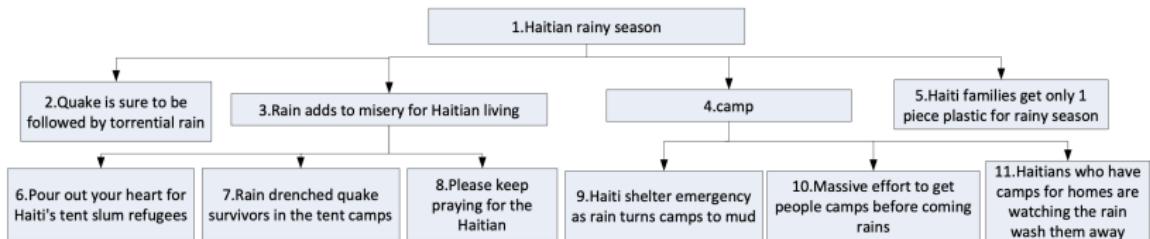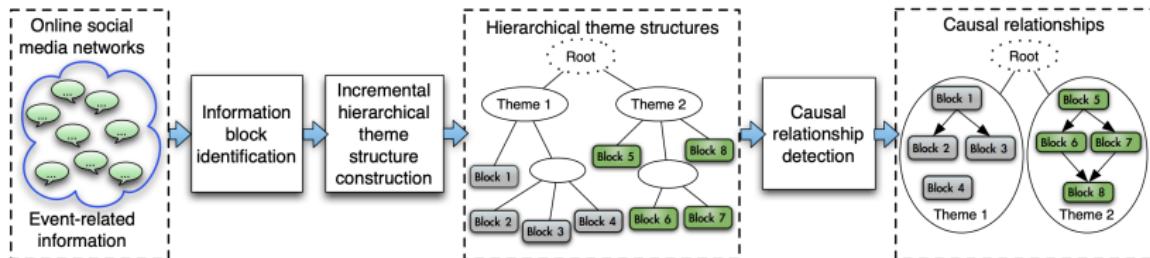

[Gu et al., 2011]

finding important nodes

# PageRank

- classic approach for measuring node importance
- listed in the top-10 most important data-mining algorithms

[Wu et al., 2008]

- numerous applications
  - ranking web pages
  - trust and distrust computation
  - finding experts in social networks
  - ...


# PageRank

- PageRank defined as the **stationary distribution** of a **random walk** in the graph
- inherently a static process
- however, many modern networks can be viewed as a sequence (stream) of edges
  - **temporal network** :  $G = (V, E)$ , with  $E = \{(u, v, t)\}$
  - **examples** : twitter, instagram, IMs, email, ...
- what is an appropriate PageRank definition for temporal networks?


# temporal networks

network nodes **interact** with each other

(e.g., a “like”, a repost, or sending a message to each other)

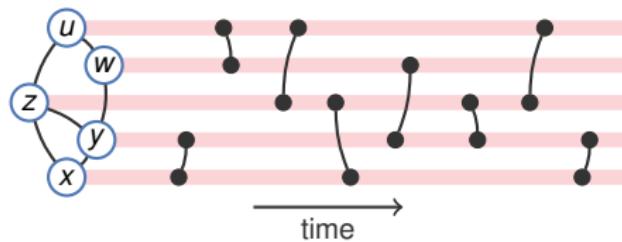


## motivating example

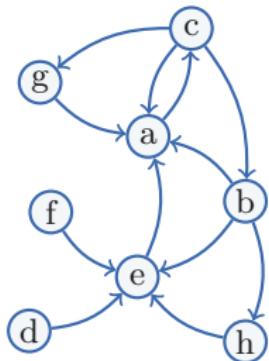


(a)

static network

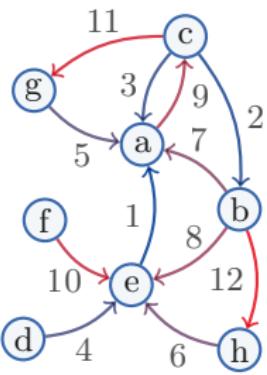

(b)

temporal network

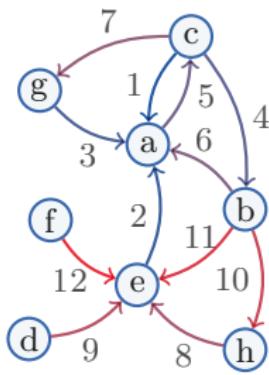

(c)

temporal network

## research questions and objectives

- extend PageRank to incorporate temporal information and network dynamics
- adapt PageRank to reflect changes in network dynamics and node importance
- estimate importance of a node  $u$  at any given time  $t$

[Rozenshtein and Gionis, 2016]

## dynamic PageRank vs. temporal PageRank

- extensive work on dynamic PageRank
- dynamic PageRank computation :
  - maintain correct PageRank during network updates
    - e.g., edge additions / deletions
- computation should return the static PageRank at a given network snapshot
- for edges present in a snapshot, order does not matter

[Rozenshtein and Gionis, 2016]

## static PageRank

- graph  $G = (V, E)$
- corresponding row-stochastic matrix  $P \in \mathbb{R}^{n \times n}$
- personalization vector  $\mathbf{h} \in \mathbb{R}^n$
- PageRank is the **stationary distribution** of a random walk, with restart probability  $(1 - \alpha)$


$$\pi(u) = \sum_{v \in V} \sum_{k=0}^{\infty} (1 - \alpha) \alpha^k \sum_{\substack{z \in \mathcal{Z}(v, u) \\ |z|=k}} h(v) \Pr[z \mid v]$$

where,  $\mathcal{Z}(v, u)$  is the set of all paths from  $v$  to  $u$

and  $\Pr[z \mid v] = \prod_{(i,j) \in z} P(i, j)$

# temporal PageRank

- make a random walk only on temporal paths
  - e.g., time-respecting paths
  - time-stamps increase along the path

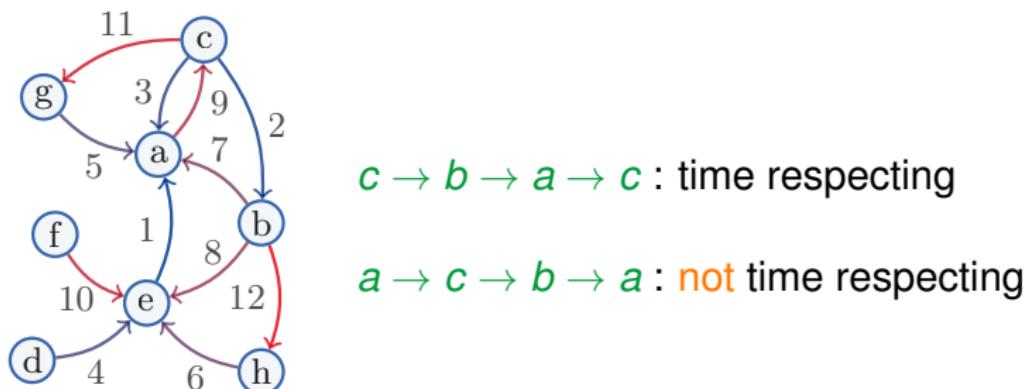

# temporal PageRank

- intuition : probability of visiting node  $u$  at time  $t$  given a random walk on temporal paths
- need to model probability of following next temporal edge
  - we use an exponential distribution
- temporal PageRank definition

$$r(u, t) = \sum_{v \in V} \sum_{k=0}^t (1 - \alpha) \alpha^k \sum_{\substack{z \in \mathcal{Z}^T(v, u | t) \\ |z|=k}} \Pr'[z | t]$$

$\mathcal{Z}^T(v, u | t)$  set of temporal paths from  $v$  to  $u$  until time  $t$

# computation

- simple online algorithm
- $r(u, t)$  : temporal PageRank estimate of  $u$  at time  $t$
- $s(u, t)$  : count of active walks visiting  $u$  at time  $t$

**input** :  $E$ , transition probability  $\beta$ , jumping probability  $\alpha$

- 1  $r = \mathbf{0}$ ,  $s = \mathbf{0}$ ;
- 2 **foreach**  $(u, v, t) \in E$  **do**
- 3    $r(u) = r(u) + (1 - \alpha);$
- 4    $r(v) = r(v) + (s(u) + (1 - \alpha))\alpha;$
- 5    $s(v) = s(v) + (s(u) + (1 - \alpha))(1 - \beta)\alpha;$
- 6    $s(u) = (s(u) + (1 - \alpha))\beta;$
- 7 **normalize**  $r$ ;
- 8 **return**  $r$ ;

## static vs. temporal PageRank

- temporal PageRank is designed to capture changes in network dynamics and concept drifts
- what if the edge distribution is stable?

## static vs. temporal PageRank


- consider static network  $G_S = (V, E_S, w)$
- time period  $[1, \dots, T]$
- construct temporal network  $G = (V, E)$  by sampling edges proportionally to their weight

proposition :


as  $T \rightarrow \infty$ , the temporal PageRank on  $G$   
converges to the static PageRank on  $G_S$ ,  
with personalization vector equal to weighted out-degree

[Rozenshtein and Gionis, 2016]

## experiment — adaptation to concept drift

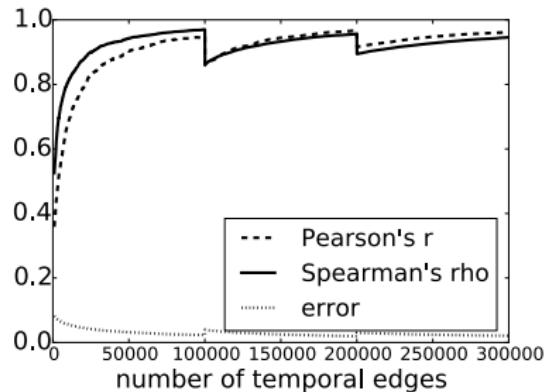

(a) *Facebook*

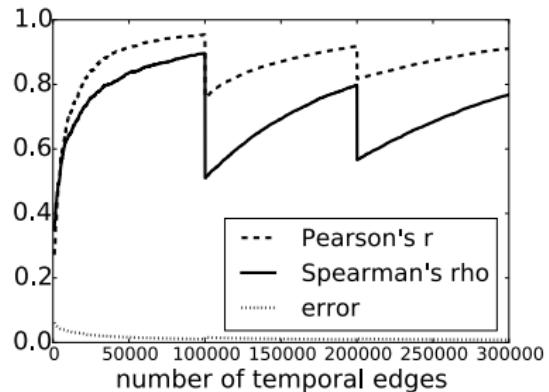

(b) *Twitter*

[Rozenshtein and Gionis, 2016]

diffusion analysis and influence spreading

# diffusion analysis and influence spreading

- propagation models
  - used to study disease spreading or information cascade in the network
- activity spreading: virus, information, idea, rumor
- applications: epidemiology, information security, marketing
- why use models?
  - facilitate mathematical analysis of propagation processes
  - have intuitive interpretation
  - proven to be realistic by empirical studies
- extensive survey in the book [Shakarian et al., 2015]

# standard models

- susceptible-infected (SI) model
  - SIR, SIRS, other variants
- independent cascade (IC) model
- linear threshold (LT) model
- shortest path (SP) model

## static models: assumptions

- all models have similar implicit assumptions on temporality:
  1. uniform time steps
  2. interactions happen at each time step and are independent

## drawbacks of static models

- large heterogeneity in the time instances of real interactions

[Barabasi, 2005, Candia et al., 2008,  
Leskovec and Horvitz, 2008]

- burstiness in communication patterns
- periodic activity changes
- causal relationships between interactions

## temporal propagation models

- intuitive **extensions** from **static graphs** to temporal graphs
- add distributions (e.g., Poisson or power-law) of the **intervals between interactions** (latencies)

[Vazquez et al., 2007, Min et al., 2011]

- **realistic generalizations** of well-studied models

[Karsai et al., 2011, Candia et al., 2008]

- continuous time, partially observed graph
- develop **mathematical analysis** for novel and generalized models

[Harris, 2002, Fernández-Gracia et al., 2011]

## typical problem formulations

- immunization strategies
- influence maximization
- seed and cascade reconstruction

## static immunization strategies

- main aspects differentiating the research works:
  - assumptions about the spreading model
  - assumptions about the network structure
  - whether the whole network is observable
- both assumptions on the network structure and on the infection propagation are crucial
- results may not hold for any general network and real infection

[Newman, 2003, Pastor-Satorras and Vespignani, 2002a].

## static immunization strategies

- simple model-blind strategies, such as random immunization, perform moderately well in different scenarios  
[Pastor-Satorras and Vespignani, 2002b, Madar et al., 2004]
- better results on real-world networks can be achieved by immunizing nodes with high connectivity  
[Pastor-Satorras and Vespignani, 2002b, Dezső and Barabási, 2002].
- requires explicit knowledge of the network structure and it is impractical for real applications

## static immunization strategies


- [Cohen et al., 2003] overcomes this drawback by employing acquaintance immunization strategy:
- immunization of random neighbors of randomly selected nodes leads to immunization of the most central nodes without knowing any global information about the network

# temporal immunization strategies


- adjust successful static strategies
- e.g., Cohen's neighborhood vaccination scheme  
[Lee et al., 2012]
- two vaccination strategies
- recent:
  - ask a random individual  $i$  to name its most recent contact and vaccinate this person
- weight:
  - ask a random individual  $i$  to name its most frequent contact since some time  $t$

## 2 protocols



C Recent

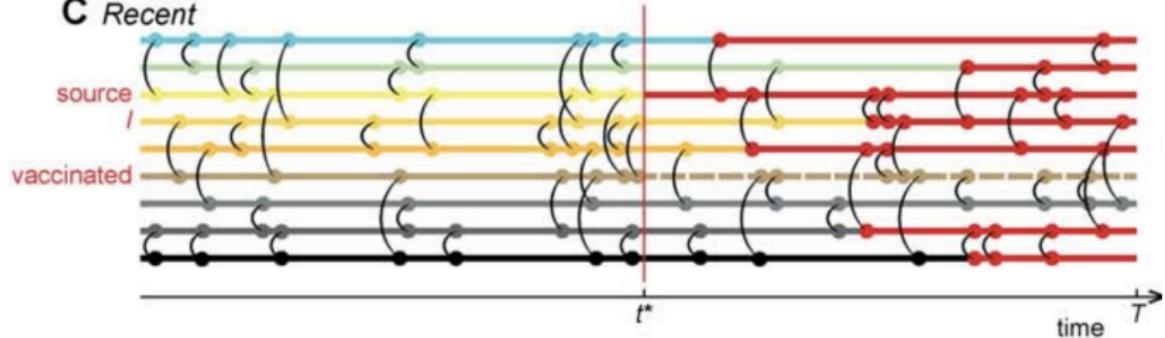

D Weight

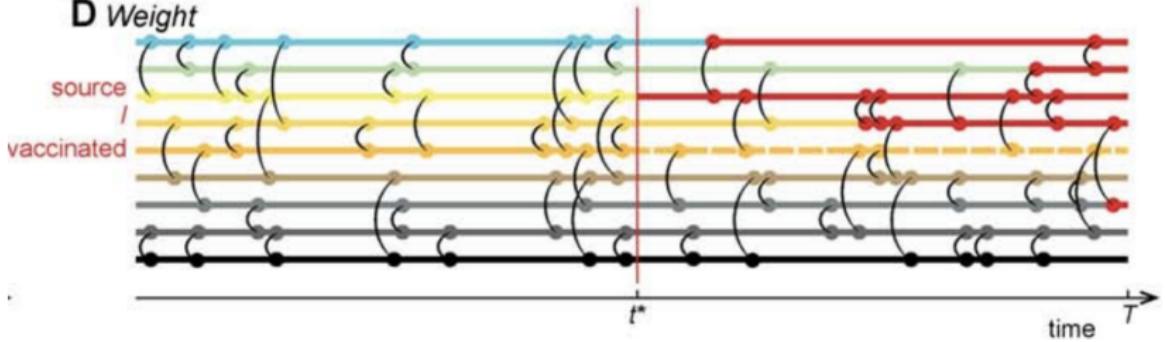

# temporal immunization strategies

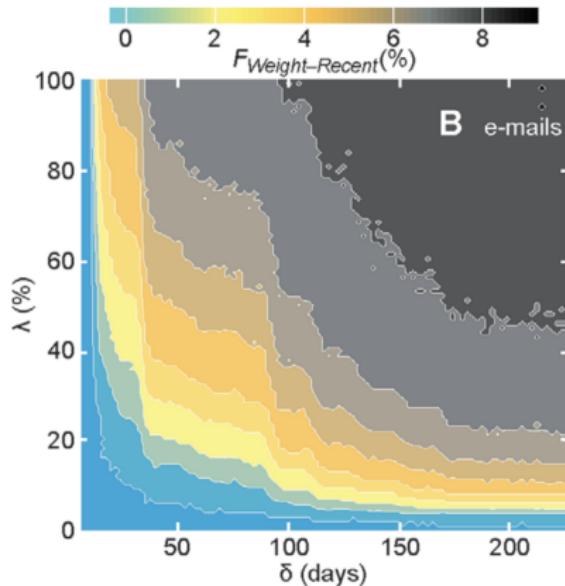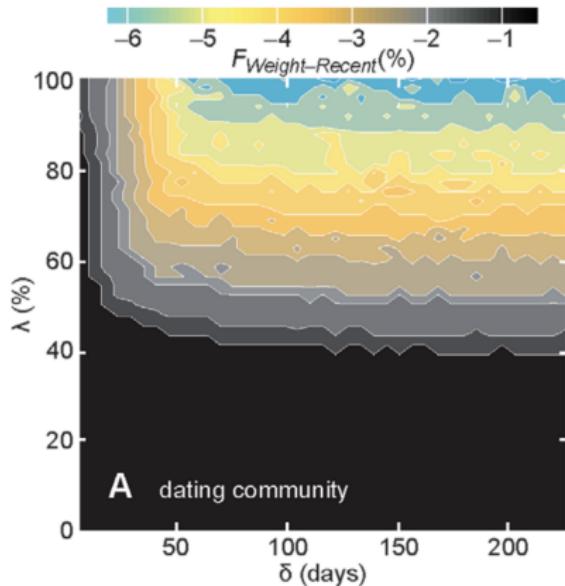

recent is the most efficient method for the most of the datasets

[Lee et al., 2012]

# temporal immunization strategies

- full knowledge of the temporal graph:
  - vaccinations of nodes with high **temporal degree**, **temporal betweenness**, or other type of **centrality**  
[Yu et al., 2010, Starnini et al., 2013, Génois et al., 2015]
- another line of works
- find persistent **communication patterns** to approximate the communication structure in **future**
  - apply standard vaccination on the **predicted** graph  
[Valdano et al., 2015, Gauvin et al., 2015]  
[Mantzaris and Higham, 2016]

## static influence maximization

- how to select the initial set of infected nodes (seeds), such that the speed, size, or other spread characteristics are optimized
- applications in marketing and network design
- influence maximization problem was introduced by [Kempe et al., 2003] in the IC and LT models
- find a set of  $k$  seed nodes, such that the expected number of nodes activated by the infection cascade is maximized

## static influence maximization

- NP-hard [Kempe et al., 2003]
- simple greedy algorithm with approximation guarantee
- influence maximization problem was been studied for many different variants of other models, constraints, and objective functions
- many practical heuristics and approximations

[Chen et al., 2009, Chen et al., 2010, Tang et al., 2014]

# temporal influence maximization

- **intuitive** approach to reflect temporality:
  - sequence of graphs (or snapshots)
  - each **time step** of propagation corresponds to propagation over the **corresponding graph**
  - all interactions within one time step happen **simultaneously**
- related papers:

[Aggarwal et al., 2012, Zhuang et al., 2013,  
Gayraud et al., 2015]

## temporal influence maximization

- another approach:
- incorporate time into the diffusion model as distribution of intervals between the interactions
- different types of models and interval distributions
  - [Chen et al., 2012, Liu et al., 2012, Rodriguez and Schölkopf, 2012, Du et al., 2013]
- the most realistic approachable setting?
- the latest promising research:
  - infer propagation model parameters from the data

[Rodriguez et al., 2011, Gomez-Rodriguez et al., 2016]

## influence maximization in the continuous model

- use **fully continuous** time model of diffusion  
[Rodriguez et al., 2011]
- pairwise **transmission likelihood**:
- define  $f(t_j | t_i; \alpha_{i,j})$  as the **conditional likelihood** of transmission between a node  $i$  and a node  $j$ ,
  - $t_i$  and  $t_j$  are **infection times** and
  - $\alpha_{i,j}$  is the transmission rate
- assume that the **likelihood** depends on:
  - the pairwise **transmission rate**  $\alpha_{i,j}$  and
  - the **time difference**  $(t_j - t_i)$
- consider the **exponential** distribution of model pairwise interactions


## influence maximization in the continuous model

- given a diffusion process that started in the set of source nodes  $A$
- $N(A; T)$  is the number of nodes infected up to time  $T$
- the influence function  $\sigma(A; T)$  as the average total number of nodes infected up to time  $T$ , i.e.,  $\sigma(A; T) = \mathbb{E}N(A; T)$ .
- continuous time influence maximization problem:
  - find the set of source nodes  $A$  in a diffusion network  $G$  that maximizes the influence function  $\sigma(A; T)$
- i.e.,  $A = \arg \max_{|A| \leq k} \sigma(A; T)$


[Gomez-Rodriguez et al., 2016]

# influence maximization in the continuous model

- efficient pruning based on identifying ‘blocked’ nodes
- **infection time** of a node is the length of the **stochastic shortest path**

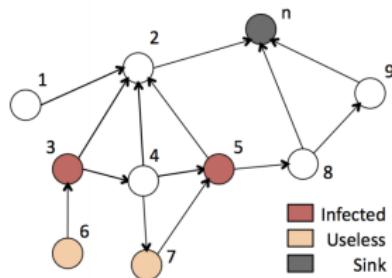

(a)  $t_1$ :  $|I| = 2$ ,  $|U_n| = 2$ ,  $|X_n| = 4$

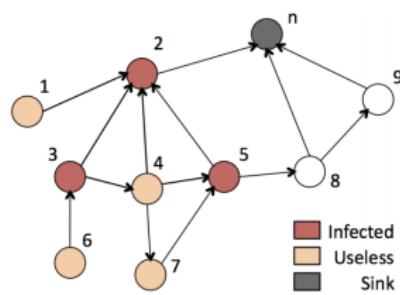

(b)  $t_2$ :  $|I| = 3$ ,  $|U_n| = 4$ ,  $|X_n| = 7$

[Gomez-Rodriguez et al., 2016]

## seed and cascade reconstruction

- given some observed data about the infection
  - e.g., a small subset of infected nodes, the goal is to find the most probable seed nodes
- other versions:
  - find the most probable cascades
- the order of infection (who got infected from whom)
- these works are data-driven:
  - it is essential that the assumed propagation model matches the actual infection flow in the network

# seed and cascade reconstruction

- applications:
  - epidemiology (who was the patient zero?)
  - influencer discovery  
(who was the source of information?)
- a number of different approaches
  - find a single source under the SI model  
[Shah and Zaman, 2011]
  - multiple seeds [Prakash et al., 2012]
  - $k$  seeds under the IC model [Lappas et al., 2010]
- the most recent papers
  - take advantage of the recorded infection order  
[Sefer and Kingsford, 2016].

## temporal reconstruction

- the problems formulated **in this setting** tend to be either
  - **oversimplified** versions of static reconstruction or
  - become **too hard** or **ill-posed**
- knowing the history of interactions allow to reconstruct feasible paths of infection and prune unfeasible
- any noise or missing information adds uncertainty
- need more assumptions about the **noise** and information **available**

## temporal reconstruction


- some problem formulations :
- reconstruct the cascade given the **sequence** of graph **snapshots** along with **node-status** information  
[Feizi et al., 2016, Sefer and Kingsford, 2016]
- reconstruct an **SI cascade** from one **sampled** snapshot with **all** information  
[Sundareisan et al., 2015]
- while there are methods to handle **partially observed cascade** for static graphs, in temporal graphs most of works rely on **noise-free data**
- the knowledge of the **diffusion model** is crucial
- see survey paper: [Holme, 2015]

## history reconstruction

[Sefer and Kingsford, 2016]

- SEIRS diffusion dynamics over directed graph  $G = (V, E)$
- SEIRS states are Susceptible (S), Exposed but not contagious (E), Infected and contagious (I), and previously infected but Recovered (or immune to the infection) (R)
- given: a graph  $G = (V, E)$ , state transition probabilities  $(p_{u,v}, e2i_v, i2s_v, i2r_v, r2s_v)$ , and a collection of diffusion snapshots  $= \{D_t\}$ , with  $D_t \in T_D$
- each snapshot records the state of every node at a single time point, partitioning them into  $V = S_t \cup E_t \cup I_t \cup R_t$
- the goal is to infer the past states (susceptible, exposed, infected and recovered) of every node at every time

# history reconstruction

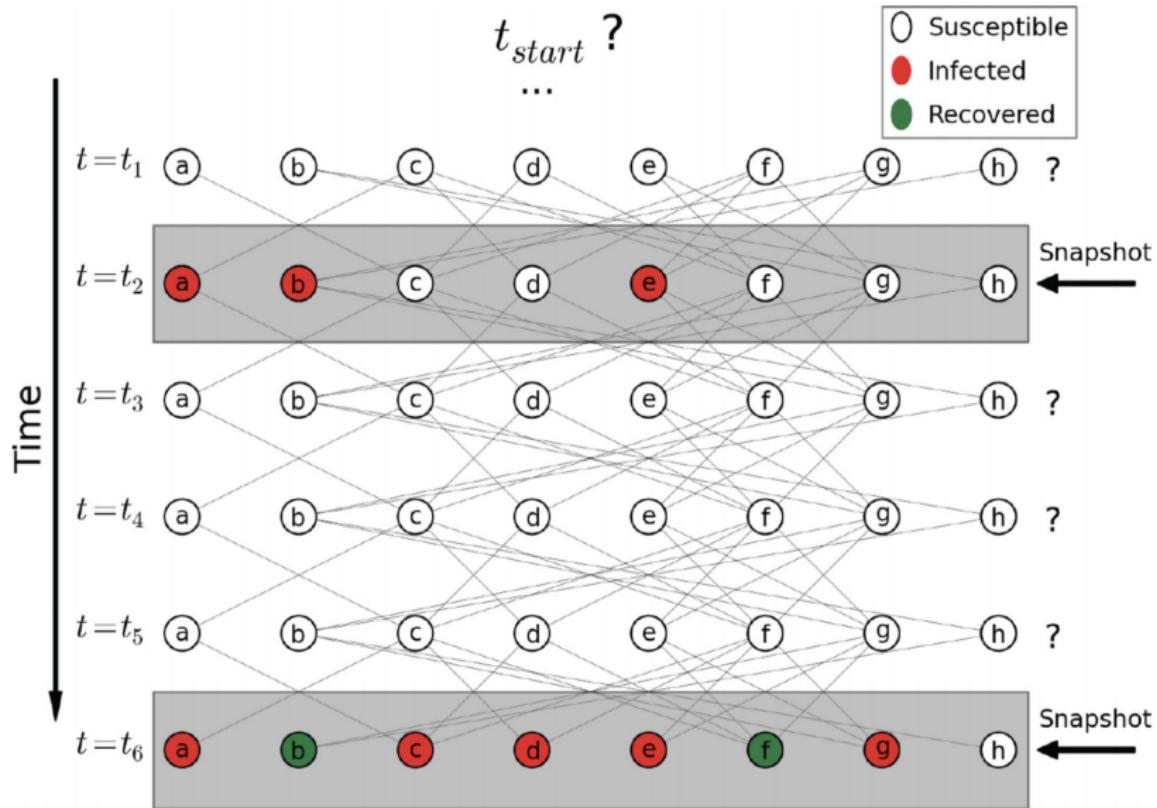



# history reconstruction

[Sefer and Kingsford, 2016]

- proposed solution :
  - maximum likelihood history given diffusion snapshots that may come from multiple time points
- algorithm called DHR-sub (submodular history reconstruction on discrete dynamics)
- reconstructs the history before the earliest measurement:
  - greedily maximize the non-monotone submodular log-likelihood at each previous time step
- reconstructs the history between the consecutive diffusion data time points:
  - non-monotone submodular maximization under matroid base constraints
- speedups and approximations

[Sefer and Kingsford, 2016]

# history reconstruction

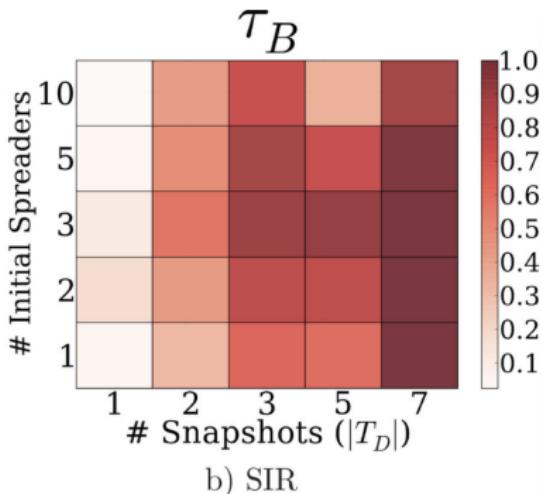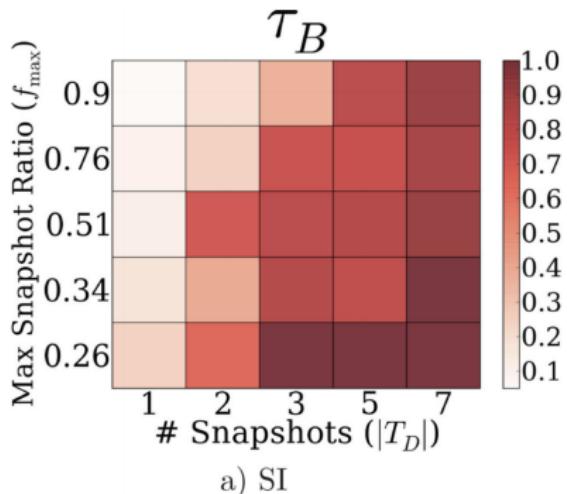

[Sefer and Kingsford, 2016]

network summarization

# network summarization

- aims to **simplify** and **explain** the **high-level** structure of complex real graphs
- many different problem formulations and techniques:
  - recent **survey** [Liu et al., 2016a]

# motivation and applications


- fast and interactive large-graph analysis:
  - summaries decrease space and memory required for the storage and processing of real-world networks
- clear human understandable visualization
- noise elimination: filter out insignificant structural fluctuations in networks and preserve only prominent patterns

# approaches to summarization


- sparsification
- aggregation / compression
- non-graph summary

# sparsification

- remove somewhat **unimportant** edges or/and nodes
- preserving certain **local** or/and **global** structures
- important properties to preserve are **cuts**, **community structures**, **distances**, **spectral properties**, etc.

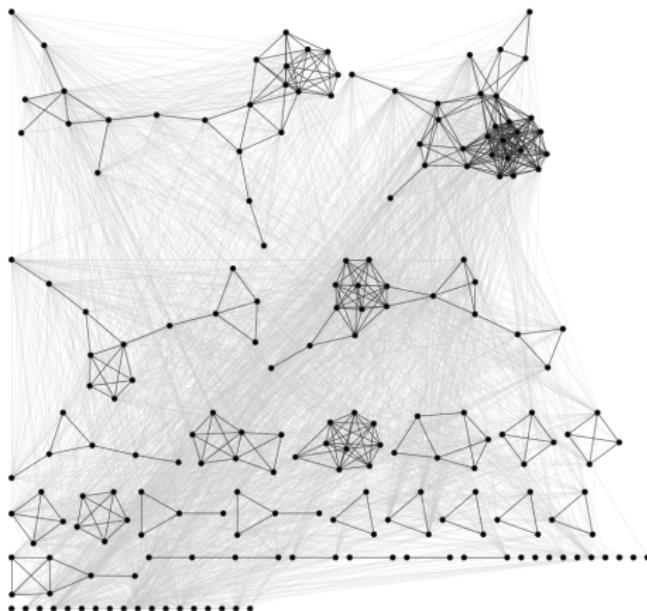

(a) Quadrilateral Simmelian Backbone

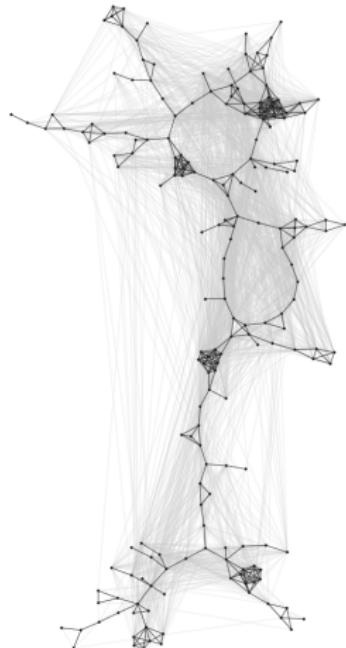

(b) Quadrilateral Simmelian Backbone with UMST

[Hamann et al., 2016]

# sparsification

- sparsification problems are often formulated as **optimization** problems:
  - minimize some kind of graph **approximation** (**reconstruction**) error
  - while sparsifying **as much as possible**
- examples:
  - preservation of **distances** between nodes and connectivity  
[Elkin and Peleg, 2005, Zhou et al., 2010]
  - **cuts** [Ahn et al., 2012]
  - **spectral** graph properties [Batson et al., 2013]
  - various types of **social network-specific characteristics**
- **survey**: [Hamann et al., 2016]


# comparison

- random edge (RE)
- triangle counts (Tri)
- Jaccard similarity (JS) [Satuluri et al., 2011]
- simmelian backbones (TS, QLS) [Nick et al., 2013]
- edge forest fire (EFF) [Leskovec and Faloutsos, 2006]
- algebraic distance (AD) [Chen and Safro, 2011]
- local degree (LD) [Hamann et al., 2016]
- “local” versions of all mentioned methods  
[Hamann et al., 2016]

[Hamann et al., 2016]

# comparison

MOD	0.4	0.46	0.39	0.38	0.42	0.39	0.44	0.41	0.24	-0.13	0.026	-0.025	-0.00022	0.013	
+	Ad	0.74	0.38	0.37	0.37	0.37	0.4	0.39	0.31	-0.14	-0.075	-0.087	0.00016	-0.0094	
+	+	LAD	0.36	0.44	0.4	0.45	0.42	0.47	0.21	-0.17	0.046	-0.018	-0.00011	0.021	
+	+	+	ls	0.83	0.84	0.7	0.93	0.77	0.81	-0.19	-0.15	-0.18	0.0002	-0.03	
+	+	+	+	+	Ls	0.75	0.83	0.84	0.92	0.57	-0.25	0.034	-0.041	0.00014	0.011
+	+	+	+	+	+	As	0.88	0.85	0.76	0.68	-0.13	-0.11	-0.14	3.2e-05	-0.017
+	+	+	+	+	+	LAs	0.76	0.84	0.48	-0.19	0.034	-0.028	-3.4e-05	0.015	
+	+	+	+	+	+	+	qAs	0.88	0.71	-0.18	-0.059	-0.11	9.2e-05	-0.011	
+	+	+	+	+	+	+	+	LqAs	0.53	-0.19	0.05	-0.017	-9.5e-05	0.017	
+	+	+	+	+	+	+	+	+	Tr	0.21	-0.51	-0.4	6.5e-05	-0.086	
-	-	-	-	-	-	-	-	-	+	Ad	-0.4	-0.19	-0.00015	-0.041	
+	-	+	-	+	-	+	-	+	-	-	EFF	0.46	5e-05	0.097	
-	-	-	-	-	-	-	-	-	-	-	LEFF	-0.00038	0.076		
											RE	8.8e-05			
+	-	+	-	+	-	+	-	+	-	-	+	+		LRE	



## comparison

- random edge deletion:
  - performs surprisingly well
  - retains a wide range of properties
- simmelian backbones, Jaccard similarity and algebraic distance:
  - prefer intra-cluster edges
  - do not keep global structures
- local degree:
  - preserves shortest paths
  - overall connectivity of the network
- forest fire sampling edge scoring:
  - depends strongly on the specific network's structure
  - good at preserving connectivity


## aggregation / compression

- super graph:
  - nodes are grouped into **supernodes** and
  - edges between the super nodes form **superedges**
- graph aggregation can be formulated as an optimization problem
  - minimizing reconstruction error
  - **preserve some properties**
- the preserved properties are similar to sparsification problems

## aggregation / compression


- some examples:
  - node aggregation to approximate node degree and eigenvector centrality  
[LeFevre and Terzi, 2010, Riondato et al., 2017]
  - edge aggregation to preserve the weights of superedges or strengths of the paths  
[Toivonen et al., 2011]
- common heuristic is to build a supergraph based on clustering  
[Abello et al., 2006, Cléménçon et al., 2012]

## compression example

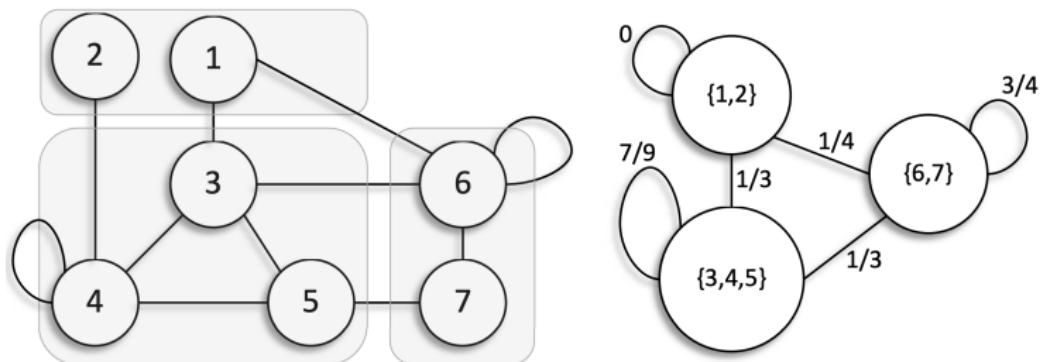

- graph  $G = (V, E)$
- number  $k$
- $A_G$  : adjacency matrix of  $G$
- $k$ -summary  $S$  of  $G$  is a complete undirected weighted graph  $S = (V', V' \times V')$
- where  $V'$  is a disjoint  $k$ -partition of  $V$

## compression example

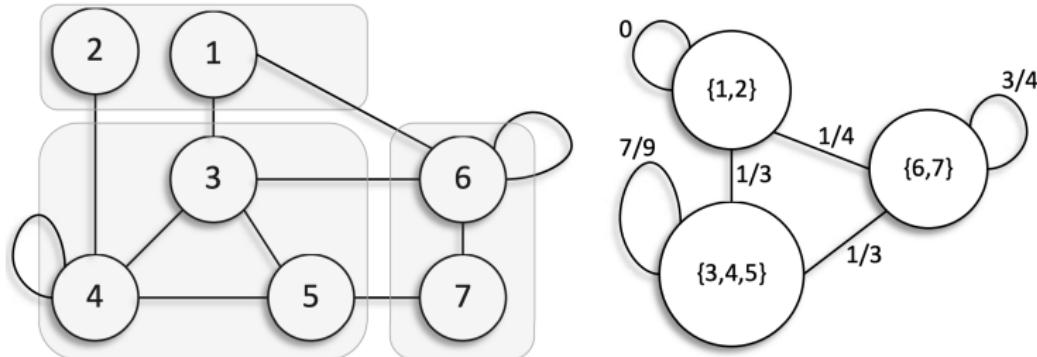

- the vertices of  $S$  are called **supernodes**, edges are **superedges**
- each superedge  $e_{ij}$  has a **weight**, corresponding to the **density** of edges between  $V_i$  and  $V_j$ :

$$d_G(i, j) = \frac{\sum_{i' \in V_i, j' \in V_j} A_G(i', j')}{|V_i||V_j|}$$

[Riondato et al., 2017]

- density matrix of  $S$  as the  $k \times k$  matrix  $A_S$  with entries  $A_S(i, j) = d_G(i, j)$ ,  $1 \leq i, j \leq k$
- $A_S \in \mathbb{R}^k \times k$  can be lifted to the matrix  $A^\uparrow \in S \in \mathbb{R}^n \times n$  as  $A_S^\uparrow(v, w) = A_S(s(v), s(w))$
- summarization problem: find the  $k$ -summary to minimize the error  $err(A_G, A_S^\uparrow) = \|A_G - A_S^\uparrow\|_p$

	1	2	3	4	5	6	7
1	0	0	1/3	1/3	1/3	1/4	1/4
2	0	0	1/3	1/3	1/3	1/4	1/4
3	1/3	1/3	7/9	7/9	7/9	1/3	1/3
4	1/3	1/3	7/9	7/9	7/9	1/3	1/3
5	1/3	1/3	7/9	7/9	7/9	1/3	1/3
6	1/4	1/4	1/3	1/3	1/3	3/4	3/4
7	1/4	1/4	1/3	1/3	1/3	3/4	3/4

[Riondato et al., 2017]

## non-graph summary


- represent some **interesting**, **characterizing**, or otherwise **important** structures observed in the graph
    - e.g. a set of tightly interconnected nodes (**communities**)
    - graph can be summarized as a set of communities, **ignoring other parts**
- [Lancichinetti et al., 2011, Perozzi and Akoglu, 2018]

## non-graph summary

- other examples:
  - motif counting  
(counting small subgraphs of restricted size)  
[Itzhack et al., 2007]
  - finding frequent subgraphs  
[Jiang et al., 2013]
- other approaches develop specialized vocabulary to encode a large graph.
- e.g., summarize by a set of chains, stars, cliques, and bipartite cores  
[Koutra et al., 2015]
- this framework can be further extended to domain-specific vocabulary constructed by an expert

# vocabulary-based summarization

- vocabulary: full and near cliques (fc, nc), full and near bipartite cores (fb, nb), stars (st), and chains (ch)
- encode the graph using MDL-base encoding:  
 $\text{graph} = \text{vocabulary} + \text{noise}$

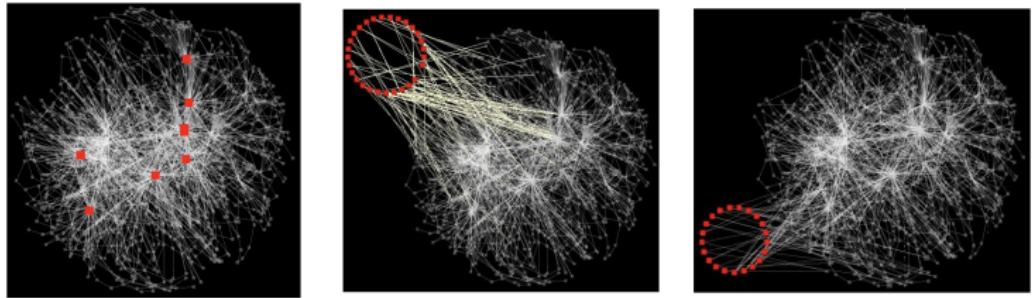

- more approaches in the survey [Liu et al., 2016a]

[Koutra et al., 2015]

# temporal graph summarization

- time-related changes are **important**:
  - summarized patterns and substructures **may not be persistent in time**
  - the elements of a pattern can be frequent in **different distant time periods** and **not** frequent in a continuous time interval
- **purely** temporal patterns may occur:
  - substructures may change in time according to **hidden rules**
  - e.g., nodes with certain labels may **gain** centrality over time, while the importance of some other labels may **decline**

## adaptation of existing techniques

- frequent subgraph mining: find persistent graph patterns over a collection of snapshots
- do not take into account how the instances of the same subgraph are located in time
- sequential pattern mining: search for time-ordered patterns in the sequence of snapshots
- network evolutionary patterns  
[Berlingerio et al., 2009, Wackersreuther et al., 2010]
- ignores structural patterns
- time-series analysis: gather node- and structure-dependent statistics over time
- apply segmentation techniques [Ye and Keogh, 2009]
- does not consider network structure

# temporal techniques

- summarization of both structural and temporal aspects
- how to define a summary?
- many possible options:
  - a summary can be a short temporal sequence of small graphs,
  - a concise presentation of evolutionary patterns,
  - a representative collection of temporally and topologically frequent patterns
- one common approach to summary definition:
- summary should consist of
  - small structurally “interesting” subgraphs
  - with non-trivial temporal behavior

# frequent and persistent temporal subgraphs

- definition of temporal subgraphs?
  - undirected or directed subgraphs aggregated with or without frequency edge-weight over short intervals
  - directed acyclic graphs, as they model information flow in the graph
- temporal order of interactions:
  - fixed or flexible
- temporal constraints:
  - window length and/or delays between two interactions
- how to measure counts, frequencies, and importance of the subgraphs?
- how to treat the temporal duplicates of the same edges?
- how to weight patterns by the time span and recency?

# temporal motifs

- temporal motif counting

[Paranjape et al., 2017, Kovanen et al., 2013]:

- temporal motif is a small subgraph with temporally ordered edges (and/or interval or delay constraints)

- some other works explore temporal graphlets


- time constrained causal subgraphs

[Hulovatyy et al., 2015]

and cyclic patterns


[Lahiri and Berger-Wolf, 2008]

# temporal motifs

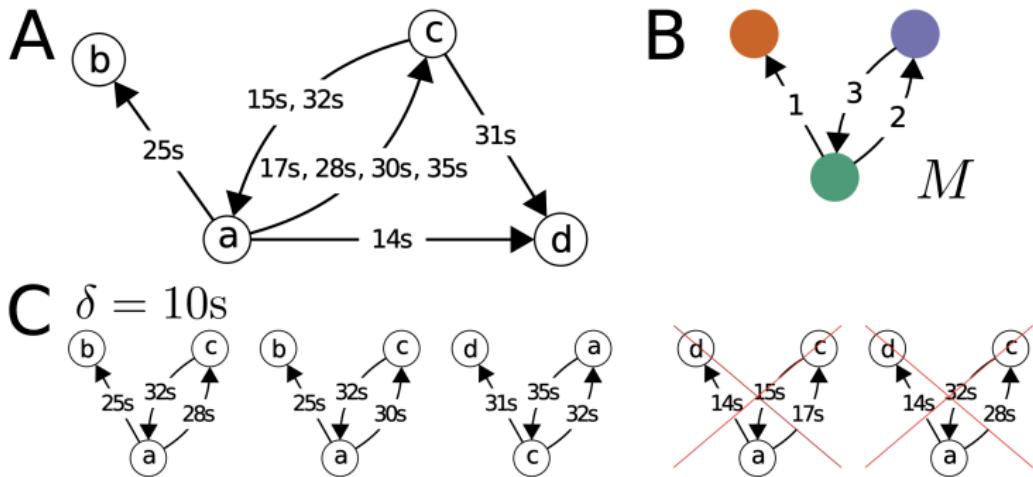

$\delta$ -temporal motif: a sequence of directed temporally ordered edges which appear within a time window  $\delta$

[Paranjape et al., 2017]

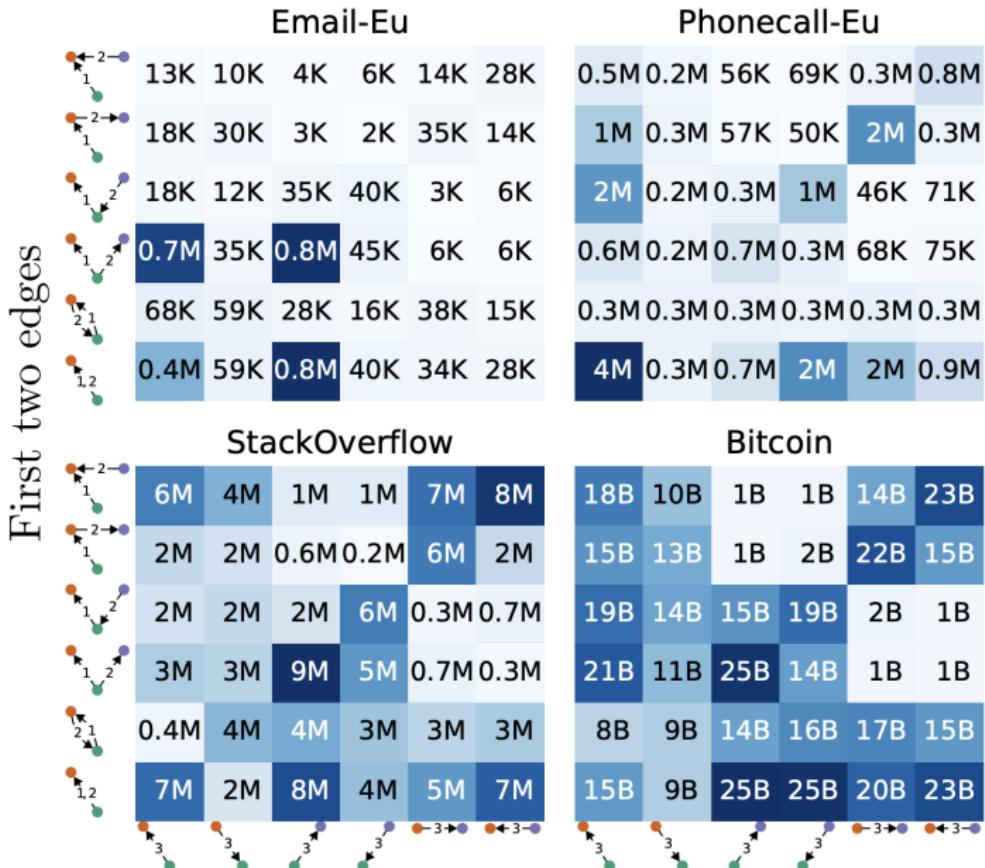

## vocabulary-based summarization

- summarize a temporal graph as a set:
  - subgraphs of a special “most non-random” shape (stars, cliques, bipartite cores, chains), and
  - behavioural temporal patterns (flickering, periodic, oneshot, ranged, and constant patterns)
- use MDL principle to encode whole temporal network by the vocabulary plus noise

[Shah et al., 2015]

## larger structures

- use larger structures to summarize the network:
  - communities
  - spanning graphs
  - backbones
  - cores
- common approach:
  - given a sequence of graphs  
(snapshot, or sliding-window aggregation)
  - search for communities that are coherent and/or persistent in time
- different measures of community quality and temporal smoothness are used

[Pietilänen and Diot, 2012, He and Chen, 2015]
- the resulting summary is a trade-off between structural quality and historical consistency



## temporal backbones

- $G = (G_1, \dots, G_F)$  time history  $[1, F]$
- $G_i = (V, E)$  have weighted edges  $w_i : E \rightarrow \mathbb{R}$
- the **heaviest** temporal subgraph:
- find an **interval**  $[i, j] \subseteq [1, F]$  and a **subgraph**  $G' = (E', V') \subseteq G$ , that **maximizes**


$$\text{score}(G', i, j) = \sum_{e \in E'} \sum_{k=i}^j w_i(e)$$

- **NP-hard** problem
- **scalable** heuristics

[Bogdanov et al., 2011]

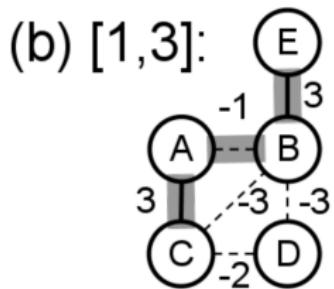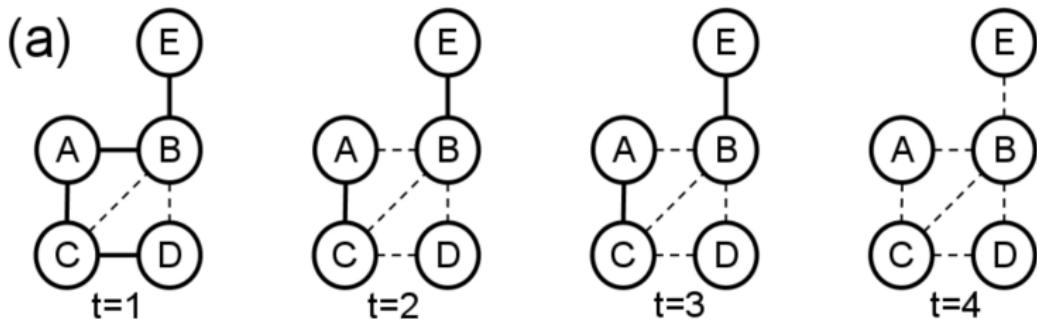

$$\text{score}(\{AB, AC, BE\}, 1, 3) = 5$$

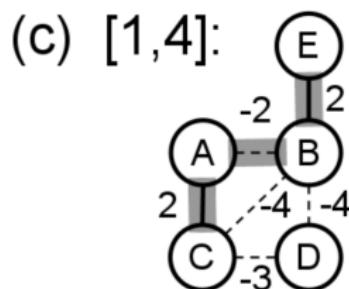

$$\text{score}(\{AB, AC, BE\}, 1, 4) = 2$$

[Bogdanov et al., 2011]

## influence-based summarization

- summarizes the flow of information propagation:
  - find influential nodes and information-forwarding connections
- OSNet [Qu et al., 2014]:
  - processes a temporal network in a streaming fashion
  - outputs the subgraphs of influential nodes
  - node importance is calculated based on temporal spreading trees
- [Lin et al., 2008] identify influential nodes and interactions in temporal multi-view social networks
  - networks with edges between different types of entities, e.g., users, photos, and comments
  - explain the evolution of topics over time

# agenda

Part I : introduction and motivation

Part II : models of temporal networks

Part III : group work

Part IV : algorithmic frameworks

Part V : data mining problems

Part VI : future challenges

Part VII : group work

## part VI

# future challenges

## temporal community detection: challenges

- large number of **problem formulations** and variants
- lack **fundamental theoretical** treatment
  - most of the approaches are **heuristics**
  - many are combinations of **several** ideas and algorithms
  - require **many** parameters and attention to implementation details
- hard to compare methods and choose one for an application
  - **few datasets** with ground-truth temporal communities
  - synthetic generators are built on **various assumptions**
  - **no** standards and benchmarks
- a large number of **quality metrics** to calculate and compare
- may be **misleading** if a method is not designed for that particular community definition

## temporal community detection: directions

- more systematic approaches, quality guarantees
- interpretability of the results
- visualization
- applications and application-tailored algorithms, e.g., for
  - computational social science
  - temporal network summarization

## event detection: challenges

- actively **evolving** area, **application- and data-oriented**
  - families of problems and methods are considered only for the **specific** sources of data
    - e.g., a large body of research is focused on the analysis of **Twitter** data [Atefah and Khreich, 2015]
  - no **unified classification** for problem settings, research questions, and data requirements
    - recent classifications are based on **various** aspects:
    - event **definitions**, **online or retrospective detection**, **specified or unspecified** event detection, etc.
- [Cordeiro and Gama, 2016, Goswami and Kumar, 2016]

## event detection: directions

- speed and quality:
- online streaming event-detection techniques are demanded for nearly real-time event detection
- quality: both false events and missed events may have a high price
- more use of multi-modal data:
- text: complex semantic and sentiment analysis is rare
- high-resolution interaction patterns: “who talked to whom about what and what happened then” are also often not considered

# diffusion analysis: challenges

- influence maximization:
  - what is the most realistic approachable setting?
  - the latest promising research focuses on inferring the parameters of a propagation model from the data, including latency distributions
- [Rodriguez et al., 2011, Gomez-Rodriguez et al., 2016]
- reconstruction:
  - received little attention
  - the problems formulated in this setting tend to be either oversimplified versions of static reconstruction or become too hard or ill-posed
  - most of the works rely on noise-free data
  - the assumption of diffusion model is crucial

# diffusion analysis: open directions

- models:
  - temporal diffusion models are proposed, but the theoretical properties of many of them are **not yet well studied**
  - the applications and limitations are **not yet well understood**
- immunization strategies:
  - not extensively studied yet
  - most of the approaches are based on **heuristics**

## summarization challenges

- meaningful summary vocabulary
- diversity of summarizing substructures is vast  
[Perozzi and Akoglu, 2018, Koutra et al., 2015,  
Jiang et al., 2013])
- which summaries are preferable and in which applications?
- summaries useful for a general network exploration by a  
non-expert analyst?

## summarization challenges

- fast and light-weighted algorithms
- interactive analysis
- have a hierarchical structure, which is possible to browse
  - similar to a visual analytic tool OntoVis, which constructs some type of graphical summaries  
[Shen et al., 2006]
- multi-level summarizations:
- use all available attributes in the temporal networks
  - text, geotags, propagation patterns...

# agenda

Part I : introduction and motivation

Part II : models of temporal networks

Part III : group work

Part IV : algorithmic frameworks

Part V : data mining problems

Part VI : future challenges

Part VII : group work

part VII

group work

## group work : brainstorming

- task : come up with your own project on mining temporal networks
  - what is the problem?
  - what are the applications?
  - what is the motivation?
  - what will be your approach
- work in groups or 2 or 3 people [10 min]
- one person from each team presents the project, no slides [2 min per team]

# references

-  **Abdelhaq, H., Sengstock, C., and Gertz, M. (2013).**  
Eventweet: Online localized event detection from twitter.  
*Proceedings of the VLDB Endowment*, 6(12):1326–1329.
-  **Abello, J., Van Ham, F., and Krishnan, N. (2006).**  
Ask-graphview: A large scale graph visualization system.  
*IEEE transactions on visualization and computer graphics*, 12(5):669–676.
-  **Aggarwal, C. and Subbian, K. (2014).**  
Evolutionary network analysis: A survey.  
*ACM Computing Surveys (CSUR)*, 47(1):10.
-  **Aggarwal, C. C., Lin, S., and Yu, P. S. (2012).**  
On influential node discovery in dynamic social networks.  
In *Proceedings of the 2012 SIAM International Conference on Data Mining*, pages 636–647. SIAM.

## references (cont.)

-  Aggarwal, C. C. and Subbian, K. (2012).  
Event detection in social streams.  
In *Proceedings of the 2012 SIAM international conference on data mining*, pages 624–635. SIAM.
-  Ahn, K. J., Guha, S., and McGregor, A. (2012).  
Graph sketches: sparsification, spanners, and subgraphs.  
In *Proceedings of the 31st ACM SIGMOD-SIGACT-SIGAI symposium on Principles of Database Systems*, pages 5–14. ACM.
-  Akrida, E. C., Mertzios, G. B., Spirakis, P. G., and Zamaraev, V. (2018).  
Temporal vertex cover with a sliding time window.  
*arXiv preprint arXiv:1802.07103*.
-  Atefah, F. and Khreich, W. (2015).  
A survey of techniques for event detection in twitter.  
*Computational Intelligence*, 31(1):132–164.

## references (cont.)

-  Aynaud, T., Fleury, E., Guillaume, J., Wang, Q., Ganguly, N., Mukherjee, A., Mitra, B., Peruani, F., and Choudhury, M. (2013).  
Dynamics on and of complex networks.
-  Barabasi, A.-L. (2005).  
The origin of bursts and heavy tails in human dynamics.  
*Nature*, 435(7039):207.
-  Batal, I., Fradkin, D., Harrison, J., Moerchen, F., and Hauskrecht, M. (2012).  
Mining recent temporal patterns for event detection in multivariate time series data.  
In *Proceedings of the 18th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 280–288. ACM.
-  Batson, J., Spielman, D. A., Srivastava, N., and Teng, S.-H. (2013).  
Spectral sparsification of graphs: theory and algorithms.  
*Communications of the ACM*, 56(8):87–94.

## references (cont.)

-  Berlingerio, M., Bonchi, F., Bringmann, B., and Gionis, A. (2009).  
Mining graph evolution rules.  
*In joint European conference on machine learning and knowledge discovery in databases*, pages 115–130. Springer.
-  Berlingerio, M., Koutra, D., Eliassi-Rad, T., and Faloutsos, C. (2012).  
Netsimile: A scalable approach to size-independent network similarity.  
*arXiv preprint arXiv:1209.2684*.
-  Berman, K. A. (1996).  
Vulnerability of scheduled networks and a generalization of menger's theorem.  
*Networks: An International Journal*, 28(3):125–134.
-  Blondel, V. D., Guillaume, J.-L., Lambiotte, R., and Lefebvre, E. (2008).  
Fast unfolding of communities in large networks.  
*Journal of statistical mechanics: theory and experiment*, 2008(10):P10008.

## references (cont.)

-  Bogdanov, P., Mongiovì, M., and Singh, A. K. (2011).  
Mining heavy subgraphs in time-evolving networks.  
In *Data Mining (ICDM), 2011 IEEE 11th International Conference on*, pages 81–90. IEEE.
-  Candia, J., González, M. C., Wang, P., Schoenharl, T., Madey, G., and Barabási, A.-L. (2008).  
Uncovering individual and collective human dynamics from mobile phone records.  
*Journal of physics A: mathematical and theoretical*, 41(22):224015.
-  Casteigts, A., Flocchini, P., Quattrociocchi, W., and Santoro, N. (2012).  
Time-varying graphs and dynamic networks.  
*International Journal of Parallel, Emergent and Distributed Systems*, 27(5):387–408.
-  Chaintreau, A., Mtibaa, A., Massoulie, L., and Diot, C. (2007).  
The diameter of opportunistic mobile networks.  
In *Proceedings of the 2007 ACM CoNEXT conference*, page 12. ACM.

## references (cont.)

-  Charikar, M. (2000).  
Greedy approximation algorithms for finding dense components in a graph.  
In *International Workshop on Approximation Algorithms for Combinatorial Optimization*, pages 84–95. Springer.
-  Chen, J. and Safro, I. (2011).  
Algebraic distance on graphs.  
*SIAM Journal on Scientific Computing*, 33(6):3468–3490.
-  Chen, W., Lu, W., and Zhang, N. (2012).  
Time-critical influence maximization in social networks with time-delayed diffusion process.  
In *AAAI*, volume 2012, pages 1–5.

## references (cont.)

-  Chen, W., Wang, C., and Wang, Y. (2010).  
Scalable influence maximization for prevalent viral marketing in large-scale social networks.  
In *Proceedings of the 16th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 1029–1038. ACM.
-  Chen, W., Wang, Y., and Yang, S. (2009).  
Efficient influence maximization in social networks.  
In *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 199–208. ACM.
-  Cléménçon, S., De Arazoza, H., Rossi, F., and Tran, V. C. (2012).  
Hierarchical clustering for graph visualization.  
*arXiv preprint arXiv:1210.5693*.
-  Cohen, R., Havlin, S., and Ben-Avraham, D. (2003).  
Efficient immunization strategies for computer networks and populations.  
*Physical review letters*, 91(24):247901.

## references (cont.)

-  Cordeiro, M. and Gama, J. (2016).  
Online social networks event detection: a survey.  
In *Solving Large Scale Learning Tasks. Challenges and Algorithms*, pages 1–41. Springer.
-  Coscia, M., Giannotti, F., and Pedreschi, D. (2011).  
A classification for community discovery methods in complex networks.  
*Statistical Analysis and Data Mining: The ASA Data Science Journal*, 4(5):512–546.
-  Dakiche, N., Tayeb, F. B.-S., Slimani, Y., and Benatchba, K. (2019).  
Tracking community evolution in social networks: A survey.  
*Information Processing & Management*, 56(3):1084–1102.
-  Dezső, Z. and Barabási, A.-L. (2002).  
Halting viruses in scale-free networks.  
*Physical Review E*, 65(5):055103.

## references (cont.)

-  Dong, X., Mavroeidis, D., Calabrese, F., and Frossard, P. (2015).  
Multiscale event detection in social media.  
*Data Mining and Knowledge Discovery*, 29(5):1374–1405.
-  Dou, W., Wang, X., Ribarsky, W., and Zhou, M. (2012).  
Event detection in social media data.  
In *IEEE VisWeek Workshop on Interactive Visual Text Analytics-Task Driven Analytics of Social Media Content*, pages 971–980.
-  Du, N., Song, L., Rodriguez, M. G., and Zha, H. (2013).  
Scalable influence estimation in continuous-time diffusion networks.  
In *Advances in neural information processing systems*, pages 3147–3155.
-  Elkin, M. and Peleg, D. (2005).  
Approximating k-spanner problems for  $k > 2$ .  
*Theoretical Computer Science*, 337(1-3):249–277.

## references (cont.)

-  Enugala, R., Rajamani, L., Ali, K., and Kurapati, S. (2015).  
Community detection in dynamic social networks: a survey.  
*International Journal of Research and Applications*, 2(6):278–285.
-  Eswaran, D., Faloutsos, C., Guha, S., and Mishra, N. (2018).  
Spotlight: Detecting anomalies in streaming graphs.  
In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 1378–1386. ACM.
-  Feizi, S., Médard, M., Quon, G., Kellis, M., and Duffy, K. (2016).  
Network infusion to infer information sources in networks.  
*arXiv preprint arXiv:1606.07383*.
-  Fernández-Gracia, J., Eguíluz, V. M., and San Miguel, M. (2011).  
Update rules and interevent time distributions: Slow ordering versus no ordering in the voter model.  
*Physical Review E*, 84(1):015103.

## references (cont.)

-  Fortunato, S. and Hric, D. (2016).  
Community detection in networks: A user guide.  
*Physics reports*, 659:1–44.
-  Gauvin, L., Panisson, A., Barrat, A., and Cattuto, C. (2015).  
Revealing latent factors of temporal networks for mesoscale intervention in epidemic spread.  
*arXiv preprint arXiv:1501.02758*.
-  Gayraud, N. T., Pitoura, E., and Tsaparas, P. (2015).  
Diffusion maximization in evolving social networks.  
In *Proceedings of the 2015 ACM on Conference on Online Social Networks*, pages 125–135. ACM.
-  Génois, M., Vestergaard, C. L., Fournet, J., Panisson, A., Bonmarin, I., and Barrat, A. (2015).  
Data on face-to-face contacts in an office building suggest a low-cost vaccination strategy based on community linkers.  
*Network Science*, 3(3):326–347.

## references (cont.)



Gensler, A. and Sick, B. (2017).

Performing event detection in time series with swiftevent: an algorithm with supervised learning of detection criteria.

*Pattern Analysis and Applications*, pages 1–20.



Gomez-Rodriguez, M., Song, L., Du, N., Zha, H., and Schölkopf, B. (2016).

Influence estimation and maximization in continuous-time diffusion networks.

*ACM Transactions on Information Systems (TOIS)*, 34(2):9.



Goswami, A. and Kumar, A. (2016).

A survey of event detection techniques in online social networks.

*Social Network Analysis and Mining*, 6(1):107.

## references (cont.)

-  Gu, H., Xie, X., Lv, Q., Ruan, Y., and Shang, L. (2011).  
Etree: Effective and efficient event modeling for real-time online social media networks.  
In *Proceedings of the 2011 IEEE/WIC/ACM International Conferences on Web Intelligence and Intelligent Agent Technology-Volume 01*, pages 300–307. IEEE Computer Society.
-  Hamann, M., Lindner, G., Meyerhenke, H., Staudt, C. L., and Wagner, D. (2016).  
Structure-preserving sparsification methods for social networks.  
*Social Network Analysis and Mining*, 6(1):22.
-  Harris, T. E. (2002).  
*The theory of branching processes*.  
Courier Corporation.
-  Hartmann, T., Kappes, A., and Wagner, D. (2016).  
Clustering evolving networks.  
In *Algorithm Engineering*, pages 280–329. Springer.

## references (cont.)

-  He, J. and Chen, D. (2015).  
A fast algorithm for community detection in temporal network.  
*Physica A: Statistical Mechanics and its Applications*, 429:87–94.
-  Heins, K. and Stern, H. (2014).  
A statistical model for event sequence data.  
In *Artificial Intelligence and Statistics*, pages 338–346.
-  Henzinger, M. R., King, V., and King, V. (1999).  
Randomized fully dynamic graph algorithms with polylogarithmic time per operation.  
*Journal of the ACM (JACM)*, 46(4):502–516.
-  Holme, P. (2015).  
Modern temporal network theory: a colloquium.  
*The European Physical Journal B*, 88(9):234.

## references (cont.)

-  Hong, L., Ahmed, A., Gurumurthy, S., Smola, A. J., and Tsoutsouliklis, K. (2012).  
Discovering geographical topics in the twitter stream.  
In *Proceedings of the 21st international conference on World Wide Web*, pages 769–778. ACM.
-  Huang, S., Fu, A. W.-C., and Liu, R. (2015).  
Minimum spanning trees in temporal graphs.  
In *Proceedings of the 2015 ACM SIGMOD International Conference on Management of Data*, pages 419–430. ACM.
-  Hulovatyy, Y., Chen, H., and Milenković, T. (2015).  
Exploring the structure and function of temporal networks with dynamic graphlets.  
*Bioinformatics*, 31(12):i171–i180.

## references (cont.)

-  Hunter, J. and McIntosh, N. (1999).  
Knowledge-based event detection in complex time series data.  
*In Joint European Conference on Artificial Intelligence in Medicine and Medical Decision Making*, pages 271–280. Springer.
-  Itzhack, R., Mogilevski, Y., and Louzoun, Y. (2007).  
An optimal algorithm for counting network motifs.  
*Physica A: Statistical Mechanics and its Applications*, 381:482–490.
-  Jiang, C., Coenen, F., and Zito, M. (2013).  
A survey of frequent subgraph mining algorithms.  
*The Knowledge Engineering Review*, 28(1):75–105.
-  Karsai, M., Kivelä, M., Pan, R. K., Kaski, K., Kertész, J., Barabási, A.-L., and Saramäki, J. (2011).  
Small but slow world: How network topology and burstiness slow down spreading.  
*Physical Review E*, 83(2):025102.

## references (cont.)

-  Kempe, D., Kleinberg, J., and Tardos, É. (2003).  
Maximizing the spread of influence through a social network.  
In *Proceedings of the ninth ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 137–146. ACM.
-  Khuller, S. and Saha, B. (2009).  
On finding dense subgraphs.  
In *International Colloquium on Automata, Languages, and Programming*, pages 597–608. Springer.
-  Kleinberg, J. (2003).  
Bursty and hierarchical structure in streams.  
*Data Mining and Knowledge Discovery*, 7(4):373–397.
-  Kling, C. C., Kunegis, J., Sizov, S., and Staab, S. (2014).  
Detecting non-gaussian geographical topics in tagged photo collections.  
In *Proceedings of the 7th ACM international conference on Web search and data mining*, pages 603–612. ACM.

## references (cont.)

-  Koutra, D., Kang, U., Vreeken, J., and Faloutsos, C. (2015).  
Summarizing and understanding large graphs.  
*Statistical Analysis and Data Mining: The ASA Data Science Journal*,  
8(3):183–202.
-  Kovanen, L., Karsai, M., Kaski, K., Kertész, J., and Saramäki, J. (2013).  
Temporal motifs.  
In *Temporal Networks*, pages 119–133. Springer.
-  Kujala, R., Weckström, C., Mladenović, M. N., and Saramäki, J. (2018).  
Travel times and transfers in public transport: Comprehensive accessibility analysis based on pareto-optimal journeys.  
*Computers, Environment and Urban Systems*, 67:41–54.
-  Kulldorff, M. (1997).  
A spatial scan statistic.  
*Communications in Statistics-Theory and Methods*, 26(6):1481–1496.

## references (cont.)



Kumar, R., Calders, T., Gionis, A., and Tatti, N. (2015).

Maintaining sliding-window neighborhood profiles in interaction networks.

In *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pages 719–735. Springer.



Kunneman, F. and van den Bosch, A. (2014).

Event detection in twitter: A machine-learning approach based on term pivoting.



Kunneman, F. and Van den Bosch, A. (2015).

Automatically identifying periodic social events from twitter.

In *Proceedings of the International Conference Recent Advances in Natural Language Processing*, pages 320–328.



Lahiri, M. and Berger-Wolf, T. Y. (2008).

Mining periodic behavior in dynamic social networks.

In *Data Mining, 2008. ICDM'08. Eighth IEEE International Conference on*, pages 373–382. IEEE.

## references (cont.)

-  Lancichinetti, A., Radicchi, F., Ramasco, J. J., and Fortunato, S. (2011).  
Finding statistically significant communities in networks.  
*PloS one*, 6(4):e18961.
-  Lappas, T., Terzi, E., Gunopulos, D., and Mannila, H. (2010).  
Finding effectors in social networks.  
In *Proceedings of the 16th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 1059–1068. ACM.
-  Lappas, T., Vieira, M. R., Gunopulos, D., and Tsotras, V. J. (2012).  
On the spatiotemporal burstiness of terms.  
*Proceedings of the VLDB Endowment*, 5(9):836–847.
-  Latapy, M., Viard, T., and Magnien, C. (2018).  
Stream graphs and link streams for the modeling of interactions over time.  
*Social Network Analysis and Mining*, 8(1):61.

## references (cont.)

-  Lee, S., Rocha, L. E., Liljeros, F., and Holme, P. (2012).  
Exploiting temporal network structures of human interaction to effectively immunize populations.  
*PloS one*, 7(5):e36439.
-  LeFevre, K. and Terzi, E. (2010).  
Grass: Graph structure summarization.  
In *Proceedings of the 2010 SIAM International Conference on Data Mining*, pages 454–465. SIAM.
-  Leskovec, J. and Faloutsos, C. (2006).  
Sampling from large graphs.  
In *Proceedings of the 12th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 631–636. ACM.
-  Leskovec, J. and Horvitz, E. (2008).  
Planetary-scale views on a large instant-messaging network.  
In *Proceedings of the 17th international conference on World Wide Web*, pages 915–924. ACM.

## references (cont.)

-  Li, J., Tai, Z., Zhang, R., Yu, W., and Liu, L. (2014).  
Online bursty event detection from microblog.  
In *Proceedings of the 2014 IEEE/ACM 7th International Conference on Utility and Cloud Computing*, pages 865–870. IEEE Computer Society.
-  Lin, Y.-R., Sundaram, H., and Kelliher, A. (2008).  
Summarization of social activity over time: people, actions and concepts in dynamic networks.  
In *Proceedings of the 17th ACM conference on Information and knowledge management*, pages 1379–1380. ACM.
-  Liu, B., Cong, G., Xu, D., and Zeng, Y. (2012).  
Time constrained influence maximization in social networks.  
In *Data Mining (ICDM), 2012 IEEE 12th International Conference on*, pages 439–448. IEEE.
-  Liu, Y., Dighe, A., Safavi, T., and Koutra, D. (2016a).  
A graph summarization: A survey.  
*arXiv preprint arXiv:1612.04883*.

## references (cont.)

-  Liu, Y., Zhou, B., Chen, F., and Cheung, D. W. (2016b).  
Graph topic scan statistic for spatial event detection.  
*In Proceedings of the 25th ACM International Conference on Information and Knowledge Management*, pages 489–498. ACM.
-  Madar, N., Kalisky, T., Cohen, R., Ben-avraham, D., and Havlin, S. (2004).  
Immunization and epidemic dynamics in complex networks.  
*The European Physical Journal B*, 38(2):269–276.
-  Mantzaris, A. V. and Higham, D. J. (2016).  
Asymmetry through time dependency.  
*The European Physical Journal B*, 89(3):71.
-  McGregor, A. (2014).  
Graph stream algorithms: a survey.  
*ACM SIGMOD Record*, 43(1):9–20.

## references (cont.)

-  Mertzios, G. B., Molter, H., Niedermeier, R., Zamaraev, V., and Zschoche, P. (2019).  
Computing maximum matchings in temporal graphs.  
*arXiv preprint arXiv:1905.05304.*
-  Mertzios, G. B., Molter, H., and Zamaraev, V. (2018).  
Sliding window temporal graph coloring.  
*arXiv preprint arXiv:1811.04753.*
-  Michail, O. (2016).  
An introduction to temporal graphs: An algorithmic perspective.  
*Internet Mathematics*, 12(4):239–280.
-  Min, B., Goh, K.-I., and Vazquez, A. (2011).  
Spreading dynamics following bursty human activity patterns.  
*Physical Review E*, 83(3):036102.

## references (cont.)



Muthukrishnan, S. et al. (2005).

Data streams: Algorithms and applications.

*Foundations and Trends® in Theoretical Computer Science*,  
1(2):117–236.



Neill, D. B. (2006).

Detection of spatial and spatio-temporal clusters.

In *Tech Rep CMU-CS-06-142, PhD thesis*. Carnegie Mellon University.



Newman, M. E. (2003).

The structure and function of complex networks.

*SIAM review*, 45(2):167–256.



Nick, B., Lee, C., Cunningham, P., and Brandes, U. (2013).

Simmelian backbones: Amplifying hidden homophily in facebook networks.

In *Proceedings of the 2013 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining*, pages 525–532. ACM.

## references (cont.)

-  Paranjape, A., Benson, A. R., and Leskovec, J. (2017).  
Motifs in temporal networks.  
*In Proceedings of the Tenth ACM International Conference on Web Search and Data Mining*, pages 601–610. ACM.
-  Pastor-Satorras, R. and Vespignani, A. (2002a).  
Epidemics and immunization in scale-free networks.  
*arXiv preprint cond-mat/0205260*.
-  Pastor-Satorras, R. and Vespignani, A. (2002b).  
Immunization of complex networks.  
*Physical Review E*, 65(3):036104.
-  Perozzi, B. and Akoglu, L. (2018).  
Discovering communities and anomalies in attributed graphs: Interactive visual exploration and summarization.  
*ACM Transactions on Knowledge Discovery from Data (TKDD)*, 12(2):24.

## references (cont.)

-  [Pietilänen, A.-K. and Diot, C. \(2012\).](#)

Dissemination in opportunistic social networks: the role of temporal communities.

In *Proceedings of the thirteenth ACM international symposium on Mobile Ad Hoc Networking and Computing*, pages 165–174. ACM.
-  [Prakash, B. A., Vreeken, J., and Faloutsos, C. \(2012\).](#)

Spotting culprits in epidemics: How many and which ones?

In *Data Mining (ICDM), 2012 IEEE 12th International Conference on*, pages 11–20. IEEE.
-  [Qian, J., Saligrama, V., and Chen, Y. \(2014\).](#)

Connected sub-graph detection.

In *Artificial Intelligence and Statistics*, pages 796–804.

## references (cont.)

-  Qu, Q., Liu, S., Jensen, C. S., Zhu, F., and Faloutsos, C. (2014).  
Interestingness-driven diffusion process summarization in dynamic networks.  
*In Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pages 597–613. Springer.
-  Ranshous, S., Shen, S., Koutra, D., Harenberg, S., Faloutsos, C., and Samatova, N. F. (2015).  
Anomaly detection in dynamic networks: a survey.  
*Wiley Interdisciplinary Reviews: Computational Statistics*, 7(3):223–247.
-  Rayana, S. and Akoglu, L. (2016).  
Less is more: building selective anomaly ensembles.  
*ACM Transactions on Knowledge Discovery from Data (TKDD)*, 10(4):42.
-  Renaud, L. and Naoki, M. (2016).  
*A Guide To Temporal Networks*, volume 4.  
World Scientific.

## references (cont.)

-  Riondato, M., García-Soriano, D., and Bonchi, F. (2017).  
Graph summarization with quality guarantees.  
*Data Mining and Knowledge Discovery*, 31(2):314–349.
-  Rodriguez, M. G., Balduzzi, D., and Schölkopf, B. (2011).  
Uncovering the temporal dynamics of diffusion networks.  
*arXiv preprint arXiv:1105.0697*.
-  Rodriguez, M. G. and Schölkopf, B. (2012).  
Influence maximization in continuous time diffusion networks.  
*arXiv preprint arXiv:1205.1682*.
-  Rossetti, G. and Cazabet, R. (2018).  
Community discovery in dynamic networks: a survey.  
*ACM Computing Surveys (CSUR)*, 51(2):35.

## references (cont.)

-  Rossetti, G., Pappalardo, L., Pedreschi, D., and Giannotti, F. (2017).  
Tiles: an online algorithm for community discovery in dynamic social networks.  
*Machine Learning*, 106(8):1213–1241.
-  Rozenshtein, P. and Gionis, A. (2016).  
Temporal pagerank.  
In *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pages 674–689. Springer.
-  Sakaki, T., Okazaki, M., and Matsuo, Y. (2010).  
Earthquake shakes twitter users: real-time event detection by social sensors.  
In *Proceedings of the 19th international conference on World wide web*, pages 851–860. ACM.

## references (cont.)

-  Satuluri, V., Parthasarathy, S., and Ruan, Y. (2011).  
Local graph sparsification for scalable clustering.  
In *Proceedings of the 2011 ACM SIGMOD International Conference on Management of data*, pages 721–732. ACM.
-  Sefer, E. and Kingsford, C. (2016).  
Diffusion archeology for diffusion progression history reconstruction.  
*Knowledge and information systems*, 49(2):403–427.
-  Shah, D. and Zaman, T. (2011).  
Rumors in a network: Who's the culprit?  
*IEEE Transactions on information theory*, 57(8):5163–5181.
-  Shah, N., Koutra, D., Zou, T., Gallagher, B., and Faloutsos, C. (2015).  
Timecrunch: Interpretable dynamic graph summarization.  
In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1055–1064. ACM.

## references (cont.)

-  Shakarian, P., Bhatnagar, A., Aleali, A., Shaabani, E., and Guo, R. (2015).  
*Diffusion in social networks.*  
Springer.
-  Shen, Z., Ma, K.-L., and Eliassi-Rad, T. (2006).  
Visual analysis of large heterogeneous social networks by semantic and structural abstraction.  
*IEEE transactions on visualization and computer graphics*,  
12(6):1427–1439.
-  Shi, Z. and Pun-Cheng, L. S. (2019).  
Spatiotemporal data clustering: A survey of methods.  
*ISPRS International Journal of Geo-Information*, 8(3):112.

## references (cont.)

-  Starnini, M., Machens, A., Cattuto, C., Barrat, A., and Pastor-Satorras, R. (2013).  
Immunization strategies for epidemic processes in time-varying contact networks.  
*Journal of theoretical biology*, 337:89–100.
-  Sun, Y., Tang, J., Pan, L., and Li, J. (2015).  
Matrix based community evolution events detection in online social networks.  
In *2015 IEEE International Conference on Smart City/SocialCom/SustainCom (SmartCity)*, pages 465–470. IEEE.
-  Sundareisan, S., Vreeken, J., and Prakash, B. A. (2015).  
Hidden hazards: Finding missing nodes in large graph epidemics.  
In *Proceedings of the 2015 SIAM International Conference on Data Mining*, pages 415–423. SIAM.

## references (cont.)

-  Tajeuna, E. G., Bouguessa, M., and Wang, S. (2015).  
Tracking the evolution of community structures in time-evolving social networks.  
In *2015 IEEE International Conference on Data Science and Advanced Analytics (DSAA)*, pages 1–10. IEEE.
-  Tajeuna, E. G., Bouguessa, M., and Wang, S. (2016).  
Tracking communities over time in dynamic social network.  
In *International Conference on Machine Learning and Data Mining in Pattern Recognition*, pages 341–345. Springer.
-  Takahashi, K., Kulldorff, M., Tango, T., and Yih, K. (2008).  
A flexibly shaped space-time scan statistic for disease outbreak detection and monitoring.  
*International Journal of Health Geographics*, 7(1):14.
-  Takahashi, K., Yokoyama, T., and Tango, T. (2004).  
Flexscan: Software for the flexible spatial scan statistic.  
*National Institute of Public Health, Japan*.

## references (cont.)

-  Tang, J., Musolesi, M., Mascolo, C., and Latora, V. (2009).  
Temporal distance metrics for social network analysis.  
In *Proceedings of the 2nd ACM workshop on Online social networks*, pages 31–36. ACM.
-  Tang, Y., Xiao, X., and Shi, Y. (2014).  
Influence maximization: Near-optimal time complexity meets practical efficiency.  
In *Proceedings of the 2014 ACM SIGMOD international conference on Management of data*, pages 75–86. ACM.
-  Tantipathananandh, C. and Berger-Wolf, T. Y. (2011).  
Finding communities in dynamic social networks.  
In *2011 IEEE 11th International Conference on Data Mining*, pages 1236–1241. IEEE.

## references (cont.)

-  Thorup, M. (2000).  
Near-optimal fully-dynamic graph connectivity.  
In *Proceedings of the thirty-second annual ACM symposium on Theory of computing*, pages 343–350. Citeseer.
-  Toivonen, H., Zhou, F., Hartikainen, A., and Hinkka, A. (2011).  
Compression of weighted graphs.  
In *Proceedings of the 17th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 965–973. ACM.
-  Valdano, E., Poletto, C., Giovannini, A., Palma, D., Savini, L., and Colizza, V. (2015).  
Predicting epidemic risk from past temporal contact data.  
*PLoS computational biology*, 11(3):e1004152.
-  Vazquez, A., Racz, B., Lukacs, A., and Barabasi, A.-L. (2007).  
Impact of non-poissonian activity patterns on spreading processes.  
*Physical review letters*, 98(15):158702.

## references (cont.)

-  Wackersreuther, B., Wackersreuther, P., Oswald, A., Böhm, C., and Borgwardt, K. M. (2010).  
Frequent subgraph discovery in dynamic networks.  
In *Proceedings of the Eighth Workshop on Mining and Learning with Graphs*, pages 155–162. ACM.
-  Wu, H., Cheng, J., Huang, S., Ke, Y., Lu, Y., and Xu, Y. (2014).  
Path problems in temporal graphs.  
*Proceedings of the VLDB Endowment*, 7(9):721–732.
-  Wu, X., Kumar, V., Quinlan, J. R., Ghosh, J., Yang, Q., Motoda, H., McLachlan, G. J., Ng, A., Liu, B., Philip, S. Y., et al. (2008).  
Top 10 algorithms in data mining.  
*KAIS*.
-  Ye, L. and Keogh, E. (2009).  
Time series shapelets: a new primitive for data mining.  
In *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 947–956. ACM.

## references (cont.)

-  Yu, Y., Berger-Wolf, T. Y., Saia, J., et al. (2010).  
Finding spread blockers in dynamic networks.  
In *Advances in Social Network Mining and Analysis*, pages 55–76.  
Springer.
-  Zhou, F., Malher, S., and Toivonen, H. (2010).  
Network simplification with minimal loss of connectivity.  
In *Data Mining (ICDM), 2010 IEEE 10th International Conference on*,  
pages 659–668. IEEE.
-  Zhuang, H., Sun, Y., Tang, J., Zhang, J., and Sun, X. (2013).  
Influence maximization in dynamic social networks.  
In *Data Mining (ICDM), 2013 IEEE 13th International Conference on*,  
pages 1313–1318. IEEE.