


Phase 4 — JIT-compiling the inner loop closes the gap to C++; a rewrite is not worth it

(a) Numba is already C++-class



(b) C++ saves minutes; Numba saves hours

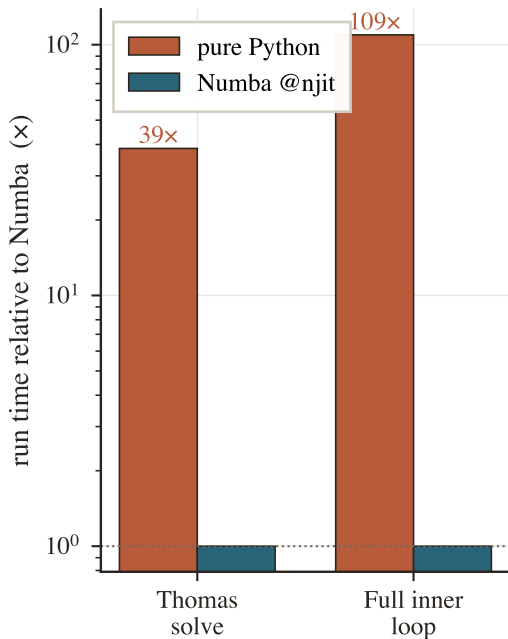