Fakulteta za informacijske študije
Faculty of information studies

lab01

Student : Filip Polić
Student ID : 35250232
Student email : policfilip2003@gmail.com

Why do we use Kali Linux?

We use Kali Linux because it is specially designed for cybersecurity, penetration testing and digital forensics.

What is the advantage of Kali Linux compared to other Linux distributions?

The main advantage of Kali Linux compared to other Linux distributions is that it already contains many preinstalled security tools, so users do not need to install everything manually.

Which features and tools of Kali Linux attracted you the most?

The features and tools that attracted me the most were Nmap, tcpdump and Searchsploit because they are useful for network scanning, monitoring traffic and searching for known vulnerabilities.

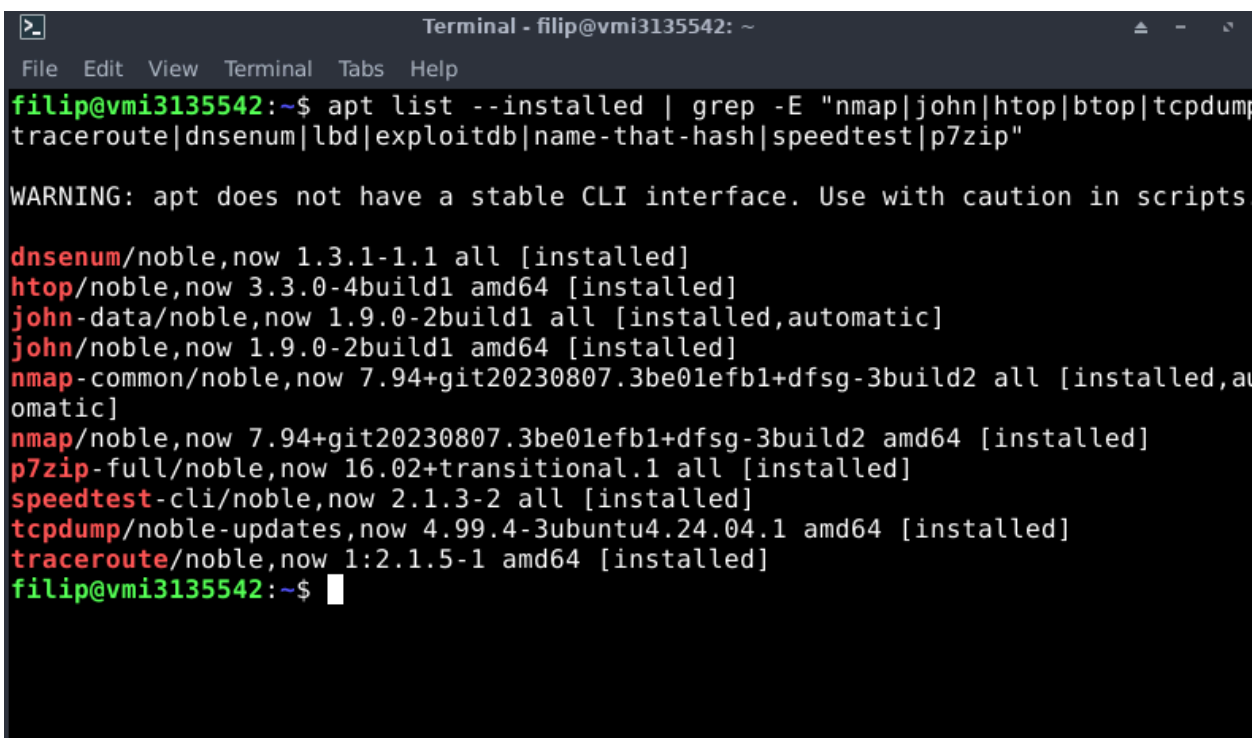

```
Terminal - filip@vmi3135542: ~
File  Edit  View  Terminal  Tabs  Help

  0[||                          3.7%]   4[|                           0.6%]
  1[||                          1.2%]   5[|                           1.2%]
  2[|                           1.8%]   6[||                          3.1%]
  3[||||                        7.4%]   7[||                          2.5%]
 Mem[||||||||||           4.51G/23.5G] Tasks: 172, 544 thr, 132 kthr; 1 runni
 Swp[                           0K/0K] Load average: 0.43 0.47 0.34
                                       Uptime: 7 days, 07:36:56

  Main   I/O
    PID USER       PRI  NI  VIRT   RES   SHR S  CPU%▽MEM%   TIME+  Command
    678 systemd-ti  20   0 91052  7992  7008 S   0.0  0.0  0:07.31 /usr/lib/syst
    696 systemd-ti  20   0 91052  7992  7008 S   0.0  0.0  0:00.01 /usr/lib/syst
    708 root        20   0  303M  7968  7032 S   0.0  0.0  0:00.29 /usr/libexec/
    709 avahi       20   0  8688  4684  4148 S   0.0  0.0  0:02.29 avahi-daemon:
    710 messagebus  20   0 12064  7116  4692 S   0.0  0.0  0:27.90 @dbus-daemon
    716 polkitd     20   0  375M 11256  7920 S   0.0  0.0  0:01.71 /usr/lib/polk
    721 root        20   0 18076  9272  8052 S   0.0  0.0  0:11.63 /usr/lib/syst
    722 root        20   0  458M 13964 11484 S   0.0  0.1  0:01.83 /usr/libexec/
    725 root        20   0  303M  7968  7032 S   0.0  0.0  0:00.00 /usr/libexec/
    726 root        20   0  303M  7968  7032 S   0.0  0.0  6:37.53 /usr/libexec/
    735 avahi       20   0  8424  1492  1132 S   0.0  0.0  0:00.00 avahi-daemon:
    740 syslog      20   0  217M  6624  4632 S   0.0  0.0  0:00.37 /usr/sbin/rsy
F1Help  F2Setup F3SearchF4FilterF5Tree  F6SortByF7Nice -F8Nice +F9Kill  F10Quit
```

```
filip@vmi3135542:~$ nmap
Nmap 7.94SVN ( https://nmap.org )
Usage: nmap [Scan Type(s)] [Options] {target specification}
TARGET SPECIFICATION:
  Can pass hostnames, IP addresses, networks, etc.
  Ex: scanme.nmap.org, microsoft.com/24, 192.168.0.1; 10.0.0-255.1-254
  -iL <inputfilename>: Input from list of hosts/networks
  -iR <num hosts>: Choose random targets
  --exclude <host1[,host2][,host3],...>: Exclude hosts/networks
  --excludefile <exclude_file>: Exclude list from file
HOST DISCOVERY:
  -sL: List Scan - simply list targets to scan
  -sn: Ping Scan - disable port scan
  -Pn: Treat all hosts as online -- skip host discovery
  -PS/PA/PU/PY[portlist]: TCP SYN/ACK, UDP or SCTP discovery to given po
  -PE/PP/PM: ICMP echo, timestamp, and netmask request discovery probes
  -PO[protocol list]: IP Protocol Ping
  -n/-R: Never do DNS resolution/Always resolve [default: sometimes]
  --dns-servers <serv1[,serv2],...>: Specify custom DNS servers
  --system-dns: Use OS's DNS resolver
  --traceroute: Trace hop path to each host
SCAN TECHNIQUES:
  -sS/sT/sA/sW/sM: TCP SYN/Connect()/ACK/Window/Maimon scans
```

```
filip@vmi3135542:~/linux-exercise$ mkdir test
filip@vmi3135542:~/linux-exercise$ mv description.txt test/
filip@vmi3135542:~/linux-exercise$ ls
test
filip@vmi3135542:~/linux-exercise$ mv test/description.txt test/my_profile.txt
filip@vmi3135542:~/linux-exercise$ cp test/my_profile.txt ~
filip@vmi3135542:~/linux-exercise$ ls
test
filip@vmi3135542:~/linux-exercise$ ls ~
Desktop    VO-Vaje                                  my_profile.txt
Documents  Videos                                   powerlevel10k
Downloads  brute_a                                  scan_hackycorp_all.sh
Music      docker-compose.yml                       snap
Pictures   google-chrome-stable_current_amd64.deb   thinclient_drives
Public     hackycorp_scan                           venv
Templates  linux-exercise                           webgoat
filip@vmi3135542:~/linux-exercise$
```

```
filip@vmi3135542:~/linux-exercise$ du -sh ./*
8.0K    ./test
filip@vmi3135542:~/linux-exercise$ ls -lh test
total 4.0K
-rw-rw-r-- 1 filip filip 12 Apr  1 17:56 my_profile.txt
filip@vmi3135542:~/linux-exercise$ chmod 444 test/my_profile.txt
filip@vmi3135542:~/linux-exercise$ ls -l test/my_profile.txt
-r--r--r-- 1 filip filip 12 Apr  1 17:56 test/my_profile.txt
filip@vmi3135542:~/linux-exercise$
```

```
filip@vmi3135542:~/linux-exercise$ uname -a
Linux vmi3135542 6.8.0-106-generic #106-Ubuntu SMP PREEMPT_DYNAMIC Fri Mar  6 07
:58:08 UTC 2026 x86_64 x86_64 x86_64 GNU/Linux
filip@vmi3135542:~/linux-exercise$ q
Command 'q' not found, but can be installed with:
sudo snap install q                       # version 1.6.3-1, or
sudo apt  install python3-q-text-as-data  # version 3.1.6-3
See 'snap info q' for additional versions.
filip@vmi3135542:~/linux-exercise$ du -ah ~ | sort -rh | head -n 5
2.6G    /home/filip
854M    /home/filip/.ZAP
675M    /home/filip/.ZAP/session
648M    /home/filip/.ZAP/session/untitled3.data
422M    /home/filip/.m2
filip@vmi3135542:~/linux-exercise$
```