EXPERIMENT 7

AIM: Using Props in ReactJS to Customize React Components

SOLUTION:

- ✓ Props (Properties) are used in ReactJS to pass data from one component to another.
- ✓ They are read-only and help in making components reusable and customizable.

Procedure

Step 1: Create React Application

npx create-react-app props-react

Step 2: Navigate to Project Folder

cd props-react

PROPS-REACT FOLDER STRUCTURE

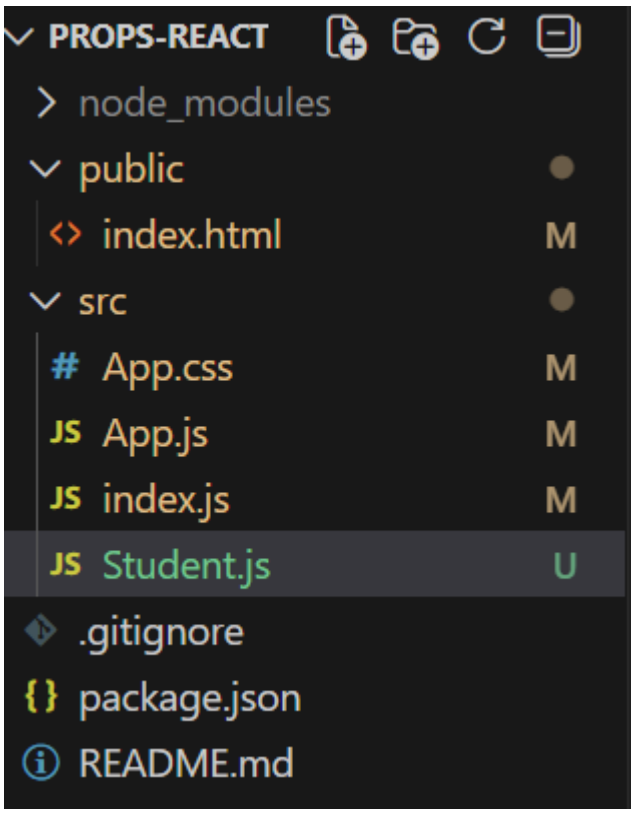

Program:

public/index.html

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>React App</title>
  </head>
  <body>
    <div id="root"></div>
  </body>
```

```
</html>
```

src/index.js

```
import React from 'react';
import ReactDOM from 'react-dom/client';
import App from './App';
const root = ReactDOM.createRoot(document.getElementById('root'));
root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```

src/app.css

```
import './App.css';
import Student from './Student';
function App() {
  return (
    <div style={{ textAlign: "center" }}>
    <h1>Props in ReactJS</h1>
      <Student rollno={101} name="Ravi" course="DBMS"/>
      <Student rollno={102} name="Ram" course="OS"/>
    </div>
  );
}
export default App;
```

src/student.js

```
import React from 'react'
function Student(props) {
  return (
    <div style={{ border: "2px solid red", margin: "10px", padding:
"10px" }}>
      <h3>Student Roll No: {props.rollno}</h3>
      <h3>Student Name: {props.name}</h3>
      <h3>Student Course: {props.course}</h3>
    </div>
```

```
  )
}
export default Student
```

Step 3: Start Application

>npm start
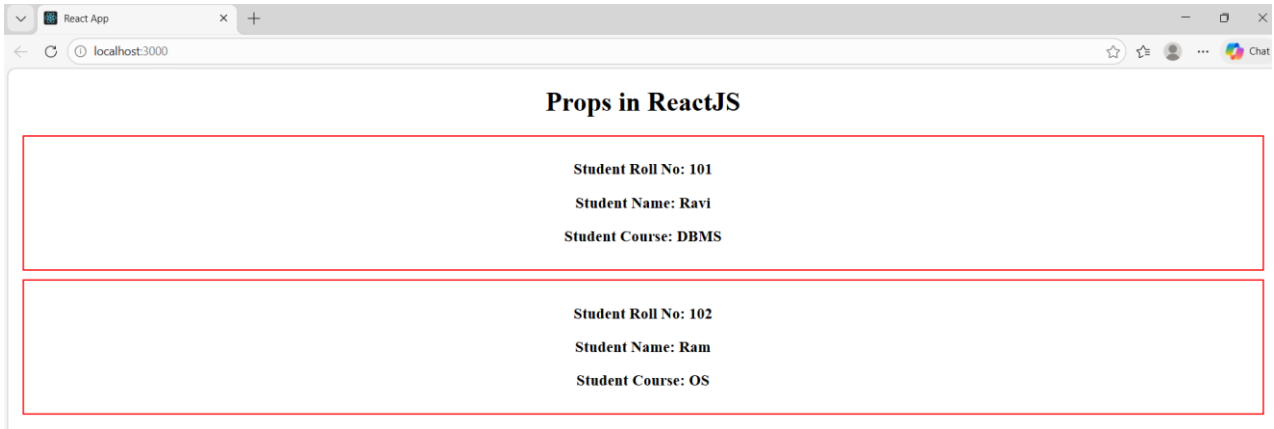
Output: