EXPERIMENT 6

AIM: Event Handling in ReactJS

SOLUTION:

- ✓ Event handling in ReactJS is used to respond to user actions such as clicking a button, typing in input fields, or mouse movements.
- ✓ React uses camelCase naming for events (e.g., onClick) and event handlers are written as functions.

Procedure:

Step 1: Create React Application

npx create-react-app event-react

Step 2: Navigate to Project Folder

cd event-react

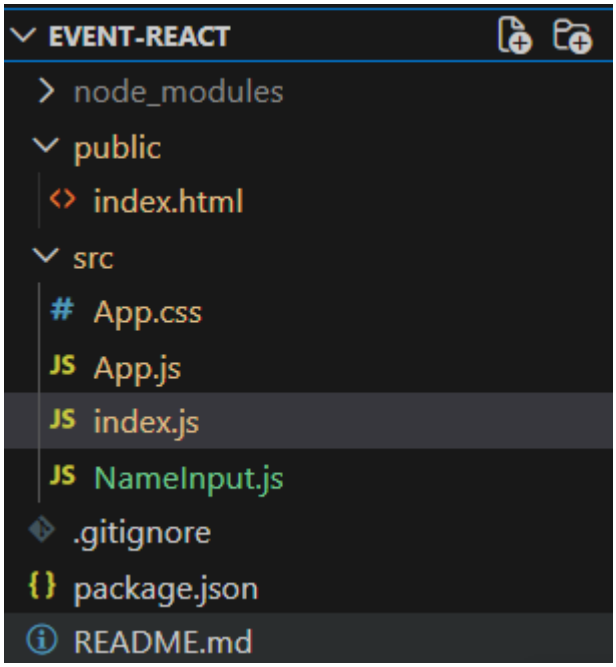

Program

public/index.html

```
<!DOCTYPE html>
<html lang="en">
  <head>
      <title>Simple React App</title>
  </head>
  <body>
    <div id="root"></div>
  </body>
</html>
```

src/index.js

```
import React from 'react';
```

```
import ReactDOM from 'react-dom/client';
import App from './App';
const root = ReactDOM.createRoot(document.getElementById('root'));
root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```

src/NameInput.js

```
import React from 'react'
import { useState } from 'react';

function NameInput() {
   const [name, setName] = useState("");
    const [displayName, setDisplayName] = useState("");
    function handleClick(){
        setDisplayName(name);
        //alert(name)
    }
  return (
    <div  style={{ textAlign: "center", marginTop: "50px" }}>
    <input type="text" placeholder="Enter Your Name" value={name}
onChange={(e)=>setName(e.target.value)} style={{ padding: "8px",
borderRadius: "5px" }}></input>
      <br/>
      <br/>
     <button onClick={handleClick} style={{
          padding: "8px 15px",
          borderRadius: "5px",
          backgroundColor: "green",
          color: "white",
          border: "none"
        }}>Click Me</button>
      <h2 style={{color:"blue"}}>Your Name is: {displayName}</h2>
    </div>
  )
```

```
}
export default NameInput
```

src/app.js

```
import ./App.css';
import NameInput from ./NameInput';
function App() {
  return (
    <div>
      <NameInput />
    </div>
  );
}
export default App;
```

Step 3: Start Application

npm start
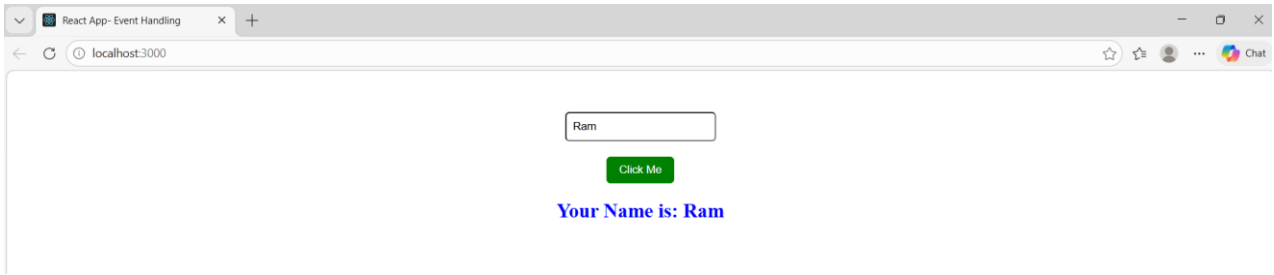
Output: