

# Cucumber Report

15-Nov-2022, 1:51:14 pm

Start : Nov 15, 1:51:14.011 pm

End : Nov 15, 1:51:14.049 pm

Duration : 0.038 s

Features

Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0


PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 0  
SKIPPED - 4





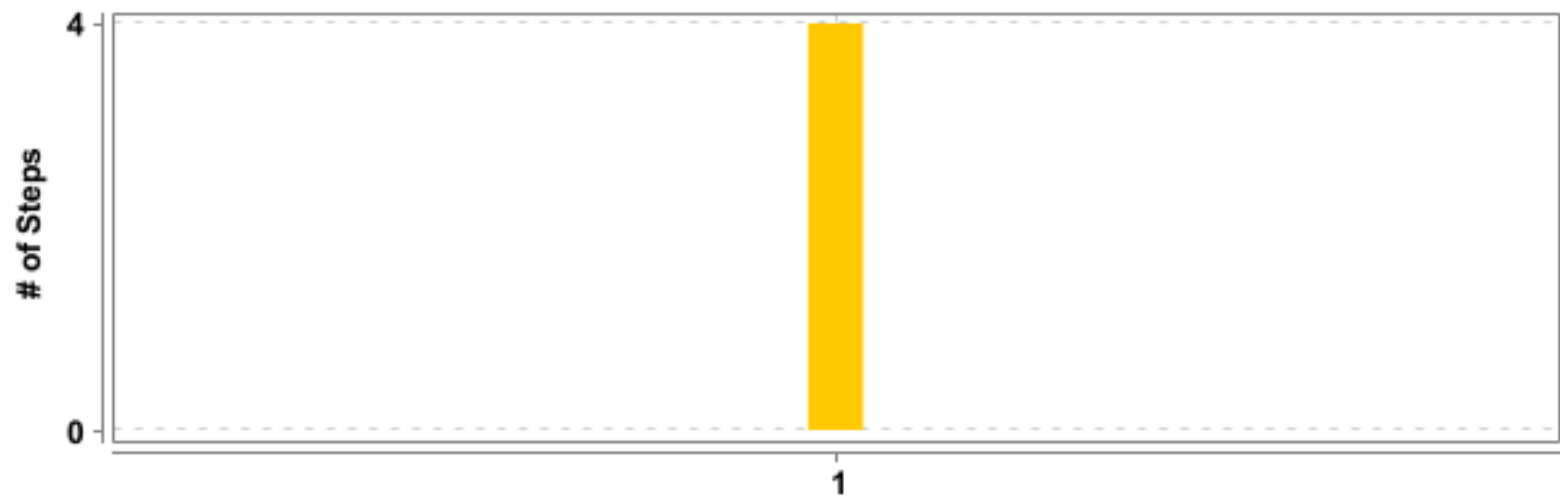

#	Feature Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	1	0	1	0	0.038 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	<u>Guru99 login function</u>	4	0	0	4	0.032 s

**(F)- Title of your feature**

<b>FAILED</b>	<b>DURATION - 0.038 s</b>	Scenarios		Steps	
/ 1:51:14.011 pm // 1:51:14.049 pm /		Total - 1	1	Total - 4	4
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 4	

**(S)- Guru99 login function**
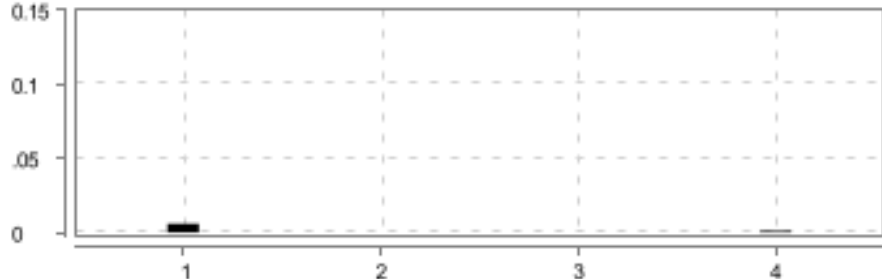
<div>FAILED</div> <div>DURATION - 0.032 s</div>			Steps		
/ 1:51:14.017 pm // 1:51:14.049 pm /			Total - 4		
Title of your feature			Pass - 0		
@login @regtest			Fail - 0		
				Skip - 4	

#	Step / Hook Details	Status	Duration
	<b>BEFORE - com.cg.Runner.Hooks.beforeScenario(io.cucumber.java.Scenario)</b> io.cucumber.core.exception.CucumberException: class com.cg.Runner.Hooks doesn't have an empty constructor. If you need dependency injection, put cucumber-picocontainer on the classpath at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:145) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.TestCase.run(TestCase.java:98) at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:110) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)	<b>FAILED</b>	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.internal.runners.statements.RunBefores.evaluate(RunBefores.java:26) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.NoSuchMethodException: com.cg.Runner.Hooks.&lt;init&gt;()   at java.base/java.lang.Class.getConstructor0(Class.java:3585)   at java.base/java.lang.Class.getConstructor(Class.java:2271)   at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:140) </pre>		
1	Given user is on login	SKIPPED	0.006 s
2	When user enter "Rajesh" and "rajesh@123"	SKIPPED	0.000 s
3	Then user click on login button	SKIPPED	0.000 s
4	Then close all browsers	SKIPPED	0.001 s
	<p>AFTER - com.cg.Runner.Hooks.afterScenario(io.cucumber.java.Scenario)</p> <pre> io.cucumber.core.exception.CucumberException: class com.cg.Runner.Hooks doesn't have an empty constructor. If you need dependency injection, put cucumber-picocontainer on the classpath   at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:145)   at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:133)   at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)   at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59)   at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) </pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.TestCase.run(TestCase.java:110) at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:110) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.internal.runners.statements.RunBefores.evaluate(RunBefores.java:26) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.NoSuchMethodException: com.cg.Runner.Hooks.&lt;init&gt;() at java.base/java.lang.Class.getConstructor0(Class.java:3585) at java.base/java.lang.Class.getConstructor(Class.java:2271) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:140) </pre>		