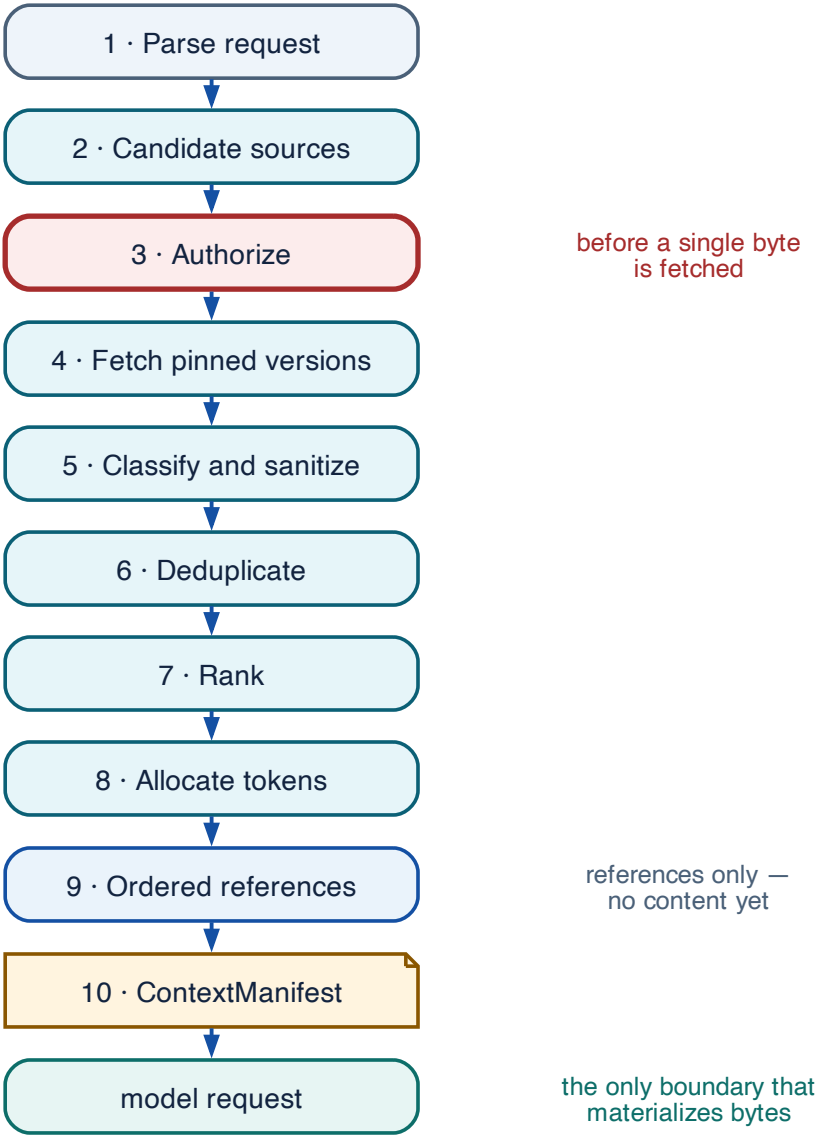
1 · Parse request
2 · Candidate sources
3 · Authorize
before a single byte is fetched
4 · Fetch pinned versions
5 · Classify and sanitize
6 · Deduplicate
7 · Rank
8 · Allocate tokens
9 · Ordered references
references only — no content yet
10 · ContextManifest
model request
the only boundary that materializes bytes