

19. Stopping Containers

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

..workspace/prod (zsh) %1 ..workspace/prod (zsh) %2

→ prod git:(master) |

}





1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

× ..orkspace/prod (zsh) ⌘61

× ..orkspace/prod (zsh) ⌘62

→ prod git:(master) docker create busybox ping google.com



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

X ..orkspace/prod (zsh) #1 X ..orkspace/prod (zsh) #2

→ prod git:(master) docker create busybox ping google.com
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701

→ prod git:(master) █

{}



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

X ..orkspace/prod (zsh) #1 X ..orkspace/prod (zsh) #2

→ prod git:(master) docker create busybox ping google.com
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701

→ prod git:(master) |



```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

× ..orkspace/prod (zsh) ⌘1 × ..orkspace/prod (zsh) ⌘2

→ prod git:(master) docker create busybox ping google.com
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) docker start a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fad
d798b921cf701
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

× ..orkspace/prod (zsh) ⌘61 × ..orkspace/prod (zsh) ⌘62

```
→ prod git:(master) docker create busybox ping google.com
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) docker start a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fad
d798b921cf701
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) █
```



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

X ..orkspace/prod (zsh) #61 X ..orkspace/prod (zsh) #62

```
→ prod git:(master) docker create busybox ping google.com
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) docker start a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fad
d798b921cf701
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) docker logs a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd
798b921cf701
PING google.com (172.217.11.238): 56 data bytes
64 bytes from 172.217.11.238: seq=0 ttl=37 time=4.011 ms
64 bytes from 172.217.11.238: seq=1 ttl=37 time=2.718 ms
64 bytes from 172.217.11.238: seq=2 ttl=37 time=3.213 ms
64 bytes from 172.217.11.238: seq=3 ttl=37 time=2.926 ms
64 bytes from 172.217.11.238: seq=4 ttl=37 time=3.449 ms
64 bytes from 172.217.11.238: seq=5 ttl=37 time=3.099 ms
64 bytes from 172.217.11.238: seq=6 ttl=37 time=2.853 ms
64 bytes from 172.217.11.238: seq=7 ttl=37 time=2.765 ms
→ prod git:(master) █
```



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

X ..orkspace/prod (zsh) #61 X ..orkspace/prod (zsh) #62

```
→ prod git:(master) docker create busybox ping google.com
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) docker start a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fad
d798b921cf701
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) docker logs a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd
798b921cf701
PING google.com (172.217.11.238): 56 data bytes
64 bytes from 172.217.11.238: seq=0 ttl=37 time=4.011 ms
64 bytes from 172.217.11.238: seq=1 ttl=37 time=2.718 ms
64 bytes from 172.217.11.238: seq=2 ttl=37 time=3.213 ms
64 bytes from 172.217.11.238: seq=3 ttl=37 time=2.926 ms
64 bytes from 172.217.11.238: seq=4 ttl=37 time=3.449 ms
64 bytes from 172.217.11.238: seq=5 ttl=37 time=3.099 ms
64 bytes from 172.217.11.238: seq=6 ttl=37 time=2.853 ms
64 bytes from 172.217.11.238: seq=7 ttl=37 time=2.765 ms
→ prod git:(master) █
```



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker start a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fad
d798b921cf701
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) docker logs a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd
798b921cf701
PING google.com (172.217.11.238): 56 data bytes
64 bytes from 172.217.11.238: seq=0 ttl=37 time=4.011 ms
64 bytes from 172.217.11.238: seq=1 ttl=37 time=2.718 ms
64 bytes from 172.217.11.238: seq=2 ttl=37 time=3.213 ms
64 bytes from 172.217.11.238: seq=3 ttl=37 time=2.926 ms
64 bytes from 172.217.11.238: seq=4 ttl=37 time=3.449 ms
64 bytes from 172.217.11.238: seq=5 ttl=37 time=3.099 ms
64 bytes from 172.217.11.238: seq=6 ttl=37 time=2.853 ms
64 bytes from 172.217.11.238: seq=7 ttl=37 time=2.765 ms
→ prod git:(master) docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STAT
US	PORTS	NAMES		
a8f48b4dc69a 3 seconds	busybox	"ping google.com" quizzical_meninsky	26 seconds ago	Up 1

→ prod git:(master) █

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker start a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fad
d798b921cf701
a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd798b921cf701
→ prod git:(master) docker logs a8f48b4dc69aa6d1d35e04bd11fca050165048c6c391b67fadd
798b921cf701
PING google.com (172.217.11.238): 56 data bytes
64 bytes from 172.217.11.238: seq=0 ttl=37 time=4.011 ms
64 bytes from 172.217.11.238: seq=1 ttl=37 time=2.718 ms
64 bytes from 172.217.11.238: seq=2 ttl=37 time=3.213 ms
64 bytes from 172.217.11.238: seq=3 ttl=37 time=2.926 ms
64 bytes from 172.217.11.238: seq=4 ttl=37 time=3.449 ms
64 bytes from 172.217.11.238: seq=5 ttl=37 time=3.099 ms
64 bytes from 172.217.11.238: seq=6 ttl=37 time=2.853 ms
64 bytes from 172.217.11.238: seq=7 ttl=37 time=2.765 ms
→ prod git:(master) docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STAT
US	PORTS	NAMES		
a8f48b4dc69a 3 seconds	busybox	"ping google.com" quizzical_meninsky	26 seconds ago	Up 1

→ prod git:(master) █



Secure | https://www.draw.io/?mode=github#HStephenGrider%2FDockerCasts%2Fmaster%2Fdiagrams%2F02%2Fdiagrams.xml

File Edit View Arrange Extras Help All changes saved

Stephen Grider

Stop a Container

docker	stop	<container id>
--------	------	----------------

Kill a Container


docker	kill	<container id>
--------	------	----------------

01 - run 02 - scratch 03 - override 04 - busybox 07 - env 08 - ps 10 - start 09 - create 10 - create 11 - stopped 12 - logs 13 - stop kill 14 - signals 15 - kill

Udemy




Stephen

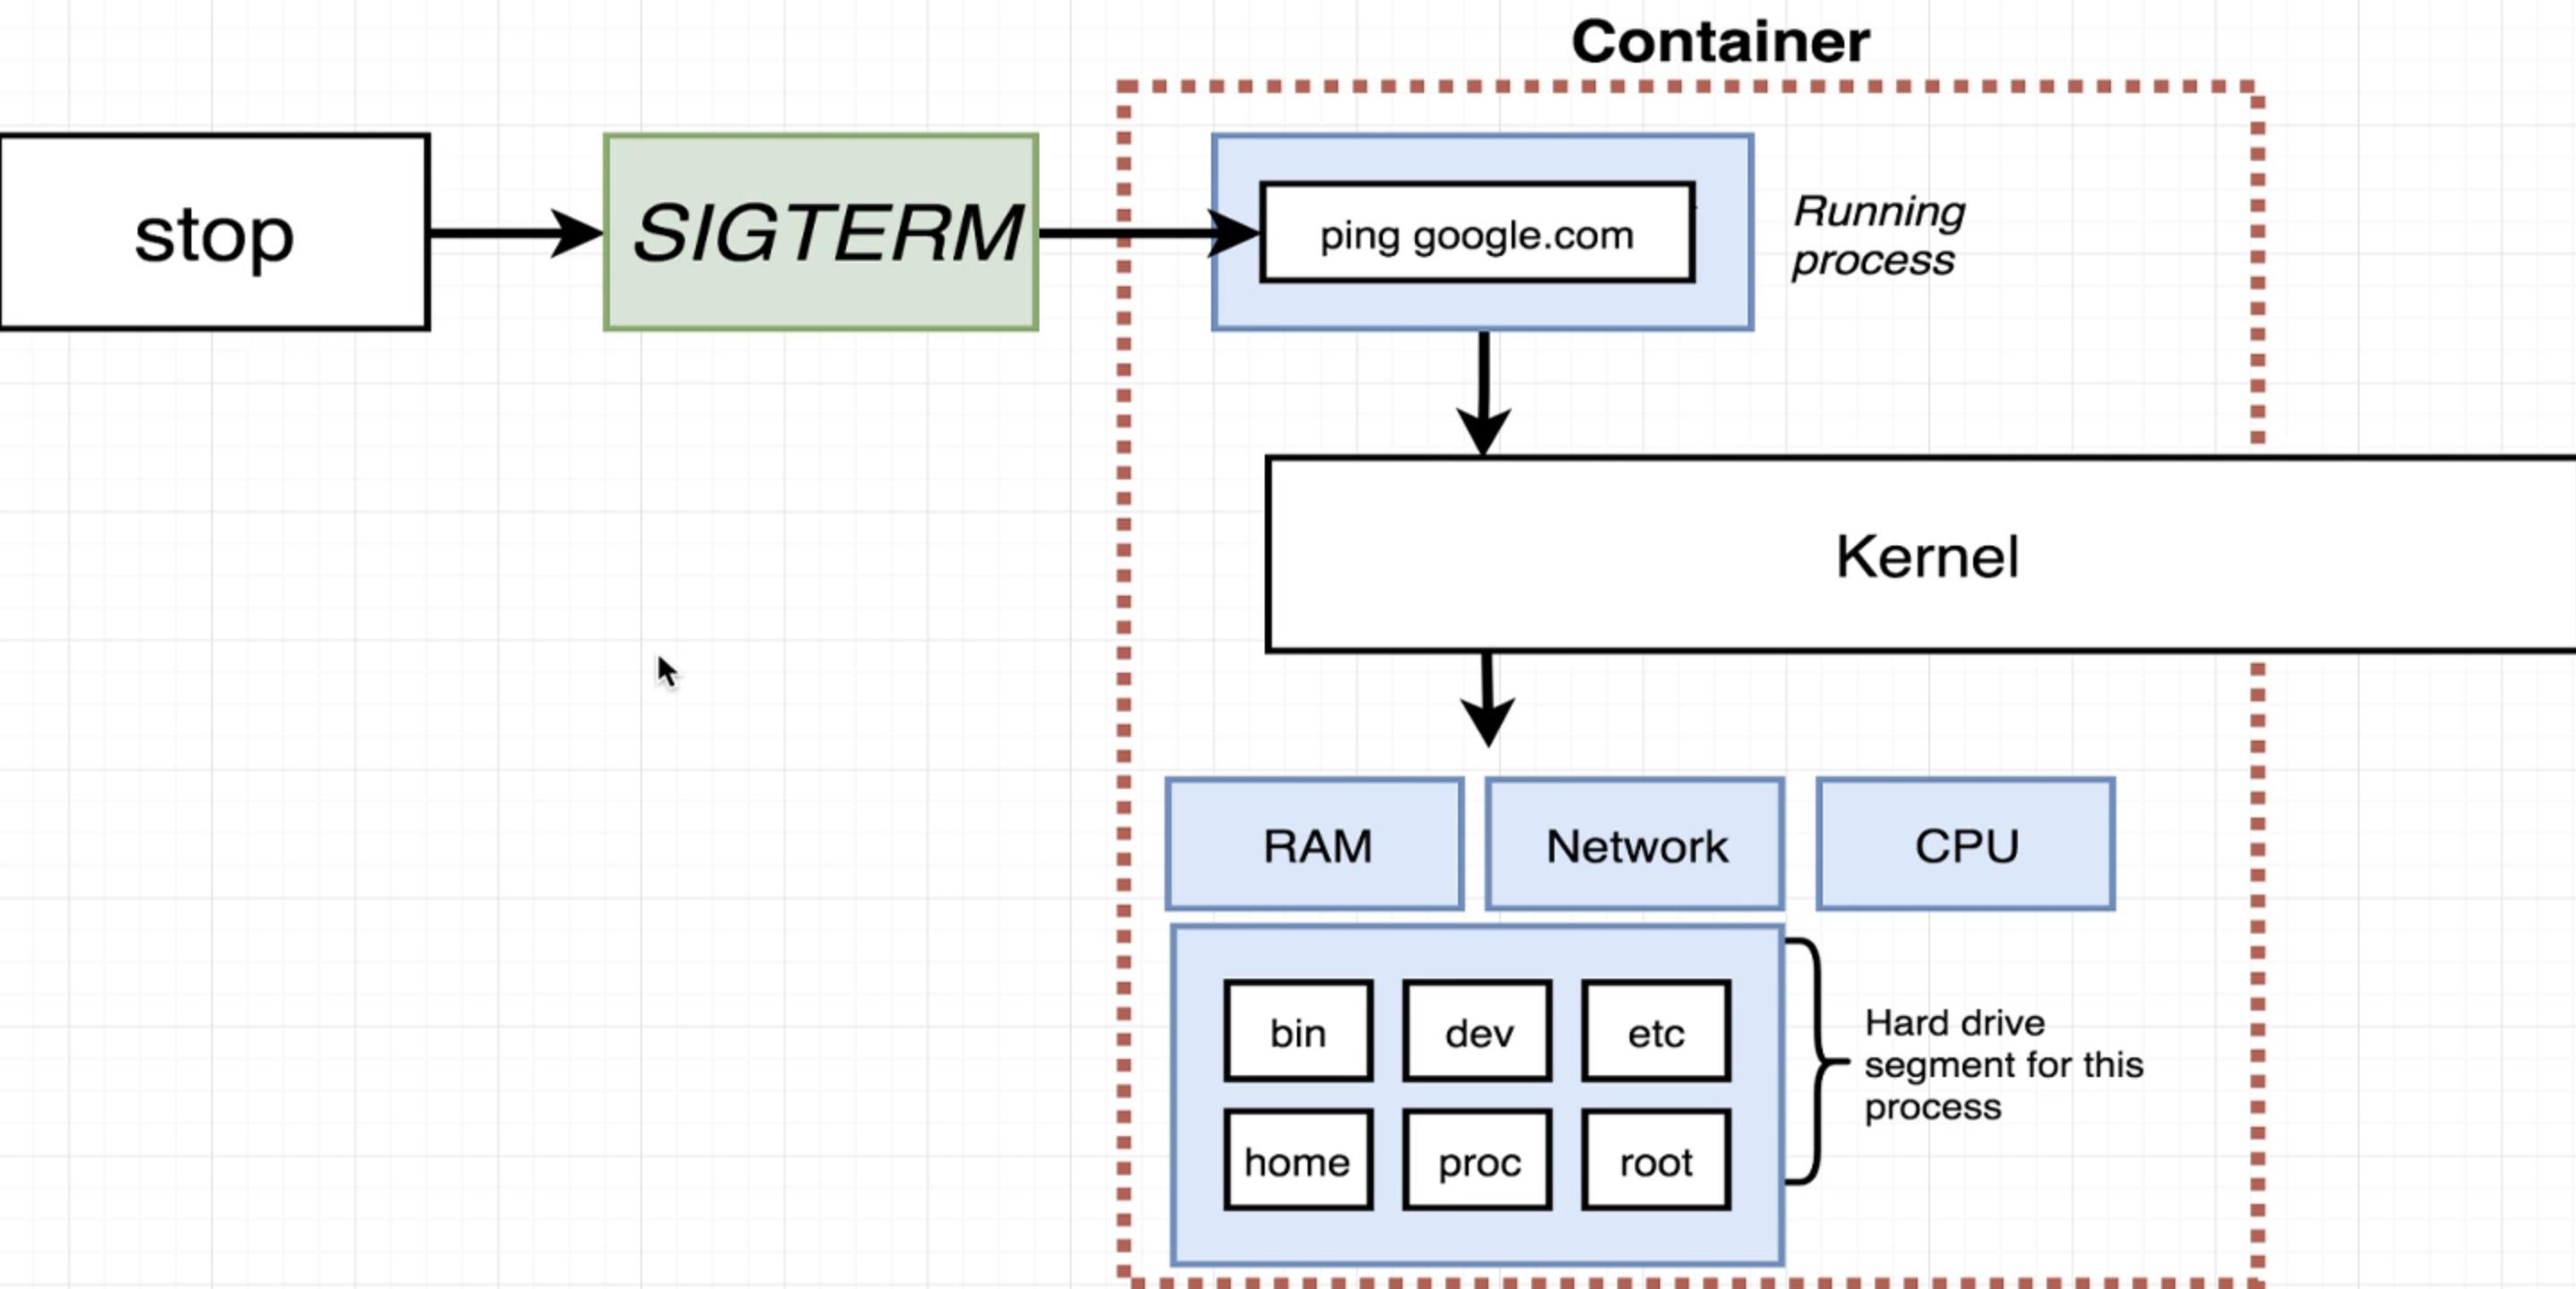



Stephen

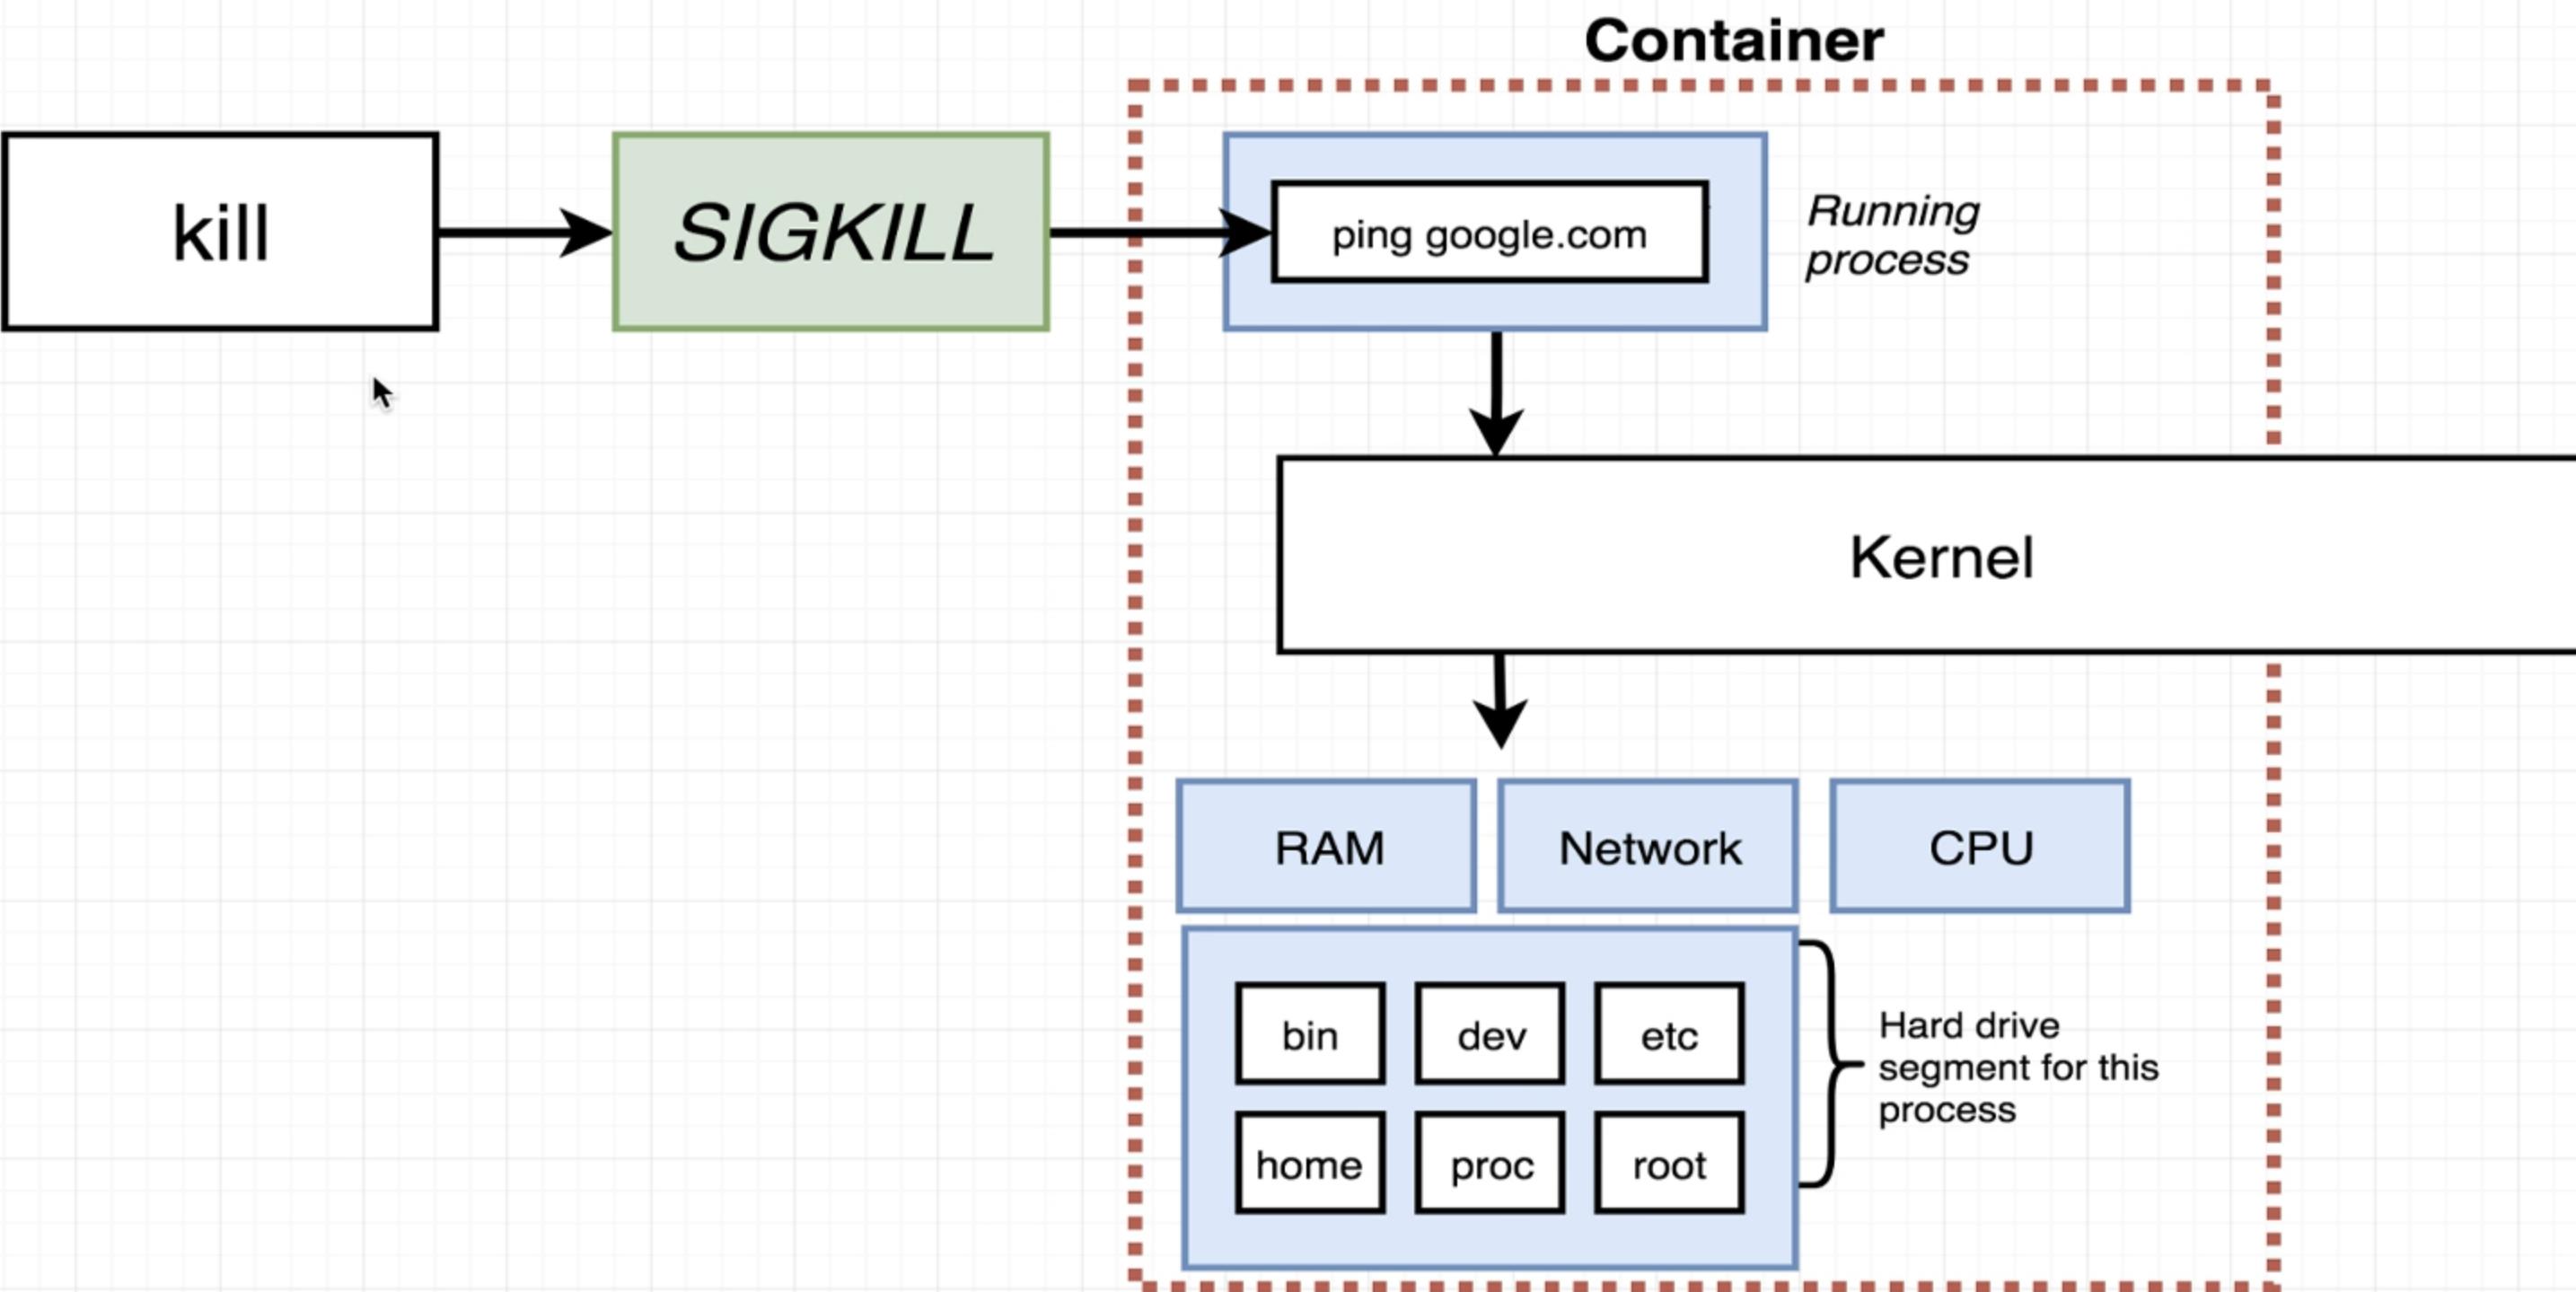



Secure | https://www.draw.io/?mode=github#HStephenGrider%2FDockerCasts%2Fmaster%2Fdiagrams%2F02%2Fdiagrams.xml

File Edit View Arrange Extras Help All changes saved

Stephen Grider

Stop a Container

docker	stop	<container id>
--------	------	----------------

Kill a Container

docker	kill	<container id>
--------	------	----------------

01 - run 02 - scratch 03 - override 04 - busybox 07 - env 08 - ps 10 - start 09 - create 10 - create 11 - stopped 12 - logs 13 - stop kill 14 - signals 15 - kill

Udemy

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

X ..orkspace/prod (zsh) #61 X ..orkspace/prod (zsh) #62

→ prod git:(master) docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STAT
US	PORTS	NAMES		
a8f48b4dc69a	busybox	"ping google.com"	3 minutes ago	Up 2
minutes		quizzical_meninsky		

→ prod git:(master) █



1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

X ..orkspace/prod (zsh) #61 X ..orkspace/prod (zsh) #62

→ prod git:(master) docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STAT
US	PORTS	NAMES		
a8f48b4dc69a minutes	busybox	"ping google.com" quizzical_meninsky	3 minutes ago	Up 2

→ prod git:(master) █

```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              PORTS
US
a8f48b4dc69a        busybox             "ping google.com"   3 minutes ago    Up 2
minutes
→ prod git:(master) docker stop a8f48b4dc69a
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (docker)

...space/prod (docker) 361

..orkspace/prod (zsh) 362

→ prod git:(master) docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STAT
US	PORTS	NAMES		
a8f48b4dc69a	busybox	"ping google.com"	3 minutes ago	Up 2
minutes		quizzical_meninsky		


→ prod git:(master) docker stop a8f48b4dc69a

a8f48b4dc69a

→ prod git:(master) █




Stephen

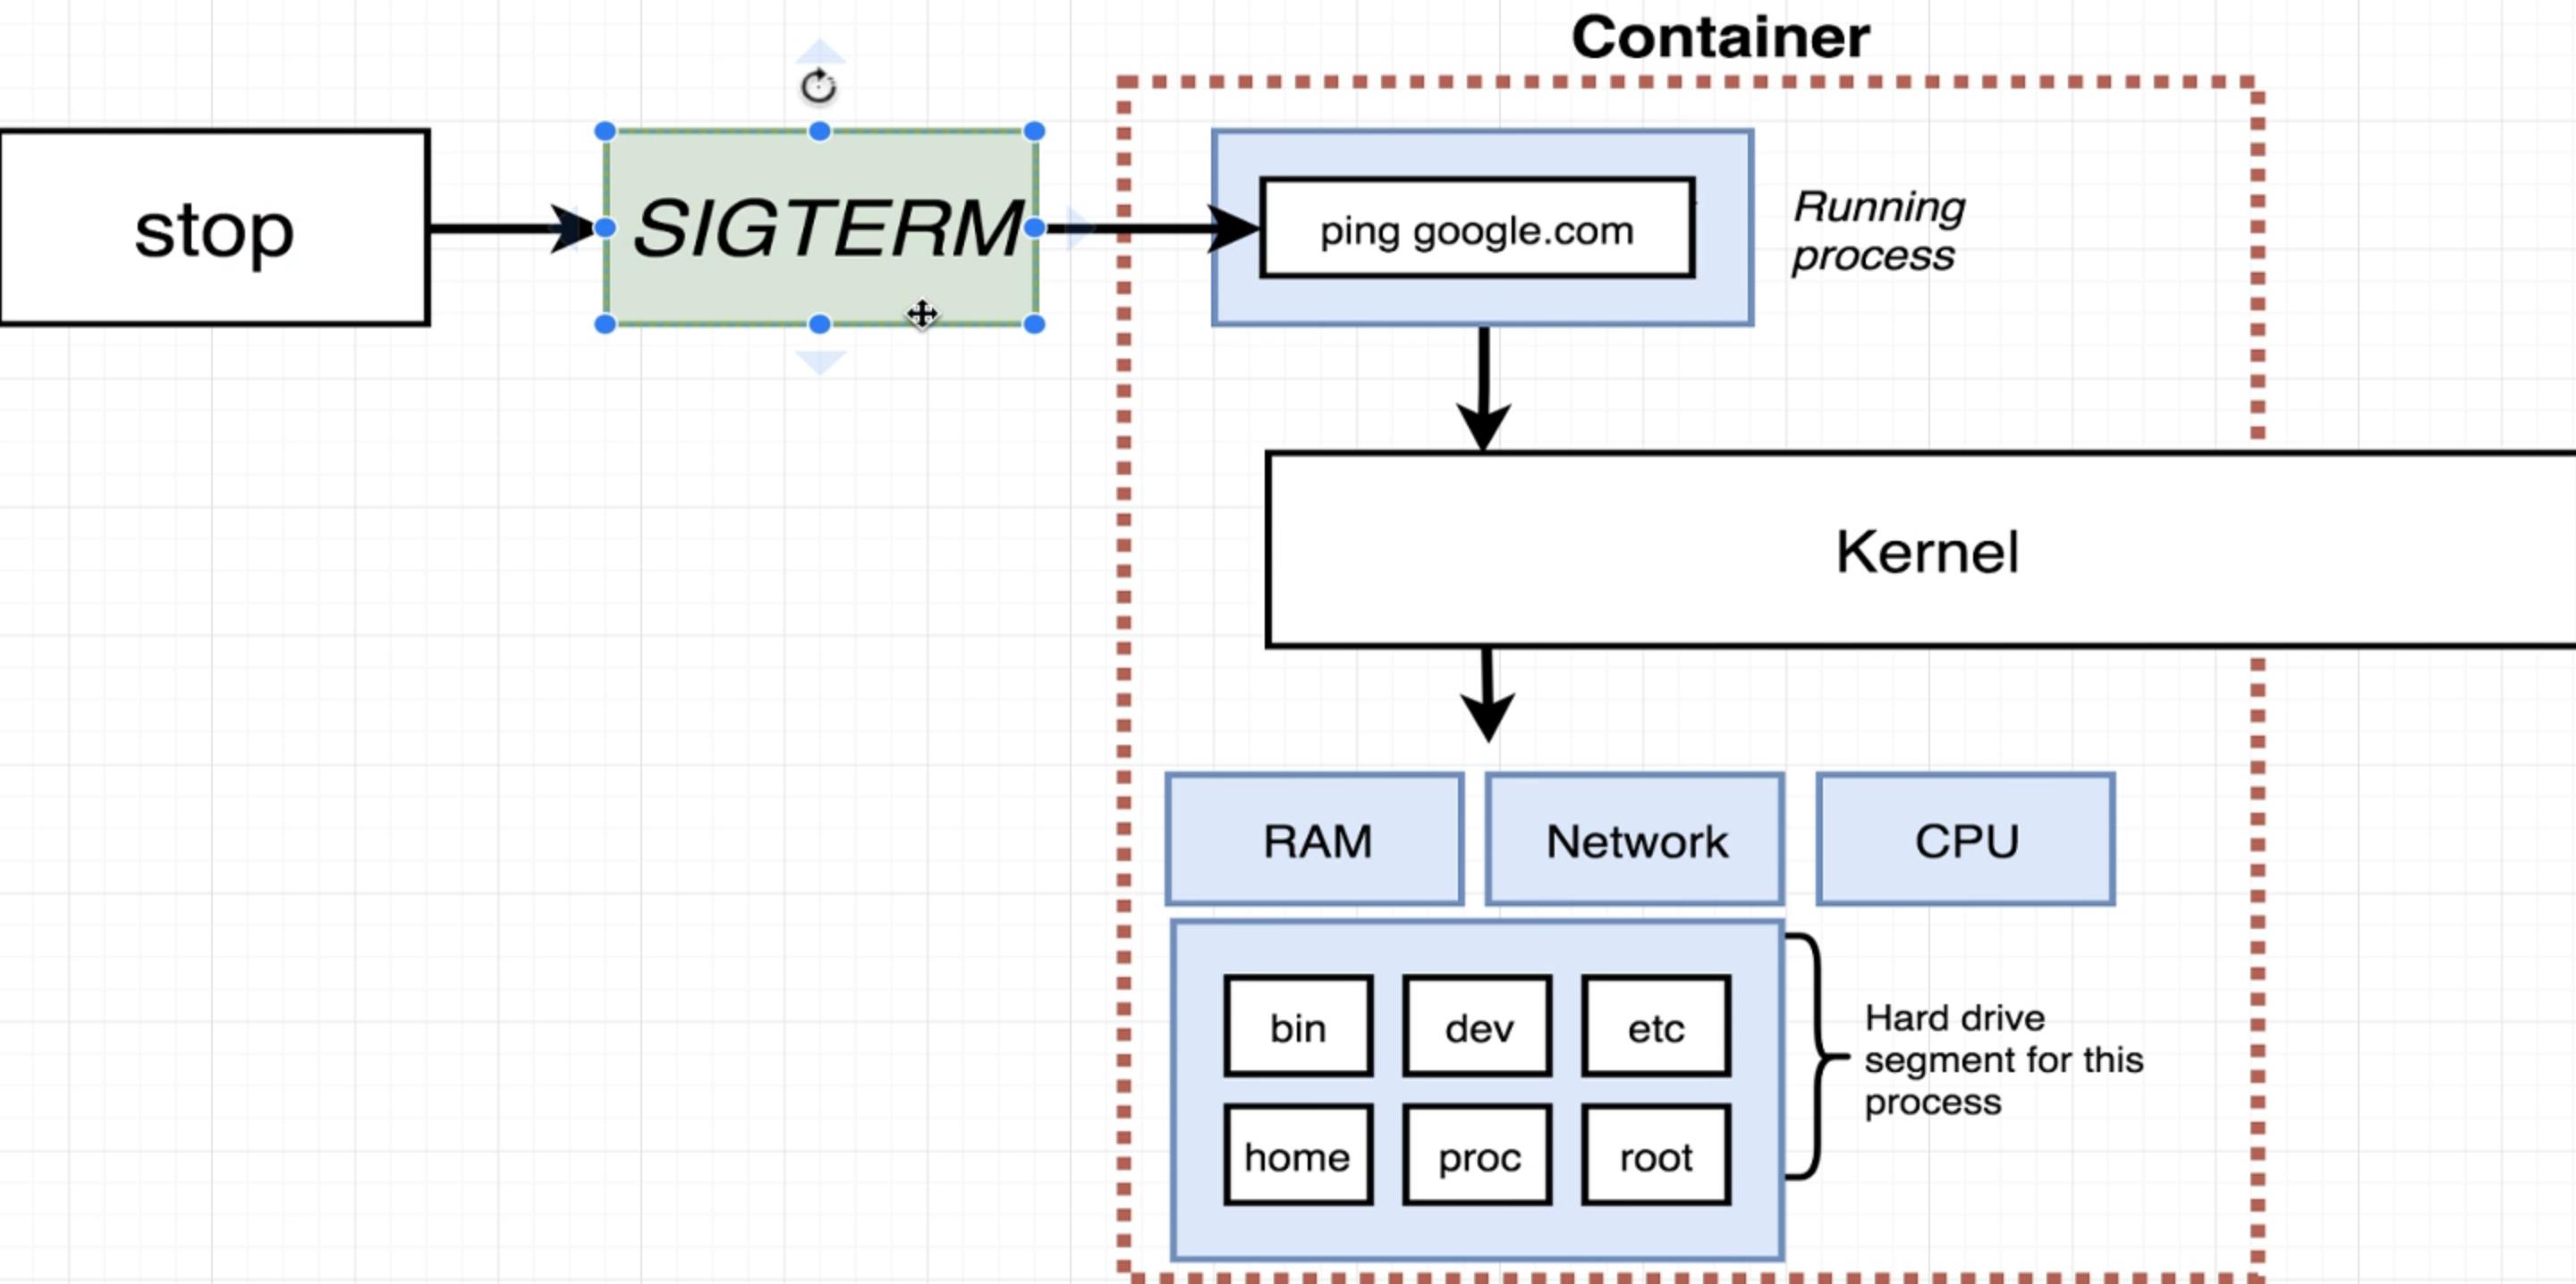



Stephen

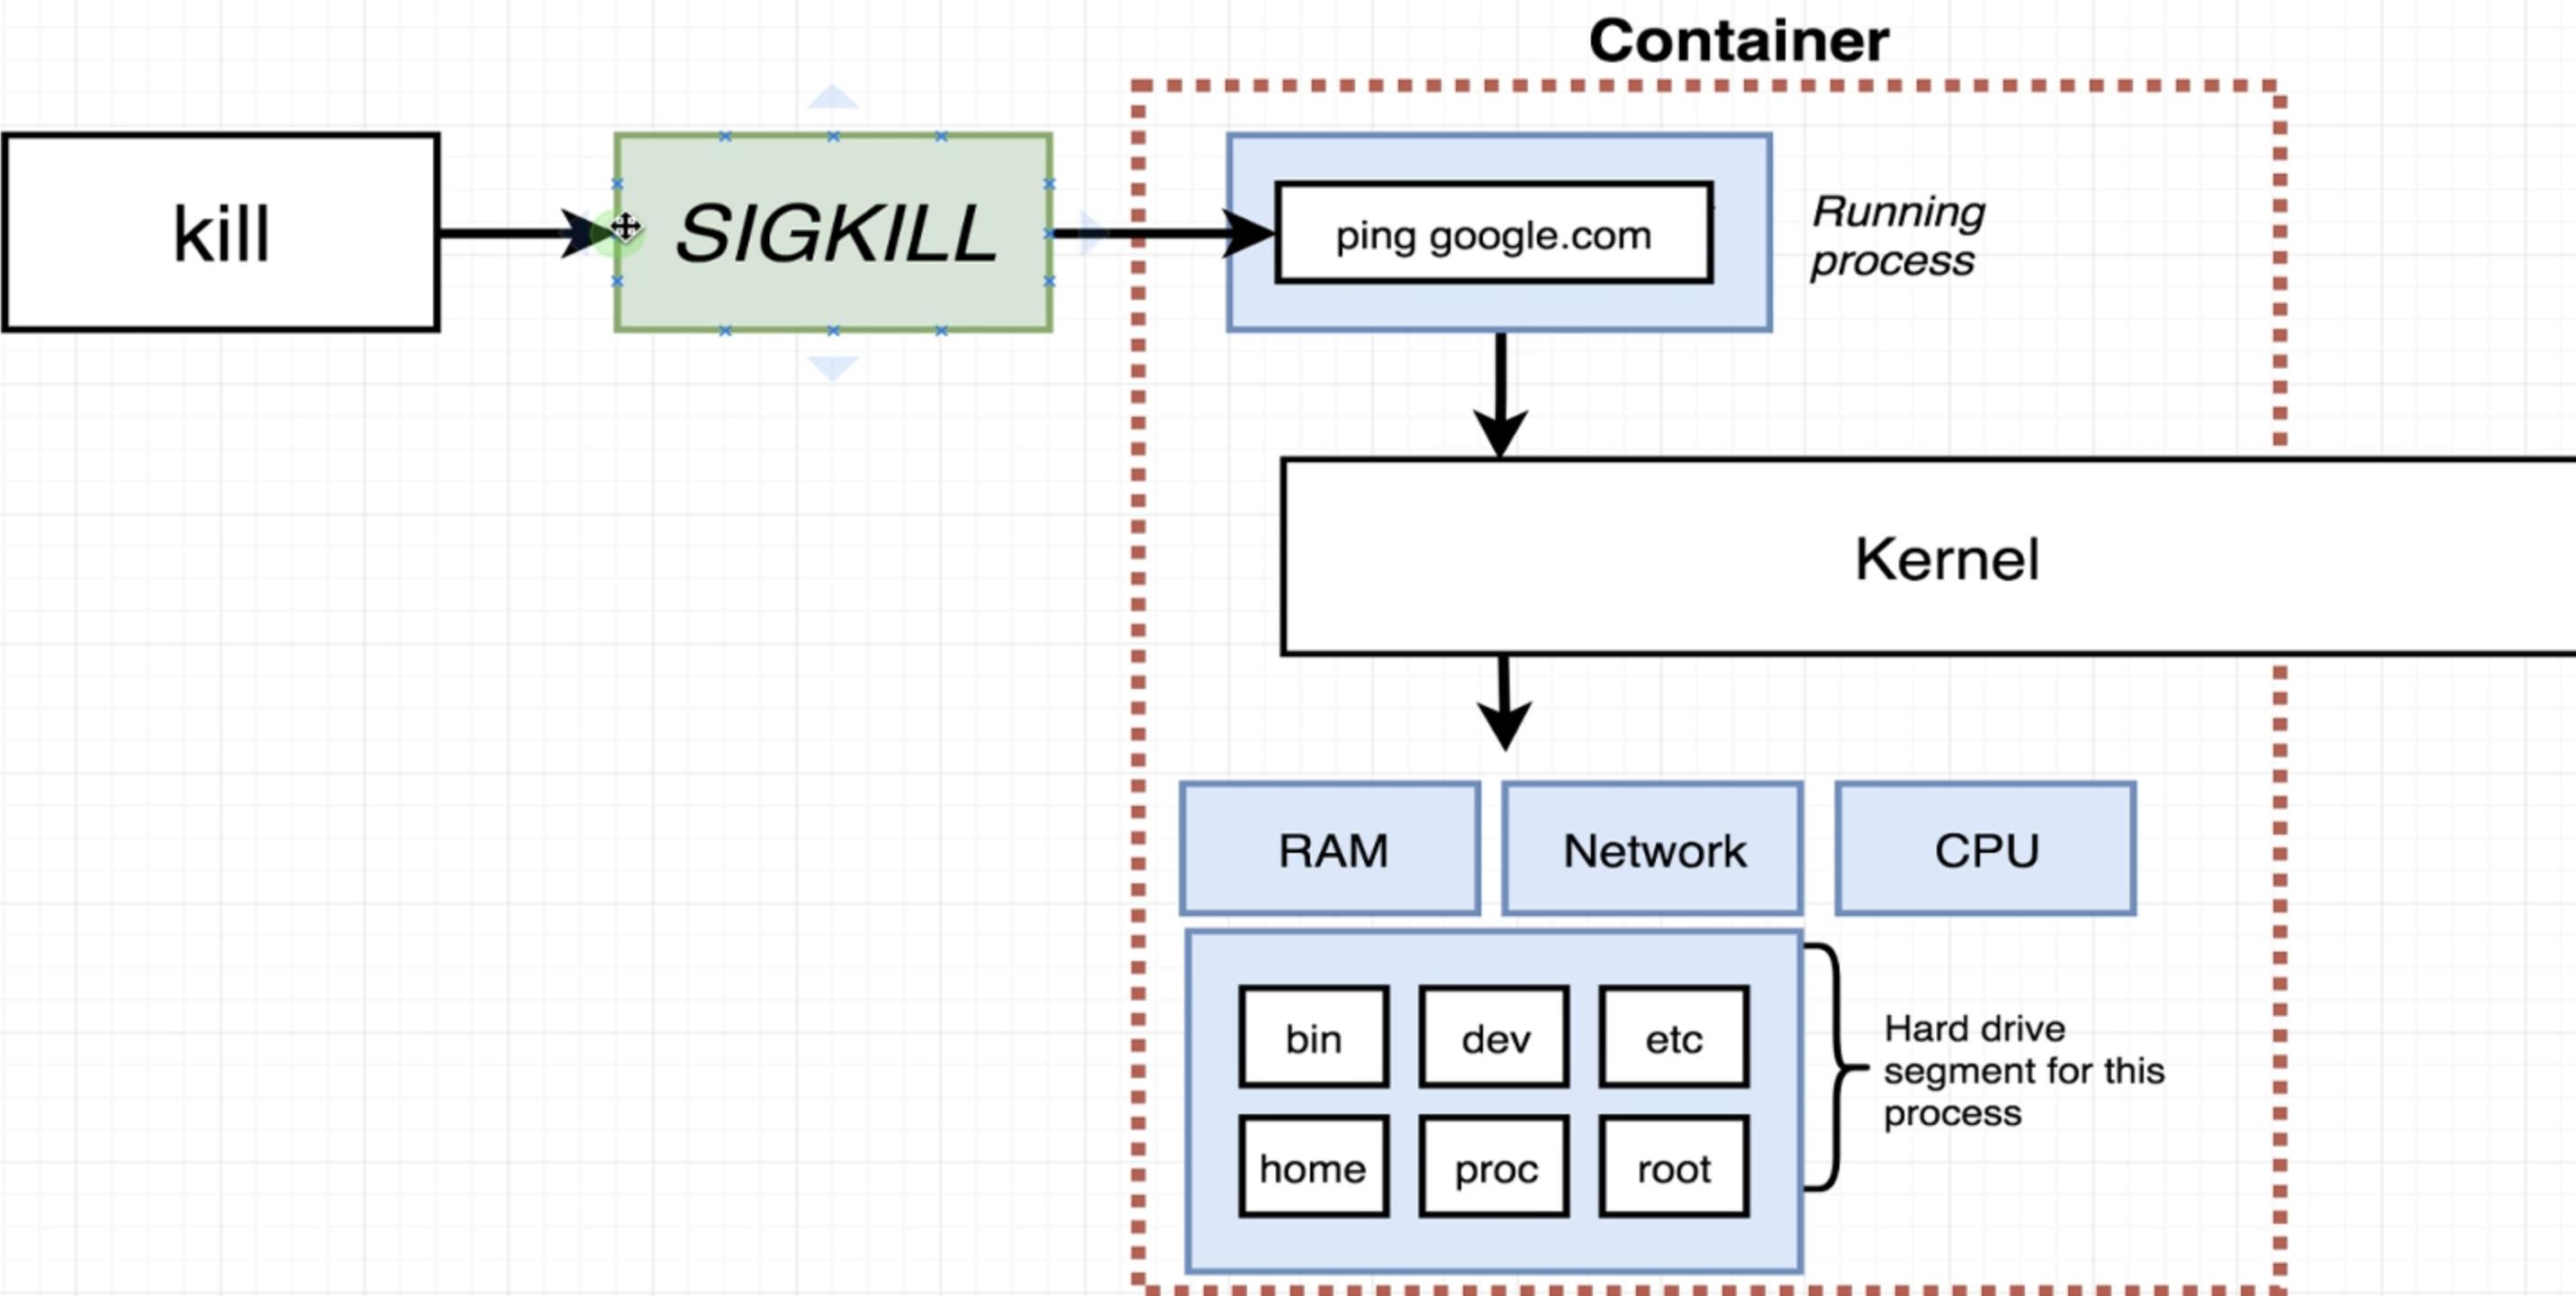

```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              PORTS
US
a8f48b4dc69a        busybox             "ping google.com"   3 minutes ago    Up 2
minutes
→ prod git:(master) docker stop a8f48b4dc69a
a8f48b4dc69a
→ prod git:(master) docker start a8f48b4dc69a
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (docker)

...space/prod (docker) 861 ..orkspace/prod (zsh) 862

→ prod git:(master) docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STAT
US	PORTS	NAMES		
a8f48b4dc69a	busybox	"ping google.com"	3 minutes ago	Up 2
minutes		quizzical_meninsky		

→ prod git:(master) docker stop a8f48b4dc69a

a8f48b4dc69a

→ prod git:(master) docker start a8f48b4dc69a

a8f48b4dc69a

→ prod git:(master) █



```
1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

→ prod git:(master) docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED            STATUS              PORTS
US
a8f48b4dc69a        busybox             "ping google.com"   3 minutes ago    Up 2
minutes
→ prod git:(master) docker stop a8f48b4dc69a
a8f48b4dc69a
→ prod git:(master) docker start a8f48b4dc69a
a8f48b4dc69a
→ prod git:(master) docker kill a8f48b4dc69a
```

1. stephengrider@stephens-MacBook-Pro: ~/workspace/DockerWorkspace/prod (zsh)

X ..orkspace/prod (zsh) #61 X ..orkspace/prod (zsh) #62

→ prod git:(master) docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STAT
US	PORTS	NAMES		
a8f48b4dc69a	busybox	"ping google.com"	3 minutes ago	Up 2
minutes		quizzical_meninsky		

→ prod git:(master) docker stop a8f48b4dc69a

a8f48b4dc69a

→ prod git:(master) docker start a8f48b4dc69a

a8f48b4dc69a

→ prod git:(master) docker kill a8f48b4dc69a

a8f48b4dc69a

→ prod git:(master) █





Secure | https://www.draw.io/?mode=github#HStephenGrider%2FDockerCasts%2Fmaster%2Fdiagrams%2F02%2Fdiagrams.xml

File Edit View Arrange Extras Help All changes saved

Stephen Grider

Stop a Container

docker	stop	<container id>
--------	------	----------------

Kill a Container

docker	kill	<container id>
--------	------	----------------

Udemy

01 - run 02 - scratch 03 - override 04 - busybox 07 - env 08 - ps 10 - start 09 - create 10 - create 11 - stopped 12 - logs 13 - stop kill 14 - signals 15 - kill +

docker Up next **stop**
20. Multi-Command Container



Cancel

How did this section go?

