


EXERCISE 1:

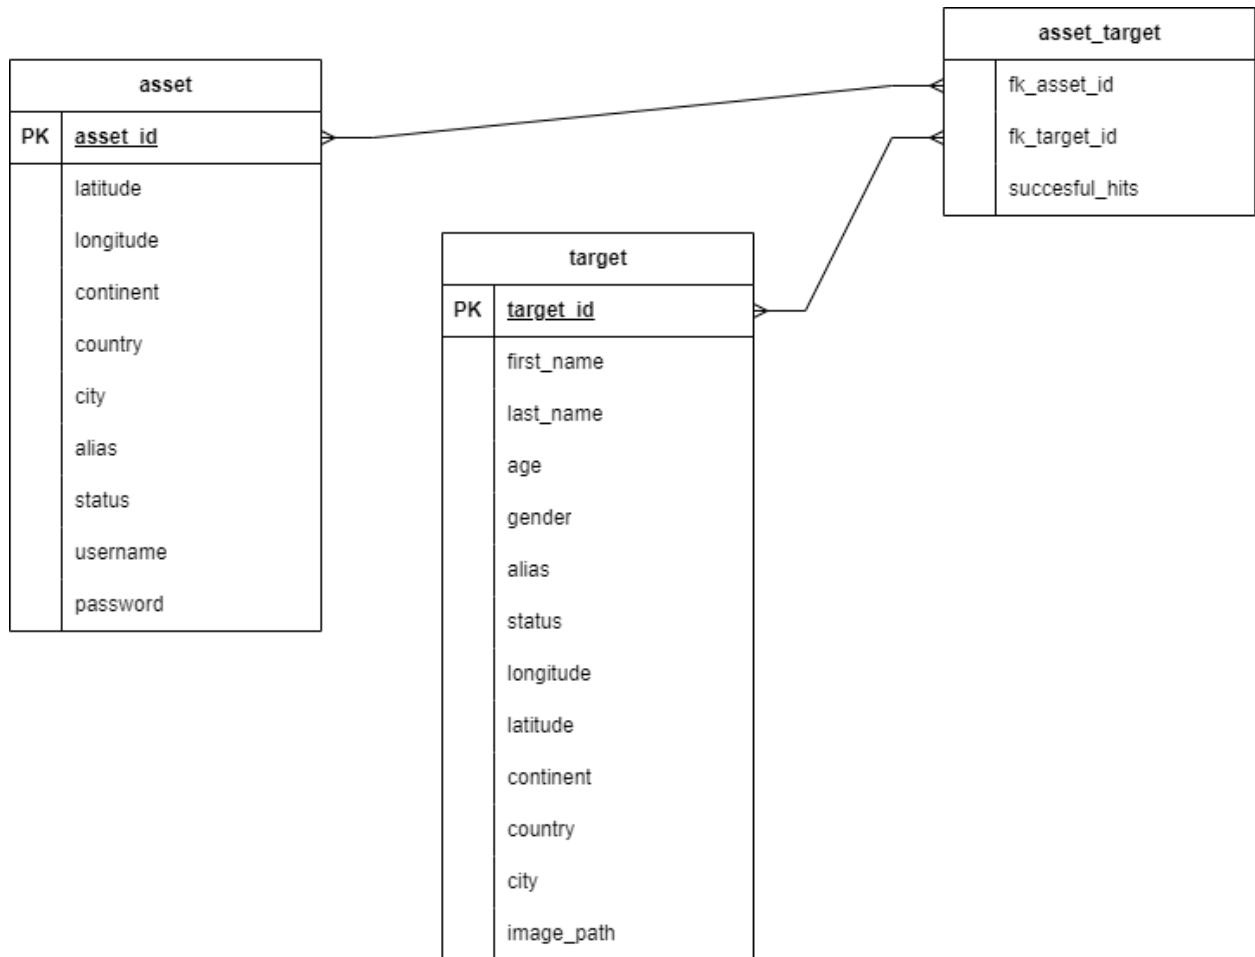

EXERCISE 2:

1.

```
SELECT * FROM `asset`;
```

2.

```
SELECT alias FROM `asset`;
```

3.

```
SELECT alias, SUM(successful_hits) AS Hits
FROM asset_target
INNER JOIN asset ON asset_target.asset_id = asset.asset_id
GROUP BY asset.alias
HAVING Hits > 0;
```

4.

```
SELECT CONCAT(first_name, ' ', last_name) AS full_name
FROM target
WHERE continent = 'Europe';
```

5.

```
UPDATE asset_target SET successful_hits = 1 WHERE target_id = 10 AND asset_id = 7;
UPDATE target
SET status = 'complete'
WHERE target_id = 10;
```

6.

```
SELECT CONCAT(target.first_name, ' ', target.last_name) AS full_name, target.continent
FROM asset_target
INNER JOIN target ON asset_target.target_id = target.target_id
WHERE asset_target.asset_id = 1 AND asset_target.successful_hits = 1;
```