



UNIVERSITY OF
CAMBRIDGE

Department of Computer
Science and Technology

Accelerating Molecular Generation through Representation Alignment

Shreyas Ravishankar

Hughes Hall

June 2026

Submitted in partial fulfillment of the requirements for the
Master of Philosophy in Advanced Computer Science

Total page count: 43

Main chapters (excluding front-matter, references and appendix): 29 pages (pp 7–35)

Main chapters word count: 8895

Methodology used to generate that word count:

```
$ make wordcount
gs -q -dSAFER -sDEVICE=txtwrite -o - \
    -dFirstPage=7 -dLastPage=36 report-draft.pdf | \
egrep '[A-Za-z]{3}' | wc -w
8895
```

Declaration

I, Shreyas Ravishankar of Hughes Hall, being a candidate for the Master of Philosophy in Advanced Computer Science, hereby declare that this report and the work described in it are my own work, unaided except as may be specified below, and that the report does not contain material that has already been used to any substantial extent for a comparable purpose. In preparation of this report, I adhered to the Department of Computer Science and Technology AI Policy. [The project required the approved use of {insert name of technology} and such use is acknowledged in the text at the relevant sections.] [I am content for my report to be made available to the students and staff of the University.]

Signed:

Date:

Abstract

Write a summary of the whole thing. Make sure it fits on one page.

Contents

1	Introduction	7
1.1	A history of trade-offs	7
1.2	Representation alignment	8
1.3	Contributions	9
2	Background and Related Work	10
2.1	Flow matching	10
2.2	Representation alignment	11
2.2.1	What makes for a good REPA encoder?	13
2.3	A primer on molecular generation	13
2.4	Tabasco and Proteina	14
2.4.1	Small molecules and Tabasco	15
2.4.2	Protein backbones and Proteina	15
2.5	Open questions	16
3	Evaluating molecular generation	17
4	Encoder targets and profiling	18
5	REPA on small molecules	19
6	REPA on protein backbones	20
6.1	Experimental setup	20
6.1.1	Datasets	20
6.1.2	Models	22
6.1.3	Metrics	23
6.1.4	Evaluation protocol	24
6.2	Results	26
6.2.1	REPA improves representation quality asymptotically	26
6.2.2	A diagnostic check on alignment	27
6.2.3	REPA accelerates generation, durably on synthetic data	28
6.2.4	REPA improves whole-model coverage but trades off designable diversity	30

6.2.5	REPA’s gains hold across sampler noise levels	32
6.2.6	What we do not claim	32
6.2.7	Robustness across scale	34
6.2.8	Summary	34
7	Conclusions	35
A	Technical details	41
A.1	Dataset composition and split overlap	41
A.2	Choice of CATH fold-probe level	41
A.3	Leakage-controlled probe evaluation	42
A.4	The ssJSD-2D secondary-structure metric	43
A.5	Placeholder section	43

Chapter 1

Introduction

The evolution of generative machine learning in scientific domains is defined by the shifting tensions between data scale, data quality, and structural priors. Our report examines a recent addition to this story, *representation alignment*, in two regimes for de novo molecular generation — small molecules and protein backbones — and characterises its behaviour. In this introduction, we trace the narrative arc of research trends in molecular generation, and highlight the motivation for our work: the emerging need for data-efficient modelling in a world of prior-light models.

1.1 A history of trade-offs

The dominant ideas in generative modelling are *denoising diffusion* and its offshoot *flow matching* [1, 2], which found breakthrough success in the realm of image generation. This paradigm has since been adapted for de novo design challenges across scientific fields, such as generating protein backbones [18, 19, 14], inorganic materials [21], and drug-like small molecules [15]. Training these models is typically expensive in both data and compute, with state-of-the-art image generators routinely training on billions of examples [32]. However, the corpus of available high-quality molecular data sits orders of magnitude below this. Experimental determination is slow and expensive, which means datasets are correspondingly small. For example, protein structure generators have largely been trained on at most half a million structures [14], which may explain why they have not yet matched the maturity of their vision-domain counterparts.

Historically, researchers compensated for the small scale of high-quality molecular data by encoding structural priors directly into model architectures [38]. SE(3)-equivariant architectures, for example, enforce the rotational and translational symmetries expected of molecules by construction [40]. But hard structural priors come with a computational cost, and the operations required to encode geometry are a bottleneck to scaling models. A recent wave of research has moved entirely the other way: drop hard priors, use bare-bones non-equivariant transformer stacks, and rely on data scale and augmentation to teach the model what equivariance buys. This shift fits a broader trend in machine

learning on leveraging representation instead of model architecture to inject soft inductive biases for structured data. Vision Transformers [41] showed that the spatial-locality and translation-equivariance priors of convolutional neural nets (CNNs) can be learned rather than imposed, given sufficient scale. Graph Transformers like TokenGT [42] have made the same case for graphs. AlphaFold 3 [44] stripped many of the SE(3)-equivariant biases of AlphaFold 2 [43], replacing the structure module with a diffusion model operating on raw coordinates. Brehmer et al. [45] make the empirical scaling case directly: more data through a simpler model beats less data through a richer one. In our work, we examine Tabasco [15] and Proteina [14], which are flow-based generators built on largely vanilla transformers for small molecules and protein backbones respectively.

Given the difficulty of procuring data in scientific domains, data scale must necessarily come from non-experimental sources, which may be of lower quality. For example, recent efforts in protein generation have leaned on synthetic structures from folding-model predictions [14, 34] to expand training datasets into the tens of millions. However, even these enhanced corpora are arguably insufficient. Metagenomic databases catalogue over two billion natural protein sequences [36], and the theoretical sequence space at a median protein length [37] is hundreds of orders of magnitude greater still. Even at the frontier of the field’s data scale, we sample but a sliver of the distribution we wish to model.

In summary, the field has traded hard structural priors for architectural simplicity, and curated data for synthetic scale. However, this trade-off dilutes the structural signal available to a model. Furthermore, even our best attempts at creating large datasets may not be large enough. These twin challenges amplify the need for techniques that make training still more efficient without sacrificing quality.

1.2 Representation alignment

But why is training diffusion-transformer architectures expensive in the first place? One answer comes from Yu et al. [5], who argue that these models suffer from a *representation bottleneck*. During training, a model is implicitly asked to learn two distinct tasks simultaneously: (1) representation: extracting semantically meaningful encodings from complex data; and (2) generation: constructing data from these encodings. The standard denoising objective alone may not provide sufficient signal for representation learning, leading to slow convergence and the large training budgets these models require in practice. In the context of molecular generation, this representation burden is compounded by the twin challenges outlined above. Models are now forced to encode complex structural geometry from datasets that only sparsely sample the true underlying distribution, all while operating without the aid of architectural priors.

Yu et al. propose Representation Alignment (REPA) as a remedy. The technique adds a regularisation term that aligns a generator’s intermediate hidden states with the embeddings of a frozen pretrained encoder. On image diffusion, they report roughly a 17.5×

training speed-up against a strong baseline to achieve similar generation quality. REPA has since been extended beyond images to video [9], audio [10], and recently to molecular generation [7, 8], where it has been demonstrated but not systematically characterised.

1.3 Contributions

In this light, the core question we investigate in this report is: *can prior-light molecular generation models benefit from representation alignment with pre-trained models, in training efficiency and generation quality?* We aim to characterise when and why this works, including failure modes and limitations.

We document two lines of enquiry.

- (i) *Does REPA work in the molecular domain?*: We conduct empirical studies on training flow-based generators with REPA in two regimes: Tabasco [15] for small molecules, and Proteina [14] for protein backbones. We find that REPA does not measurably improve Tabasco, but it improves training efficiency and advances the generation quality envelope for Proteina.
- (ii) *When does REPA work?*: Following Singh et al. [6] in the realm of image generation, we develop a profiling framework to characterise the suitability of an encoder as a representation target. We measure three properties of an encoder: (1) an upper bound on the structural information it contains (linear-probe recoverability against domain structural labels); (2) a lower bound on what a projector can transfer from that information (projector-based recoverability); (3) the geometric conditioning of its embeddings for the alignment objective (effective rank).

We do not propose a new architecture or alignment loss, and our two studies are not a controlled experiment over the conditions that govern REPA’s effectiveness. Instead, they are best read as paired case studies in regimes where those conditions differ.

The remainder of this report is organised as follows. Chapter 2 sets out the background and context needed to read the rest: flow matching, REPA, molecular generation. Chapter 3 discusses what it means for a generative model to be “good” in our domain, and the tensions that question hides. Chapter 4 develops the encoder-profiling framework and uses it to predict where REPA may and may not help. Chapters 5 and 6 present the two paired studies, small molecules first and protein backbones second. Finally, we conclude in Chapter 7 with a discussion of whether what we learn generalises beyond molecular generation.

Chapter 2

Background and Related Work

In this chapter, we introduce the machinery the rest of this thesis depends on. We outline flow matching (§2.1), the generative paradigm underlying the models we study, and representation alignment (§2.2), the regulariser that is our object of study. We then turn to the molecular setting. We situate generative models within the broader de novo molecular design pipeline (§2.3), before presenting the two molecular domains we work in, small molecules and protein backbones, and the flow-matching models we extend, Tabasco and Proteina (§2.4). The treatment is cursory by design. We intend only to guide the reader through this report, and we provide citations for omitted details.

2.1 Flow matching

At first glance, the term *generative modelling* implies the problem of *creating* new artefacts from scratch. However, it is perhaps more accurately described as the problem of *sampling* new artefacts from a complex data distribution that can only be accessed through a finite training set. A common strategy here is to fix a simple distribution we can sample from cheaply — typically standard Gaussian noise $p_0 = \mathcal{N}(0, I)$ — and learn a mapping from it to the desired data distribution p_1 .

Flow matching (FM) [2] realises this mapping as a continuous-time transport. The model designer defines a *probability path* between a noise sample and a data sample — a continuous interpolation between them — and the model learns to carry the noise sample along this path. Concretely, it parameterises a time-dependent *velocity field* $v_\theta(x, t)$ that gives the instantaneous direction of motion at each location x and time $t \in [0, 1]$. At inference, integrating the learned ordinary differential equation (ODE) $\dot{x}_t = v_\theta(x_t, t)$ from $t = 0$ to $t = 1$ pushes a fresh noise sample forward into a fresh data sample.

A common choice of probability path is the linear interpolant, $x_t = (1 - t)x_0 + tx_1$ for $x_0 \sim p_0$ and $x_1 \sim p_1$. The model’s target is the *marginal* velocity field at (x, t) : the average direction of motion over all noise-data pairs whose paths pass through that point. However, supervising this marginal directly is intractable, since the contributing pairs are not known in advance. Flow matching sidesteps this difficulty with a key observation [2]:

although the marginal field may be intractable, the *conditional* velocity along the path of any specific noise-data pair is relatively trivial. Indeed, for the linear interpolant, it is simply $\dot{x}_t = x_1 - x_0$. Regressing the model on these conditional velocities, averaged over many sampled pairs, recovers the marginal field in expectation, and gives the training loss as a mean-squared regression:

$$\mathcal{L}_{\text{FM}} = \mathbb{E}_{t, x_0, x_1} \|v_\theta(x_t, t) - (x_1 - x_0)\|^2.$$

In practice, every training step samples a time $t \in [0, 1]$ and a noise-data pair (x_0, x_1) , computes the interpolant x_t , and takes a gradient step on this squared error.

Flow matching with this linear interpolant generalises score-based diffusion: the variance-preserving Gaussian-path objective of denoising diffusion models [1] is a special case of the FM family [2, 4].

Generating samples from a trained flow-matching model amounts to integrating the learned velocity field. This is often performed with a standard ODE solver, with Euler steps usually sufficing for stable trajectories. The field also admits stochastic sampling variants — such as those drawing on the connection to score-based stochastic differential equations (SDEs) — which inject noise during the integration steps to explore the probability space and improve sample diversity. The models we work with in this report, Tabasco and Proteina, support both deterministic and stochastic samplers.

Conditional generation augments v_θ with context tokens — such as a class label, a sequence length, or a structural motif — with conditioning supplied at both training and sampling time. In this report, we focus on unconditional generation only.

For a more complete treatment of flow matching, we refer the reader to Lipman et al. [2] for the original presentation, and to the recent Lipman et al. guide [4].

2.2 Representation alignment

Chapter 1 introduced the argument made by Yu et al. [5] about the *representation bottleneck* in diffusion-transformer models. Their analysis applies to flow-matching models as well, given the equivalence between the two objectives discussed above (§2.1). The flow-matching objective implicitly asks a model to learn two things at once: a useful representation of the data, and a velocity field that interprets this representation. This twin burden, they argue, leads to slow convergence and large training budgets.

Their proposed solution, Representation Alignment (REPA), addresses the first half of this burden by adding a regularisation term to the training loss. Figure 2.1 shows the construction. The regularisation pulls z_ℓ , the generator’s intermediate hidden state at a chosen *alignment layer* ℓ , towards the embeddings produced by a frozen pretrained encoder f_{enc} run on the clean data sample x_1 . The hidden state z_ℓ is a sequence of N token vectors. In the context of images, each token represents an image patch; in the molecular

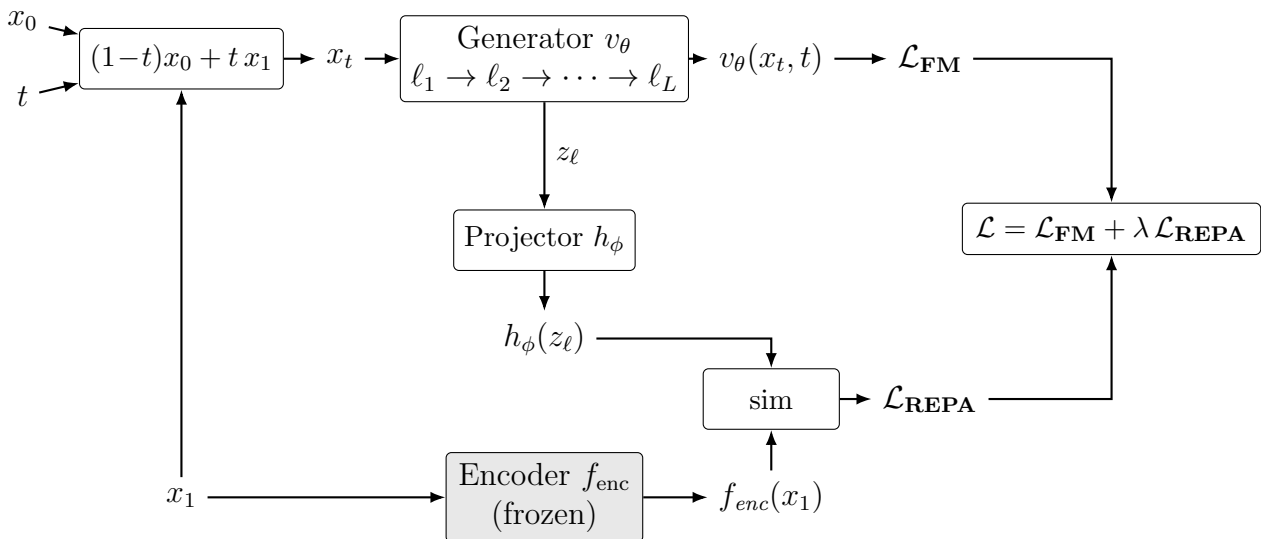


Figure 2.1: The REPA construction. A noised sample $x_t = (1-t)x_0 + tx_1$ is constructed at each training step from a noise sample x_0 , a clean data sample x_1 , and a sampled timestep $t \in [0, 1]$. The generator v_θ processes x_t through its sequence of layers $\ell_1, \dots, \ell_L$ to produce the velocity field that feeds the flow-matching loss $\mathcal{L}_{\text{FM}}$. Separately, the clean sample x_1 is also passed through a frozen pretrained encoder f_{enc} (shaded). The generator’s hidden state z_ℓ at the chosen alignment layer is mapped into the encoder’s feature space by a trainable projector h_ϕ ; the REPA loss $\mathcal{L}_{\text{REPA}}$ is the negated similarity between $h_\phi(z_\ell)$ and $f_{\text{enc}}(x_1)$, averaged across tokens. The total training loss $\mathcal{L}$ combines them with weight λ .

setting, each token represents an atom or residue that is part of the larger molecule (§2.3). A small trainable *projector head* h_ϕ — a three-layer multi-layer perceptron (MLP) in the original paper — maps z_ℓ into the encoder’s feature space, so that $h_\phi(z_\ell)$ and $f_{\text{enc}}(x_1)$ can be compared. This alignment is asymmetric. The encoder provides a fixed target throughout training, while the generator parameters θ and the projector ϕ are updated. The alignment loss is the negated similarity, averaged token-wise, between projected and target embeddings:

$$\mathcal{L}_{\text{REPA}} = -\mathbb{E}_{t, x_0, x_1} \left[\frac{1}{N} \sum_{n=1}^N \text{sim}(h_\phi(z_\ell)_n, f_{\text{enc}}(x_1)_n) \right],$$

where n indexes the N tokens within a sample. In the image setting, N is constant across the dataset, so this token-wise average is equivalent to averaging similarities once per sample and then across the batch. Indeed, the original paper draws no distinction between the two. For molecular data, where N varies per sample, the two diverge. We return to this distinction in the design knobs below.

The final training objective is the flow-matching loss from §2.1 plus this term, scaled by a weight λ :

$$\mathcal{L} = \mathcal{L}_{\text{FM}} + \lambda \mathcal{L}_{\text{REPA}}.$$

This construction exposes several design choices, some of whose effects we revisit in the ablations of Chapter 6:

- The choice of encoder f_{enc} . Different encoders may capture distinct aspects of the data distribution.
- The alignment layer ℓ at which we attach the projector. Yu et al. experimentally determined that mid-network layers work best for image diffusion, but the optimal choice is not obvious a priori.
- The alignment-loss weight λ , which balances the alignment signal against the generative objective. Once again, Yu et al. experimentally determined an optimal value of 0.5 for image diffusion, but this may not hold universally.
- The choice of similarity metric sim . Yu et al. compared cosine similarity and mean-squared error for image diffusion, and found the former more effective. We adopt cosine similarity in this report as well.
- The averaging mode. Averaging tokens within each sample first weights every molecule equally, while pooling tokens across the batch gives larger molecules proportionally more REPA signal.

We adopt the core REPA construction as in Yu et al. for this report. However, a small family of methodological variants on REPA has since emerged. Dispersive regularisers [12] replace the external encoder with an internal contrastive term, while flexible-target formulations [7] broaden which encoder features the loss attaches to. Separately, REPA-style alignment has been applied beyond the image setting, to video [9], audio [10], materials [11], and molecules [8]. We defer exploration of these variants to future work.

2.2.1 What makes for a good REPA encoder?

There are many possible choices for the encoder f_{enc} in any REPA construction, and this selection is a key design decision. But what characteristics make for a good alignment target? In their original report, Yu et al. [5] observed that ImageNet linear-probe accuracy correlates positively with generation performance, suggesting that global semantic representation is the driving factor. However, more recent work by Singh et al. [6] reports the opposite after profiling a wider range of encoders. Linear-probe accuracy does not in fact predict REPA gain, they argue, while a measure of the spatial structure of patch-token representations does. This suggests that generation performance for REPA may be driven by *local* feature geometry, rather than *global* semantic strength. Encoder characterisation for REPA remains an open research question, particularly in the molecular generation setting, and we pick up the thread in Chapter 4.

2.3 A primer on molecular generation

Having outlined the modelling paradigms driving our report, we now turn to the molecular setting in which we apply them. To situate our work, we begin with a brief primer on the role generative models play within the broader de novo molecular design pipeline.

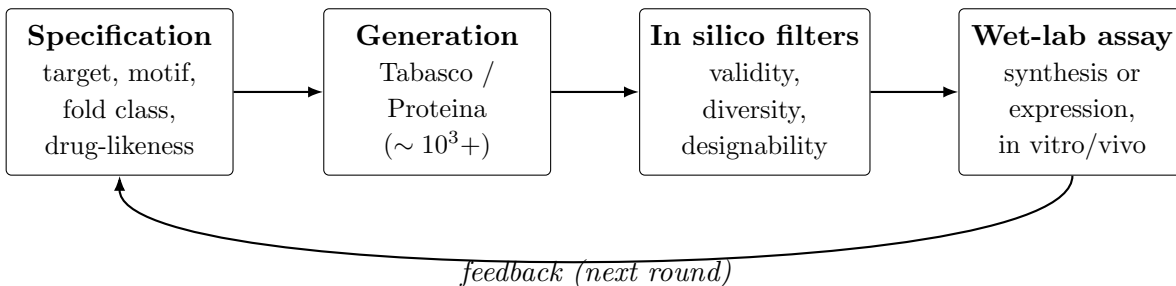


Figure 2.2: The de novo molecular design cycle. An upstream specification drives a generative model to produce a candidate pool, which is funnelled through in silico filters and then synthesised (or expressed) and assayed in the wet lab. Experimental results feed back into the next round of generation. Typical generation-step pool sizes are in the thousands to tens of thousands of candidates per round [18].

Generative models are rarely intended to produce ready-to-use artefacts. Instead, they act as high-throughput in silico proposal engines in an iterative process of refinement and selection. This process, often called a *design campaign* [53], is summarised in Figure 2.2.

An upstream specification, such as a drug-likeness profile or a fold class, conditions a generative model to produce a pool of candidate samples. These pools typically comprise thousands to tens of thousands of candidates per round [18], which are then funnelled through in silico filters. For small molecules, these typically include checks for structural validity and physical plausibility [54], drug-likeness [55], and target docking; for protein backbones, designability and structural diversity are the dominant considerations [14]. The select few survivors are produced in a laboratory, through chemical synthesis (small molecules) or expression in cell lines (proteins), and evaluated using in vitro or in vivo assays. Experimental results then feed back into the next round of generation.

This pipeline framing is relevant to our discussion of evaluation metrics in Chapter 3. Several metrics we adopt, such as structural validity and designability, are not measures of intrinsic molecular quality, but proxies for specific in silico filter steps.

2.4 Tabasco and Proteina

The two models we study — Tabasco [15] for small molecules and Proteina [14] for protein backbones — are both non-equivariant transformer flow-matching generators. They are explicitly designed to scale with data and model size, rather than relying on structural priors imposed by model architecture. The rotational and translational symmetries expected of 3D molecules are intended to be learned from data and augmentation rather than imposed by construction.

Tabasco is motivated by the success of similar architectures in protein-structure generation, like Proteina, setting it apart from equivariant message-passing small-molecule generators such as EQGAT-diff [48], MiDi [49], and SemlaFlow [50]. In turn, Proteina is motivated by the pair-bias attention mechanism introduced in AlphaFold 3 [44], which

distinguishes it from SE(3)-equivariant backbone generators such as RFdiffusion [18], FrameFlow [46], and Genie [47]. Despite their architectural minimalism, both achieve performance comparable or superior to equivariant baselines on structural-quality evaluations.

2.4.1 Small molecules and Tabasco

In medicinal chemistry, a *small molecule* is a drug-like compound at the sub-900-Dalton scale [51]. In silico, its structure is typically represented using two coupled features: a discrete *molecular graph* of typed atoms connected by typed bonds, and a continuous *conformer* placing those atoms in 3D Cartesian space. A flow-matching parameterisation must therefore handle both jointly.

Tabasco [15] represents each molecule as a sequence of per-atom tokens, each carrying an atom-type embedding and a 3D coordinate, but with no explicit bond decoder. This treats the molecule as a point cloud of typed atoms rather than a graph, sidestepping edge modelling at the cost of having to recover bond structure post hoc from interatomic distances. Tabasco is trained on GEOM-drugs [35], a public dataset of drug-like conformers.

This point-cloud-of-atoms parameterisation is one of several options in the literature, and each makes a different trade-off. *SMILES* and *SELFIES* are string encodings that work well with autoregressive models but discard the 3D conformer entirely; we encounter them later as the parameterisation employed by some candidate encoders we evaluate in Chapter 4. *3D voxel grids* preserve geometry, but lose the discrete graph and inflate the token count by an order of magnitude or more. *Equivariant point clouds*, used by generators such as EQGAT-diff [48], MiDi [49], and SemlaFlow [50], keep both graph and geometry, but pay the computational cost associated with SE(3)-equivariant layers. We refer the reader to Duval et al. [39] and Wang et al. [22] for broader surveys in this space.

2.4.2 Protein backbones and Proteina

A *protein* is a chain of amino-acid residues, ranging from around 50 to several thousands in length [52]; the largest known, titin, has approximately 34,000 residues. (Shorter chains are typically classified as *peptides* instead.) Each amino-acid residue contributes four *backbone* atoms (N, C_α, C, O) whose interactions determine the chain’s *fold* geometry, and a *side chain* that determines its amino-acid identity.

A protein’s *secondary structure* is its local pattern of α -helices and β -strands; its *tertiary structure* is the global three-dimensional fold those elements form when they pack together. A CATH code [58] (Class, Architecture, Topology, Homology) classifies this fold hierarchically. *Class* captures broad secondary-structure content (mostly- α , mostly- β , or mixed), *Architecture* the gross spatial arrangement of those elements, and *Topology* their specific connectivity.

For the structure-generation problem we study, it is customary to only model the back-

bone, with sequence identity recovered downstream using a separate *inverse-folding* model such as ProteinMPNN [24]. A further compression is the *CA-trace*, which uses only the set of C_α coordinates for every residue to represent the entire protein. This parameterisation retains enough information to recover fold topology and reduces computational cost relative to the more complete representation, which is typically referred to as *all-atom* modelling. Proteina [14] adopts this C_α parameterisation, representing each backbone as a sequence of per-residue tokens carrying continuous C_α Cartesian coordinates. The models reported in the original presentation are largely trained on high-confidence synthetic structures from the AlphaFold Database (AFDB) [34].

Once again, the CA-trace parameterisation is one of several techniques used in the literature to parameterise proteins *in silico*. *Sequence-only* models, such as the ESM lineage [23], operate on amino-acid identity strings. These models capture rich functional priors, but encode far less information on 3D structure. *Full-atom* representations close the gap to physical realism, but add substantial compute cost. *Equivariant* parameterisations, such as torsion angles and oriented residue frames, encode SE(3) symmetries by construction, and form the standard basis for the equivariant generators noted above. However, these architectures have historically bottlenecked scaling. We refer the reader to Notin et al. [56] for a broader survey of machine-learning approaches to protein design.

2.5 Open questions

This survey leaves two questions open that the rest of this report takes on:

- (i) *Does REPA work in the molecular domain?* Existing applications of REPA in molecular generation [7, 8] have not been ablated over encoder choice, and protein backbone generation in particular remains unexplored.
- (ii) *When does REPA work?* The encoder-characterisation work surveyed in §2.2.1 has begun to ask which properties of an encoder predict REPA gain, but only within the image setting. We extend this question to the molecular domain.

We take both questions up empirically in Chapters 4–6.

Chapter 3

Evaluating molecular generation

Chapter 4

Encoder targets and profiling

Chapter 5

REPA on small molecules

Chapter 6

REPA on protein backbones

In this chapter, we expand the scope of our study on representation alignment from small molecules to much larger ones: proteins. Previously (Chapter 5), our efforts using REPA to generate small molecules yielded little demonstrable improvement, largely because the Tabasco [15] baseline was already saturated on most measures of generation quality. However, de novo backbone design represents a more challenging task, as the data distribution of proteins is significantly larger, and the geometry of these structures is correspondingly more complex. In this context, we ask: *can REPA accelerate or improve the training of Proteina [14], a flow-matching transformer-based protein backbone generator?*

Our headline finding is that REPA accelerates convergence on the two key measures of protein generation quality. This holds across both experimental and synthetic training-data regimes (Figure 6.1). This chapter characterises *what* happens and attempts to understand *why*. We also pick up the thread from Chapter 3 on how the molecular domain differs from the image domain REPA was built for, and develop a theme throughout: REPA here is a *family* of interventions rather than a single mechanism.

6.1 Experimental setup

We integrate REPA into Proteina [14], a 60M-parameter non-equivariant flow-matching generator of C α protein backbones. Following §2.2, we attach a trainable projector at a chosen layer of the generator trunk (the transformer stack) that aligns the model’s hidden states to a frozen external encoder.

6.1.1 Datasets

We train in two regimes that span the field’s experimental–synthetic spectrum: the experimentally-determined Protein Data Bank [33], and the AlphaFold-predicted AlphaFold Database [34] (Swiss-Prot subset). (We use the manually-curated Swiss-Prot subset of AFDB as a reproducible stand-in for the Foldseek-clustered TrEMBL subset on which Proteina was trained in the original presentation [14]. This corpus contained data that has since been pruned from AFDB, and is hence inaccessible.)

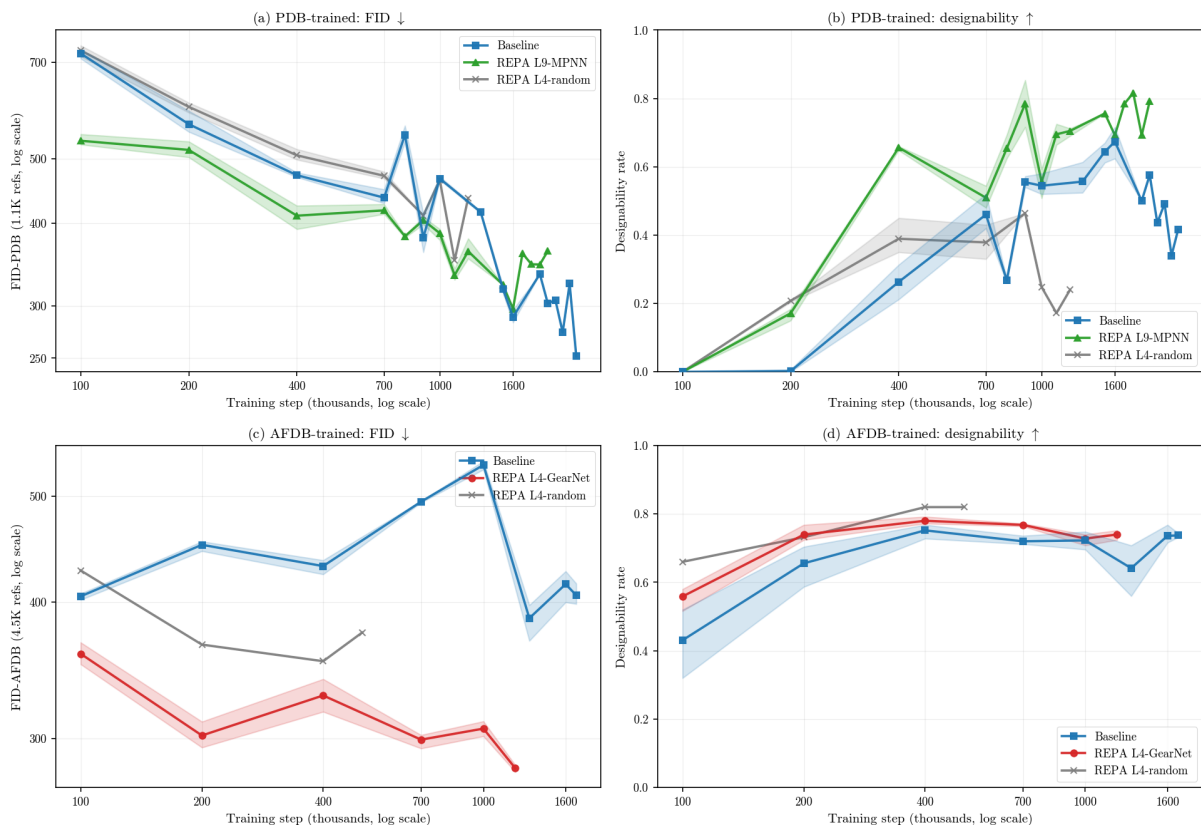


Figure 6.1: **REPA accelerates both FID and designability, in both PDB (experimental) and AFDB (synthetic) data regimes.** The random-encoder control (grey) helps distinguish gains induced by regularisation alone from those induced mechanistically by an encoder’s learned structure. While PDB retains a persistent designability gap, its baseline appears to catch up on FID after $\approx 1\text{M}$ steps; we examine this in §6.2.3. ($n \leq 256$ models, 3 seeds; shaded bands show min/max.)

Following Proteina [14], we train on the subset of chains with at most 256 residues; we represent this length-regime by $n \leq 256$. (We note that this represents only a property of the training datasets, not a bound on the length of the proteins that models trained on these datasets can generate.) Following this filter, the two training sets are comparable in size (PDB: 273,771 / 3,190 / 323 train/val/test chains; AFDB: 229,670 / 4,521 / 235). Appendix A (Table A.1) contains further details on dataset composition.

Different datasets in this domain carry different biases. Trends in designability offer a clear example, as training on AFDB raises the in-silico-designability floor well above PDB at every setting we tested (§6.2.3). The likely cause is circular. The canonical designability test inverse-folds a generated backbone with ProteinMPNN [24] and re-folds it with ESMFold [23] (Chapter 3). Both of these models share their lineage with the AlphaFold2 [43] network that produced AFDB in the first place, so AlphaFold-like backbones are plausibly the ones it re-folds most confidently. We do not test this mechanism, but flag the observation so metrics are read with care.

Property	Value
<i>Base architecture</i>	
Backbone (<i>trunk</i>)	Proteina (CAFlow): 60M-param, 10-layer non-equivariant C α transformer (token dim 512, 8 heads)
<i>REPA alignment</i>	
Encoder targets	GearNet (512-d) $\cdot$ ProteinMPNN (128-d) $\cdot$ random-GearNet (control)
Injection depth ℓ	layer 4 (middle) $\cdot$ layer 9 (last)
Projector	3-layer MLP, hidden dim 512
Similarity metric sim	cosine similarity
Averaging mode	per residue
Alignment weight λ	0.5
<i>Training & sampling</i>	
Learning rate	10^{-3}
Batch size	24 ($n \leq 256$)
Weight decay	none
Sampler	SDE, noise scale $\gamma = 0.45$

Table 6.1: Model and training configuration. This chapter presents two encoder targets and two injection depths. Other ablations are deferred to Appendix A.

6.1.2 Models

The base Proteina model comprises a stack of ten transformer layers (zero-indexed) that feeds a flow matching objective. Our experiments add a REPA loss to this design, as outlined in Table 6.1.

Encoder and injection-depth ablations. Our narrative concentrates on the two encoders identified as most viable in Chapter 4: *GearNet* [25], a structure encoder pre-trained for CATH fold classification (checkpoint released with Proteina [14]); and *ProteinMPNN* [24], which encodes each residue’s local inverse-folding environment. Each encoder is attached to the trunk in two layer-depth configurations: layer 4 (middle layer) and layer 9 (last layer). The remaining encoder and depth combinations are collected in Appendix A. Figures presented in this chapter will typically follow the best performing model to serve as an illustrative example.

Separating regularisation from mechanism. A random-weights GearNet attached at layer 4, identical in architecture but never trained, serves as a control architecture in this chapter. We use this model to separate whatever REPA achieves merely due to the regularisation effect of adding an auxiliary loss from what it achieves through the encoder’s *learned* structural knowledge. Crucially, a trained encoder at the same layer 4 still outperforms the random one, so the learned-versus-random gap is not an artefact of injection depth (Appendix A).

Hyperparameters. Our defaults largely follow the original image-domain REPA recipe [5].

6.1.3 Metrics

The original hypothesis that motivated REPA for imaging [5] was that alleviating a *representation* bottleneck would improve *generation* quality. We seek to understand if the same mechanism applies in the molecular domain as well. Hence, along with estimating the quality of a model’s generated samples, we are also interested in what the model comes to *represent* internally. To this end, we measure three families of metrics, as outlined below: representation quality, representation alignment, and generation quality (Table 6.2).

Representation quality asks what domain-specific information is *linearly decodable* from the trunk’s hidden states, following the probe principle of §3. We adapt three probing tasks from the literature, spanning three levels of abstraction:

1. *per-residue inverse-folding (IF) sequence recovery* [27], to understand whether the representation recovers the local chemical environment;
2. *per-residue backbone dihedral angle error* [26], to understand whether it encodes low-level geometry; and
3. *per-chain CATH fold classification* [26], to understand whether mean-pooled residue representations carry information about global fold structure (the CATH hierarchy is defined in §2.4.2). We headline on architecture (CATH-A), as Class offers arguably too easy a discrimination task given top-1 saturation, and Topology offers too many buckets and too few data points for a meaningful evaluation. However, we report all three levels for completeness, noting that the patterns we observe hold true across them, and motivate our choices in Appendix A (Table A.2).

We note that these three tasks probe largely independent capabilities. Local sequence, local geometry, and global fold are orthogonal to one another, so even a model that is optimised for one may not perform well on the others. Hence, improving performance on all three at once is strong evidence of holistic representation quality.

Representation alignment asks how close one model’s representations are to those produced by another — here, the trunk versus a structural encoder. We measure it with CKNNA [59], a mutual-nearest-neighbour kernel alignment between two representations, as used in the original REPA analysis [5] and a recent molecular extension [8]. We use alignment as a diagnostic — a mechanistic lens on *how* REPA might produce its representation gains — rather than a quantity we optimise or build claims on.

Generation quality is what ultimately matters, and we report it in the five groups of Chapter 3: per-sample quality, tertiary structure over the whole set and the designable subset (T-W, T-D), and secondary structure over the same two (S-W, S-D).

A second axis cuts across these groups and recurs through the chapter. *Fidelity* metrics ask how closely the generated distribution matches a reference: FID, the fold Jensen–Shannon divergence (fJSD), and our secondary-structure divergence (ssJSD-2D). *Diversity* metrics ask how widely the generated set spreads: the fold score (fS), pairwise TM-score,

and cluster count. Most of these follow the original presentation in Proteina [14], which introduced distributional (FID-style) metrics to the protein-generation literature.

Building on these, we introduce a new metric, ssJSD-2D, which compares the full (helix-fraction, strand-fraction) secondary-structure distribution between a set of proteins and a reference dataset. A fuller description is given in Appendix A.4. As we will explore in §6.2.4, REPA improves fidelity and whole-set diversity together, but may trade off tertiary-structure diversity *within* the designable subset.

6.1.4 Evaluation protocol

Representation probing. To measure the representation quality of a frozen model checkpoint, we fit linear probes to the hidden states it generates for a batch of clean inputs ($t=1$). The inverse-folding and dihedral probes are per-residue (a linear classifier and a linear regressor); the CATH probe is a per-chain logistic regression on mean-pooled representations. The classification probes (inverse folding and CATH) are scored as top-1 accuracy. IF is a 20-way problem, while CATH-A is a ~ 40 -way problem. The dihedral probe reports mean absolute angular error.

Each probe is fit on 5,000 training chains. We evaluate the per-residue probes (inverse folding and dihedral) on a *blinded* set of ~ 325 proteins (~ 43 k residues) held to under 30% sequence identity to all training data, which removes both model- and probe-side leakage. The per-chain CATH probe needs many distinct chains spread across fold classes, which that small slice cannot supply, so we relax it to a *probe-clean* evaluation on a larger validation set of $\sim 3,190$ chains. We detail this scheme, and the model/probe leakage distinction it controls for, in Appendix A.3, and read rank-order and Δ -from-baseline throughout this chapter.

Representation alignment. To measure how close the trunk’s geometry is to an encoder’s, we compute CKNN [59] between each trunk layer’s hidden states (clean inputs, $t=1$) and the frozen embeddings of GearNet, ProteinMPNN, and ESM2 [23], on a fixed held-out batch. CKNN restricts an unbiased kernel-alignment estimator to the intersection of each side’s $k=10$ mutual nearest neighbours. It therefore scores agreement of *local* neighbourhood structure rather than global geometry. It is normalised so that self-alignment is 1 and alignment to random features is ≈ 0 . We compute it at two granularities — per-residue (10,000 residues) and per-protein (3,000 mean-pooled chains) — and bracket each value with a subsample-without-replacement bootstrap (50 draws at 80% of the sample; with-replacement inflates the metric through duplicate nearest-neighbour pairs). One reading note carries through the alignment results: absolute CKNN is small throughout — an order of magnitude below the values reported for image-domain REPA [5] — so we read the *direction and layer structure* of the effect, and its separation from the baseline, rather than its raw magnitude.

Generation sampling. Our generation evaluation follows the Proteina protocol [14], at a reduced sample budget.

Metric	Definition	Content	Granularity
Representation quality			
IF top-1 $\uparrow$	Inverse-folding sequence recovery (top-1 accuracy)	Semantic content	Per residue
Dihedral MAE $\downarrow$	Backbone dihedral-angle error	Low-level geometry	Per residue
CATH-A top-1 $\uparrow$	Fold-architecture classification top-1 accuracy (Table A.2)	Fold-level structure	Per chain
Representation alignment			
CKNNA $\uparrow$ [59]	Mutual-nearest-neighbour kernel alignment	Trunk–encoder similarity	Per residue
Generation quality (Chapter 3)			
<i>Quality</i>			
Des $\uparrow$	Fraction of samples that are designable	Physical realisability	Whole set
FID $\downarrow$	Frchet distance to the reference set (GearNet features)	Distributional fidelity	Whole set
<i>Tertiary structure — whole set (T-W)</i>			
fJSD-A $\downarrow$	Jensen–Shannon divergence vs. reference CATH-A distribution	Fold-distribution fidelity	Whole set
fS-A $\uparrow$	Spread of generated folds across CATH-architecture classes	Whole-set fold diversity	Whole set
pwTM $\downarrow$	Mean pairwise TM-score	Structural diversity	Whole set
<i>Tertiary structure — designable subset (T-D)</i>			
#Clust $\uparrow$	Number of TM ≥ 0.5 structural clusters	Designable diversity	Designable subset
pwTM $\downarrow$	Mean pairwise TM-score, designable subset	Designable diversity	Designable subset
<i>Secondary structure — whole set (S-W)</i>			
ssJSD-2D $\downarrow$	Jensen–Shannon divergence of the (helix-frac, strand-frac) distribution	Secondary-structure fidelity	Whole set
<i>Secondary structure — designable subset (S-D)</i>			
ssJSD-2D $\downarrow$	As above, on the designable subset	SS fidelity (designable)	Designable subset
E%des $\uparrow$	Mean β -strand (E) fraction	β -content	Designable subset

Table 6.2: The three measurement families used in this chapter: representation quality, representation alignment, and generation quality (five reported groups). The whole set is all generated backbones; the designable subset is those passing the designability filter. Arrows give the good direction. Full per-metric results appear in Tables 6.5–6.7.

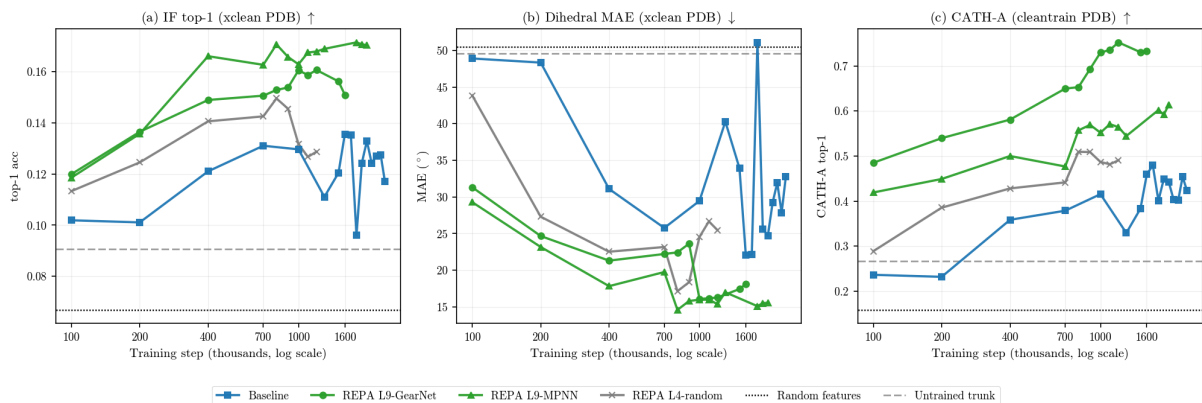


Figure 6.2: **REPA offers a mechanistic effect that lifts the trunk’s representation quality asymptotically.** REPA variants open a quality gap over baseline that never closes. The random control gains least, evidence that a trained encoder contributes a genuine mechanistic effect rather than mere regularisation from the auxiliary loss. ($n \leq 256$, PDB-trained; best-layer linear probes; per-residue probes on a blinded cross-database slice, CATH on a probe-clean split. See Appendix A.3 for further details and ablations.)

For whole-set evaluations, we sample 1,125 backbones per checkpoint — 125 at each length in $\{50, 75, \dots, 250\}$ — and compute metrics over all of them. Depending on the training regime, we use matching PDB or AFDB reference statistics.

For designability evaluations, 50 backbones at each length $\{50, 100, 150, 200, 250\}$ are inverse-folded with ProteinMPNN (8 sequences each), re-folded with ESMFold, and called designable when the self-consistency RMSD is below $2 \text{ \AA}$. The designable-subset metrics (T-D, S-D) are then computed on the backbones that pass.

With this experimental testbed in place, the rest of the chapter investigates what the REPA construction changes with respect to baseline, and how that helps improve generation quality. We now turn to the results.

6.2 Results

6.2.1 REPA improves representation quality asymptotically

At baseline, the flow-matching objective helps the model encode some **useful representational information**. We probe our models along the three orthogonal axes of §6.1.3 — local chemical environment (inverse folding), local geometry (backbone dihedrals), and global fold (CATH classification, with CATH-A as our headline metric; Figure 6.2). The trained baseline consistently does better than both random features and an untrained ProteinA trunk. This suggests that the flow-matching objective does indeed learn to *represent* protein backbones as it learns to *generate* them.

However, REPA improves representational capacity, consistently and permanently. Every REPA variant lifts all three probes substantially above the baseline from the very beginning of training, and the difference persists. This is an asymptotic gap,

	IF top-1 $\uparrow$	dihedral MAE ($^{\circ}$) $\downarrow$	CATH top-1 acc. $\uparrow$		
			C	A	T
Baseline	0.130	27.6	0.717	0.397	0.303
REPA L4-random	+0.007	−5.1	+0.101	+0.089	+0.060
REPA L9-GN	+0.026	−8.1	+0.171	+0.305	+0.449
REPA L9-MPNN	+0.036	−11.4	+0.120	+0.151	+0.172

Table 6.3: **REPA offers persistent and encoder-routed representation advantages.** Best-layer linear-probe performance, averaged over the 700K–1.2M training-step window common to all variants. REPA-GearNet wins the fold probes (CATH C/A/T), while REPA-MPNN wins the per-residue probes (IF, dihedral), and the random control gains least — consistent with what each encoder was trained for. We headline on CATH-A and report Class and Topology for completeness. ($n \leq 256$ PDB; Δ from baseline; green = improvement, darker = best per probe.)

not just a head start or an accelerated convergence pattern. This gap confirms one of the hypotheses posited in the original REPA presentation [5]: an alignment target during training can fill the representational headroom left by the flow-matching objective.

Every encoder routes representation gain differently. REPA-GearNet consistently wins the fold probes, while REPA-MPNN wins the per-residue probes (Table 6.3). This pattern follows what we would expect a priori, given the tasks that each encoder has been specifically trained for. This ties into our emerging theme on the multi-factorial nature of representation learning in the molecular domain (Chapter 3). No single encoder captures every factor, so the choice of alignment target is also a choice over the representational factor a model designer wishes to emphasise. We establish this routing on PDB-trained models and report the AFDB results in Appendix A.

REPA offers a mechanistic effect beyond just regularisation. Our random-weights control also improves on the baseline across all probes. This may be because *any* regularisation generically improves the model’s representation capacity, or because even an untrained message-passing network imposes geometric priors that aid the trunk. Nevertheless, trained encoders consistently offer more, suggesting a genuine mechanistic effect.

6.2.2 A diagnostic check on alignment

Following Yu et al. [5] and recent in-domain work [8], we investigate the mechanism that may be driving REPA’s representation quality gains by quantifying the representation alignment it induces. Using CKNNA [59], we score how closely our models’ per-residue geometry matches that of three domain-specific encoders: GearNet and ProteinMPNN, our two alignment targets in this chapter; and ESM2 [23], which we align to only in our ablations, not in the models presented here. We note that we study alignment only as a diagnostic, and not to make claims about REPA’s utility.

REPA lifts alignment above the random floor, albeit at low magnitude. The baseline sits at the random floor at every layer (CKNNA ≈ 0), while REPA separates from

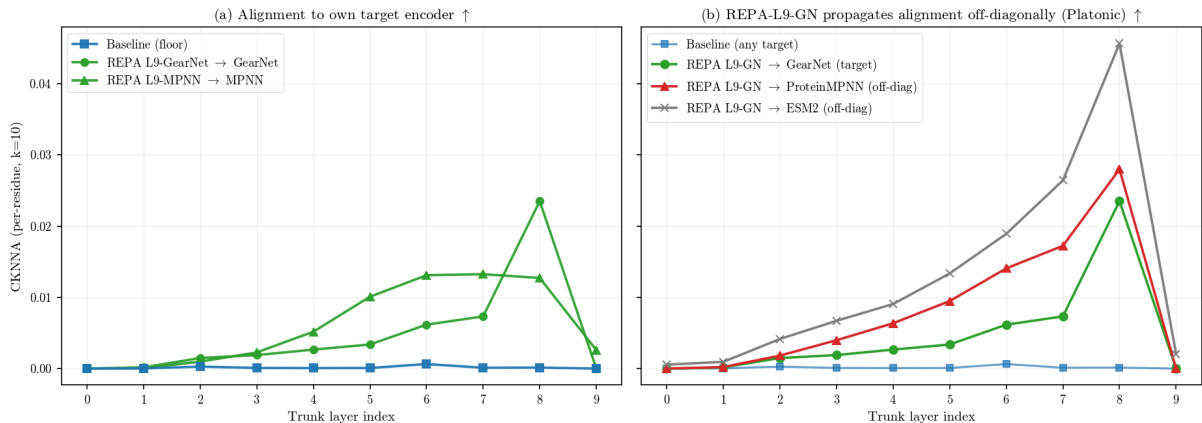


Figure 6.3: **REPA aligns the trunk toward structural encoders — including ones it never trained against (Platonic convergence).** (a) Each REPA variant lifts per-residue alignment to its own target encoder above the baseline floor (CKNNA ≈ 0); magnitudes to different target encoders are not directly comparable. (b) A GearNet-aligned trunk also moves toward ProteinMPNN and ESM2, encoders it was never aligned to. Absolute alignment is small throughout (peak ≈ 0.02 – 0.05 against 1 for self-alignment), so we read the pattern, not its magnitude; the per-protein signal is far weaker, and we claim no chain-level benefit. ($n \leq 256$ PDB, step 1M, $t=1.0$; per-residue CKNNA, $k=10$.)

it cleanly, suggesting that its hidden states do move towards the encoder’s (Figure 6.3a). This serves as a minimal check that the construction does something. However, the magnitude of this signal is small. Peak per-residue CKNNA is ≈ 0.02 – 0.05 , on a scale where self-alignment is 1. We therefore read the pattern, not its size, and stake no strong claim on these numbers. We also note that the effect is confined to per-residue geometry; the per-protein signal is far weaker (peak ≈ 0.01), so we claim no chain-level benefit.

Aligning to one encoder nudges the trunk toward other encoders in this domain. Every REPA variant we tested raises alignment to all three encoders, including those it was not aligned to (full model $\times$ encoder matrix in Appendix A). A GearNet-aligned trunk, for example, also moves closer to ProteinMPNN and ESM2 [23] (Figure 6.3b), suggesting that REPA-induced alignment is not merely circular self-alignment. One possible explanation for this phenomenon is the *Platonic representation hypothesis* [59]. This idea suggests models trained on related data converge toward a shared representation. In this framework, REPA may be nudging the trunk toward a common structural representation that several encoders approximate, rather than toward any single encoder. We offer this only as a possible interpretation, not as a claim.

6.2.3 REPA accelerates generation, durably on synthetic data

On synthetic data the acceleration is large and permanent. REPA-GearNet reaches the AFDB baseline’s best-ever FID 6.5– $13\times$ earlier and keeps improving past it (Table 6.4); the baseline floors at 386 and never closes the gap. *One caveat:* AFDB’s designability edge is partly a proxy artefact — the ProteinMPNN $\rightarrow$ ESMFold round-trip shares lineage with the AlphaFold2 that built AFDB (§6.2.6) — but the FID, distribution-

Dataset	Metric	Variant	Baseline best	REPA reaches @	Speedup	REPA’s own best
<i>FID acceleration — durable on AFDB:</i>						
AFDB	FID-AFDB	L4-GN	386 @1.3M	100K	13.0×	282
AFDB	FID-AFDB	L9-GN	386 @1.3M	200K	6.5×	313
AFDB	FID-AFDB	MPNN-L9	386 @1.3M	400K	3.2×	352
AFDB	FID-AFDB	MPNN-L4	386 @1.3M	never	—	416
<i>FID acceleration — transient on PDB (baseline catches up late):</i>						
PDB	FID-PDB	L9-GN	~330 plateau	700K	~1.3–1.5×	319 (@1.2M)
PDB	FID-PDB	L9-MPNN	~330 plateau	1.1M	~1.3×	334 (@1.1M)
PDB	FID-PDB	MPNN-L4	329 plateau (1.6M)	1.6M	budget-matched	329 (@1.6M)
<i>Designability acceleration — clean on PDB:</i>						
PDB	Des	L4-GN	0.67 @1.6M	700K	2.3×	0.70
PDB	Des	L9-MPNN	0.67 @1.6M	900K	1.8×	0.81
PDB	Des	L4-random	0.67 @1.6M	never	—	0.39
AFDB	Des	(all)	baseline saturates at 0.75 by 400K — acceleration not meaningful (proxy bias, §6.2.3)			

Table 6.4: **REPA’s acceleration is durable on AFDB FID (6.5–13×) and clean on PDB designability (1.8–2.3×), but only transient on PDB FID.** On AFDB, REPA-GearNet keeps improving past the baseline’s FID floor; on PDB the FID lead is handed back as the long baseline catches up, yet REPA’s designability advantage persists — the random control never reaches the baseline’s best. (“Baseline best” = baseline’s cumulative-best value; “REPA reaches @” = first step REPA matches it; speedup = their ratio. $n \leq 256$.)

match, and representation gains share no such lineage.

On experimental data the acceleration is real but transient. REPA-L9 leads on FID at every step up to 1.2M, by 27% at 700K. But the PDB baseline is a strong asymptotic learner: it matches REPA’s plateau by ≈ 1.4 M and edges below by 1.6M. On designability the PDB story is cleaner — a 1.8–2.3× speedup, with the random control never reaching the baseline’s best.

The regime split is about the baseline, not REPA. The AFDB baseline plateaus poorly, so REPA’s head start is never given back; the PDB baseline is strong, so it closes. Same intervention, opposite asymptotics — REPA helps most where the base learner struggles most. It is also the first sign that REPA’s gains are front-loaded, a theme we return to at the trade-off [13].

The generation gain plausibly runs through representation. Across checkpoints, better student geometry tracks better generation, and the two move together only under REPA (Figure 6.4). Lower dihedral error predicts higher designability (Pearson $r = -0.54$; -0.47 controlling for training step). The same envelope holds for inverse folding, and on AFDB for fold accuracy against FID.

The link is encoder-matched, which is the strongest evidence that it is causal. GearNet’s fold-representation advantage surfaces as a fold-*distribution* gain; MPNN’s local advantage surfaces as a *designability* gain. Both sides rank-order the encoders identically. We stop short of formal mediation — the random control brackets the relationship, but co-movement is not proof.

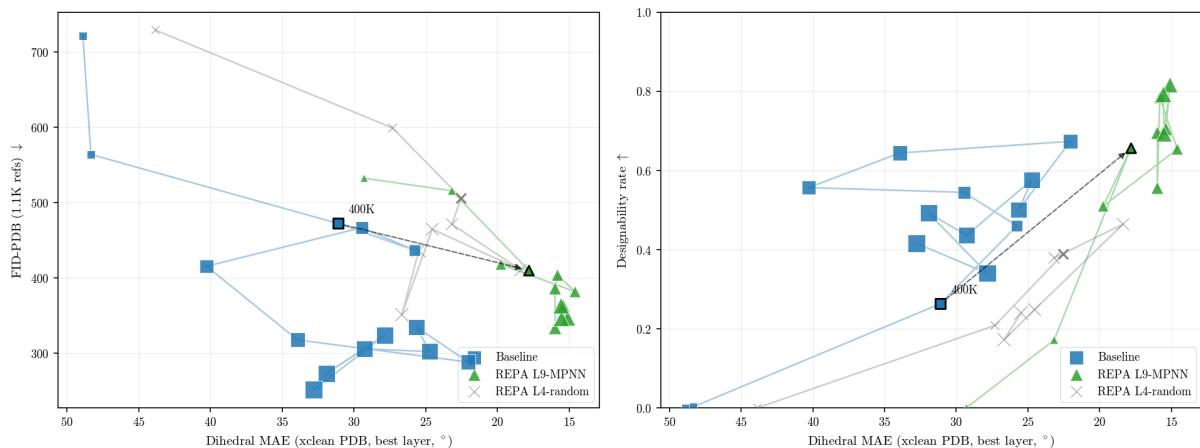


Figure 6.4: **Better student geometry buys better generation at equal compute — direct evidence REPA relieves the representation bottleneck.** Baseline, REPA L9-MPNN, and the random control all fall on a common band: lower student dihedral error accompanies better generation on both FID and designability. At matched compute ($\approx 400K$ steps, dashed arrow) REPA sits further along that band than the baseline. ($n \leq 256$ PDB, one marker per checkpoint; x -axis student dihedral MAE, better to the right; left FID-PDB $\downarrow$, right designability $\uparrow$.)

6.2.4 REPA improves whole-model coverage but trades off designable diversity

REPA’s effect on generation is not uniform; the supercolumn suite resolves it. Decomposed across quality, tertiary, and secondary structure (Table 6.5), the gain is strongest and most encoder-robust on whole-set distribution, encoder-specific on per-sample quality, and — the load-bearing finding — carries a cost in designable diversity that grows with training.

Whole-set distribution and diversity improve under almost every variant. Fold entropy rises, and secondary-structure distribution-match is the single most robust REPA effect — it holds even for the random control. This is the generic core: aligning to any reasonable structural encoder makes the generated *set* match the reference better.

Per-sample quality and secondary-structure direction are encoder-specific. MPNN accelerates designability on both datasets; GearNet helps it less consistently — the generation-side mirror of the representation rank-order. The designable subset also shifts in secondary-structure composition, but the *direction* is encoder $\times$ dataset gated: β -ward for learned REPA on PDB, α -ward for MPNN on AFDB. It is not a generic “more sheets” effect.

The cost is concentration: REPA funnels designable samples onto a few encoder-preferred, β -rich folds. Whole-set fold coverage rises while distinct designable folds fall. The loss is localised to the sheet-rich folds, where it is severe (Table 6.6): designable pwTM in the $\beta \geq 25$ bin climbs from the baseline’s ≈ 0.13 to 0.87 under GearNet.

Variant	Quality		T-W			T-D		S-W	S-D	
	Des $\uparrow$	FID $\downarrow$	fJSD-A $\downarrow$	fS-A $\uparrow$	pwTM $\downarrow$	#Clust $\uparrow$	pwTM $\downarrow$	ssJSD2D $\downarrow$	ssJSD2D $\downarrow$	E%des $\uparrow$
<i>PDB-trained, $n \leq 256$, 700K, 3 seeds; FID is FID-PDB (in-distribution).</i>										
Baseline	0.46	437	1.11	5.48	0.22	77	0.27	0.35	0.40	0.22
REPA L4-random	-0.08	+34	-0.55	+0.05	-0.05	-23	-0.10	-0.13	-0.01	-0.11
REPA L4-GN	+0.24	+71	-0.38	+1.63	+0.13	+1	+0.11	-0.21	-0.12	+0.00
REPA L9-GN	+0.14	-118	-0.57	+2.31	-0.03	+27	-0.02	-0.19	-0.10	-0.04
REPA L4-MPNN	+0.18	-88	-0.13	+0.48	+0.05	-4	+0.08	-0.16	-0.14	+0.01
REPA L9-MPNN	+0.05	-19	-0.32	+0.37	-0.01	+33	-0.01	-0.14	-0.11	-0.07
<i>AFDB-trained, $n \leq 256$, 700K, 3 seeds (MPNN-L4: 1 seed); FID is FID-AFDB.</i>										
Baseline	0.72	494	2.45	4.59	0.20	128	0.22	0.15	0.16	0.15
REPA L4-GN	+0.05	-195	-1.56	+2.27	+0.00	-35	-0.04	-0.11	-0.07	-0.02
REPA L9-GN	+0.01	-172	-1.29	+2.76	+0.01	-50	+0.11	-0.12	-0.06	+0.04
REPA L4-MPNN	-0.03	-22	-0.39	+0.03	—	-1	-0.07	-0.02	+0.05	-0.01
REPA L9-MPNN	+0.05	-139	-0.93	+0.31	-0.03	+21	-0.03	+0.01	+0.02	-0.04

Table 6.5: **At one fixed early step, REPA’s effect is already encoder-routed — GearNet to whole-set distribution, MPNN to per-sample quality.** GearNet wins the tertiary-whole metrics (FID, fJSD-A, fS-A) on both datasets; MPNN wins quality (Des). The random control wins whole-set distribution-match but hurts quality and designable diversity — a regulariser without the quality benefit. ($n \leq 256$, step 700K; baseline absolute, REPA rows Δ ; green = improvement, red = regression; header arrows give the good direction.)

Designable-subset pwTM↓	700K steps			1.0M steps		
	$\beta<10$	10–25	$\beta\geq 25$	$\beta<10$	10–25	$\beta\geq 25$
<i>PDB-trained (baseline = absolute; REPA = Δ vs. baseline)</i>						
Baseline	0.15	0.22	0.50	0.15	0.23	0.13
REPA L9-GN	+0.01	+0.05	+0.23	−0.01	+0.01	+0.74
REPA L9-MPNN	+0.01	−0.01	+0.17	+0.11	−0.01	+0.54
REPA L4-random	<i>[TODO: random control — not yet β-stratified]</i>					
<i>AFDB-trained</i>						
Baseline	0.14	0.29	0.17	0.16	0.26	0.15
REPA L9-GN	+0.23	+0.02	+0.65	+0.24*	+0.06*	+0.61*
REPA L9-MPNN (<i>falsifier</i>)	+0.01	−0.02	−0.06	−0.01	−0.02	+0.00

Table 6.6: **REPA’s one consistent cost — a loss of tertiary diversity — is confined to the sheet-rich folds, grows with training, and is escaped only by the AFDB-MPNN falsifier.** Concentration appears only in the $\beta \geq 25$ bin, under encoders that route toward β -rich folds (GearNet on both datasets, MPNN on PDB), and grows over training (+0.23 $\rightarrow$ +0.74); AFDB-MPNN-L9 stays diverse in every bin. (Designable-subset pwTM stratified by $\beta\%$, lower = more diverse; Δ = REPA – baseline; red ($\Delta > 0$) = concentrates, green = more diverse, $|\Delta| < 0.05$ uncoloured. Single-seed; *900K for AFDB L9-GN.)

β -rich folds are fold-narrow, so concentrating them costs diversity.

The trade-off is gated, temporal, and has a clean falsifier. It appears only where the encoder routes toward β -rich folds — GearNet on both datasets, MPNN on PDB — and AFDB-MPNN, which routes α -ward, escapes it entirely. It also develops with training: at 700K several variants still gain designable diversity, but by 1.0M every PDB variant has lost it while the whole-set gains persist (Table 6.7).

Variant	Quality		T-W			T-D		S-W	S-D	
	Des $\uparrow$	FID $\downarrow$	fJSD-A $\downarrow$	fS-A $\uparrow$	pwTM $\downarrow$	#Clust $\uparrow$	pwTM $\downarrow$	ssJSD2D $\downarrow$	ssJSD2D $\downarrow$	E%des $\uparrow$
<i>PDB-trained, $n \leq 256$, 1.0M; FID is FID-PDB.</i>										
Baseline	0.54	467	0.95	5.67	0.17	114	0.16	0.32	0.39	0.15
REPA L9-MPNN	+0.01	-81	-0.05	+0.29	+0.07	-51	+0.15	-0.15	-0.08	+0.04
<i>AFDB-trained, $n \leq 256$, 1.0M; FID is FID-AFDB.</i>										
Baseline	0.72	534	2.23	4.35	0.20	133	0.21	0.16	0.18	0.14
REPA L4-GN	+0.01	-228	-1.43	+3.68	-0.00	-39	+0.03	-0.12	-0.09	+0.01

Table 6.7: **The whole-set gains persist at 1.0M while designable diversity turns negative — the trade-off is temporal, not immediate.** Past the crossover the best variant per dataset keeps its FID, fS-A and fJSD-A gains but loses designable diversity (#Clust -51 PDB, -39 AFDB); contrast the 700K snapshot (Table 6.5). ($n \leq 256$, step 1.0M; baseline absolute, REPA rows Δ ; green/red = improvement/regression.)

The two halves of the trade-off come apart cleanly. The *clustering* is a geometric inductive bias: a random-weights GearNet also reduces designable diversity, so it needs no learned features — graph-convolution over residue contacts smooths similar geometries together. The *direction* of the secondary-structure shift does need learned features; random GearNet shows no β -shift. This late, concentration-driven degradation is our structural instance of *REPA works until it doesn't* [13]: as the student saturates the encoder’s lower-dimensional target, alignment turns from guide to straitjacket. A schedule that switched alignment off after the early gains — which we did not test — should, on this reading, keep the whole-set gains while sparing designable diversity.

6.2.5 REPA’s gains hold across sampler noise levels

REPA’s training-time gains compose with the inference-time sampler. Proteina’s SDE noise dial γ trades designability for diversity at sampling time. REPA and baseline navigate it identically — REPA shifts the *levels*, not the shape — so our $\gamma=0.45$ results are not an artefact of one sampler setting (Table 6.8).

The encoder-selectivity is itself sampler-invariant. REPA’s distribution-match advantage holds at every γ for the learned encoders but is near-chance for the random control. The mechanism of §6.2.4 — learned structure helps, an auxiliary loss alone does not — survives the full noise sweep.

REPA also raises the deterministic-sampling floor. At $\gamma=0$ the baseline’s designability collapses; REPA lifts it, durably under every learned AFDB encoder and under learned (not random) encoders on PDB (Table 6.9). The one surviving γ -failure is encoder-specific: at $\gamma=0$ GearNet-aligned REPA loses designability on both datasets, while MPNN preserves it.

6.2.6 What we do not claim

Several tempting claims do not survive our own data, and we flag them. REPA does not reliably improve novelty — the signal is too noisy to call. It does not “preserve

Δ (REPA – baseline) ODE	$\gamma = 0$	$\gamma = 0.35$	$\gamma = 0.45$	$\gamma = 0.5$	$\gamma = 1.0$	
<i>PDB — REPA L9-MPNN vs Baseline (step-matched cells).</i>						
Des $\uparrow$	+0.06	+0.07	+0.16	+0.18	+0.15	+0.04
FID $\downarrow$	−22	−1225	−78	−77	−89	−131
fJSD-A $\downarrow$	−0.13	+0.18	+0.21	−0.06	+0.07	−0.30
ssJSD2D $\downarrow$	−0.11	+0.08	−0.01	−0.03	−0.00	−0.10
#Clust $\uparrow$	+9	+8	−7	+4	+12	+2
<i>AFDB — REPA L4-GearNet vs Baseline (step-matched cells).</i>						
Des $\uparrow$	+0.16	+0.08	+0.07	+0.06	+0.06	+0.08
FID $\downarrow$	−102	−45	−133	−144	−132	−97
fJSD-A $\downarrow$	−0.31	+0.28	−0.94	−1.06	−0.92	−0.24
ssJSD2D $\downarrow$	−0.04	−0.19	−0.13	−0.13	−0.10	−0.03
#Clust $\uparrow$	+32	−15	−27	−23	−21	+10

Table 6.8: **REPA’s gains are sampler-invariant in the middle band ($\gamma \in [0.35, 0.5]$) and largely survive at the extremes — a training-time effect that composes with the inference-time noise dial.** The large −1225 FID gain at $\gamma=0$ reflects the PDB baseline mode-collapsing at deterministic sampling. (Mean Δ = REPA – baseline across step-matched cells per noise level, for the best PDB and AFDB variants; green = improvement, red = regression; negative is a win on lower-is-better metrics.)

ODE designability	700K	1.0M
<i>PDB-trained (baseline = absolute; REPA = Δ vs. baseline)</i>		
Baseline	0.04	0.04
REPA L4-random	−0.02	—
REPA L4-GN	+0.16	+0.00
REPA L9-GN	+0.04	+0.09
REPA L4-MPNN	+0.12	−0.01
REPA L9-MPNN	—	+0.16
<i>AFDB-trained</i>		
Baseline	0.12	0.12
REPA L4-GN	+0.23	+0.22
REPA L9-GN	+0.21	+0.28*
REPA L9-MPNN	+0.10	+0.02

Table 6.9: **REPA raises the deterministic-sampling (ODE) designability floor — durably under every learned encoder on AFDB, and for learned but not random encoders on PDB.** The ODE baseline floors near-zero on PDB and modest on AFDB; REPA lifts it by +0.10 to +0.28 across steps on AFDB, while the PDB random control does not (−0.02). (ODE designability; baseline absolute, REPA rows Δ ; green = higher, $|\Delta| < 0.025$ uncoloured. Single-seed; *900K for AFDB L9-GN.)

β ” in general; the direction is encoder $\times$ dataset conditional, and MPNN-AFDB reverses it. It does not strictly *require* a learned encoder at every scale — at $n\leq 128$ a random encoder helps nearly as much (§6.2.7). Its designability gains are read through a proxy (ProteinMPNN $\rightarrow$ ESMFold) that shares lineage with AFDB’s AlphaFold2, so we never compare designability across datasets without that caveat. We claim co-movement, not formal mediation, between representation and generation. And we retract an earlier “distribution collapse at $\gamma=1$ ” reading: with the full encoder grid it was a single-cell artefact.

6.2.7 Robustness across scale

At smaller scale the learned-versus-random gap narrows, so we anchor headline claims at $n\leq 256$. At $n\leq 128$ the random control helps nearly as much on representation and whole-set metrics. The direction of every gain is consistent across scale, but the margin of learned over random shrinks, so we read $n\leq 128$ as a scale-robustness check rather than a headline regime. Training-dynamics ablations (λ , batch size, projector depth) are reported in Appendix A; length extrapolation — generating proteins longer than the training crop — is the natural next test and remains future work.

6.2.8 Summary

REPA does real mechanistic work on Proteina — but as a family of encoder-routed interventions, not a single effect. It installs structural representations the flow-matching loss never learns, as a persistent gap; it pulls the trunk’s geometry onto the encoder’s, generalising across encoders in the Platonic sense; and it accelerates generation, durably on synthetic data and transiently on experimental data. The representation and generation gains are encoder-matched, strong evidence that the one runs through the other. The gain is generic on whole-set distribution, encoder-specific on quality, and carries a designable-diversity trade-off that develops with training and splits into a geometric-bias clustering component and a learned-feature directional one. Which encoder you align to chooses which of these you get. We carry this — and the contrast with the small-molecule study of Chapter 5 — into Chapter 7.

Chapter 7

Conclusions

Bibliography

- [1] Jonathan Ho, Ajay Jain, Pieter Abbeel. *Denoising Diffusion Probabilistic Models*. NeurIPS 2020. arXiv:2006.11239.
- [2] Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, Matt Le. *Flow Matching for Generative Modeling*. ICLR 2023. arXiv:2210.02747.
- [3] Peter Holderrieth and Ezra Erives. *An Introduction to Flow Matching and Diffusion Models*. MIT 6.S184 lecture notes, 2025. diffusion.csail.mit.edu.
- [4] Yaron Lipman, Marton Havasi, Peter Holderrieth, Neta Shaul, Matt Le, Brian Karrer, Ricky T. Q. Chen, David Lopez-Paz, Heli Ben-Hamu, Itai Gat. *Flow Matching Guide and Code*. 2024. arXiv:2412.06264.
- [5] Sihyun Yu, Sangkyung Kwak, Huiwon Jang, Jongheon Jeong, Jonathan Huang, Jinwoo Shin, Saining Xie. *Representation Alignment for Generation: Training Diffusion Transformers Is Easier Than You Think*. ICLR 2025. arXiv:2410.06940.
- [6] Jaskirat Singh, Xingjian Leng, Zongze Wu, Liang Zheng, Richard Zhang, Eli Shechtman, Saining Xie. *What matters for Representation Alignment: Global Information or Spatial Structure?* 2025. arXiv:2512.10794.
- [7] Chenyu Wang, Cai Zhou, Sharut Gupta, Zongyu Lin, Stefanie Jegelka, Stephen Bates, Tommi Jaakkola. *Learning Diffusion Models with Flexible Representation Guidance*. 2025. arXiv:2507.08980.
- [8] Hyosoon Jang, Hyunjin Seo, Yunhui Jang, Seonghyun Park, Sungsoo Ahn. *Boltz is a Strong Baseline for Atom-level Representation Learning*. 2026. arXiv:2602.13249.
- [9] Xiangdong Zhang, Jiaqi Liao, Shaofeng Zhang, Fanqing Meng, Xiangpeng Wan, Junchi Yan, Yu Cheng. *VideoREPA: Learning Physics for Video Generation through Relational Alignment with Foundation Models*. 2025. arXiv:2505.23656.
- [10] Tri Ton, Jiajing Hong, Chang D. Yoo. *Temporally Aligned Audio for Video with Autoregression*. ICCV 2025. arXiv:2504.05684.
- [11] Wei Zhang, Shijie Jin, Hangrui Zhang, Yi Li, Yan Wang. *CrystalREPA: Element-aware Representation Alignment for Crystal Generation*. 2026. arXiv:2605.08960.
- [12] Runqian Wang and Kaiming He. *Diffuse and Disperse: Image Generation with Representation Regularization*. 2025. arXiv:2506.09027.

- [13] Ziqiao Wang, Wangbo Zhao, Yuhao Zhou, Zekai Li, Zhiyuan Liang, Mingjia Shi, Xuanlei Zhao, Pengfei Zhou, Kaipeng Zhang, Zhangyang Wang, Kai Wang, Yang You. *REPA Works Until It Doesn't: Early-Stopped, Holistic Alignment Supercharges Diffusion Training*. 2025. arXiv:2505.16792.
- [14] Tomas Geffner et al. *Proteina: Scaling Flow-based Protein Structure Generative Models*. ICLR 2025. arXiv:2503.00710.
- [15] C. Vonessen et al. *TABASCO: A Fast, Simplified Model for Molecular Generation with Improved Physical Quality*. 2025. arXiv:2507.00899.
- [16] Marcus Olivecrona, Thomas Blaschke, Ola Engkvist, Hongming Chen. "Molecular de-novo design through deep reinforcement learning". *Journal of Cheminformatics* 9:48 (2017). doi:10.1186/s13321-017-0235-x.
- [17] Alex Zhavoronkov et al. "Deep learning enables rapid identification of potent DDR1 kinase inhibitors". *Nature Biotechnology* 37 (2019), pp. 1038–1040. doi:10.1038/s41587-019-0224-x.
- [18] Joseph L. Watson et al. "De novo design of protein structure and function with RFDiffusion". *Nature* 620 (2023), pp. 1089–1100. doi:10.1038/s41586-023-06415-8.
- [19] John B. Ingraham et al. "Illuminating protein space with a programmable generative model". *Nature* 623 (2023), pp. 1070–1078. doi:10.1038/s41586-023-06728-8.
- [20] Amil Merchant et al. "Scaling deep learning for materials discovery". *Nature* 624 (2023), pp. 80–85. doi:10.1038/s41586-023-06735-9.
- [21] Claudio Zeni et al. "A generative model for inorganic materials design". *Nature* 639 (2025), pp. 624–632. doi:10.1038/s41586-025-08628-5.
- [22] Liang Wang, Chao Song, Zhiyuan Liu, Yu Rong, Qiang Liu, Shu Wu, Liang Wang. *Diffusion Models for Molecules: A Survey of Methods and Tasks*. 2025. arXiv:2502.09511.
- [23] Zeming Lin et al. "Evolutionary-scale prediction of atomic-level protein structure with a language model". *Science* 379.6637 (2023), pp. 1123–1130. doi:10.1126/science.ade2574.
- [24] J. Dauparas et al. "Robust deep learning-based protein sequence design using ProteinMPNN". *Science* 378.6615 (2022), pp. 49–56. doi:10.1126/science.add2187.
- [25] Zuobai Zhang, Minghao Xu, Arian Jamasb, Vijil Chenthamarakshan, Aurelie Lozano, Payel Das, Jian Tang. *Protein Representation Learning by Geometric Structure Pre-training*. ICLR 2023. arXiv:2203.06125.
- [26] Arian R. Jamasb, Alex Morehead, Chaitanya K. Joshi, et al. *Evaluating Representation Learning on the Protein Structure Universe*. ICLR 2024.
- [27] John Ingraham, Vikas K. Garg, Regina Barzilay, Tommi Jaakkola. "Generative Models for Graph-Based Protein Design". *Advances in Neural Information Processing Systems (NeurIPS)* 32 (2019).

- [28] Martin Steinegger, Johannes Söding. “MMseqs2 enables sensitive protein sequence searching for the analysis of massive data sets”. *Nature Biotechnology* 35.11 (2017), pp. 1026–1028. doi:10.1038/nbt.3988.
- [29] Ilyes Batatia et al. “A foundation model for atomistic materials chemistry”. *The Journal of Chemical Physics* 163.18 (2024), 184110. doi:10.1063/5.0155322.
- [30] Michael Heinzinger et al. “Bilingual language model for protein sequence and structure”. *NAR Genomics and Bioinformatics* 6.4 (2024), lqae150. doi:10.1093/nargab/lqae150.
- [31] Jin Su et al. “SaProt: Protein Language Modeling with Structure-aware Vocabulary”. *bioRxiv* (2023). Preprint. doi:10.1101/2023.10.01.560349.
- [32] Christoph Schuhmann et al. *LAION-5B: An open large-scale dataset for training next generation image-text models*. NeurIPS 2022 Datasets and Benchmarks. arXiv:2210.08402.
- [33] Helen M. Berman et al. “The Protein Data Bank”. *Nucleic Acids Research* 28.1 (2000), pp. 235–242. Statistics retrieved Nov 2025, rcsb.org/stats.
- [34] Mihaly Varadi et al. “AlphaFold Protein Structure Database in 2024: providing structure coverage for over 214 million protein sequences”. *Nucleic Acids Research* 52 (2024), D368–D375. doi:10.1093/nar/gkad1011.
- [35] Simon Axelrod and Rafael Gómez-Bombarelli. “GEOM, energy-annotated molecular conformations for property prediction and molecular generation”. *Scientific Data* 9, 185 (2022). doi:10.1038/s41597-022-01288-4.
- [36] Lorna Richardson et al. “MGnify: the microbiome sequence data analysis resource in 2023”. *Nucleic Acids Research* 51 (2023), D753–D759. doi:10.1093/nar/gkac1080. Release statistics retrieved May 2022 (2.4 billion non-redundant sequences): ebi.ac.uk.
- [37] Luciano Brocchieri and Samuel Karlin. “Protein length in eukaryotic and prokaryotic proteomes”. *Nucleic Acids Research* 33.10 (2005), pp. 3390–3400. doi:10.1093/nar/gki615.
- [38] Michael M. Bronstein, Joan Bruna, Taco Cohen, Petar Veličković. *Geometric Deep Learning: Grids, Groups, Graphs, Geodesics, and Gauges*. 2021. arXiv:2104.13478.
- [39] Alexandre Duval, Simon V. Mathis, Chaitanya K. Joshi, Victor Schmidt, Santiago Miret, Fragkiskos D. Malliaros, Taco Cohen, Pietro Liò, Yoshua Bengio, Michael Bronstein. *A Hitchhiker’s Guide to Geometric GNNs for 3D Atomic Systems*. 2024. arXiv:2312.07511.
- [40] Nathaniel Thomas, Tess Smidt, Steven Kearnes, Lusann Yang, Li Li, Kai Kohlhoff, Patrick Riley. *Tensor Field Networks: Rotation- and Translation-Equivariant Neural Networks for 3D Point Clouds*. 2018. arXiv:1802.08219.
- [41] Alexey Dosovitskiy et al. *An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale*. ICLR 2021. arXiv:2010.11929.

- [42] Jinwoo Kim, Tien Dat Nguyen, Seonwoo Min, Sungjun Cho, Moontae Lee, Honglak Lee, Seunghoon Hong. *Pure Transformers are Powerful Graph Learners*. NeurIPS 2022. arXiv:2207.02505.
- [43] John Jumper et al. “Highly accurate protein structure prediction with AlphaFold”. *Nature* 596 (2021), pp. 583–589. doi:10.1038/s41586-021-03819-2.
- [44] Josh Abramson et al. “Accurate structure prediction of biomolecular interactions with AlphaFold 3”. *Nature* 630 (2024), pp. 493–500. doi:10.1038/s41586-024-07487-w.
- [45] Johann Brehmer et al. *Does equivariance matter at scale?* NeurIPS 2024. arXiv:2410.23179.
- [46] Jason Yim et al. *Fast protein backbone generation with SE(3) flow matching*. 2023. arXiv:2310.05297.
- [47] Yeqing Lin and Mohammed AlQuraishi. *Generating Novel, Designable, and Diverse Protein Structures by Equivariantly Diffusing Oriented Residue Clouds*. ICML 2023. arXiv:2301.12485.
- [48] Tuan Le et al. *Navigating the design space of equivariant diffusion-based generative models for de novo 3D molecule generation*. ICLR 2024. arXiv:2309.17296.
- [49] Clement Vignac et al. *MiDi: Mixed Graph and 3D Denoising Diffusion for Molecule Generation*. ECML PKDD 2023. arXiv:2302.09048.
- [50] Ross Irwin et al. *Efficient 3D Molecular Generation with Flow Matching and Scale Optimal Transport*. 2024. arXiv:2406.07266.
- [51] National Institutes of Health. *Regulatory Knowledge Guide for Small Molecules*. NIH SEED, 2024. seed.nih.gov.
- [52] Encyclopaedia Britannica. *What is the difference between a peptide and a protein?* britannica.com.
- [53] Gisbert Schneider. “Automating drug discovery”. *Nature Reviews Drug Discovery* 17 (2018), pp. 97–113. doi:10.1038/nrd.2017.232.
- [54] Martin Buttenschoen, Garrett M. Morris, and Charlotte M. Deane. “PoseBusters: AI-based docking methods fail to generate physically valid poses or generalise to novel sequences”. *Chemical Science* 15 (2024), pp. 3130–3139. arXiv:2308.05777.
- [55] G. Richard Bickerton et al. “Quantifying the chemical beauty of drugs”. *Nature Chemistry* 4 (2012), pp. 90–98. doi:10.1038/nchem.1243.
- [56] Pascal Notin et al. “Machine learning for functional protein design”. *Nature Biotechnology* 42 (2024), pp. 216–228. doi:10.1038/s41587-024-02127-0.
- [57] Yeqing Lin, Minji Lee, Zhao Zhang, and Mohammed AlQuraishi. “Out of Many, One: Designing and Scaffolding Proteins at the Scale of the Structural Universe with Genie 2”. *arXiv preprint* arXiv:2405.15489 (2024). arXiv:2405.15489.

- [58] Christine A. Orengo, A. D. Michie, S. Jones, David T. Jones, M. B. Swindells, Janet M. Thornton. “CATH — a hierarchic classification of protein domain structures”. *Structure* 5.8 (1997), pp. 1093–1108. doi:10.1016/S0969-2126(97)00260-8.
- [59] Minyoung Huh, Brian Cheung, Tongzhou Wang, Phillip Isola. *The Platonic Representation Hypothesis*. ICML 2024. arXiv:2405.07987.

Appendix A

Technical details

A.1 Dataset composition and split overlap

Table A.1 summarises the two datasets used in Chapter 6. Both training sets are α/β -dominated and span a substantial fraction of CATH architectures (44.2% PDB, 61.8% AFDB), which is what makes the per-chain CATH fold probe meaningful. Neither random split is sequence-clustered: 98.3% of PDB and 92.2% of AFDB validation chains have a $\geq 30\%$ -identity homolog in their own training set, so absolute in-house scores are inflated and we read rank-order and Δ -from-baseline instead. The cross-database overlap is far lower — only 62.1% of AFDB validation chains have a $\geq 30\%$ -identity hit in PDB training — so a homology-filtered AFDB set serves as a cleaner probe set for PDB-trained models (Chapter 3).

A.2 Choice of CATH fold-probe level

We report CATH *architecture* (CATH-A) as the headline fold-probe level throughout Chapter 6. Table A.2 justifies that choice: Class is too coarse (four buckets, one already near-saturated), Topology too finely-bucketed to probe reliably, and Architecture sits between — discriminative but learnable.

Property	PDB	AFDB (Swiss-Prot)
Origin	Experimental (X-ray, cryo-EM)	Predicted (AlphaFold2, v6)
Residue-length crop n	≤ 256 residues	
Train / val / test chains	273,771 / 3,190 / 323	229,670 / 4,521 / 235
CATH coverage (train)	44.2%	61.8%
Val $\leftrightarrow$ train, $\geq 30\%$ id.	98.3%	92.2%
AFDB-val $\leftrightarrow$ PDB-train, $\geq 30\%$ id.	62.1%	

Table A.1: Properties of the two datasets we study, at the headline $n \leq 256$ regime. Sequence identity is computed with MMseqs2 [28] (**easy-search**, $\geq 30\%$ identity over $\geq 80\%$ alignment coverage).

CATH level	#classes	baseline probe acc.	verdict
C (class)	4	0.733	one class (α/β) is 55% of the data; coarse, already near-saturated — <i>gameable</i>
A (architecture)	~ 40	0.407	balanced and discriminative, with headroom to move — our headline fold metric
T (topology)	~ 1400	0.301	long-tailed (top fold $\sim 18\%$; only ~ 89 classes populated enough to probe); per-class accuracy is unreliable — <i>too many buckets</i>

Table A.2: **We read fold-level representation quality off CATH *architecture* — Class is too coarse to discriminate, Topology too finely-bucketed to probe reliably.** Class has 4 buckets (one at 55%, baseline already 0.73); Topology has ~ 1400 imbalanced buckets; Architecture sits between — enough classes to be meaningful, enough examples per class to be learnable — so CATH-A is our headline fold metric (C and T are reported in the appendix). (“Baseline probe acc.” is a linear probe on the un-aligned trunk.)

A.3 Leakage-controlled probe evaluation

The random train/val split (§A.1) is not sequence-clustered, so probe scores are exposed to two distinct leakages. *Model leakage* is asymmetric: a model trained on the leaky split has effectively seen near-duplicates of the evaluation proteins, an advantage a differently-curated model (such as an externally-pretrained checkpoint) does not share. *Probe leakage* is symmetric: a probe fit on training chains near-identical to its evaluation set can shortcut by matching sequences rather than learning generalisable structure, inflating every model’s absolute score.

We control these by filtering the evaluation. A *probe-clean* split removes probe leakage alone — the probe’s training chains are filtered to have no $\geq 30\%$ sequence-identity hit to the evaluation set, which is otherwise the full validation set. A *blinded* split removes both — the evaluation proteins are held to under 30% identity to all training data (here, a cross-database set of AFDB chains with no such hit in either the PDB or AFDB training pool, ~ 325 proteins). We use the blinded split for the per-residue probes (inverse folding, dihedral), where the ~ 325 proteins still yield $\sim 43\text{k}$ residues — full statistical power. The per-chain CATH probe is different: fold classification needs many distinct chains spread across populated fold classes, and the blinded slice is too small and too class-sparse for this, so we relax it to the probe-clean split on the fuller validation set ($\sim 3,190$ chains). Comparing the splits also decomposes the leakage — the dirty-to-probe-clean drop isolates probe leakage and the probe-clean-to-blinded drop isolates model leakage — and the REPA-over-baseline gap survives in every regime.

A.4 The ssJSD-2D secondary-structure metric

Proteina’s secondary-structure metric compares the *mean* helix and strand content of a generated set against a reference. This collapses each set to a single point, so it cannot see variance, bimodality, or tails — a model that matches the average composition while collapsing its spread scores the same as one that reproduces it. ssJSD-2D removes this blind spot by comparing the full joint distribution.

For each backbone we annotate every residue as helix, strand, or coil with a C α -only secondary-structure assignment (P-SEA, as implemented in Biotite) and record the fraction of residues in helix (f_H) and in strand (f_E). A set of N backbones is then a cloud of N points in the (f_H, f_E) plane. We bin that plane into a 5×5 grid over $[0, 1]^2$, form normalised two-dimensional histograms for the generated and reference sets, and report the Jensen–Shannon divergence between them (lower is better). Binning the joint distribution, rather than comparing marginal means, lets the metric reward a model for reproducing the *shape* of the secondary-structure distribution and penalise mode collapse onto, say, all- α backbones.

A.5 Placeholder section

TODO.