

The Powerplay Effect: Predicting IPL Match Outcomes from Early-Over Performance

GitLab - [Predicting IPL Match Outcomes from Early-Over Performance](#)

1. Contribution & Roles

S/N	Name	Student ID	Email	Contribution
1	Avinash Rajasekar	A00051626	avinash.rajasekar2@mail.dcu.ie	Powerplay prediction model development, machine learning implementation, training, performance evaluation and visual evaluation of report.
2	Ashika Rajkumar	A00052851	ashika.rajkumar2@mail.dcu.ie	Data cleaning and preprocessing, feature engineering, dataset merging, result interpretation, report writing, and documentation.
3	Haritha Ramadass	A00052071	haritha.ramadass2@mail.dcu.ie	Exploratory data analysis, data visualisation, Powerplay prediction, model comparison and collecting information for report.
4	Kundan Raghavendra Rao	A00052883	kundan.raghavendrarao2@mail.dcu.ie	Dataset identification and sourcing, literature review support, and report formatting and reference management.

2. Title & Abstract

The Powerplay Effect: Predicting IPL Match Outcomes from Early-Over Performance Abstract

This study examines how Powerplay performance in the first six overs affects IPL match results using machine learning. The analysis used public match-level and ball-by-ball data to create features related to Powerplay, teams, venues, and the toss. A majority-class model and Logistic Regression served as baseline models, while three supervised machine learning models Decision Tree, Random Forest, and XGBoost were tested. Random Forest gave the best results, with about 63% accuracy. What-if simulations showed that changes in Powerplay runs and keeping wickets can greatly impact the chance of winning, underlining how important early-over performance is in T20 cricket.

3. Problem & Data

Problem Definition

This study explores IPL match outcome prediction as a binary classification problem using Powerplay performance. Each data point is a match viewed from the Powerplay batting team's side, using only information available after the first six overs. The goal is to see how well early-match events can predict the final result. By focusing only on Powerplay and pre-match context, the study measures how much early momentum affects T20 cricket outcomes.

The target variable won is defined as:

- a) 1 - Batting team won the match
- b) 0 - Batting team lost the match

Evaluation Metrics

Model performance is evaluated using the following metrics:

- Accuracy (primary metric)
- Precision, Recall and F1-score (for class-wise performance)

These metrics help check if the model is not just accurate overall, but also performs fairly for both winning and losing teams [6].

Dataset Description

This study used two IPL datasets from Kaggle [1]: one with 1,095 completed matches and another with about 260,000 ball-by-ball records. The data only include professional match details like teams, venues, scores, and wickets, with no personal or sensitive information. This makes them suitable for ethical academic research.

Data Cleaning & Preparation

Data cleaning was done to create a consistent dataset for modelling. Unnecessary details like umpire names, player-of-match, match type, and super-over indicators were removed. Matches without a winner were left out. If a city was missing, it was marked as "Unknown," and missing result margins were set to zero. Only delivery variables relevant to the Powerplay were kept, and the cleaned match and delivery data were joined by match ID.

4. Methods

Preprocessing and Feature Engineering

Powerplay deliveries from overs 0 to 5 were collected and grouped by match to calculate Powerplay runs, wickets, run rate, and wicket rate. Contextual features such as batting-first status, toss alignment, and toss decision were included. Historical win rates were calculated for the batting team, opponent, and venue. The net Powerplay rating (PP-NRR) combined run rate and wicket loss. Categorical variables were one-hot encoded, and variables that were not useful or could cause data leakage were removed. Any remaining missing values were replaced with zero.

Models and Validation Protocol

Four supervised learning models were tested to compare linear and non-linear methods: Logistic Regression, Decision Tree, Random Forest, and XGBoost [2]. Logistic Regression was used as a clear and interpretable baseline implemented using Scikit-learn [5].The ensemble models helped capture more complex relationships between Powerplay performance and match context.

The dataset was divided into 80% for training and 20% for testing using stratified sampling. Model generalization was checked with 5-fold cross-validation. GridSearchCV was used to tune key parameters for Random Forest and XGBoost, such as number of trees, tree depth, learning rate, and minimum split size, to improve performance and keep computations efficient.

5. Results

The majority-class model had an accuracy of 0.54, which shows the dataset is fairly balanced. Logistic Regression did a bit better at 0.58, suggesting Powerplay features help but only to a limited extent. Table 1 summarises the full model comparison.

Table 1. Model Accuracy Results for Powerplay-Based Outcome Prediction

Model	Accuracy
Majority Baseline	0.54
Logistic Regression	0.58
Decision Tree	0.52
Random Forest	0.63
XGBoost	0.57

Random Forest had the highest test accuracy at about 0.63 and balanced precision and recall best. Decision Tree and XGBoost were similar to Logistic Regression and did not show clear improvement. Five-fold cross-validation gave mean accuracies between 0.55 and 0.56, showing all models were stable but only moderately accurate.

Visual Evaluation

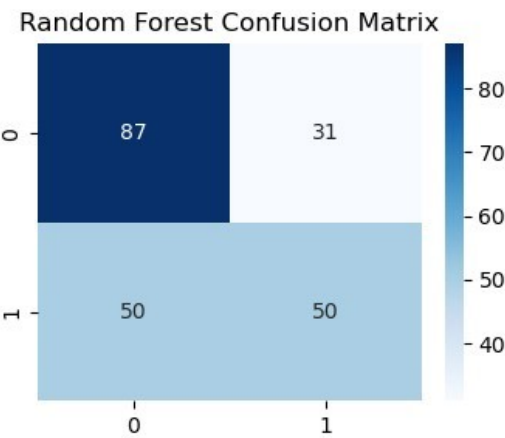


Figure 1: Confusion Matrix for the Random Forest Model

Figure 1 displays the confusion matrix for the Random Forest model on the test set. The model gets most winning and losing outcomes right, especially for the dominant class. Still, there are quite a few mistakes, especially in close matches. This shows it is hard to predict full match results using only Powerplay and static features, since the model does not account for what happens later in the game.

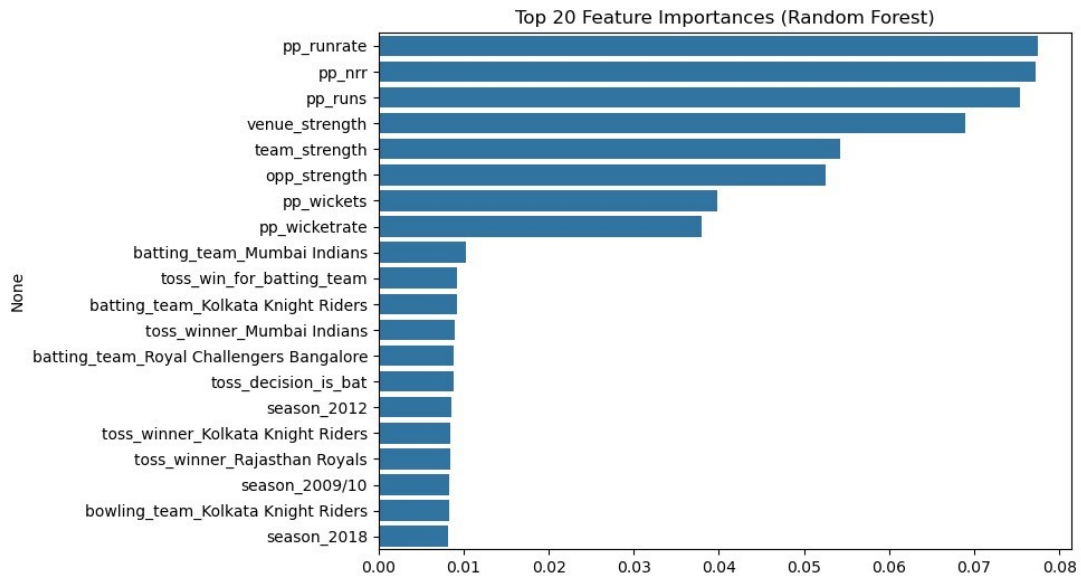


Figure 2. Top 20 most important features in the Random Forest model.

Figure 2 presents the top 20 most important features from the Random Forest model. The analysis finds that Powerplay run rate, Powerplay runs, team strength, opponent strength, venue strength, Powerplay wickets, and net Powerplay rating (PP-NRR) are the strongest predictors of match outcome. These results match what cricket experts expect, showing that aggressive but steady Powerplay performance matters most [3]. All exploratory plots and diagnostic visualisations, including the confusion matrix and feature importance charts, were produced using Matplotlib and Seaborn [4], [8].

6. Analysis & Discussion

Powerplay performance, along with other match factors, gives a useful but moderate indication of who might win an IPL match. Teams that score more runs early and keep their wickets tend to win more often, while losing wickets early lowers their chances. Team strength, the quality of the opponent, and where the match is played also affect the expected outcome.

Most prediction errors happen in matches where the later overs are very different from the early ones, like when there is a sudden batting collapse or a burst of runs at the end. Since the model only uses Powerplay and fixed match features, it cannot account for changing factors during the game, such as how players are performing, changes in bowling, or new tactics.

The model's accuracy of about 63% might seem average, but it is reasonable for a prediction based only on Powerplay data. Many things affect cricket results after the first six overs, like tactics in the middle and end of the game, how players are performing, and pressure during the match. Because the model only looks at early-over information, it cannot see these important late-game factors. So, the results show that Powerplay performance is a useful predictor, not that the model itself is limited.

7. Ethical & Legal Considerations

This project uses only publicly available IPL match data, which includes team names, venues, and match statistics. It does not use any personal or sensitive information, so there are no privacy concerns. The analysis follows standard academic guidelines for ethical data use. While predictive models could be used for betting, this study is meant only for education and analysis.

8. Conclusion & Future Work

This study shows that Powerplay performance, along with other match factors, plays a key role in deciding IPL match results. Of all the models tested, Random Forest gave the most reliable predictions, showing it can handle the complex links between early runs, wickets, team strength, and venue. The what-if simulations also show that improving Powerplay runs and keeping wickets can clearly increase the chance of winning, highlighting how important early decisions are in a match.

Future research will aim to improve prediction accuracy by adding player details, pitch and weather information, and models that track changes during the match beyond the Powerplay. Expanding this approach to live ball-by-ball predictions and other T20 leagues would also make it more useful and widely applicable.

9. Bibliography

- [1] P. Bhat, "IPL Complete Dataset (2008–2020): Match-Level and Ball-by-Ball Cricket Data for the Indian Premier League," Kaggle, 2020
<https://www.kaggle.com/datasets/patrickb1912/iplcompletedataset-20082020>
- [2] T. Chen and C. Guestrin, "XGBoost: A scalable tree boosting system," in Proc. 22nd ACM SIGKDD Int. Conf. on Knowledge Discovery and Data Mining, San Francisco, CA, USA, 2016, pp. 785–794. <https://arxiv.org/abs/1603.02754>
- [3] Cricbuzz, "Rajasthan Royals benefit again from the Powerplay head start," Indian Premier League, 2024 <https://www.cricbuzz.com/cricket-news/130267/rajasthan-royals-benefit-again-fromthepowerplay-head-start-cricbuzzcom>
- [4] John. D. Hunter, "Matplotlib: A 2D graphics environment," Computing in Science & Engineering, vol. 9, no. 3, pp. 90–95, 2007. doi: 10.1109/MCSE.2007.55
<https://ieeexplore.ieee.org/document/4160265>
- [5] F. Pedregosa *et al.*, "Scikit-learn: Machine Learning in Python," Journal of Machine Learning Research, vol. 12, pp. 2825–2830, 2011 <https://jmlr.org/papers/v12/pedregosa11a.html>
- [6] Precision, Recall & F1 Score Intuitively Explained, YouTube, 2020
<https://www.youtube.com/watch?v=8d3JbbSj-I8>
- [7] V. Tagore, "ICC tweaks Powerplay rules for shortened T20Is," Cricbuzz, Jun. 26, 2025
<https://www.cricbuzz.com/cricket-news/134788/icc-tweaks-powerplay-rules-for-shortenedt20iscricbuzzcom>
- [8] M. Waskom, "Seaborn: Statistical data visualization," Journal of Open Source Software, vol. 6, no. 60, p. 3021, 2021. doi: 10.21105/joss.03021 <https://joss.theoj.org/papers/10.21105/joss.03021>