

# Class intervals for thematic mapping: implementations in R

---

Roger Bivand

September 2023

## Introduction

- We will review briefly the background in applied cartography for using class intervals,
- and describe the implementation of methods available in functionality available in R, in particular in **classInt** and associated packages.

## Classed or unclassed

- From Dickinson (1973) to Tyler (2010), via Slocum et al. (2005), key handbooks on statistical mapping and thematic cartography present similar lists of ways of creating class intervals.
- These authorities stress the need for the creator of the thematic map to consider the message(s) being conveyed.
- One of the choices facing us is whether to use class intervals or unclassed maps, representing the variability of the values being mapped by pseudo-continuous variations in shading or colour (Tobler 1973), or rather to choose class intervals.
- The colour rendering technology of the output device will determine the discrete colour count available in the pseudo-continuous case.

## Class intervals

- When class intervals are chosen, the legend constitutes a look-up table, from which the observer can readily read off which shading or colour corresponds to which value interval.
- Such quantising of course transforms interval or ratio-level data to the ordinal level, while retaining interval or ratio-level labels, as in a histogram
- For nominal or ordinal data, the starting point for class intervals may be given by the definition of the discrete variables being mapped, but here again input categories may need to be merged to reach a sensible number of classes.

- Neither choice avoids the basic challenge of the stronger visual impact of irregular polygonal observations with larger surface areas, but often administrative data is only available for such aggregates.
- When gridded data is available, or when cartograms are presented in place of maps of polygon boundaries, this challenge may be addressed but not eliminated.
- Because these adaptations also need to handle the visual representation of observed variables, they constitute a distinctly different problem, and will not be considered here.

## Border lines

- Similarly, while the display of boundary lines between the regular or irregular polygon borders that show the support of the data being visualized is an important question, it will not be considered here.
- We just note that without some even minimal border line, neighbouring observations with the same class (or value for unclassed maps) will be perceived as a single entity.

## Applied thematic cartography

---

## Applied thematic cartography

- The authorities cited in the introduction (Dickinson 1973; Slocum et al. 2005; Tyler 2010) write for users of thematic cartography rather than for those studying the underlying principles
- Naturally, the underlying perceptual and semiotic principles are important, but are not central to this discussion in applied thematic cartography
- Many users simply go with the default, and perhaps resent being asked to choose how to construct class intervals, despite there being no obvious automatic route
- Software providers like ESRI provide some helpful guidance:  
<https://pro.arcgis.com/en/pro-app/latest/help/mapping/layer-properties/data-classification-methods.htm>, referring on to:  
[https://www.spatialanalysisonline.com/HTML/classification\\_and\\_clustering.htm](https://www.spatialanalysisonline.com/HTML/classification_and_clustering.htm)

## Class intervals in applied thematic cartography

- As part of an online course: <https://magrit-formations.github.io/>, a useful distinction is drawn in <https://magrit-formations.github.io/discretisation>
- This is based on the univariate classification of variables with many unique values, as clearly discrete variables with few categories do not require further discretisation (unless categories need grouping).
- The important distinction is between symmetrical and skewed distributions, where variables displaying uniform and symmetrical distributions can use equal-width intervals, and symmetrical distributions can also use intervals based on multiples of standard deviations from the mean; unclassed maps may work best for uniform distributions
- Skewed and multi-modal distributions should preferably not use these kinds of intervals, but rather quantiles (equal-count) or observed (natural) thresholds, and skewed distributions can also use geometric progression

## Example data set: Lot Départément, France

- Giraud and Pecout (2023) use a data set for the Lot Département in south-western France stored here as a GeoPackage file, with a number of layers.
- We will use the 313 commune layer with administrative boundaries from 2020, and population and economic activity data also from 2020.
- This is a vector example data set; it would be interesting in parallel to consider a raster data set, but here we use only the vector representation.

## Lot Département geopackage

We'll use `sf` to read the Lot GeoPackage file:

```
com <- sf::st_read("data/lot46.gpkg", layer = "commune")

## Reading layer `commune' from data source
##   `/home/rsb/presentations/eqc23_talk/data/lot46.gpkg'
##   using driver `GPKG'
## Simple feature collection with 313 features and 12 fields
## Geometry type: MULTIPOLYGON
## Dimension:      XY
## Bounding box:  xmin: 539668.5 ymin: 6346290 xmax: 637380.9 ymax: 6439668
## Projected CRS: RGF93 v1 / Lambert-93
```

and subset labels for the largest observations by population:

```
bigcom <- com[com$POPULATION > 2000,]
bigcom <- bigcom[rev(order(bigcom$NOM_COM)),]
```

## Variables: population density and economically active population share





Population density is taken as the population count divided by observation area in square km; percentage economically active of total population by summing women and men in four sectors:

```
(com$POPULATION / (sf::st_area(com) |> units::set_units(km^2))) |>  
  as.numeric() -> com$DENS  
vars <- c("AGR_H", "AGR_F", "IND_H", "IND_F", "BTP_H", "BTP_F", "TER_H", "TER_F")  
com |> subset(select=vars, drop=TRUE) |> apply(1, sum) |>  
  unname() -> com$POP_ACT  
com$SHARE_ACT <- 100 * com$POP_ACT / com$POPULATION
```

A Dougenik cartogram is also constructed:

```
ccom <- cartogram::cartogram_cont(com, weight="POPULATION", prepare = "none")
```

# DENS and SHARE\_ACT histograms and density plots

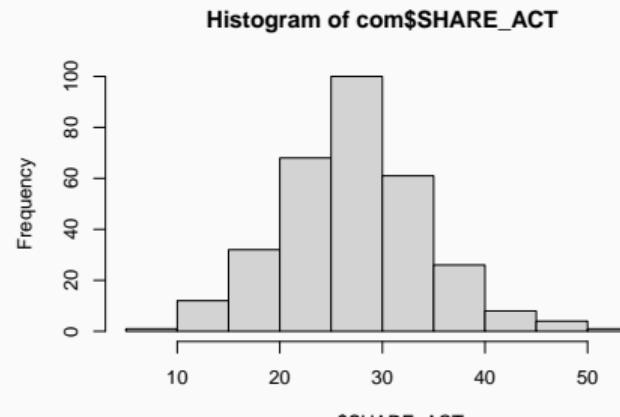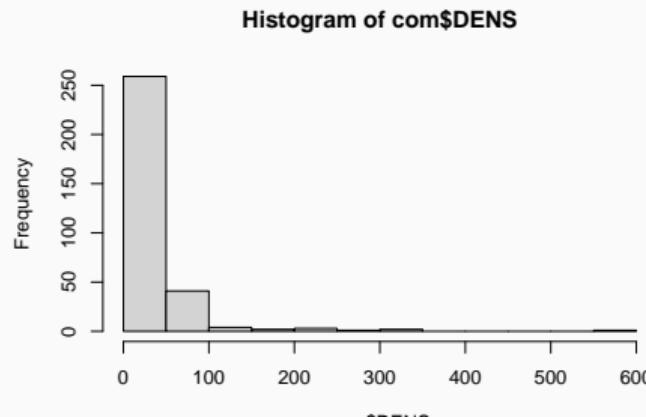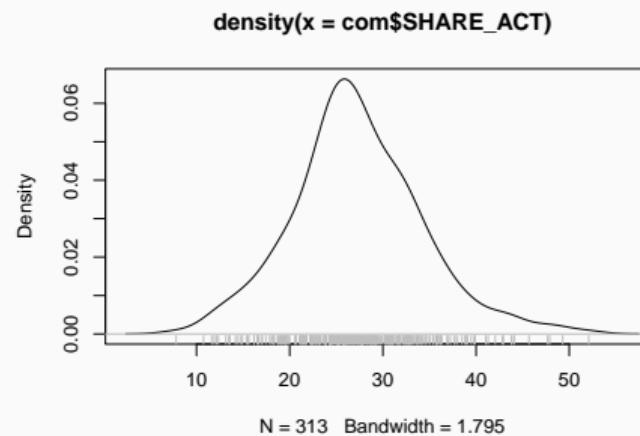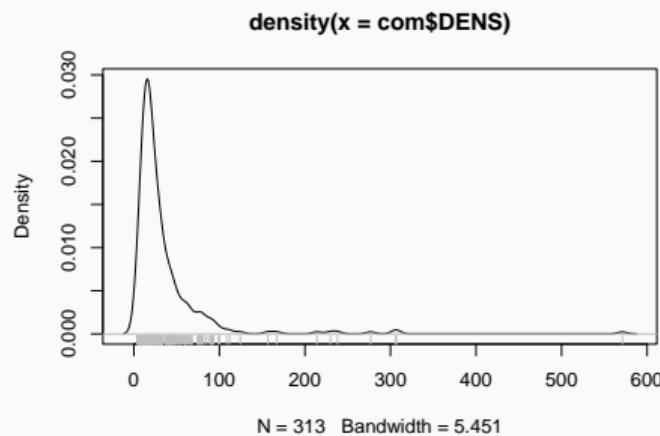


## DENS and SHARE\_ACT distributions


We can try to distinguish between symmetrical and skewed distributions, but most tests for divergence from the Normal lose power when the distribution is not Normal, DENS is obviously skewed, SHARE\_ACT is symmetrical:

```
c(DENS=moments::agostino.test(com$DENS)$p.value < 0.005,  
  SHARE_ACT=moments::agostino.test(com$SHARE_ACT)$p.value < 0.005)  
  
##      DENS  SHARE_ACT  
##      TRUE     FALSE
```

# No class intervals, population density map, Lot, 2020

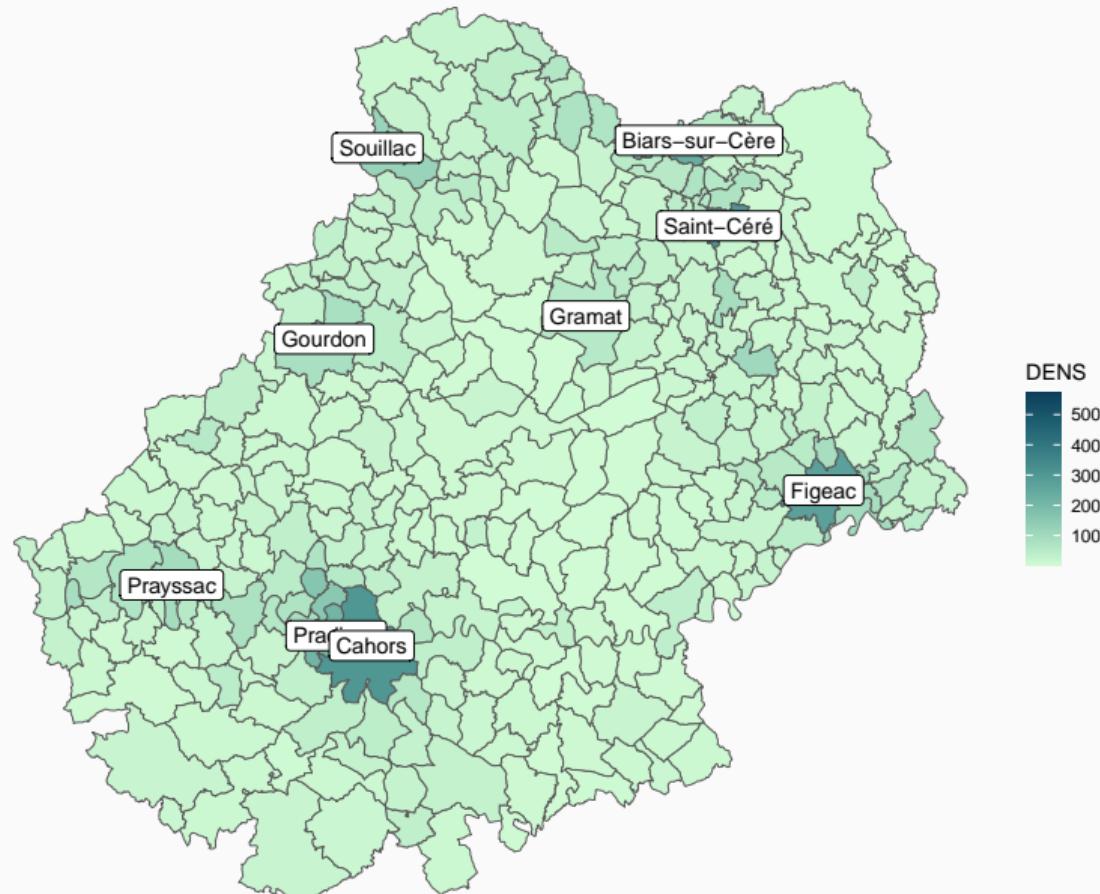

# No class intervals, economically active population share map, Lot, 2020

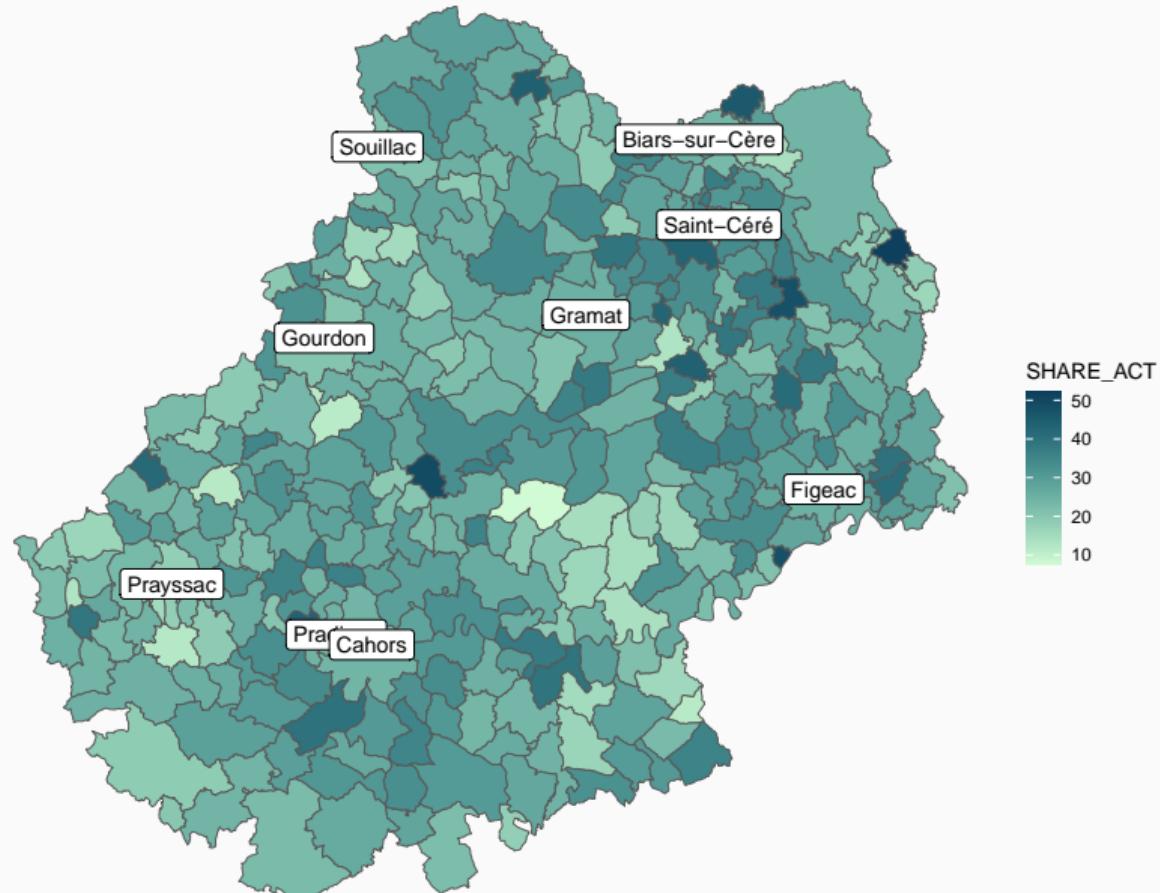

## Kinds (styles) of class intervals

- Books like Tyler (2010) offer similar lists of kinds (styles) of class intervals driven by data rather than fixed in advance by the user
- Fixed class intervals may for example represent regulatory or customary limits, so the output maps shows where the chosen limits were exceeded
- Where the data diverge from a fixed point, often zero in for example regression residuals, choosing ways of representing the fixed point in otherwise data-driven interval construction may matter
- Both interval closure (left or right) and the data rounding/precision used in creating breaks do matter; more rounding may improve legend legibility



## Equal-width class intervals

- Equal-width (equal-step, **equal**) intervals take the range of the data and cut into  $k$  intervals; the range may be buffered out a little; the break points may not be *pretty* numbers
- **pretty** intervals may not yield exactly  $k$  intervals, but instead of unrounded width values in **equal** intervals, the steps/intervals are **pretty**, 1, 2 or 5 times a power of 10; this approach was initially used for positioning and labelling ticks on scatterplot axes (Becker and Chambers 1984)
- Both of these styles are data-driven but neither are compute-intensive, so are also suited to larger data sets; however, they should not be used with data other than those with uniform or symmetric distributions

# Equal-width class intervals, economically active population share map, Lot, 2020

Economically active population share, Lot, 2020



percent economically active

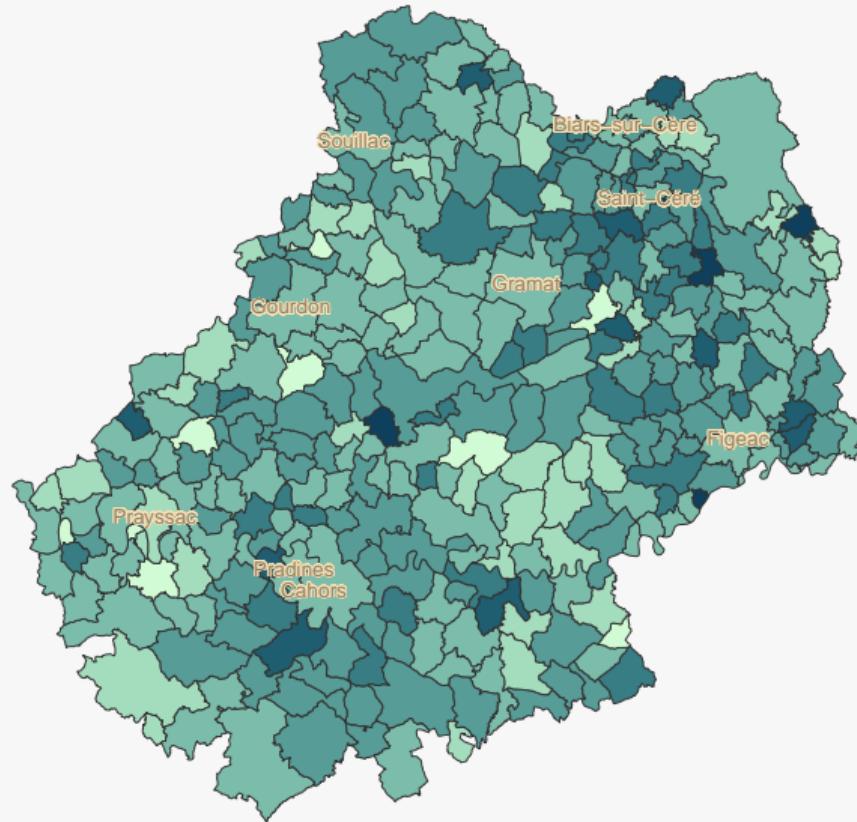

# “Pretty” class intervals, economically active population share map, Lot, 2020

Economically active population share, Lot, 2020

percent economically active

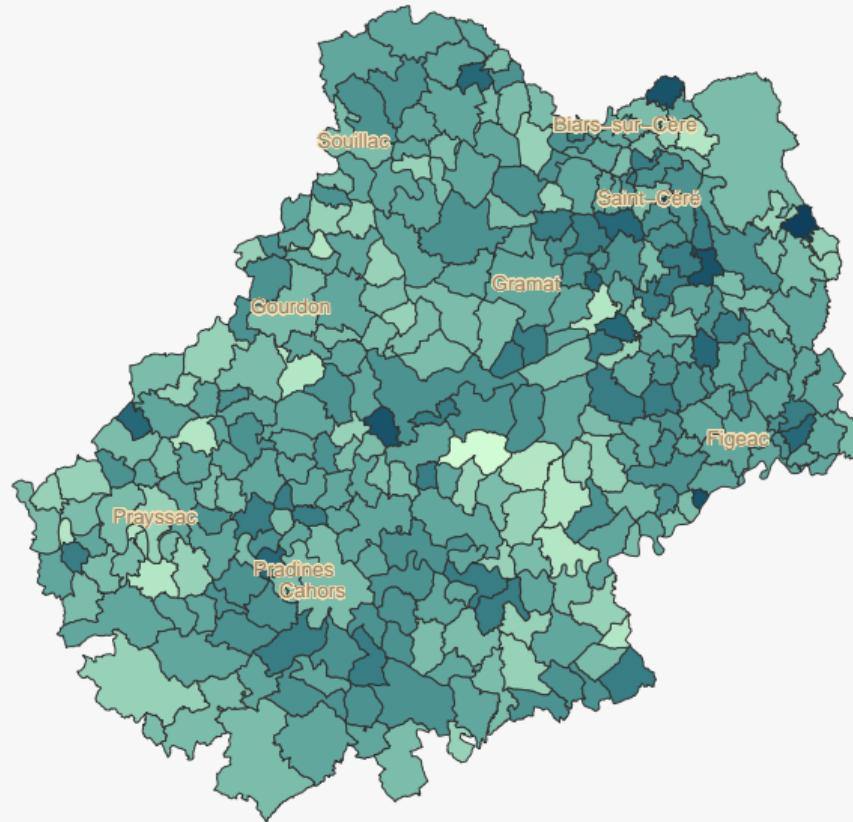



## Standard-deviation class intervals

- If the data are roughly symmetric, the class intervals may be constructed to cover the data range by  $\bar{x} \pm m\hat{\sigma}$  where  $\bar{x}$  is the sample mean,  $\hat{\sigma}$  the standard deviation, and  $m$  a sequence of intervals around zero
- It is possible for example to set  $m$  as `c(-Inf, -2, -1, 0, 1, 2, +Inf)`, or `c(-Inf, -2.5, -1.5, -0.5, 0.5, 1.5, 2.5, Inf)`
- The `sd` style in `classInt::classIntervals` uses `pretty` run on the centred and scaled data to set  $m$  by default
- This style is data-driven but not compute-intensive, so also suited to larger data sets; however, it should not be used with data other than those with symmetric distributions

# Standard-deviation class intervals, economically active population share map, Lot, 2020

Economically active population share, Lot, 2020



percent economically active

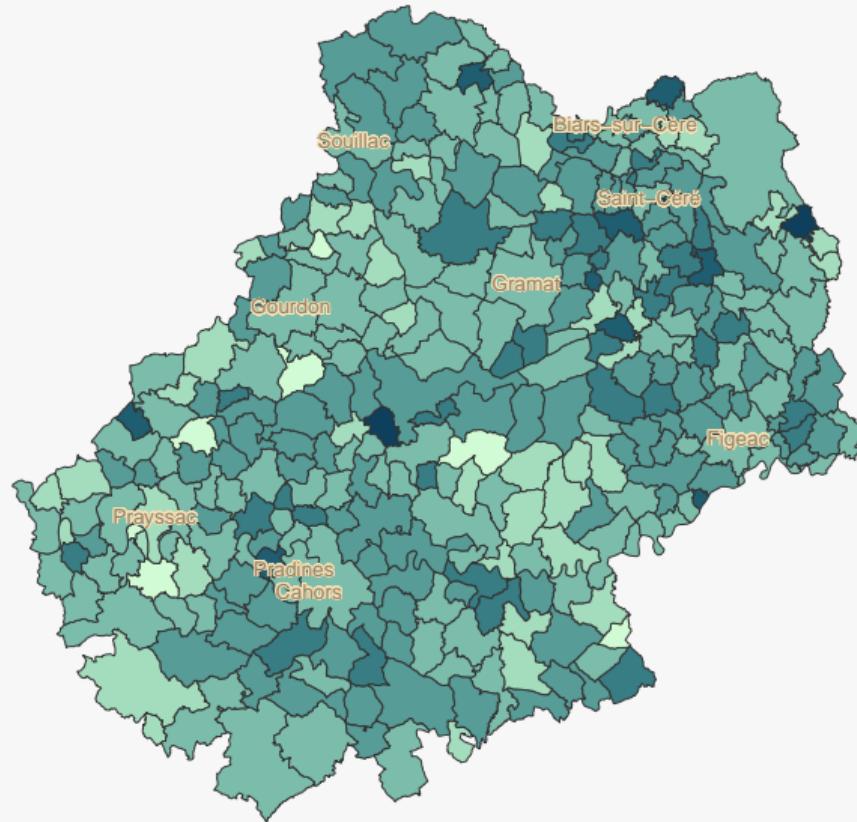

# Standard-deviation class intervals, economically active population share cartogram by population, 2020

Economically active population share, Lot, 2020, Dougenik cartogram

inhabitants per km<sup>2</sup>





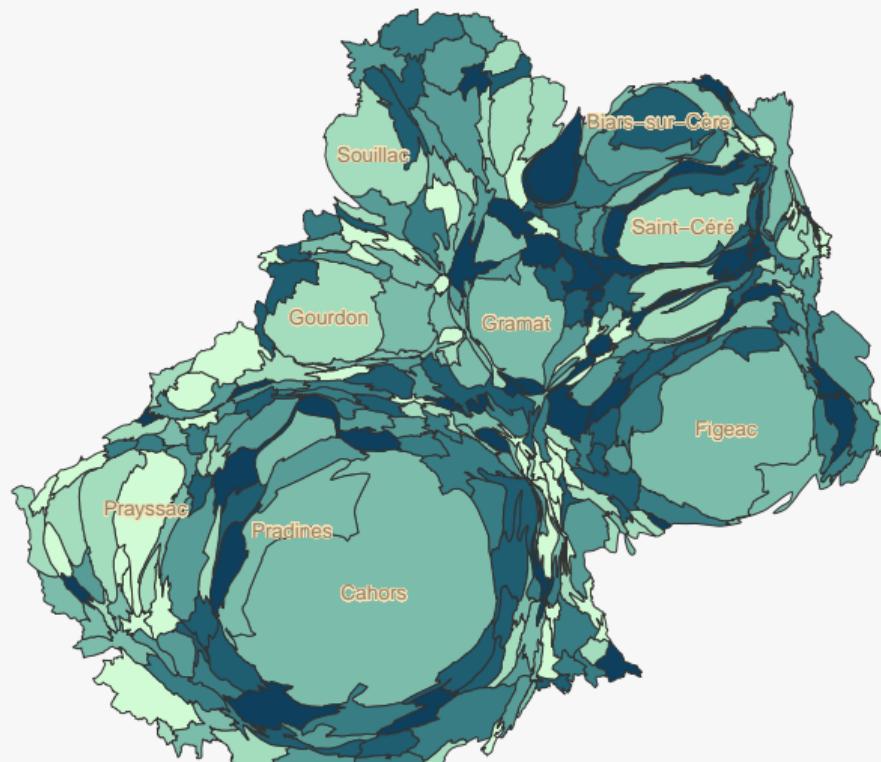



## Comparing class intervals (symmetrical)

Table: Standard deviation by Pretty

sd		1	2	3	4	5	6	All
1	N	1	6	0	0	0	0	7
2	N	0	38	1	0	0	0	39
3	N	0	0	119	0	0	0	119
4	N	0	0	48	57	0	0	105
5	N	0	0	0	30	2	0	32
6	N	0	0	0	0	9	0	9
7	N	0	0	0	0	1	1	2
All	N	1	44	168	87	12	1	313


# Comparing class intervals, empirical CDF (economically active share, symmetrical)

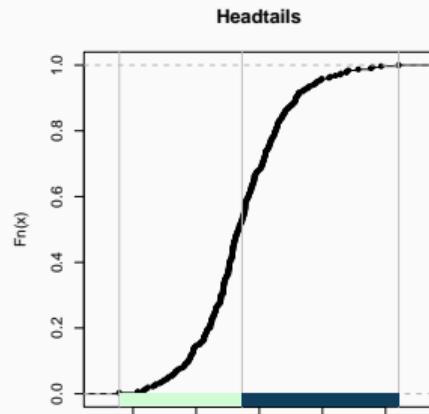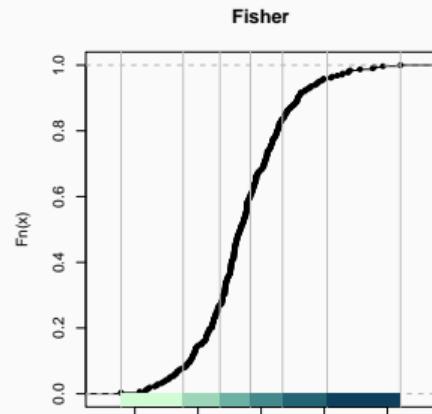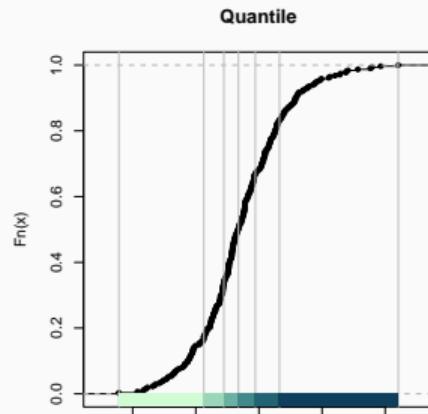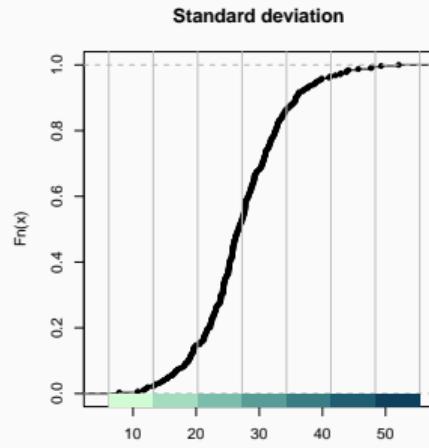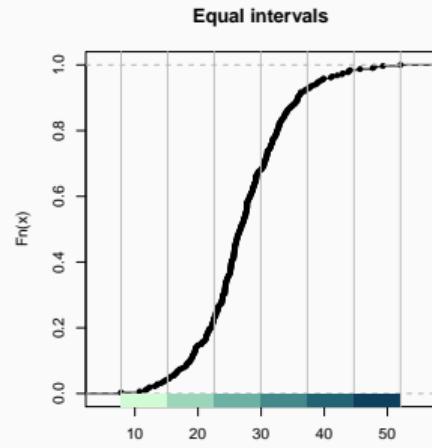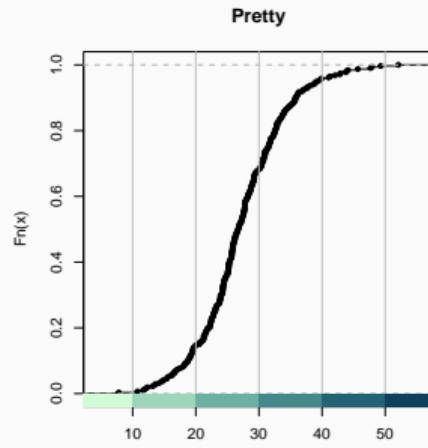

## Quantile class intervals

- Quantiles cut the data into classes with equal counts as far as possible, and may be used with all kinds of data
- It is worth noting that quantiles may be calculated in many ways; some earlier algorithms have been superceded (Hyndman and Fan 1996), see also  
<https://en.wikipedia.org/wiki/Quantile>
- `classInt::classIntervals` uses default `type=7`, but `type=8` might be preferable; this can be passed through in `classInt::classIntervals` and `tmap::tm_fill`, but not in `mapsf::mf_map` or `sf::plot.sf`


# Quantile class intervals, population density, Lot, 2020

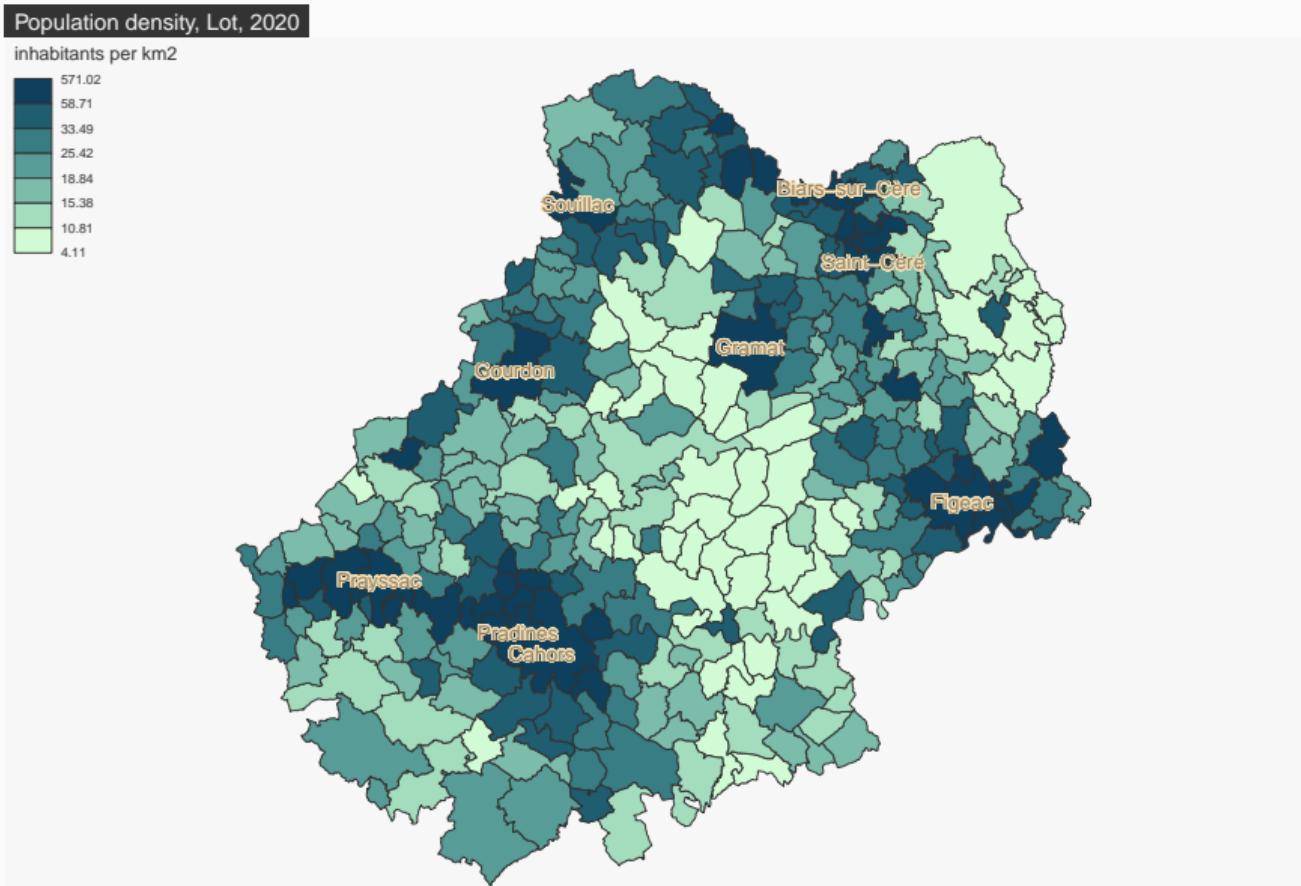

## Observed threshold/natural breaks class intervals

- Jenks and Caspall (1971) **jenks** and Fisher (1958) **fisher** are legacy algorithms for data-driven univariate clustering, and are relatively compute-intensive; if there are many observations, a random sample may be used to calculate the breaks anchored with **set.seed**
- **stats::hclust** provides several hierarchical clustering methods that work in a univariate setting, defaulting to complete clustering, but requires a dense distance matrix so is not suitable for large data sets
- **stats::kmeans** can be used in a univariate setting, anchored with **set.seed** (but could be extended for larger data sets with **cluster::clara** which takes samples internally)
- Bagged clustering may also be used **e1071::bclust**, combining **kmeans** and hierarchical clustering Dolnicar and Leisch (2003)


# Fisher class intervals, population density, Lot, 2020

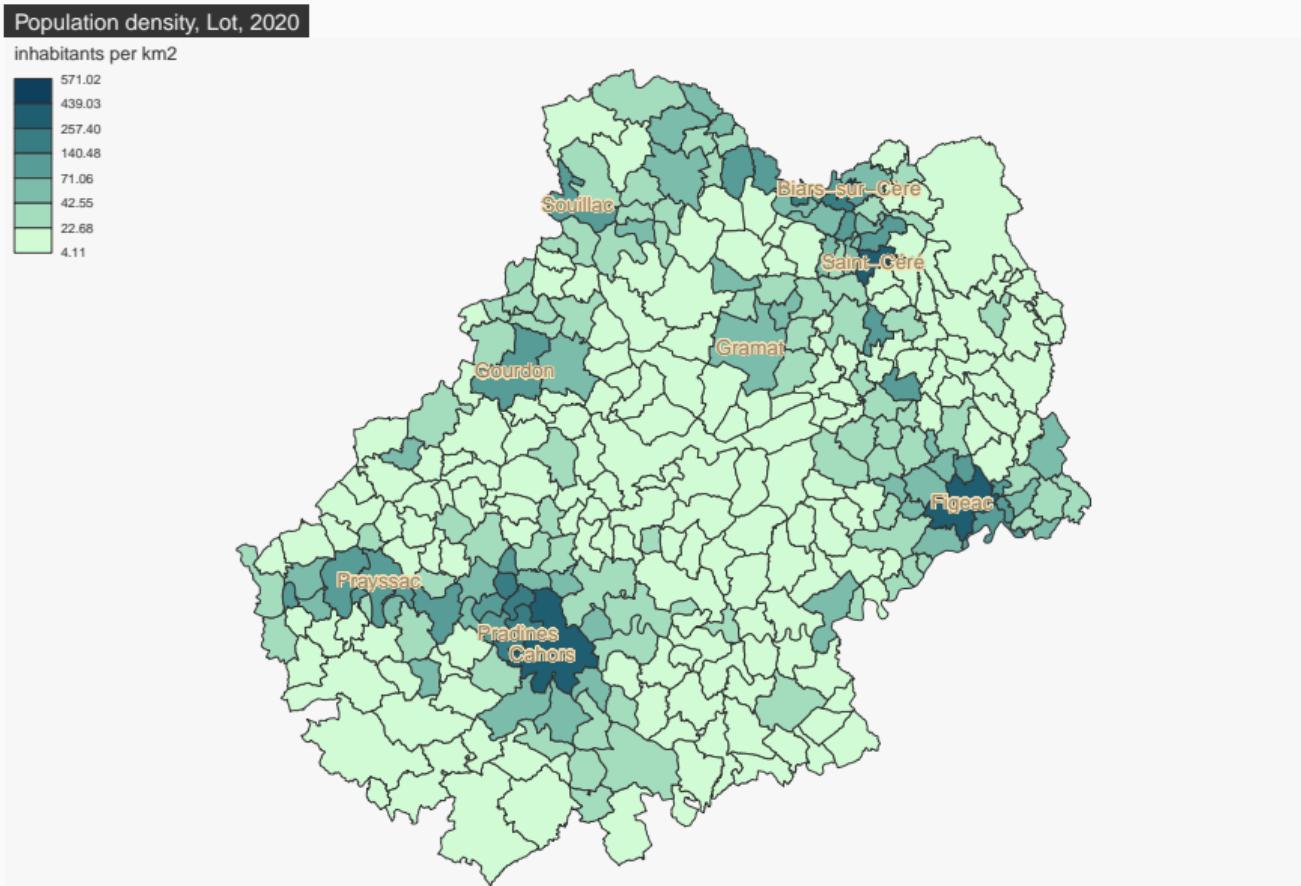

## Geometric progression and other class intervals

- The `geom` style in `mapsf` is based on a geometric progression, all variable values must be strictly greater than zero.
- `headtails` based on Jiang (2013) has been contributed by Diego Hernangómez
- `box` was also contributed by Diego Hernangómez using the boxplot as a template
- `maximum` was contributed by Josiah Parry

# Geometric progression class intervals, population density, Lot, 2020






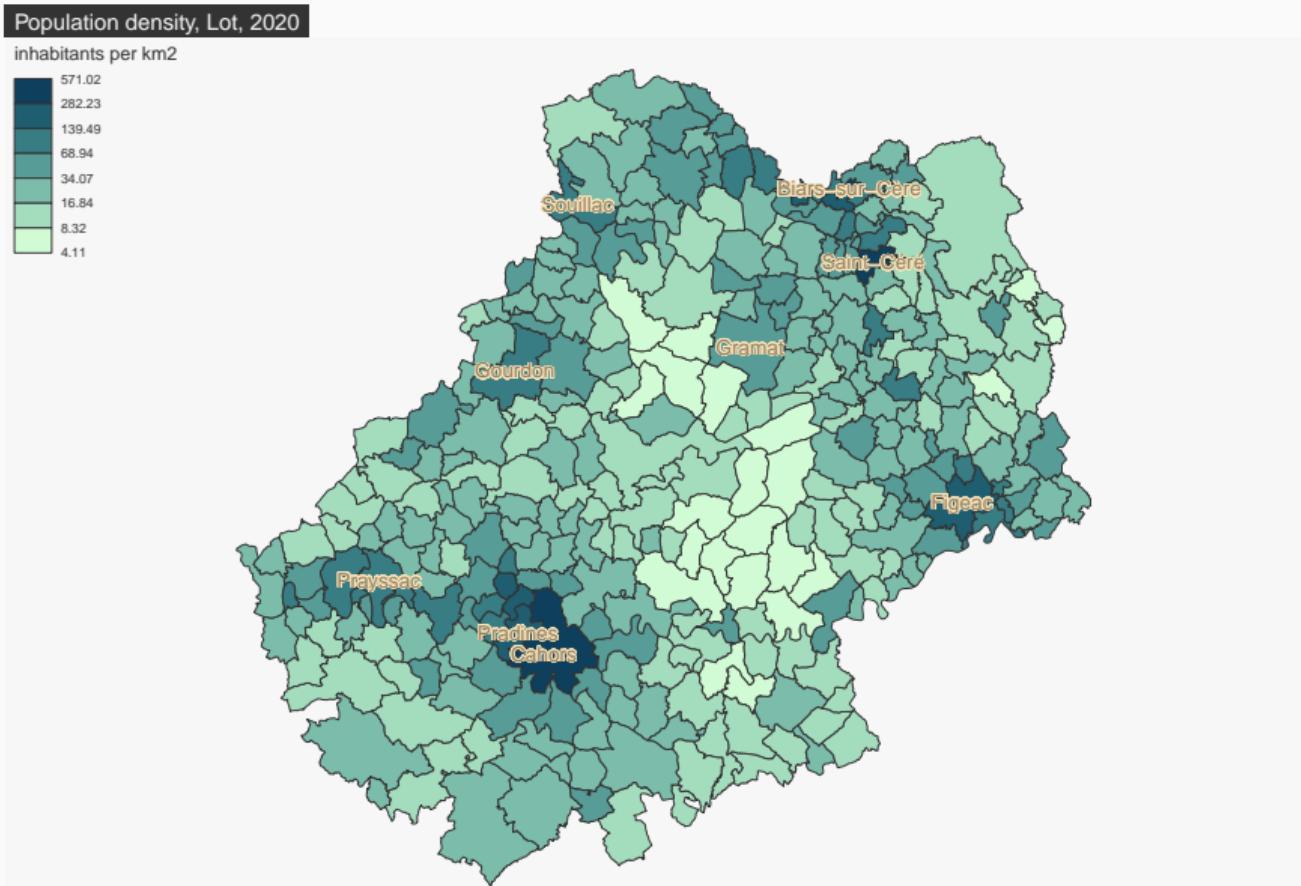


## Comparing class intervals (skewed) ii

Table: Fisher by Geometric progression

fisher		1	2	3	4	5	6	7	8	9	All
1	N	14	49	93	12	0	0	0	0	0	168
2	N	0	0	0	61	15	0	0	0	0	76
3	N	0	0	0	0	31	7	0	0	0	38
4	N	0	0	0	0	0	20	2	0	0	22
5	N	0	0	0	0	0	0	2	3	0	5
6	N	0	0	0	0	0	0	0	3	0	3
7	N	0	0	0	0	0	0	0	0	1	1
All	N	14	49	93	73	46	27	4	6	1	313

## Comparing class intervals, empirical CDF (population density, skewed)

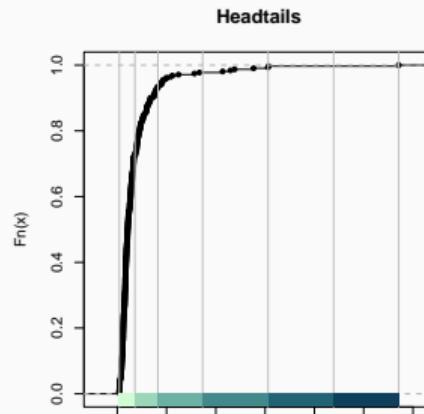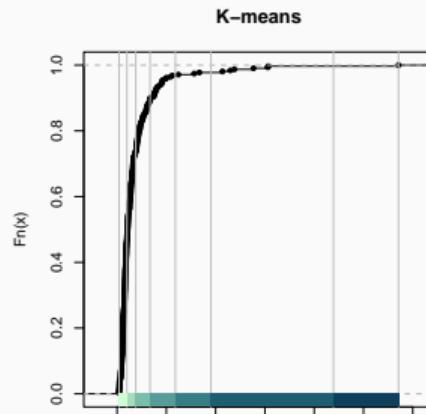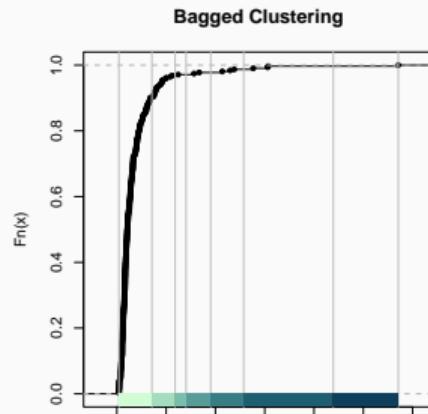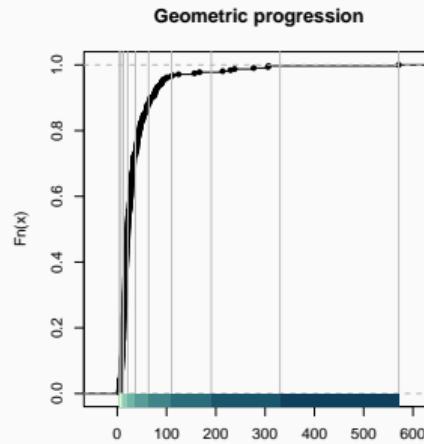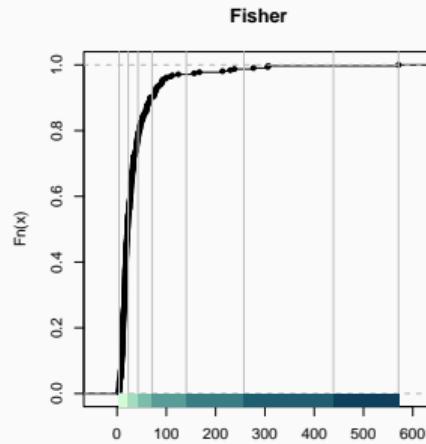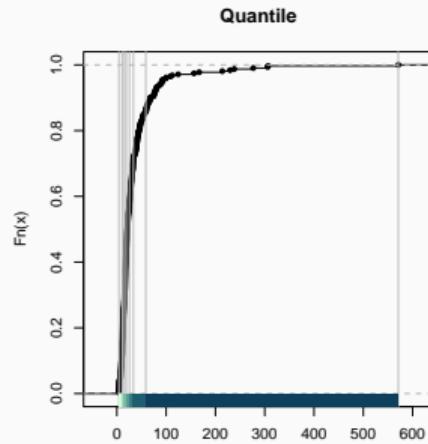

## Comparing class intervals (skewed) iii

Table: Fisher by K-means

fisher		1	2	3	4	5	6	7	All
1	N	145	23	0	0	0	0	0	168
2	N	0	62	14	0	0	0	0	76
3	N	0	0	35	3	0	0	0	38
4	N	0	0	0	21	1	0	0	22
5	N	0	0	0	0	2	3	0	5
6	N	0	0	0	0	0	3	0	3
7	N	0	0	0	0	0	0	1	1
All	N	145	85	49	24	3	6	1	313

## Concluding remarks

---

## How to document available choices?

- A useful discussion around a github issue raised about the R **classInt** package (<https://github.com/r-spatial/classInt/issues/41>) highlighted the desirability of deeper reflection about the role played by class intervals in contemporary applied thematic cartography.
- In Pebesma and Bivand (2023) (<https://r-spatial.org/book/08-Plotting.html#sec-classintervals>), only a brief paragraph is devoted to this topic, despite the use of the **classInt::classIntervals** function in thematic mapping in the sf, stars, tmap, mapsf, and other R packages.

## The `sf`, `stars` and `mapsf` packages



- The `sf` package documentation provides figures showing consequences of different choices: <https://r-spatial.github.io/sf/articles/sf5.html#class-intervals> (using `pretty` as default), supplemented for `stars` by <https://r-spatial.github.io/stars/reference/plot.html> (using `quantile` as default).
- The `mapsf` package has more detailed documentation, including <https://riatelab.github.io/mapsf/articles/mapsf.html#choropleth-map> and `mapsf::mf_get_breaks` extending `classInt::classIntervals` ([https://riatelab.github.io/mapsf/reference/mf\\_get\\_breaks.html](https://riatelab.github.io/mapsf/reference/mf_get_breaks.html)); `mapsf::mf_map` uses `quantile` as default for choropleth maps
- A work-in-progress bookdown book is available at [https://rcarto.github.io/cartographie\\_avec\\_r/](https://rcarto.github.io/cartographie_avec_r/).

## The `tmap` package



- The `tmap` package is evolving towards version 4, which is to be documented in a work-in-progress bookdown book, with class intervals presented in this section: <https://r-tmap.github.io/tmap-book/visual-variables.html#color-scale-styles>.
- Earlier versions of `tmap` are covered by Tennekes (2018), and a section in the second edition of the bookdown book <https://r.geocompx.org/adv-map.html#color-settings> (Lovelace, Nowosad, and Muenchow 2019); `tmap::tm_fill` uses `pretty` as default for choropleth maps

## The terra package - continuous

**Population density**

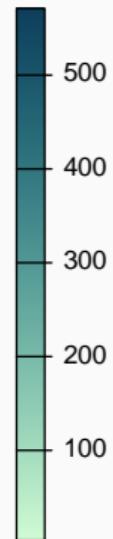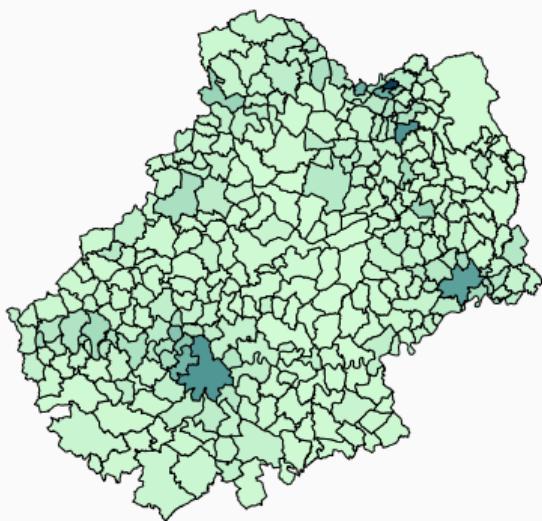


**Economically active**

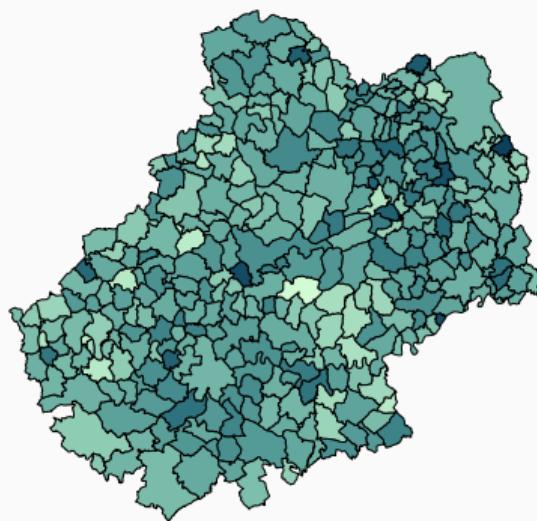


# The terra package - quantile

**Population density**

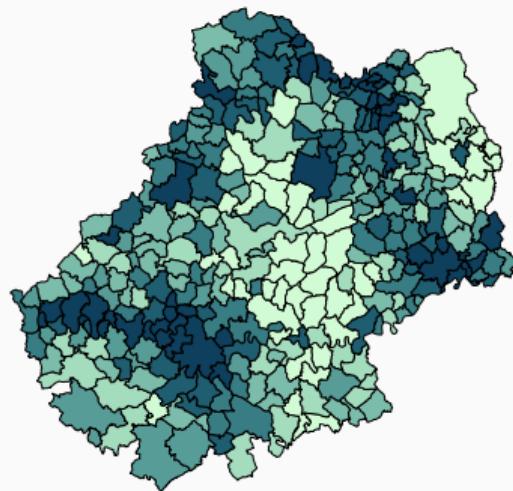


**Economically active**

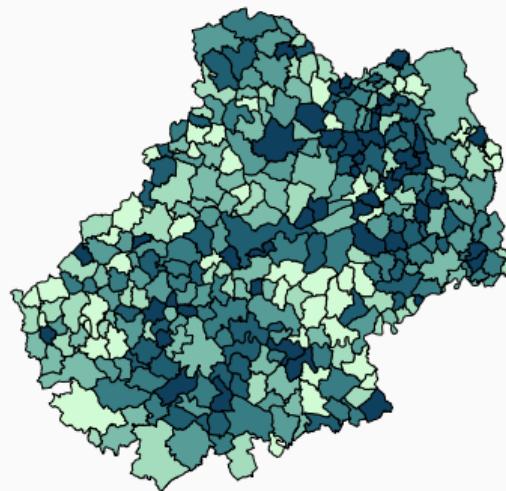


# The terra package - Fisher


**Population density**

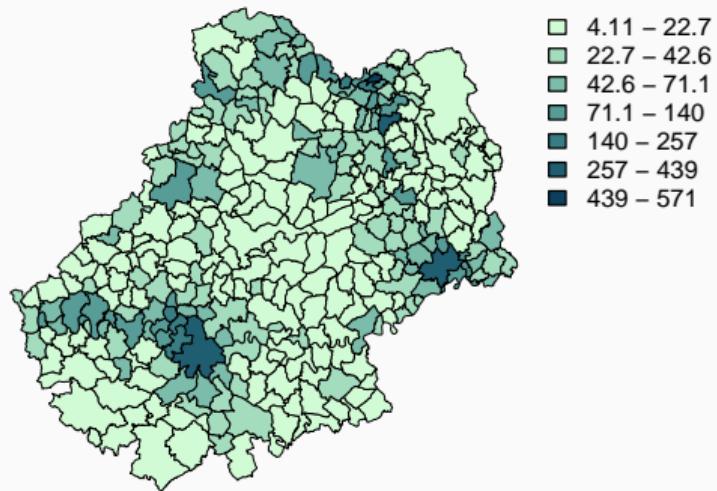

**Economically active**

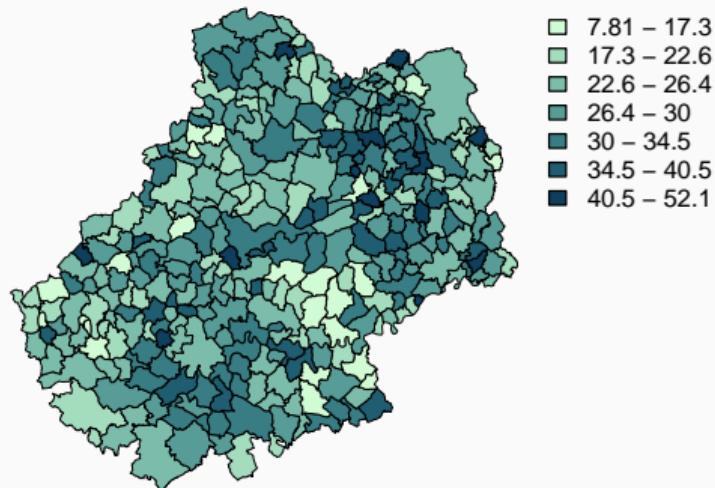

# The terra package - geometric progression

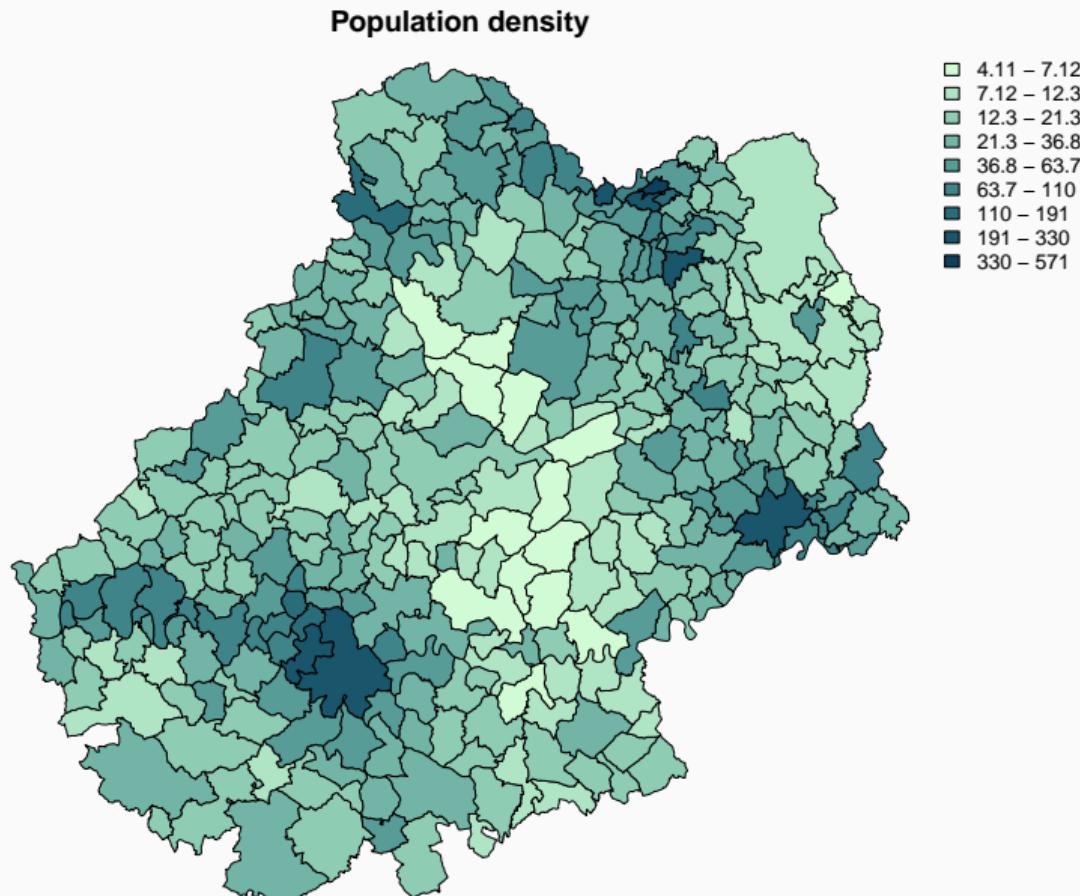

- Similarly, the Python module `mapclassify` is a helper in the background rather than being offered the attention it arguably deserves.
- While many users will be more familiar with graphical user interfaces for choosing how to construct class intervals, programmatic interfaces reveal a good deal of what is happening when choices are made.

## sessionInfo()

```
sessionInfo()

## R version 4.3.1 (2023-06-16)
## Platform: x86_64-pc-linux-gnu (64-bit)
## Running under: Fedora Linux 38 (Workstation Edition)
##
## Matrix products: default
## BLAS:    /home/rsb/topics/R/R431-share/lib64/R/lib/libRblas.so
## LAPACK:  /home/rsb/topics/R/R431-share/lib64/R/lib/libRlapack.so;  LAPACK version 3.11.0
##
## locale:
## [1] LC_CTYPE=en_GB.UTF-8      LC_NUMERIC=C
## [3] LC_TIME=en_GB.UTF-8       LC_COLLATE=en_GB.UTF-8
## [5] LC_MONETARY=en_GB.UTF-8   LC_MESSAGES=en_GB.UTF-8
## [7] LC_PAPER=en_GB.UTF-8      LC_NAME=C
## [9] LC_ADDRESS=C              LC_TELEPHONE=C
## [11] LC_MEASUREMENT=en_GB.UTF-8 LC_IDENTIFICATION=C
##
## time zone: Europe/Oslo
## tzcode source: system (glibc)
##
## attached base packages:
## [1] stats      graphics   grDevices utils      datasets  methods
```

## sessionInfo ii

```
## [7] base
##
## other attached packages:
## [1] modelsummary_1.4.1 classInt_0.4-10      mapsf_0.7.0
## [4] ggplot2_3.4.3
##
## loaded via a namespace (and not attached):
## [1] tidyselect_1.2.0      viridisLite_0.4.2
## [3] dplyr_1.1.2          farver_2.1.1
## [5] fastmap_1.1.1        cartogram_0.3.0
## [7] fontquiver_0.2.1     promises_1.2.1
## [9] digest_0.6.33         mime_0.12
## [11] lifecycle_1.0.3       sf_1.0-14
## [13] gfonts_0.2.0         ellipsis_0.3.2
## [15] terra_1.7-39         magrittr_2.0.3
## [17] compiler_4.3.1       rlang_1.1.1
## [19] tools_4.3.1          utf8_1.2.3
## [21] yaml_2.3.7           gt_0.9.0
## [23] huxtable_5.5.2       data.table_1.14.8
## [25] knitr_1.43            htmlwidgets_1.6.2
## [27] askpass_1.1            labeling_0.4.2
## [29] curl_5.0.2             xml2_1.3.5
## [31] KernSmooth_2.23-22    httpcode_0.3.0
```

## sessionInfo iii

```
## [33] withr_2.5.0           grid_4.3.1
## [35] fansi_1.0.4            gdtools_0.3.3
## [37] xtable_1.8-4           e1071_1.7-13
## [39] colorspace_2.1-0        scales_1.2.1
## [41] crul_1.4.0              insight_0.19.3
## [43] cli_3.6.1               rmarkdown_2.24
## [45] crayon_1.5.2            ragg_1.2.5
## [47] generics_0.1.3           rstudioapi_0.15.0
## [49] httr_1.4.7               DBI_1.1.3
## [51] proxy_0.4-27             stringr_1.5.0
## [53] assertthat_0.2.1          rvest_1.0.3
## [55] vctrs_0.6.3              webshot_0.5.5
## [57] jsonlite_1.8.7            fontBitstreamVera_0.1.1
## [59] systemfonts_1.0.4          packcircles_0.3.5
## [61] units_0.8-3               glue_1.6.2
## [63] codetools_0.2-19          DT_0.28
## [65] stringi_1.7.12            flextable_0.9.2
## [67] gtable_0.3.3              later_1.3.1
## [69] tables_0.9.17             munsell_0.5.0
## [71] tibble_3.2.1               pillar_1.9.0
## [73] htmltools_0.5.6            openssl_2.1.0
## [75] R6_2.5.1                  textshaping_0.3.6
## [77] evaluate_0.21              kableExtra_1.3.4
```

## sessionInfo iv

```
## [79] shiny_1.7.5           highr_0.10
## [81] backports_1.4.1        moments_0.14.1
## [83] fontLiberation_0.1.0    httpuv_1.6.11
## [85] class_7.3-22           Rcpp_1.0.11
## [87] zip_2.3.0               uuid_1.1-0
## [89] checkmate_2.2.0          svglite_2.1.1
## [91] officer_0.6.2            xfun_0.40
## [93] pkgconfig_2.0.3
```

## Aftermatter

---

## References i

- Becker, R. A., and J. M. Chambers. 1984. *S: An Interactive Environment for Data Analysis and Graphics*. Pacific Grove, CA, USA: Wadsworth & Brooks/Cole.
- Dickinson, G. C. 1973. *Statistical Mapping and the Presentation of Statistics*. London: Edward Arnold.
- Dolnicar, Sara, and Friedrich Leisch. 2003. "Winter Tourist Segments in Austria: Identifying Stable Vacation Styles Using Bagged Clustering Techniques." *Journal of Travel Research* 41 (3): 281–92. <https://doi.org/10.1177/0047287502239037>.
- . 2004. "Segmenting Markets by Bagged Clustering." *Australasian Marketing Journal* 12 (1): 51–65. [https://doi.org/10.1016/S1441-3582\(04\)70088-9](https://doi.org/10.1016/S1441-3582(04)70088-9).
- Fisher, Walter D. 1958. "On Grouping for Maximum Homogeneity." *Journal of the American Statistical Association* 53 (284): 789–98. <https://doi.org/10.1080/01621459.1958.10501479>.

## References ii

- Giraud, Timothée, and Hugues Pecout. 2023. "Cartographie avec R."  
<https://doi.org/10.5281/zenodo.7528161>.
- Hyndman, Rob J., and Yanan Fan. 1996. "Sample Quantiles in Statistical Packages." *The American Statistician* 50 (4): 361–65. <https://doi.org/10.1080/00031305.1996.10473566>.
- Jenks, George F., and Fred C. Caspall. 1971. "Error on Choroplethic Maps: Definition, Measurement, Reduction." *Annals of the Association of American Geographers* 61 (2): 217–44.  
<https://doi.org/10.1111/j.1467-8306.1971.tb00779.x>.
- Jiang, Bin. 2013. "Head/Tail Breaks: A New Classification Scheme for Data with a Heavy-Tailed Distribution." *The Professional Geographer* 65 (3): 482–94.  
<https://doi.org/10.1080/00330124.2012.700499>.

## References iii

- Leisch, Friedrich. 1999. "Bagged Clustering." WorkingPaper 51. August 1999. Working Papers SFB "Adaptive Information Systems and Modelling in Economics and Management Science". SFB Adaptive Information Systems; Modelling in Economics; Management Science, WU Vienna University of Economics; Business; SFB Adaptive Information Systems; Modelling in Economics; Management Science, WU Vienna University of Economics; Business.
- Lovelace, Robin, Jakub Nowosad, and Jannes Muenchow. 2019. *Geocomputation with R*. Chapman; Hall/CRC.<https://geocompr.robinlovelace.net/> .
- Pebesma, Edzer, and Roger Bivand. 2023. *Spatial Data Science with Applications in R*. Chapman & Hall. <https://www.routledge.com/Spatial-Data-Science-With-Applications-in-R/Pebesma-Bivand/p/book/9781138311183>.
- Slocum, Terry A., Robert B. McMaster, Fritz C. Kessler, and Hugh H. Howard. 2005. *Thematic Cartography and Geographic Visualization*. Upper Saddle River NJ: Prentice Hall.

- Tennekes, Martijn. 2018. "tmap: Thematic Maps in R." *Journal of Statistical Software* 84 (6): 1–39.  
<https://doi.org/10.18637/jss.v084.i06>.
- Tobler, W. R. 1973. "Choropleth Maps Without Class Intervals?" *Geographical Analysis* 5 (3): 262–65. <https://doi.org/10.1111/j.1538-4632.1973.tb01012.x>.
- Tyler, Judith A. 2010. *Principles of Map Design*. New York: Guilford.