CQLOE.1_A Flight Crew Paperwork

B747-8F / GENX-2B67P Callsign: GIANT 416 HEAVY RKSI / RJAA

NOTE: ALL DATA IS FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI416/##XXX/RKSI-RJAA/N###GT
OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

GTI416/## **RKSI - RJAA** **## XXX ##** **N###GT**
COST INDEX 041 **Revision: 0**
B747-8F / GENX-2B67P / KG / IFR / **FF +3.5**
PROGS ###### Release Valid Until ####Z ##XXX##

ORIG	RKSI/ICN SEOUL/INCHEON INTL	N37278E126263	####Z
DEST	RJAA/NRT TOKYO/NARITA INTL	N35459E140231	####Z
PALT	RJTT/HND TOKYO/HANEDA INTL	N35332E139469	####Z

RKSI/F350 OSPOT2C OSPOT Y782 TGU Y659 KPO Y685 SAPRA Y599 KABKI Y597 MIHOU Y45 KMC Y515 ZUWAI Y517 ESKAS Y303 ENTAK/F360 Y30 SWAMP SWAMPN RJAA

Coldest Fuel Temp: N/A A/WC: T088 T-DEV: P05
FMC Reserves: 9.1 ADIS: 812

	RKSI-RJAA		
ALT1/2	RJTT/		
	FUEL	TIME	GDIS
TRIP	**018600**	**01.53**	**0924**
CONT	001800	00.11	
ALT1	004400	00.25	0112
FRES	004700	00.30	
ADD.AL	000300	00.02	
PCF	000000	00.00	
MINF	**029800**	**03.01**	**....**
EXTRA	013800	01.28	
TOF	043600		
TAXI	001400	00.35	
BLOCK	**045000**	**05.04**	
REMF	**025000**	**02.40**	**....**

	Weight	**Actual**	**Limit**	
DOW	195000			
PYLD	105000			
ZFW	300000	.....	S329761	ZFW INC/1000 X 206 MINF ADJ
RAMP	345000		S449056	
TOGW	343600	.....	L364690	
LDGW	325000		S346090	

WEIGHT LIMIT CODES:
S-STRUCT P-PERF L-MTOW BASED ON LDW+TRIP FUEL I-BY DISPATCHER

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

Remarks

GCC CONTACTS
+1-914-701-8045 = ATLAS DISPATCH
+1-914-701-8050 = SYSTEM OPS MOD

RAIM VALIDATION PASSED

EXTRA FUEL FOR TANKERING

B747-8F/GENX-2B67/-2B67P. Engine failure takeoff performance
based on 10-minute max takeoff EGT limit. Ref: TA747-25-1

RKSI CAT II/III - RWY 15L/15R/16L/16R/33L/33R/34L/34R
RJAA CAT II/III - RWY 16R
RJTT CAT II/III - RWY 34R

MEL/CDL
No Applicable Items

Flight Release Authorization

I certify that this flight has been dispatched in accordance with applicable FARs. All pages of the Operational Flight Plan are an integral part of the Flight Release. By signing this release, I am affirming my belief that the planned flight can be operated safely.

Signed by PIC .. .. (Circle name below)

Signed by Dispatcher: RELEASE NOT VALID

Fit for Duty Affirmation

By signing below, I affirm that I am fit for duty to operate this flight.

			FIT FOR DUTY/ JS VERIFY	RELIEF PIC START-END(Z)
CA	1	1	.. ..	
			TO/LNDG Expiry: --	
FO	2	2	.. ..	
			TO/LNDG Expiry: --	

TO/LNDG currency questions? contact Duty Pilot

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI416/##XXX/RKSI-RJAA/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

TIME		FUEL			
OUT:	/	ETA RJAA:		UPLIFT:	
OFF:	/	SOB:		PYLD:	
ON:	/	RVSM ALTIMETER RECORD			
IN:	/	L:	S:		R:

```
(FPL-GTI416-IS
-B748/H-SDE1E2E3FGHIJ3J7M3P2RWXYZ/LB1D1
-RKSI####
-N0486F350 OSPOT2C OSPOT Y782 TGU Y659 KPO Y685 SAPRA Y599 KABKI
Y597 MIHOU Y45 KMC Y515 ZUWAI Y517 ESKAS Y303 ENTAK/N0492F360 Y30
SWAMP
-RJAA0153 RJTT
-PBN/A1B1C1D1L1O1S2 NAV/RNVD1E2A1 DAT/CPDLCX SUR/260B RSP180 CANMANDATE
DOF/###### REG/N###GT EET/RJJJ0032 SEL/#### CODE/###### OPR/GTI RMK/TCAS
II EQUIPPED CARGO EMERG CTC 19147018045)
```

Overflight/Landing Permits

AWY	WPT	MTK	NM	GS	TAS	LEG-T	ETA	MTRS	ISA	WC	REMF
MORA		TTK	MH	IAS	.M	TOT-T	ATA	FL	TEMP	WIND	AREM
	RKSI 00023 FT							SEOUL/INCHEON INTL			
	N37 27.8										
	E126 26.3										
OSPOT2C	**OSPOT**										
	N36 50.3	123	063	367	341	00.11			CLB	T026	0391
	E127 20.9	114	145	CLB	CLB	00.11		CLB	CLB	281/035	
Y782	**VASLI**										
	N36 42.9	144	011	503	461	00.01			CLB	T043	0387
	E127 30.0	135	149	CLB	CLB	00.12		CLB	CLB	277/054	
Y782	**MAKDU**										
	N36 27.2	144	022	523	478	00.03			CLB	T046	0380
	E127 49.2	135	151	CLB	CLB	00.15		CLB	CLB	270/068	
Y782	**BITUX**										
	N36 16.7	145	014	523	476	00.02			CLB	T048	0377
	E128 01.8	136	153	CLB	CLB	00.17		CLB	CLB	266/080	
Y782	**TOC**										
	N36 10.6	145	009	525	476	00.01			CLB	T050	0375
	E128 09.2	136	153	CLB	CLB	00.18		CLB	CLB	266/082	
Y782	**TGU**		**DALSEONG**					**112.20**			
	N35 48.6	145	031	538	486	00.03			P04	T053	0369
	E128 35.4	136	154	286	836	00.21		F350	-51	266/090	

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI416/##XXX/RKSI-RJAA/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

AWY	WPT	MTK	NM	GS	TAS	LEG-T	ETA	MTRS	ISA	WC	REMF
MORA		TTK	MH	IAS	.M	TOT-T	ATA	FL	TEMP	WIND	AREM
Y659	LAPAL										
	N35 54.2	085	024	573	485	00.03			P04	T089	0365
	E129 04.9	077	083	285	834	00.24		F350	-51	266/090	
Y659	KPO		POHANG					112.50			
	N35 58.6	086	020	574	484	00.02			P03	T091	0361
	E129 28.5	077	083	285	834	00.26		F350	-51	266/092	
Y685	BULGA										
	N35 56.2	107	017	575	484	00.01			P03	T092	0359
	E129 49.4	098	110	285	834	00.27		F350	-52	266/094	
(RJJJ)	AT SAPRA						00.32	FUKUOKA FIR			
Y685	SAPRA										
	N35 49.4	107	044	577	484	00.05			P03	T094	0352
	E130 43.4	099	110	285	834	00.32		F350	-51	267/096	
Y599	KABKI										
	N35 45.2	101	094	582	484	00.10			P04	T098	0336
	E132 39.5	092	102	284	833	00.42		F350	-50	267/099	
Y597	PEPOS										
	N35 43.0	131	005	562	485	00.00			P04	T078	0335
	E132 43.8	122	139	284	834	00.42		F350	-50	266/101	
Y597	MIHOU										
	N35 31.9	131	021	568	485	00.02			P04	T085	0331
	E133 05.6	122	140	284	833	00.44		F350	-50	266/110	
Y45	ATPOD										
	N35 40.9	080	028	589	483	00.03			P04	T107	0327
	E133 38.5	071	075	283	831	00.47		F350	-50	266/112	
Y45	SAKYU										
	N35 55.0	080	045	582	484	00.05			P05	T099	0320
	E134 31.1	071	076	284	831	00.52		F350	-50	267/103	
Y45	MADUL										
	N35 59.0	080	013	581	484	00.01			P05	T098	0318
	E134 46.2	072	077	283	830	00.53		F350	-49	267/102	
Y45	SONBU										
	N36 11.5	081	041	581	484	00.05			P05	T098	0311
	E135 35.0	072	077	283	830	00.58		F350	-49	267/102	
Y45	KMC		KOMATSU					112.00			
	N36 23.8	081	042	587	483	00.04			P05	T104	0305
	E136 24.3	073	079	283	830	01.02		F350	-50	261/106	

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI416/##XXX/RKSI-RJAA/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

AWY MORA	WPT	MTK TTK	NM MH	GS IAS	TAS .M	LEG-T TOT-T	ETA ATA	MTRS FL	ISA TEMP	WC WIND	REMF AREM
Y515	ZUWAI										
	N36 37.8	070	029	586	483	00.03			P04	T105	0299
	E136 57.0	062	065	283	830	01.05		F350	-50	261/112	
Y517	OTARI										
	N36 47.4	088	056	598	482	00.06			P04	T117	0291
110	E138 05.6	080	088	283	829	01.11		F350	-50	262/117	
Y517	HAKKA										
	N36 50.6	089	019	600	483	00.01			P05	T118	0288
	E138 28.8	080	088	283	829	01.12		F350	-50	262/118	
Y517	IKAHO										
	N36 55.2	089	029	592	484	00.03			P06	T109	0283
	E139 04.5	081	088	282	829	01.15		F350	-48	263/109	
Y517	MAUKA										
	N36 58.4	089	020	582	484	00.02			P06	T099	0281
	E139 29.1	081	088	282	829	01.17		F350	-48	264/099	
Y517	YAGAN										
	N37 00.8	089	015	583	484	00.02			P05	T100	0278
	E139 47.9	081	088	283	829	01.19		F350	-49	264/100	
Y517	SYOEN										
	N37 02.3	090	010	583	484	00.01			P05	T100	0276
	E140 00.2	081	089	283	829	01.20		F350	-49	264/100	
Y517	LIVET										
	N37 04.1	089	012	583	484	00.01			P05	T100	0274
	E140 14.6	081	089	283	829	01.21		F350	-49	264/100	
Y517	ESKAS										
	N37 06.6	090	017	583	484	00.02			P05	T100	0272
	E140 35.8	081	089	283	829	01.23		F350	-49	264/100	
Y303	ENTAK										
	N36 59.6	135	012	555	486	00.01			P05	T070	0270
	E140 47.7	126	144	284	833	01.24		F350	-49	264/101	
Y30	GURIP										
	N36 33.3	205	027	436	492	00.04			P07	H055	0263
	E140 37.6	197	216	282	843	01.28		F360	-49	263/111	
Y30	TOD										
	N36 29.6	205	004	431	492	00.01			P07	H060	0262
	E140 36.2	197	216	282	844	01.29		F360	-49	263/119	

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI416/##XXX/RKSI-RJAA/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

AWY MORA	WPT	MTK NM TTK MH	GS IAS	TAS .M	LEG-T TOT-T	ETA ATA	MTRS FL	ISA TEMP	WC WIND	REMF AREM
Y30	SWAMP									
	N36 19.2	205 011	425	485	00.01			DSC	H059	0262
	E140 32.3	197 216	DSC	DSC	01.30		DSC	DSC	263/118	
SWAMPN	RJAA	00135 FT					TOKYO/NARITA INTL			
	N35 45.9	141 119	331	334	00.23			DSC	H004	0250
	E140 23.1	133 193	DSC	DSC	01.53		DSC	DSC	258/045	

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

GTI416/##XXX/RKSI-RJAA/N###GT

OPERATIONAL FLIGHT PLAN -- RELEASE NOT VALID --

Destination Primary Alternate Route

RJAA DCT MESSE DCT RJTT

RJAA/0170

GCD 032 GDIS112 FUEL 4400 TIME 00.25

MORA 2000

TLR

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

```
TAKEOFF AND LANDING REPORT GTI 0416 RKSI-RJAA ##XXX##
TLR-2 SEQ-88292711 ##XXX## ####Z
A/C N###GT  B747-8F GENX-2B67P KG

ACARS INIT DATE = ##    ACARS TAKEOFF REQUEST = ####Z-####Z
        -- TLR TAKEOFF DATA VALID IF --
OAT RANGE = -4C TO MT      QNH = GREATER OR EQUAL TO 29.61

/// TAKEOFF DATA ///

APT PRWY        POAT PWIND PQNH FLP PTOW MFPTW
RKSI 15R        6.0 240M02 29.76 10 3436 4037

RMKS PACKS ON
     ENGINE ANTI-ICE ON
     WET RUNWAY
     FLAPS PLANNED AT 10 ONLY
     29-11-02-04

-------- ---- ---- ---- ----------------- -----   --- --- ---
RWY      MTOW ATM N1    THR/PACKS CONFIG FLAPS    V1 VR V2

-------- -------- --------------------------
SMRGN    ACCEL    EFP

---------------------------- RUNWAY INFO ----------------------------
RWY          LENGTH EFP     NOTES
15L           12303 DT H154
15R           12303 DT H154
16L           13123 DT H154
16R           12303 DT H154
33L           12303 LT H240
33R           12303 LT H240
34L           12303 LT H240
34R           13123 LT H240

------------- DRY RWY - PTOW - ENG A/I ON - CALM WIND ---------------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3436 50 83.6 D-TO 2 - PACKS ON    10 154 164 172
15R          3436 50 83.6 D-TO 2 - PACKS ON    10 154 164 172
16L          3436 53 82.4 D-TO 2 - PACKS ON    10 156 164 172
16R          3436 50 83.6 D-TO 2 - PACKS ON    10 154 164 172
33L          3436 50 83.6 D-TO 2 - PACKS ON    10 154 164 172
33R          3436 50 83.6 D-TO 2 - PACKS ON    10 154 164 172
34L          3436 50 83.6 D-TO 2 - PACKS ON    10 154 164 172
34R          3436 53 82.4 D-TO 2 - PACKS ON    10 156 164 172

-------- DRY RWY - PTOW PLUS 10000 - ENG A/I ON - CALM WIND ---------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3536 46 85.1 D-TO 2 - PACKS ON    10 155 166 174
15R          3536 46 85.1 D-TO 2 - PACKS ON    10 155 166 174
16L          3536 50 83.5 D-TO 2 - PACKS ON    10 156 167 174
16R          3536 46 85.1 D-TO 2 - PACKS ON    10 155 166 174
33L          3536 46 85.1 D-TO 2 - PACKS ON    10 155 166 174
33R          3536 46 85.1 D-TO 2 - PACKS ON    10 155 166 174
34L          3536 46 85.1 D-TO 2 - PACKS ON    10 155 166 174
34R          3536 50 83.5 D-TO 2 - PACKS ON    10 156 167 174

-------------- DRY RWY - PTOW - ENG A/I ON - 15KT TW ----------------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3436 45 85.3 D-TO 2 - PACKS ON    20 141 153 160
15R          3436 45 85.3 D-TO 2 - PACKS ON    20 141 153 160
16L          3436 45 85.3 D-TO 2 - PACKS ON    20 146 153 160
16R          3436 45 85.3 D-TO 2 - PACKS ON    20 141 153 160
33L          3436 45 85.3 D-TO 2 - PACKS ON    20 141 153 160
33R          3436 45 85.3 D-TO 2 - PACKS ON    20 141 153 160
34L          3436 45 85.3 D-TO 2 - PACKS ON    20 141 153 160
34R          3436 45 85.3 D-TO 2 - PACKS ON    20 146 153 160

--------- DRY RWY - PTOW PLUS 10000 - ENG A/I ON - 15KT TW ----------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
```

```
15L          3536 42 86.7 D-TO 2 - PACKS ON    20 142 155 162
15R          3536 42 86.7 D-TO 2 - PACKS ON    20 142 155 162
16L          3536 42 86.7 D-TO 2 - PACKS ON    20 146 155 162
16R          3536 42 86.7 D-TO 2 - PACKS ON    20 142 155 162
33L          3536 42 86.7 D-TO 2 - PACKS ON    20 142 155 162
33R          3536 42 86.7 D-TO 2 - PACKS ON    20 142 155 162
34L          3536 42 86.7 D-TO 2 - PACKS ON    20 142 155 162
34R          3536 42 86.7 D-TO 2 - PACKS ON    20 146 155 162

------------- WET RWY - PTOW - ENG A/I ON - CALM WIND ---------------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3436 49 83.9 D-TO 2 - PACKS ON    10 148 164 172
15R          3436 49 83.9 D-TO 2 - PACKS ON    10 148 164 172
16L          3436 53 82.5 D-TO 2 - PACKS ON    10 151 164 172
16R          3436 49 83.9 D-TO 2 - PACKS ON    10 148 164 172
33L          3436 49 83.9 D-TO 2 - PACKS ON    10 148 164 172
33R          3436 49 83.9 D-TO 2 - PACKS ON    10 148 164 172
34L          3436 49 83.9 D-TO 2 - PACKS ON    10 148 164 172
34R          3436 53 82.5 D-TO 2 - PACKS ON    10 151 164 172

-------- WET RWY - PTOW PLUS 10000 - ENG A/I ON - CALM WIND ---------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3536 46 85.0 D-TO 2 - PACKS ON    10 153 166 174
15R          3536 46 85.0 D-TO 2 - PACKS ON    10 153 166 174
16L          3536 49 84.0 D-TO 2 - PACKS ON    10 151 167 174
16R          3536 46 85.0 D-TO 2 - PACKS ON    10 153 166 174
33L          3536 46 85.0 D-TO 2 - PACKS ON    10 153 166 174
33R          3536 46 85.0 D-TO 2 - PACKS ON    10 153 166 174
34L          3536 46 85.0 D-TO 2 - PACKS ON    10 153 166 174
34R          3536 49 84.0 D-TO 2 - PACKS ON    10 151 167 174

-------------- WET RWY - PTOW - ENG A/I ON - 15KT TW ----------------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3436 44 85.7 D-TO 2 - PACKS ON    20 131 151 159
15R          3436 44 85.7 D-TO 2 - PACKS ON    20 131 151 159
16L          3436 45 85.3 D-TO 2 - PACKS ON    20 135 153 160
16R          3436 44 85.7 D-TO 2 - PACKS ON    20 131 151 159
33L          3436 44 85.7 D-TO 2 - PACKS ON    20 131 151 159
33R          3436 44 85.7 D-TO 2 - PACKS ON    20 131 151 159
34L          3436 44 85.7 D-TO 2 - PACKS ON    20 131 151 159
34R          3436 45 85.3 D-TO 2 - PACKS ON    20 135 153 160

--------- WET RWY - PTOW PLUS 10000 - ENG A/I ON - 15KT TW ----------
RWY          MTOW MT    N1 CONFIG              FL V1 VR V2
15L          3536 42 86.7 D-TO 2 - PACKS ON    20 132 153 161
15R          3536 42 86.7 D-TO 2 - PACKS ON    20 132 153 161
16L          3536 42 86.6 D-TO 2 - PACKS ON    20 136 155 162
16R          3536 42 86.7 D-TO 2 - PACKS ON    20 132 153 161
33L          3536 42 86.7 D-TO 2 - PACKS ON    20 132 153 161
33R          3536 42 86.7 D-TO 2 - PACKS ON    20 132 153 161
34L          3536 42 86.7 D-TO 2 - PACKS ON    20 132 153 161
34R          3536 42 86.6 D-TO 2 - PACKS ON    20 136 155 162

/// LANDING DATA ///

APT PRWY         POAT PWIND PQNH    FLP PLDW PMRLW
RJAA 16R         10.0 000M00 1008   25 3250 4490

RMKS 29-11-02-04
     HYD PRES SYS 1+4 - FLAPS 25 VREF 30+20 (SEE FDP)

---------------------------- RUNWAY INFO -----------------------------
RWY          LENGTH SLOPE NOTES
16L            8202 0.07
16R           13123 0.07
34L           13123 -0.07
34R            8202 -0.07

- AUTOBRK 2 - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND --
        FLAPS 25
  LDW   DRY      WET
  3400  10519    10530
  3300  10259    10270
/ 3250  10129    10140
  3200   9999    10010
  3100   9739     9750
```

HW/KT   -49   -49
TW/KT   +164   +165
UP/1PCT   -12   -13
DN/1PCT   +5   +9

- AUTOBRK 3 - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND --
        FLAPS 25
  LDW   DRY   WET
  3400   9245   9514
  3300   9025   9294
/ 3250   8915   9184
  3200   8805   9074
  3100   8585   8854
HW/KT   -43   -44
TW/KT   +142   +145
UP/1PCT   0   -3
DN/1PCT   +0   +3

- AUTOBRK 4 - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND --
        FLAPS 25
  LDW   DRY   WET
  3400   8118   9050
  3300   7938   8850
/ 3250   7848   8750
  3200   7758   8650
  3100   7578   8450
HW/KT   -37   -38
TW/KT   +122   +126
UP/1PCT   0   -2
DN/1PCT   +0   +5

 AUTOBRK MAX - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND -
        FLAPS 25
  LDW   DRY   WET
  3400   6494   8727
  3300   6354   8507
/ 3250   6284   8397
  3200   6214   8287
  3100   6074   8067
HW/KT   -28   -36
TW/KT   +91   +133
UP/1PCT   0   -12
DN/1PCT   +0   +16

- MAX MANUAL - 15PCT LDG FACTOR - NO THR REV - MAN LAND - CALM WIND --
        FLAPS 25
  LDW   DRY   WET
  3400   6065   8734
  3300   5885   8514
/ 3250   5795   8404
  3200   5705   8294
  3100   5525   8074
HW/KT   -24   -37
TW/KT   +78   +133
UP/1PCT   -6   -14
DN/1PCT   +0   +16

  343600/343600/325000/1400/18600/29800/45000
END TAKEOFF AND LANDING REPORT GTI 0416 RKSI-RJAA ##XXX##

Sable Loadsheet

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

```
ATLAS AIR              B747-8F            LOADSHEET       (Rel. 5.2.11-11010)  Loadsheet Printout NR: 1
                       STANDARD           PROD. TIME: ##:##                     Loadplan Printout NR: 1
FROM/TO        FLIGHT                     A/C REG         ACM     DATE           TIME
ICN/NRT        GTI416                     N###GT           0      ##-XXX-####    ##:##
                            Data Rev. Date: ##-XXX-####
ALL WEIGHTS IN KG
 ---------------- MAIN DECK ------------------------------
     A1   A2   B1   C    D    E    F    G    H    J    K    L    M    P    R    S    T    U    X
R    0    0    6000 6000 6000 6000 5000 5000 4000 4000 3000 2000 3000 2500 0    0    0    0    0
C    0    0    0    0    0    0    0    0    0    0    0    0    0    0    0    0    0    0    0
L    0    0    6000 6000 6000 6000 5000 5000 4000 4000 3000 2000 3000 2500 0    0    0    0    0
 ---------------- LOWER DECK ------------------------------
     11P  12P  21P  22P  23P  24P  25P  31P  32P  33P  41P  42P  52   53   54
     0    0    0    0    0    0    0    0    0    0    0    0    0    0    0
IDX  0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00
                                        WGT KG     CAPTAIN:
BASIC OPERATING WGT                     194687
BALLAST                                      0
ACM                 (00)                     0
SWA                                        313
TOTAL TRAFFIC LOAD                      105000
ZERO FUEL WEIGHT    (Max: 329761)       300000
TAXI FUEL                                 1400
TAKE OFF FUEL                            43600
TAKE OFF WEIGHT     (Op. Max: 364690)   343600
TRIP FUEL                                18600
LANDING WEIGHT      (Max: 346090)       325000
ALLOWED PAYLOAD                         126090
                                        FUEL TANK STATUS: ALL FUEL TANKS OK
CAPTAINS INFO BEFORE LMC
IMBALANCE            0.0 %
NOTOC DG             NO                 LOADING CERTIFICATE-I CERTIFY THAT THE LOADING OF THIS
NOTOC SC             NO                 A/C IS IN ACCORDANCE WITH CURRENT LOADING INSTRUCTIONS
                                        AND LOADPLAN. FERRY FLIGHTS-THE BULK AND LOWER
ACTUAL WEIGHT USED FOR CARGO            COMPARTMENTS HAVE BEEN CHECKED AND ALL BAGGAGE/CARGO
                                        REMOVED.
BALANCE CONDITIONS
                  FWD              AFT  LOAD SUPERVISOR: _____________________ (PRINT NAME)
ZFW MAC   21.0 %   14               33
TOW MAC   21.0 %   12               33                   _____________________ (SIGNATURE)
LDG MAC   21.0 %   13               33
STABTRIM                                CPT ACCEPTANCE : _____________________ (SIGNATURE)
UNDERLOAD BEFORE LMC:     21090 KG      LAST MINUTE CHANGES
LOADSHEET CHECKED AND APPROVED BY:      RELEASE NOT VALID
--------------------      --------------------      --------------------      --------------------
LWR/FWD DECK CHECKED      LWR/AFT DECK CHECKED      PRINT NAME                SIGNATURE
```

FDP

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

RKSI 15R Flaps 10

```
QU HDQIT5Y
.PERFF5Y ######
M31
AN N###GT/FI 5Y416
- 300.0
021.0

RKSI          GENX-2B67P
FLT NO    RLS NO    TIME
0416         0     ####Z
WIND KTS  OAT C      QNH
240/02     +06      1008
------------------------
GRWT 345.0    VREF30 161
FUEL  45.0
ZFW  300.0

REMARKS
WET RUNWAY
29-11-02-04
ENGINE ANTI-ICE ON

RKSI  15R          12303
TOGW  343.6   SMRGN ----
FLAPS 10        PACKS ON
ATM   49C         V1 148
THR   D-TO 2      VR 164
N1    83.9        V2 172
CG    21.0     TRIM  7.6

DT H154      ACCEL  1000
```

RKSI 33L Flaps 20

```
RKSI          GENX-2B67P
FLT NO    RLS NO    TIME
0416         0     ####Z
WIND KTS  OAT C      QNH
240/02     +06      1008
------------------------
GRWT 345.0    VREF30 161
FUEL  45.0
ZFW  300.0

REMARKS
WET RUNWAY
29-11-02-04
ENGINE ANTI-ICE ON

RKSI  33L          12303
TOGW  343.6   SMRGN ----
FLAPS 20        PACKS ON
ATM   44C         V1 131
THR   D-TO 2      VR 151
N1    85.7        V2 159
CG    21.0     TRIM  7.8

LT H240      ACCEL  1000
```

RJAA 16R Flaps 25

```
RJAA          GENX-2B67P
FLT NO     LDW      TIME
0416      325.0    ####Z
WIND KTS  OAT C      QNH
000/00     +10      1008
------------------------
REMARKS
NONE

16R               13123
LDW 325.0   MRLW 449.0/A
FLAPS 25    VREF +05
AUTOBRK 2    10129   5.3
AUTOBRK 3     8915   5.6
AUTOBRK 4     7848   5.8
MAX AUTO      6283   6.0
MAX MAN       5795   6.3
```

RJAA 16R Flaps 25 Reverse Credit

```
RJAA          GENX-2B67P
FLT NO     LDW      TIME
0416      325.0    ####Z
WIND KTS  OAT C      QNH
000/00     +10      1008
------------------------
REMARKS
THRUST REVERSE CREDIT

16R               13123
LDW 325.0   MRLW 449.0/A
FLAPS 25    VREF +05
AUTOBRK 2    10029   2.2
AUTOBRK 3     8915   3.0
AUTOBRK 4     7848   3.7
MAX AUTO      6283   4.8
MAX MAN       5436   5.7
```

RJAA 16R Flaps 30 Reverse Credit

```
RJAA          GENX-2B67P
FLT NO     LDW      TIME
0416      325.0    ####Z
WIND KTS  OAT C      QNH
000/00     +10      1008
-----------------------
REMARKS
THRUST REVERSE CREDIT

16R               13123
LDW 325.0   MRLW 449.0/A
FLAPS 30    VREF +05
AUTOBRK 2     9664   2.2
AUTOBRK 3     8560   3.0
AUTOBRK 4     7544   3.7
MAX AUTO      6048   4.8
MAX MAN       5267   5.7
```

RJAA 16R Flaps 30

```
RJAA          GENX-2B67P
FLT NO     LDW      TIME
0416      325.0    ####Z
WIND KTS  OAT C      QNH
000/00     +10      1008
-----------------------
REMARKS
NONE

16R               13123
LDW 325.0   MRLW 449.0/A
FLAPS 30    VREF +05
AUTOBRK 2     9714   5.3
AUTOBRK 3     8560   5.6
AUTOBRK 4     7544   5.8
MAX AUTO      6048   6.0
MAX MAN       5586   6.3
```

RJAA 16R Flaps 25 HYD SYS 1+4

```
RJAA          GENX-2B67P
FLT NO     LDW      TIME
0416      325.0    ####Z
WIND KTS  OAT C      QNH
000/00     +10      1008
-----------------------
REMARKS
THRUST REVERSE CREDIT
HYD PRES SYS 1+4 -
FLAPS 25 VREF 30+20

16R               13123
LDW 325.0   MRLW 449.0/A
FLAPS 25    VREF +20
AUTOBRK 2    -----   ---
AUTOBRK 3    -----   ---
AUTOBRK 4    -----   ---
MAX AUTO     -----   ---
MAX MAN       7212   6.6
```

COMPANY NOTAMS

GENERAL

RKSI **A####/##** ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: RKSI-FREQ

RKSI IN-RANGE CALL FREQ

ATLAS AIR OPS (B777, B747, B767) USE - 131.000

RJAA **A####/##** ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: RJAA-CURFEW

****
NRT CURFEW:
B747-400/F CURFEW = 1400-2100Z DAILY
N###MC, N###MC, N###SG, N###SG, N###BA CURFEW = 1500-2100Z DAILY
B767, B777, B748 CURFEW = 1500-2100Z DAILY
****

RJAA **A####/##** ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: RJAA-FLTOPS

NRT RUNWAY USE

DUE TO SLOT RESTRICTIONS IN NRT, POLAR ARRIVALS BETWEEN 1200Z
1400Z MAY BE ASSIGNED RWY 34R/16L. YOU MAY REQUEST RWY 34L/16R
IF NECESSARY.

FOR DEPARTURES, UTILIZE THE DEPARTURE RUNWAY THAT IS ASSIGNED BY
ATC IN THE CLEARANCE. IF 34R/16L IS ASSIGNED IN THE CLEARANCE,
REQUEST 34L/16R IF REQUIRED FOR OPERATIONAL NECESSITY. MUST BE
WHEELS UP BY 1359Z DUE TO CURFEW.

IF AN EXCEPTION TO THIS REQUIREMENT OCCURS, FILE AN FCR.

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ADMIN-AERODATA

AERODATA PERFORMANCE
IF 1/8 INCH OR LESS OF WATER, FROST, DRY SNOW OR WET SNOW
- USE WET RUNWAY FOR TAKEOFF PERFORMANCE.
- USE RCC/BRAKING ACTION, IF PROVIDED, FOR LANDING PERFORMANCE.
  OTHERWISE, USE LANDING SURFACE CONDITION.
THIS IS IN ACCORDANCE WITH FOM 8.1 RCAM MATRIX.

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ADMIN-DEICE

DEICING / ANTI-ICING INFORMATION FORM
---
* 1. TYPE OF PROCEDURE (DEICE OR DEICE/ANTI-ICE) (CIRCLE ONE) *
*   *
* 2. FLUID TYPE (TYPE I, II, III, OR IV)   (CIRCLE ONE)
*   BRAND:.....................
*   *
* 3. FLUID MIXTURE RATIO -   /   *
*   (FOR TYPE II, III, OR IV FLUID ONLY)   *
*   *
* 4. TIME (UTC) OF THE START OF THE FINAL APPLICATION -   Z *
*   *
*   - - RETAIN THIS FORM WITH THE TRIP ENVELOPE - -   *
*   **FOR LCF AIRCRAFT ONLY - DEICE REQUIRES LOGBOOK ENTRY** *

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ADMIN-PUBS747A

CURRENT AIRCRAFT LIBRARY REVISIONS

CURRENT / CURRENT EFF ON RECEIPT
747-8F
- QRH..... REV 17 ##-XXX-## / NA
- DDG..... VER 20 ##-XXX-## / NA
- NORMAL CHECKLIST..... ##-XXX-## / NA
- ECL ..... BFT2B-4000-01G9 / BFT29-4000-01L0
747-400P GE
- QRH..... REV 16 ##-XXX-## / NA
- DDG..... VER 22 ##-XXX-## / NA
- NORMAL CHECKLIST..... ##-XXX-## / NA
747-400P PW
- QRH..... REV 7 ##-XXX-## / NA
- DDG..... VER 22 ##-XXX-## / NA
- NORMAL CHECKLIST..... ##-XXX-## / NA
747-400F/C GE
- QRH..... REV 16 ##-XXX-## / NA
- DDG..... VER 22 ##-XXX-## / NA
- NORMAL CHECKLIST..... ##-XXX-## / NA
747-400F/C PW
- QRH..... REV 10 ##-XXX-## / NA
- DDG..... VER 22 ##-XXX-## / NA
- NORMAL CHECKLIST..... ##-XXX-## / NA
747-400LCF
- QRH..... REV 16 ##-XXX-## / NA
- DDG..... VER 8 ##-XXX-## / NA
- NORMAL CHECKLIST..... ##-XXX-## / NA
ALL 747
- SUPERNUM/JS BRIEFING CARD...##-XXX-## / NA
FOR ALL DDG TRS - REFER TO EFB COMPLY365

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ADMIN-WB INDEX

INDEX INFO REMOVED FROM W&B CO NOTAM. FOM 14.1.1 BEING REVISED.

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: ###-WB

N###GT WEIGHT AND BALANCE ADVISORY

BASIC CREW 195,000
+1 - 195,119 / +2 - 195,238 / +3 - 195,357
+4 - 195,476 / +5 - 195,595 / +6 - 195,714

A####/## ####-XXX-## ##:## - UFN
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

SUBJECT: B747-MAINDECK

****
FALSE MAIN DECK WARNINGS

THERE HAVE BEEN MULTIPLE FALSE MAIN DECK CARGO FIRE WARNING
MESSAGES CAUSED BY CONDENSATION OF MOISTURE AND FOG WHILE
CARRYING HIGH DENSITY FLOWERS AND LIVE ANIMALS SUCH AS PIGS
*MOST FALSE CARGO FIRE WARNING MESSAGES HAVE OCCURRED SEVERAL HRS
INTO THE FLIGHT AND MAIN DECK TEMP BELOW 8 DEGREES
*ANYTIME PERISHABLES OR LIVE ANIMALS ARE ON BOARD
THE USE OF FCOM SP PROCEDURES FOR CARRIAGE
OF ANIMALS AND PERISHABLES (FREIGHTER) MUST BE FOLLOWED
*IAW WITH FOM GUIDANCE, FLIGHT CREWS SHOULD DETERMINE THE
BEST COURSE OF ACTION BEFORE ENTERING CLASS E CARGO
COMPARTMENTS (MAIN DECK) TO VERIFY THE PRESENCE OF A FIRE

****

APT RKSI

ICN - SEOUL/INCHEON INTL DEPARTURE ## ##:## - ## ##:##
RWYS: 15L/33R 15R/33L 16L/34R 16R/34L

RUNWAY

RKSI ICN A1656/25 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

RWY 15L/33R CLSD DUE TO CONSTRUCTION
ACFT CROSSING RWY 15L/33R AVBL UNDER ATC INSTRUCTION

RKSI ICN A1657/25 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

RWY 16L/34R CLSD DUE TO WIP

RAMP

RKSI ICN Z1295/25 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

TRIGGER NOTAM - AIRAC AIP SUP 103/25
WEF #### UTC ## XXX #### TO #### UTC ## XXX ####
- ACFT STAND NR 711 OPNL RESTRICTION

AIRSPACE

RKSI ICN A1654/25 ####-XXX-## ##:## - PERM
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

REF AIP SUP 73/24 :
1. RECAT PROC WILL BE USED WI SEOUL TMA(RKSI, RKSS)
2. RECAT WAKE TURB MNM BASED ON GROUPING OF TYP INTO SEVEN GROUPS(A TO G)

OBSTACLE

RKSI ICN A1655/25 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - FL003

TEMP OBST(CRANE) ERECTED AS FLW :
1. AREA BOUNDED BY 372611N1262743E 372615N1262743E 372614N1262748E 372611N1262743E
2. HGT : 74.7M(245.08FT) AMSL
3. RADIUS : 70M

GENERAL

RKSI ICN Z1294/25 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

TRIGGER NOTAM - AIRAC AIP SUP 102/25
WEF #### UTC ## XXX #### TO #### UTC ## XXX ####
- OPNL RESTRICTION

RKSI ICN Z1290/25 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

TRIGGER NOTAM - PERM AIRAC AIP AMDT 12/25 WEF #### UTC ## XXX ####
- INFORMATION OF ISSUANCE OF DE/ANTI-ICING OPNS PHASE
- INFORMATION OF HOT SPOT, STOP-BAR LGTS, MAG VAR(9 DEGREE W 2020 CHG TO 9 DEGREE W 2025) AND ANNUAL RATE OF CHANGE(6 MIN W CHG TO 2 MIN W)

APT RJAA

NRT - TOKYO/NARITA INTL DESTINATION ## ##:## - ## ##:##
RWYS: 16L/34R 16R/34L

OBSTACLE

RJAA NRT A1612/25 ####-XXX-## ##:## - ####-XXX-## ##:##
CREATED:####-XXX-## ##:## **FL:** SFC - UNL

XXX ##-## ##-## ##-## ##-## XXX
##-## ##-## ##-## ##-## ####/####
HVY EQPT EXIST ABV APCH SFC FOR RWY 34R
1.PSN : BOUNDED BY FLW POINT
354648.43N1402348.29E 354644.60N1402351.06E
354642.96N1402351.06E 354643.33N1402348.76E
354643.43N1402347.48E 354642.18N1402344.88E
354645.23N1402341.08E
(701M TO 875M BFR RWY 34R THR AND
40M RIGHT TO 166M LEFT EXTENDED RCL)
(NARITA-SHI IN CHIBA)
2.NUMBER : 1
3.RMK : WX MNM, INST APCH PROC, DEP PROC NO CHANGE

APT RJTT

HND - TOKYO/HANEDA INTL ALTN 1 ## ##:## - ## ##:##
RWYS: 04/22 05/23 16L/34R 16R/34L

GENERAL

NIL

FIR RKRR

INCHEON FIR

GENERAL

NIL

FIR RJJJ

FUKUOKA FIR

GENERAL

NIL

APT RKSI

ICN - SEOUL/INCHEON INTL DEPARTURE ## ##:## - ## ##:##
RWYS: 15L/33R 15R/33L 16L/34R 16R/34L

TAF

```
TAF RKSI ######Z ####/#### 24002KT 0400 FG OVC001 TX06/####Z TN00/####Z
```

METAR

```
METAR RKSI ######Z 24002KT 0400 R15R/0350 FG OVC001 06/00 Q1008 NOSIG
```

APT RJAA

NRT - TOKYO/NARITA INTL DESTINATION ## ##:## - ## ##:##
RWYS: 16L/34R 16R/34L

TAF

```
TAF RJAA ######Z ####/#### 00000KT 6000 OVC008
```

METAR

```
METAR RJAA ######Z 00000KT 6000 OVC008 10/06 Q1008 NOSIG
```

APT RJTT

HND - TOKYO/HANEDA INTL ALTN 1 ## ##:## - ## ##:##
RWYS: 04/22 05/23 16L/34R 16R/34L

TAF

```
TAF RJTT ######Z ####/#### 00000KT 6000 OVC008
```

METAR

```
METAR RJTT ######Z 00000KT 6000 OVC008 10/06 Q1008 NOSIG
```

FIR RKRR

INCHEON FIR

SIGMET

```
NIL
```

FIR RJJJ

FUKUOKA FIR


SIGMET

```
NIL
```

Maps and Company Docs

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

Note - this is a placeholder or a representative company OFP Weather map and may not reflect the actual enroute weather conditions

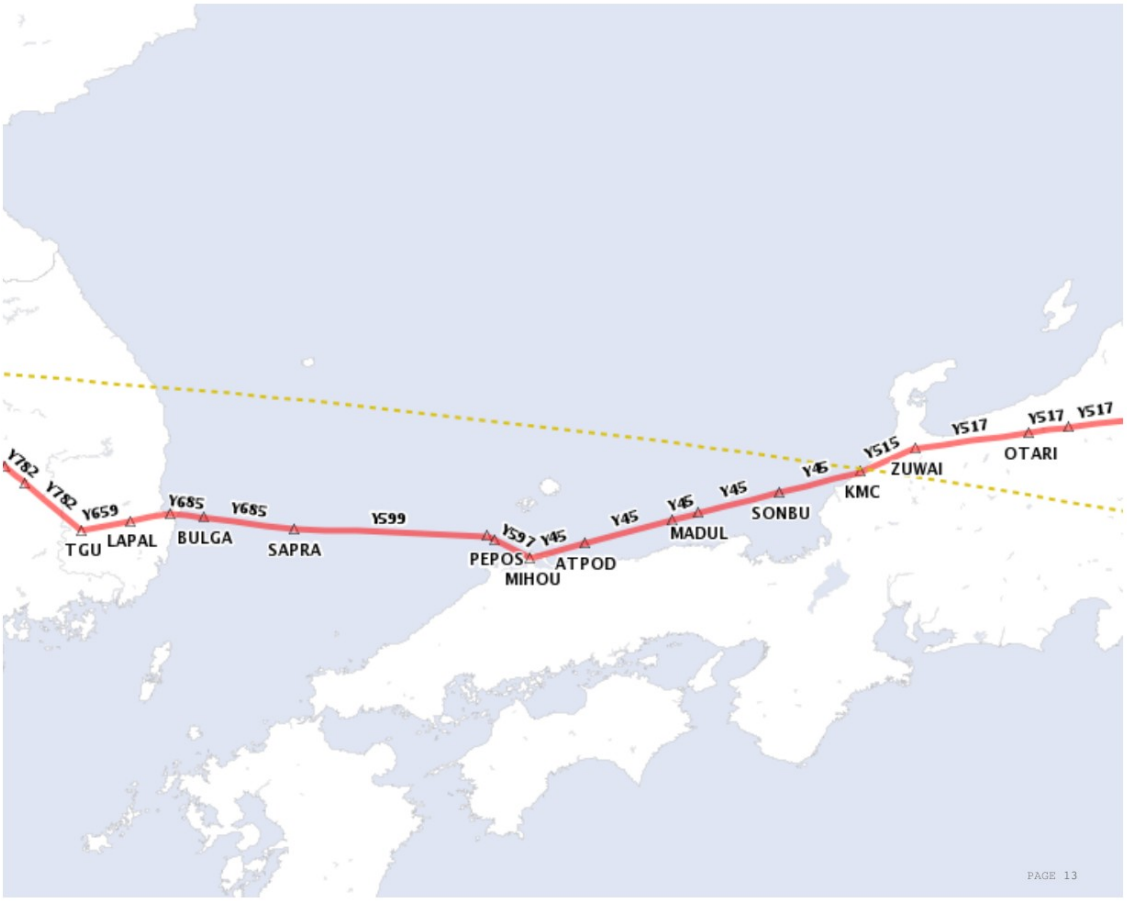

CLEARANCE and ATIS

FOR TRAINING USE ONLY. NOT A VALID RELEASE. PERFORMANCE VALUES ARE DERIVED OR APPROXIMATED.

RKSI DEP ATIS A ####Z

```
EXP RWY 15R
RVR 1200/1200/1200
WIND 240/02KT  VIS 1/4 MILE
OVC 001  T 6  DP 0  QNH 1008
RWY 15L CLOSED DUE TO
CONSTRUCTION.
RWY 16L UNUSABLE DUE TO WORK IN
PROGRESS.
CAUTION BIRD ACTIVITY.
ADVISE ON INITIAL CONTACT YOU
HAVE INFORMATION ALPHA.
```

CLEARANCE - DCL RKSI GTI 416

```
CLD ####Z ###### RKSI PDC 007
GTI416 CLRD RJAA OFF 15R VIA
OSPOT_2C CLIMB VIA SID FL150
SQUAWK 1477
ATIS A
```

RJAA ARR ATIS BRAVO ####Z

```
WIND CALM  VIS 6 KILOMETERS
CEILING 800 OVERCAST
T 10  DP 6
QNH 1008 HECTOPASCALS
APPROACH IN USE ILS Z RWY 16R
ADVISE ON INITIAL CONTACT YOU
HAVE INFORMATION BRAVO.
```